

## 20-W/15-W STEREO DIGITAL AMPLIFIER POWER STAGE

### FEATURES

- 2×20 W at 10% THD+N Into 8-Ω BTL at 18 V (With Heatsink for TAS5102)
- 2×15 W at 10% THD+N Into 8-Ω BTL at 15.5 V for TAS5103
- 2×10 W at 10% THD+N Into 8-Ω BTL at 13 V
- >100-dB SNR (A-Weighted)
- <0.1% THD+N at 1 W
- Thermally Enhanced Package: 32-pin HTSSOP
  - DAD (TAS5102) Pad Up
  - DAP (TAS5103) Pad Down
- High-Efficiency Power Stage (>90%) With 180-mΩ Output MOSFETs
- Wide PVDD Range from 8V to 23V
- Power-On Reset for Protection on Power Up Without Any Power-Supply Sequencing
- Integrated Self-Protection Circuits Including Undervoltage, Overtemperature, Overcurrent, Short Circuit
- Built-In Regulator for Gate Drive Supply
- Error Reporting
- EMI Compliant When Used With Recommended System Design

### APPLICATIONS


- Televisions
- Mini/Micro Audio Systems
- DVD Receivers
- Home Theaters

### DESCRIPTION

The TAS5102/TAS5103 are integrated stereo digital amplifier power stages with an advanced protection system. The TAS5102/TAS5103 are capable of driving an 8-Ω bridge-tied load (BTL) at up to 20 W/15 W per channel with low integrated noise at the output, low THD+N performance, and low idle power dissipation.

A low-cost, high-fidelity audio system can be built using a TI chipset, comprising a modulator (e.g., TAS5086) and the TAS5102/TAS5103. This system only requires a simple passive LC demodulation filter to deliver high-quality, high-efficiency audio amplification with proven EMI compliance. These devices require two power supplies, at 3.3 V for VREG, and up to 23 V for PVDD. The TAS5102/TAS5103 does not require power-up sequencing due to internal power-on reset. The efficiency of this digital amplifier is greater than 90% into 8 Ω, which enables the use of smaller power supplies and heatsinks.

The TAS5102/3 has an innovative protection system integrated on chip, safeguarding the device against a wide range of fault conditions that could damage the system. These safeguards are short-circuit protection, overcurrent protection, undervoltage protection, and overtemperature protection. The TAS5102/TAS5103 has a new proprietary current-limiting circuit that reduces the possibility of device shutdown during high-level music transients.

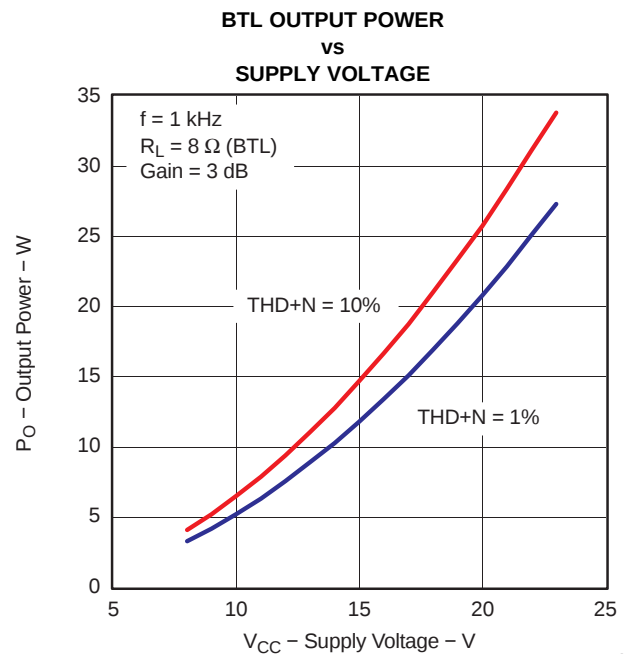

G009



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2008, Texas Instruments Incorporated




These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

## DEVICE INFORMATION

### Pin Assignment

The TAS5102/TAS5103 are available in a thermally enhanced package:

- TAS5102 Pad Up 32-pin HTSSOP PowerPAD™ package (DAD)
- TAS5103 Pad Down 32-pin HTSSOP PowerPAD™ package (DAP)

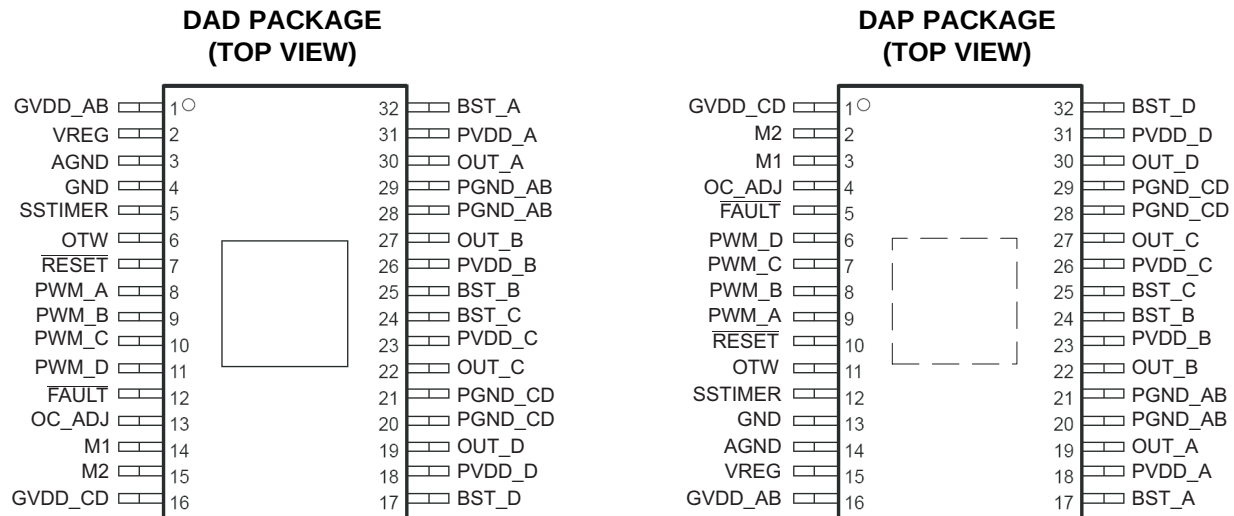

### MODE Selection Pins

| Mode |    | PWM INPUT                          | OUTPUT CONFIGURATION  | PROTECTION SCHEME                                                                                                                                                  |
|------|----|------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M2   | M1 |                                    |                       |                                                                                                                                                                    |
| 0    | 0  | 2N <sup>(1)</sup> AD/BD modulation | 2 channels BTL output | BTL mode <sup>(2)</sup>                                                                                                                                            |
| 0    | 1  | 1N <sup>(1)</sup> AD modulation    | 2 channels BTL output | BTL mode <sup>(2)</sup>                                                                                                                                            |
| 1    | 0  | 1N <sup>(1)</sup> AD modulation    | 4 channels SE output  | Protection works similarly to BTL mode <sup>(2)</sup> . Only difference in SE mode is that OUT_X is Hi-Z instead of a pulldown through internal pulldown resistor. |
| 1    | 1  | Reserved                           |                       |                                                                                                                                                                    |

(1) The 1N and 2N naming convention is used to indicate the required number of PWM lines to the power stage per channel in a specific mode.

(2) An overcurrent protection (OC) occurring on A or B causes all channels to shut down. An OC on C or D works similarly. Global errors like overtemperature error (OTE), undervoltage protection (UVP), and power-on reset (POR) affect all channels.

### Package Heat Dissipation Ratings

| PARAMETER               | TAS5102DAD              | TAS5103DAP |
|-------------------------|-------------------------|------------|
| R <sub>θJC</sub> (°C/W) | 1.69                    | 1.69       |
| R <sub>θJA</sub> (°C/W) | See Note <sup>(1)</sup> | 23.5       |

- (1) The TAS5102 package is thermally enhanced for conductive cooling using an exposed metal pad area. It is impractical to use the device with the pad exposed to ambient air as the only means for heat dissipation for higher power applications. For this reason, R<sub>θJA</sub>, a system parameter that characterizes the thermal treatment, is provided in the Application Information section of the data sheet. An example and discussion of typical system R<sub>θJA</sub> values are provided in the Thermal Information section. This example provides additional information regarding the power dissipation ratings. This example should be used as a reference to calculate the heat dissipation ratings for a specific application. TI application engineering provides technical support to design heatsinks if needed. Also, for additional general information on PowerPad packages, see TI document [SLMA002B](#).

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

|                  |                                               |              | UNIT |
|------------------|-----------------------------------------------|--------------|------|
|                  | PVDD_X to GND_X DC                            | –0.3 to 23   | V    |
|                  | PVDD_X to GND_X <sup>(2)</sup>                | –0.3 to 32   | V    |
|                  | OUT_X to GND_X <sup>(2)</sup>                 | –0.3 to 32   | V    |
|                  | BST_X to GND_X <sup>(2)</sup>                 | –0.3 to 43.2 | V    |
|                  | VREG to AGND                                  | –0.3 to 4.2  | V    |
|                  | GVDD to GND                                   | –0.3 to 13.2 | V    |
|                  | GND_X to GND                                  | –0.3 to 0.3  | V    |
|                  | GND_X to AGND                                 | –0.3 to 0.3  | V    |
|                  | GND to AGND                                   | –0.3 to 0.3  | V    |
|                  | PWM_X, OC_ADJ, M1, M2 to AGND                 | –0.3 to 4.2  | V    |
|                  | RESET_X, FAULT, OTW to AGND                   | –0.3 V to 7  | V    |
|                  | Maximum continuous sink current (FAULT, OTW)  | 9            | mA   |
| T <sub>J</sub>   | Maximum operating junction temperature range, | 0 to 150     | °C   |
| T <sub>STG</sub> | Storage temperature range                     | –65 to 150   | °C   |
|                  | Minimum pulse duration, low                   | 50           | ns   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) These voltages represent the dc voltage + peak ac waveform measured at the terminal of the device in all conditions.

## ORDERING INFORMATION

| T <sub>A</sub> | PACKAGE <sup>(1)</sup> | DESCRIPTION   |
|----------------|------------------------|---------------|
| 0°C to 70°C    | TAS5102DAD             | 32-pin HTSSOP |
|                | TAS5103DAP             | 32-pin HTSSOP |


- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

## Pin Functions


| PIN                       |             |             | FUNCTION <sup>(1)</sup> | DESCRIPTION                                                                                                                                                                  |
|---------------------------|-------------|-------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                      | TAS5102 NO. | TAS5103 NO. |                         |                                                                                                                                                                              |
| AGND                      | 3           | 14          | P                       | Analog ground                                                                                                                                                                |
| BST_A                     | 32          | 17          | P                       | HS bootstrap supply (BST). External capacitor to OUT_A required.                                                                                                             |
| BST_B                     | 25          | 24          | P                       | HS bootstrap supply (BST). External capacitor to OUT_B required.                                                                                                             |
| BST_C                     | 24          | 25          | P                       | HS bootstrap supply (BST). External capacitor to OUT_C required.                                                                                                             |
| BST_D                     | 17          | 32          | P                       | HS bootstrap supply (BST). External capacitor to OUT_D required.                                                                                                             |
| $\overline{\text{FAULT}}$ | 12          | 5           | O                       | Device error signal (shutdown); open drain                                                                                                                                   |
| GND                       | 4           | 13          | P                       | Ground                                                                                                                                                                       |
| PGND_AB                   | 29          | 20          | P                       | Power ground for half-bridges A and B                                                                                                                                        |
| PGND_AB                   | 28          | 21          | P                       | Power ground for half-bridges A and B                                                                                                                                        |
| PGND_CD                   | 21          | 28          | P                       | Power ground for half-bridges C and D                                                                                                                                        |
| PGND_CD                   | 20          | 29          | P                       | Power ground for half-bridge D                                                                                                                                               |
| GVDD_AB                   | 1           | 16          | P                       | Gate-drive voltage supply. Requires 1- $\mu$ F capacitor to GND.                                                                                                             |
| GVDD_CD                   | 16          | 1           | P                       | Gate-drive voltage supply. Requires 1- $\mu$ F capacitor to GND.                                                                                                             |
| M2                        | 15          | 2           | I                       | Mode selection 2, connect to either AGND or VREG, no pull-up or pull-down resistors                                                                                          |
| M1                        | 14          | 3           | I                       | Mode selection 1, connect to either AGND or VREG, no pull-up or pull-down resistors                                                                                          |
| OC_ADJ                    | 13          | 4           | O                       | Analog overcurrent programming. Requires resistor to ground.                                                                                                                 |
| OTW                       | 6           | 11          | O                       | Overtemperature warning signal, push-pull, active high                                                                                                                       |
| OUT_A                     | 30          | 19          | O                       | Output, half-bridge A                                                                                                                                                        |
| OUT_B                     | 27          | 22          | O                       | Output, half-bridge B                                                                                                                                                        |
| OUT_C                     | 22          | 27          | O                       | Output, half-bridge C                                                                                                                                                        |
| OUT_D                     | 19          | 30          | O                       | Output, half-bridge D                                                                                                                                                        |
| PVDD_A                    | 31          | 18          | P                       | Power supply input for half-bridge A. Requires close decoupling of 0.1- $\mu$ F capacitor to GND_A.                                                                          |
| PVDD_B                    | 26          | 23          | P                       | Power supply input for half-bridge B. Requires close decoupling of 0.1- $\mu$ F capacitor to GND_B.                                                                          |
| PVDD_C                    | 23          | 26          | P                       | Power supply input for half-bridge C. Requires close decoupling of 0.1- $\mu$ F capacitor to GND_C.                                                                          |
| PVDD_D                    | 18          | 31          | P                       | Power supply input for half-bridge D. Requires close decoupling of 0.1- $\mu$ F capacitor to GND_D.                                                                          |
| PWM_A                     | 8           | 9           | I                       | Input signal for half-bridge A                                                                                                                                               |
| PWM_B                     | 9           | 8           | I                       | Input signal for half-bridge B                                                                                                                                               |
| PWM_C                     | 10          | 7           | I                       | Input signal for half-bridge C                                                                                                                                               |
| PWM_D                     | 11          | 6           | I                       | Input signal for half-bridge D                                                                                                                                               |
| $\overline{\text{RESET}}$ | 7           | 10          | I                       | PWM is not active if $\overline{\text{RESET}}$ goes low.                                                                                                                     |
| SSTIMER                   | 5           | 12          | I                       | Controls start/stop time of PWM modulation. Requires 2.2 nF capacitor to GND for AD BTL. Leave pin floating (NC) for BD BTL mode. Also, leave pin floating (NC) for SE mode. |
| VREG                      | 2           | 15          | P                       | Digital regulator supply filter. Requires 0.1- $\mu$ F capacitor to AGND.                                                                                                    |

(1) I = input, O = output, P = power

## SYSTEM BLOCK DIAGRAM

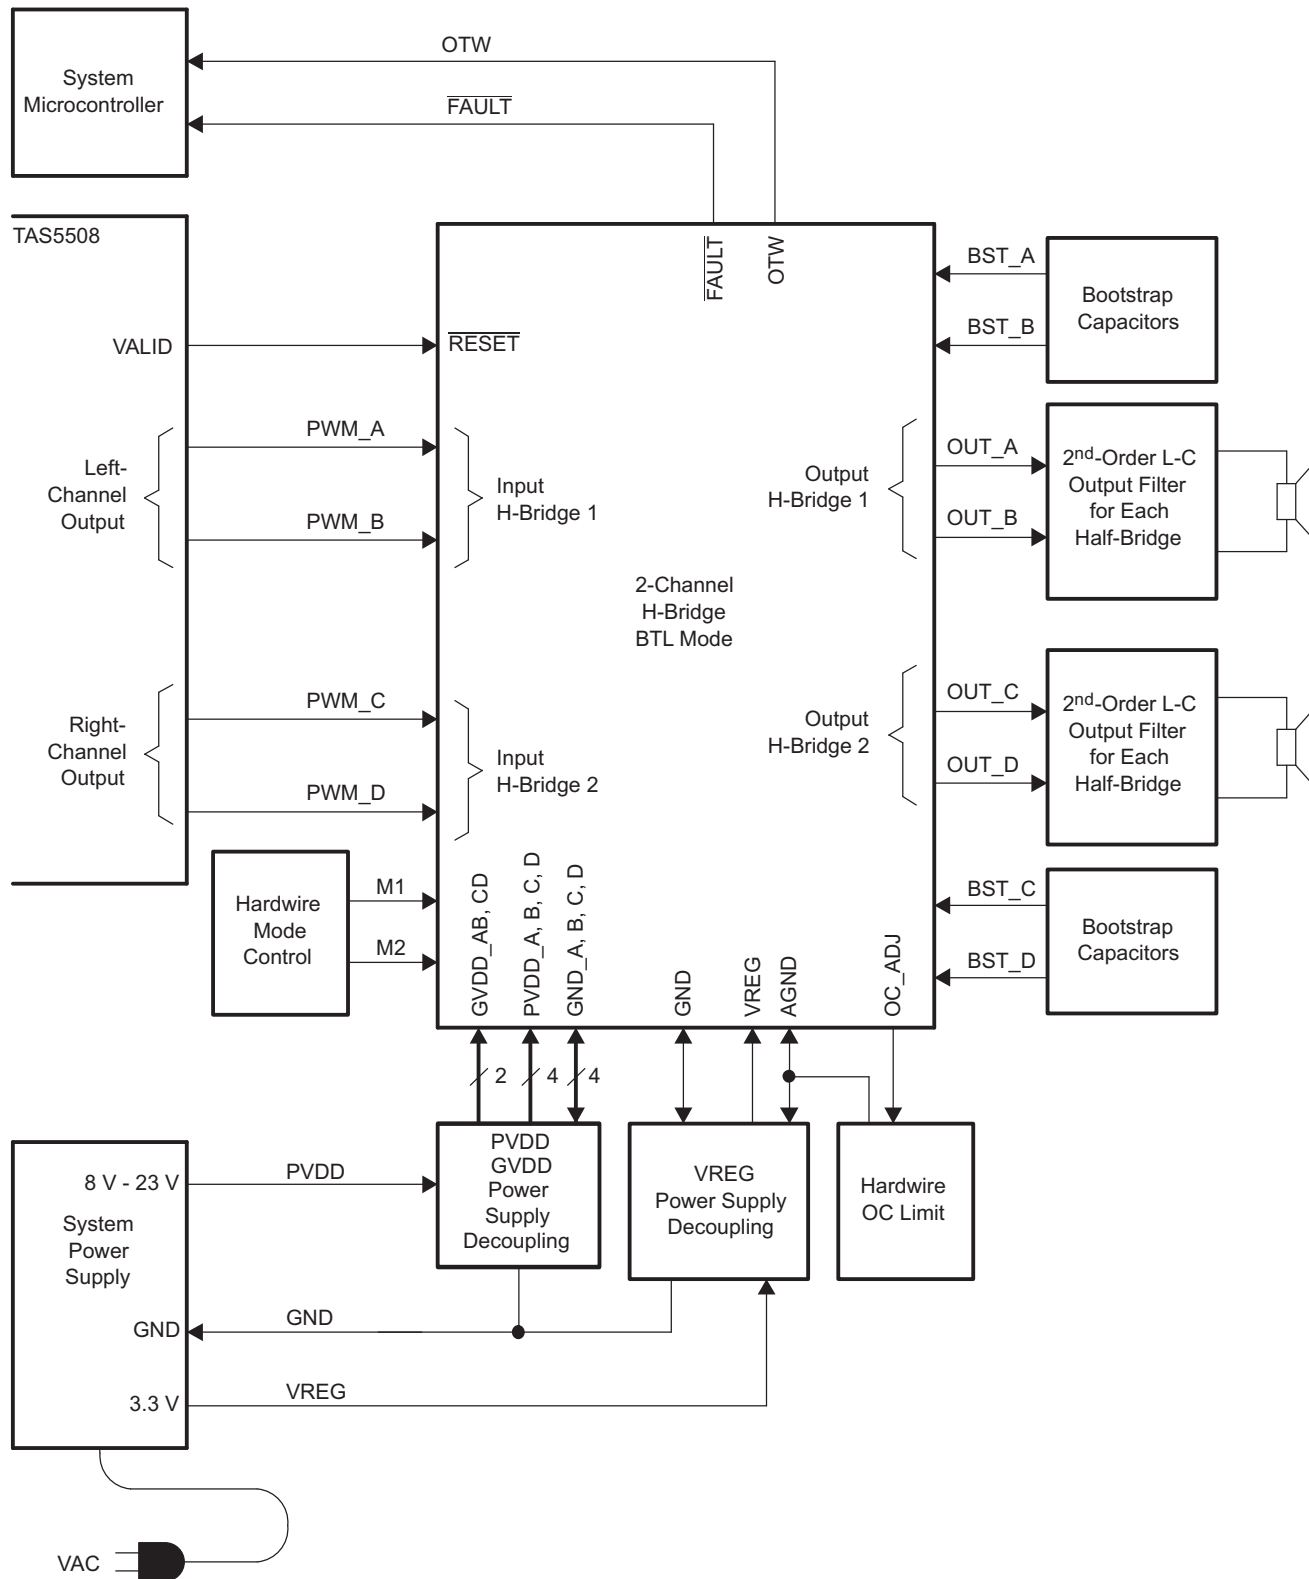

# FUNCTIONAL BLOCK DIAGRAM

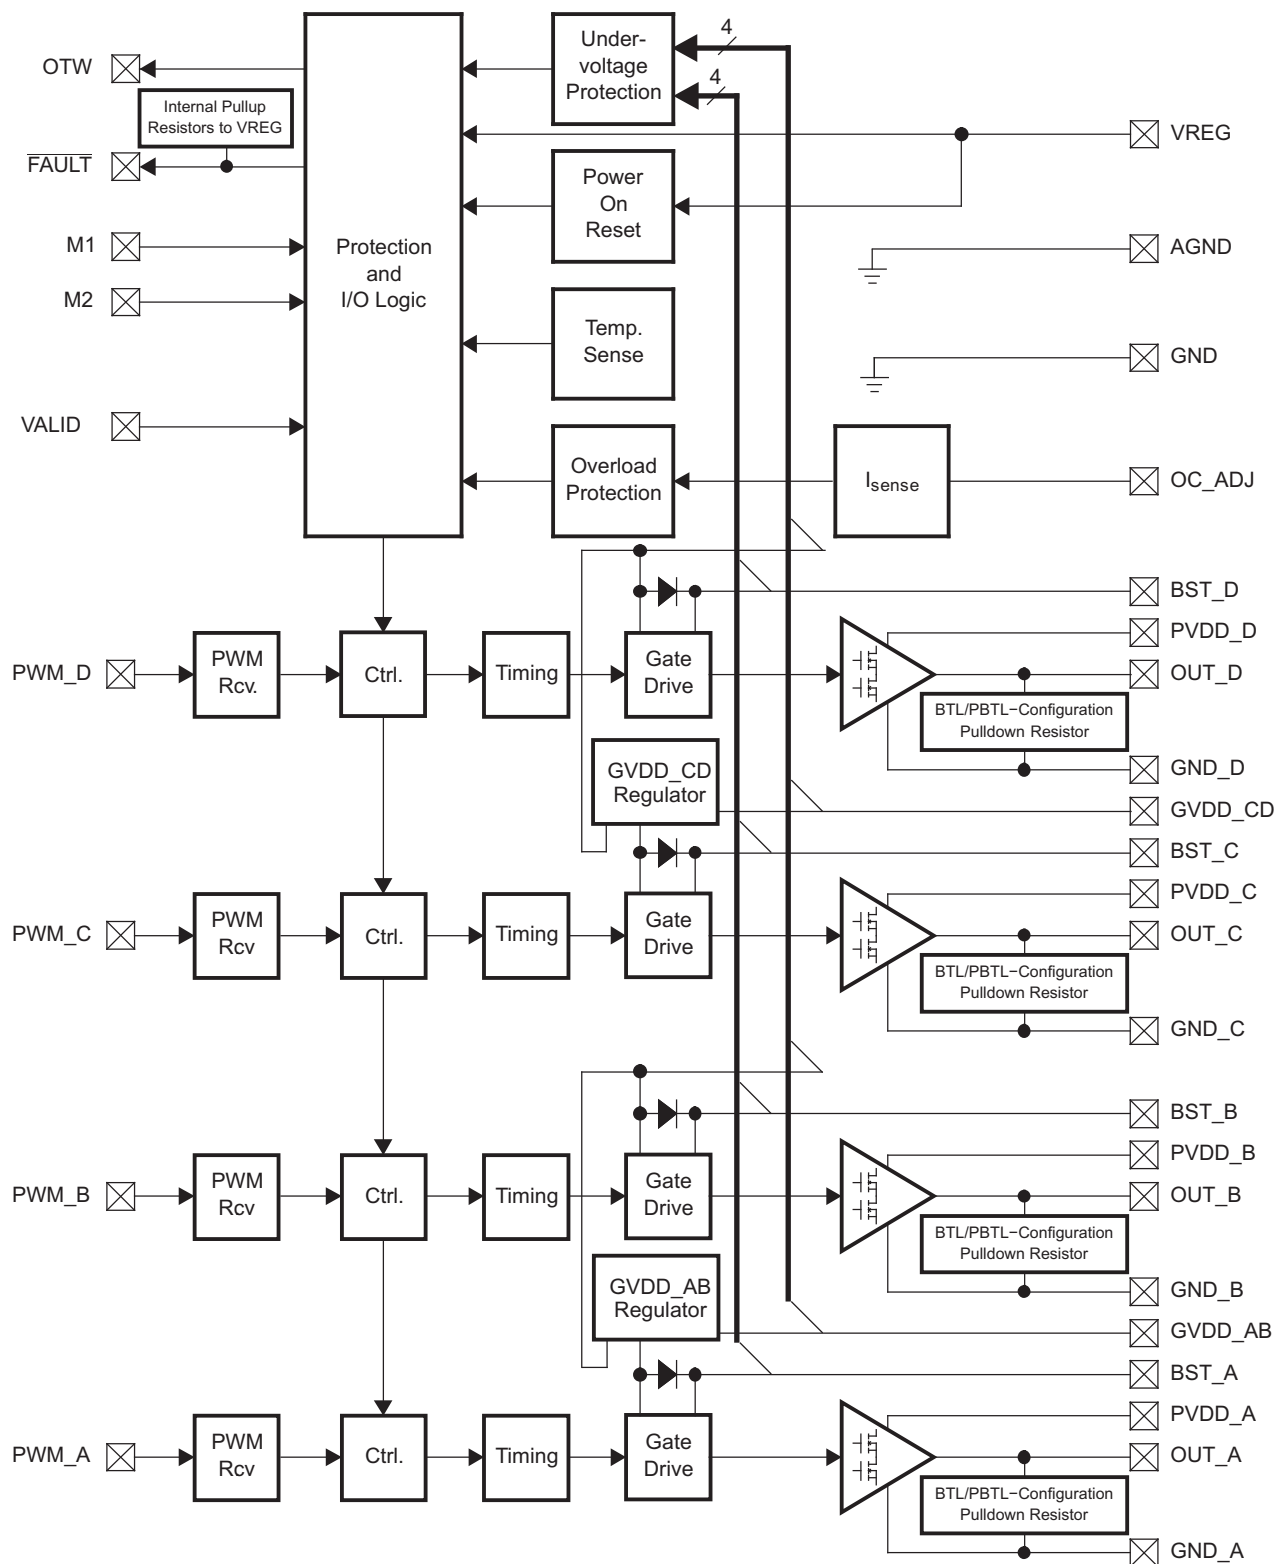

## RECOMMENDED OPERATING CONDITIONS

|                       |                                           |                                                                                              | MIN | TYP | MAX | UNIT |
|-----------------------|-------------------------------------------|----------------------------------------------------------------------------------------------|-----|-----|-----|------|
| V <sub>SS</sub>       | Half-bridge supply, PVDD_X                | DC supply voltage                                                                            | 8   | 18  | 23  | V    |
|                       | Supply for Protection and I/O Logic, VREG | DC supply voltage                                                                            | 3   | 3.3 | 3.6 | V    |
| R <sub>L</sub> (BTL)  | Load impedance                            | Output filter: L = 10 μH, C = 470 nF.<br>Output AD modulation, switching frequency > 350 kHz | 6-8 |     |     | Ω    |
| R <sub>L</sub> (SE)   |                                           |                                                                                              | 3-4 |     |     |      |
| R <sub>L</sub> (PBTL) |                                           |                                                                                              | 3-4 |     |     |      |
| L <sub>O</sub> (BTL)  | Output-filter inductance                  | Minimum output inductance under short-circuit condition                                      | 200 |     |     | nH   |
| L <sub>O</sub> (SE)   |                                           |                                                                                              | 200 |     |     |      |
| L <sub>O</sub> (PBTL) |                                           |                                                                                              | 200 |     |     |      |
| F <sub>PWM</sub>      | PWM frame rate                            |                                                                                              | 192 | 384 | 432 | kHz  |
| T <sub>J</sub>        | Junction temperature                      |                                                                                              | 0   |     | 125 | °C   |

## AC Characteristics (BTL)

PVDD\_X = 18 V, BTL mode, R<sub>L</sub> = 8  $\Omega$ , R<sub>OC</sub> = 22 k $\Omega$ , C<sub>BST</sub> = 33-nF, audio frequency = 1 kHz, AES17 filter, F<sub>PWM</sub> = 384 kHz, ambient temperature = 25°C (unless otherwise noted). Audio performance is recorded as a chipset, using TAS5086 PWM processor with an effective modulation index limit of 96.1%. All performance is in accordance with recommended operating conditions, unless otherwise specified.

| PARAMETER      |                                                | TEST CONDITIONS                                            | MIN | TYP  | MAX | UNIT |
|----------------|------------------------------------------------|------------------------------------------------------------|-----|------|-----|------|
| P <sub>O</sub> | Power output per channel                       | PVDD = 18 V, 10% THD                                       |     | 20   |     | W    |
|                |                                                | PVDD = 18 V, 7% THD                                        |     | 18   |     |      |
|                |                                                | PVDD = 12 V, 10% THD                                       |     | 9    |     |      |
|                |                                                | PVDD = 12 V, 7% THD                                        |     | 8    |     |      |
| THD+N          | Total harmonic distortion + noise              | PVDD = 18V, Po =10 W (half-power)                          |     | 0.15 |     | %    |
|                |                                                | PVDD = 12V, Po =4.5 W (half-power)                         |     | 0.18 |     |      |
|                |                                                | 1 W                                                        |     | 0.05 |     |      |
| V <sub>n</sub> | Output integrated noise                        | A-weighted                                                 |     | 50   |     | μV   |
| SNR            | Signal-to-noise ratio <sup>(1)</sup>           | A-weighted                                                 | 94  | 105  |     | dB   |
| DNR            | Dynamic range                                  | A-weighted, input level = –60 dBFS using TAS5086 modulator | 94  | 105  |     | dB   |
| P <sub>D</sub> | Power dissipation due to idle losses (IPVDD_X) | P <sub>O</sub> = 0 W, 4 channels switching <sup>(2)</sup>  |     | 0.6  |     | W    |

(1) SNR is calculated relative to 0-dBFS input level.

(2) Actual system idle losses are affected by core losses of output inductors.

**AC Characteristics (Single-Ended Output)**

PVDD\_X = 18 V, SE mode,  $R_L = 4\ \Omega$ ,  $R_{OC} = 22\ \text{k}\Omega$ ,  $C_{BST} = 33\text{-nF}$ , audio frequency = 1 kHz, AES17 filter,  $F_{PWM} = 384\ \text{kHz}$ , ambient temperature = 25°C (unless otherwise noted). Audio performance is recorded as a chipset, using TAS5086 PWM processor with an effective modulation index limit of 96.1%. All performance is in accordance with recommended operating conditions, unless otherwise specified.

| PARAMETER      |                                                | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|----------------|------------------------------------------------|------------------------------------------------------------|-----|-----|-----|------|
| P <sub>O</sub> | Power output per channel                       | PVDD = 18 V, 10% THD                                       |     | 10  |     | W    |
|                |                                                | PVDD = 18 V, 7% THD                                        |     | 9   |     |      |
|                |                                                | PVDD = 12 V, 10% THD                                       |     | 4.5 |     |      |
|                |                                                | PVDD = 12 V, 7% THD                                        |     | 4   |     |      |
| THD+N          | Total harmonic distortion + noise              | PVDD = 18V, P <sub>o</sub> =5 W (half-power)               |     | 0.2 |     | %    |
|                |                                                | PVDD = 12V, P <sub>o</sub> =2.25 W (half-power)            |     | 0.2 |     |      |
| V <sub>n</sub> | Output integrated noise                        | A-weighted                                                 |     | 50  |     | μV   |
| SNR            | Signal-to-noise ratio <sup>(1)</sup>           | A-weighted                                                 |     | 105 |     | dB   |
| DNR            | Dynamic range                                  | A-weighted, input level = –60 dBFS using TAS5086 modulator |     | 105 |     | dB   |
| P <sub>D</sub> | Power dissipation due to idle losses (IPVDD_X) | P <sub>O</sub> = 0 W, 4 channels switching <sup>(2)</sup>  |     | 0.6 |     | W    |

(1) SNR is calculated relative to 0-dBFS input level.

(2) Actual system idle losses are affected by core losses of output inductors.

## DC Characteristics

$R_L = 8\ \Omega$ ,  $F_{PWM} = 384\ \text{kHz}$  (unless otherwise noted). All performance is in accordance with recommended operating conditions, unless otherwise specified.

| PARAMETER                                          |                                                                                          | TEST CONDITIONS                                                                                               | MIN | TYP  | MAX | UNIT |
|----------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-----|------|-----|------|
| Internal Voltage Regulator and Current Consumption |                                                                                          |                                                                                                               |     |      |     |      |
| V <sub>SS</sub>                                    | Digital Input Supply Voltage, VREG                                                       |                                                                                                               | 3   | 3.3  | 3.6 | V    |
| I <sub>(VREG)</sub>                                | Supply current, VREG                                                                     | Operating, 50% duty cycle                                                                                     |     | 6.5  | 10  | mA   |
|                                                    |                                                                                          | Reset mode, no switching                                                                                      |     | 6.5  | 10  |      |
| I <sub>(PVDD_X)</sub>                              | Total Half-bridge idle current                                                           | 50% duty cycle, without output filter or load                                                                 |     | 35   | 50  | mA   |
|                                                    |                                                                                          | Reset mode, no switching                                                                                      |     | 5    | 6.3 |      |
| Output Stage MOSFETs                               |                                                                                          |                                                                                                               |     |      |     |      |
| R <sub>DS(on)</sub>                                | Drain-to-source resistance, LS                                                           | T <sub>J</sub> = 25°C, includes metallization resistance                                                      |     | 180  |     | mΩ   |
|                                                    | Drain-to-source resistance, HS                                                           | T <sub>J</sub> = 25°C, includes metallization resistance                                                      |     | 180  |     | mΩ   |
| I/O Protection                                     |                                                                                          |                                                                                                               |     |      |     |      |
| V <sub>uvp,G</sub>                                 | Undervoltage protection limit, GVDD_X, voltage rising                                    |                                                                                                               |     | 5.7  |     | V    |
| V <sub>uvp,G</sub>                                 | Undervoltage protection limit, GVDD_X, voltage falling                                   |                                                                                                               |     | 5.5  |     | V    |
| OTW <sup>(1)</sup>                                 | Overtemperature warning                                                                  |                                                                                                               |     | 125  |     | °C   |
| OTW <sub>HYST</sub> <sup>(1)</sup>                 | Temperature drop needed below OTW temperature for OTW to be inactive after the OTW event |                                                                                                               |     | 25   |     | °C   |
| OTE <sup>(1)</sup>                                 | Overtemperature error                                                                    |                                                                                                               |     | 150  |     | °C   |
| OTE-OTW <sup>(1)</sup>                             | OTE-OTW differential                                                                     |                                                                                                               |     | 25   |     | °C   |
| OTE <sub>HYST</sub> <sup>(1)</sup>                 | A RESET must occur to exit shutdown and to release FAULT following an OTE event.         |                                                                                                               |     | 30   |     | °C   |
| OCPC                                               | Overcurrent protection counter                                                           | F <sub>PWM</sub> = 384 kHz                                                                                    |     | 0.63 |     | ms   |
| I <sub>OC</sub>                                    | Overcurrent limit protection                                                             | Resistor—programmable, max. current, R <sub>OCP</sub> = 22 kΩ                                                 |     | 4.5  |     | A    |
| I <sub>OCT</sub>                                   | Overcurrent response time                                                                |                                                                                                               |     | 150  |     | ns   |
| R <sub>OCP</sub>                                   | OC programming resistor range                                                            | Resistor tolerance = 5% for typical value; the minimum resistance should not be less than 20kΩ.               | 20  | 22   | 24  | kΩ   |
| R <sub>PD</sub>                                    | Internal pulldown resistor at the output of each half-bridge                             | Connected when $\overline{\text{RESET}}$ is active to provide bootstrap capacitor charge. Not used in SE mode |     | 3    |     | kΩ   |

(1) Specified by design

## DC Characteristics (continued)

$R_L = 8\ \Omega$ ,  $F_{PWM} = 384\text{ kHz}$  (unless otherwise noted). All performance is in accordance with recommended operating conditions, unless otherwise specified.

| PARAMETER                     |                                   | TEST CONDITIONS                                        | MIN | TYP  | MAX | UNIT |
|-------------------------------|-----------------------------------|--------------------------------------------------------|-----|------|-----|------|
| Static Digital Specifications |                                   |                                                        |     |      |     |      |
| V <sub>IH</sub>               | High-level input voltage          | PWM_A, PWM_B, PWM_C, PWM_D, M1, M2, RESET              | 2   |      |     | V    |
| V <sub>IL</sub>               | Low-level input voltage           |                                                        |     | 0.8  |     | V    |
| I <sub>lkg</sub>              | Input leakage current             | Static, High PWM_A, PWM_B, PWM_C, PWM_D, M1, M2, RESET |     |      | 100 | μA   |
|                               |                                   | Static, Low PWM_A, PWM_B, PWM_C, PWM_D, M1, M2, RESET  | −10 |      | 10  |      |
| FAULT                         |                                   |                                                        |     |      |     |      |
| R <sub>INT_PU</sub>           | Internal pullup resistance, FAULT |                                                        | 20  | 26   | 32  | kΩ   |
| V <sub>OH</sub>               | High-level output voltage         | Internal pullup resistor                               | 3   | 3.3  | 3.6 | V    |
|                               |                                   | External pullup of 4.7 kΩ to 5 V                       |     |      | 5.5 |      |
| V <sub>OL</sub>               | Low-level output voltage          | I <sub>O</sub> = 4 mA                                  |     | 0.25 | 0.5 | V    |

## TYPICAL CHARACTERISTICS

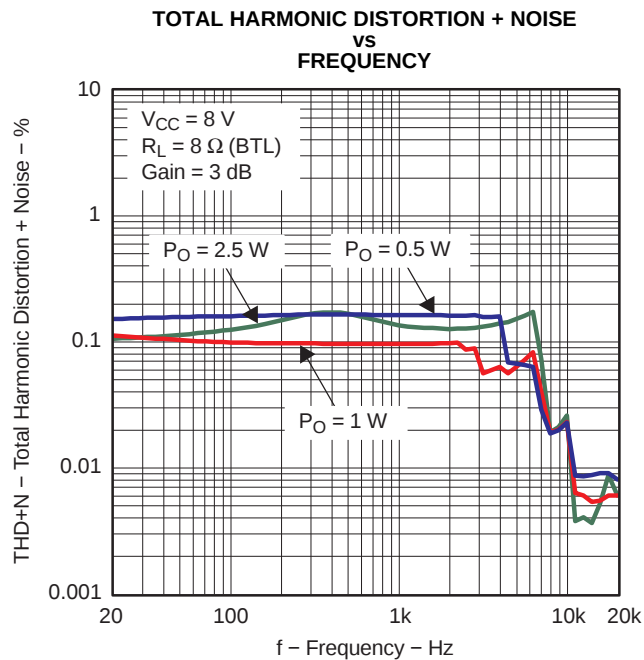


Figure 1.

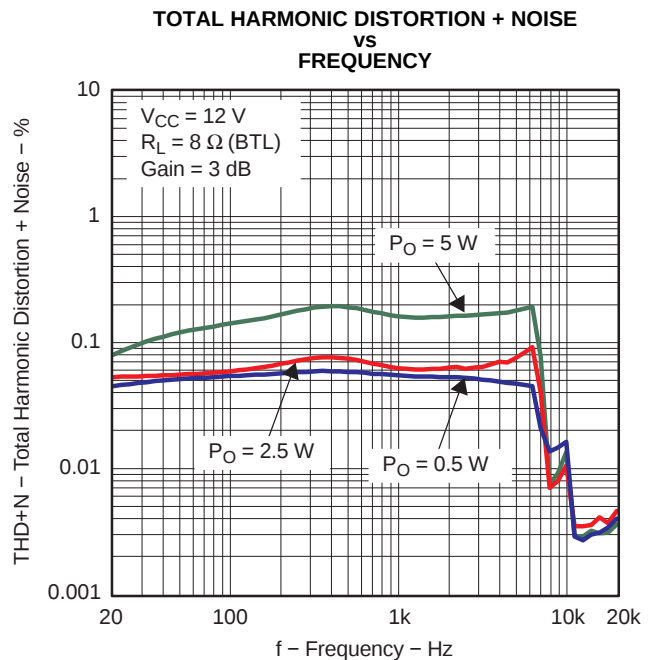


Figure 2.

## TYPICAL CHARACTERISTICS (continued)

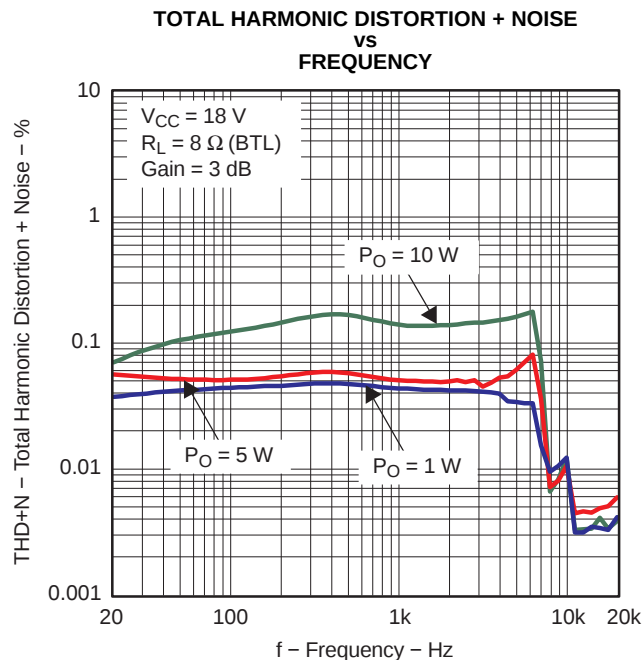


Figure 3.

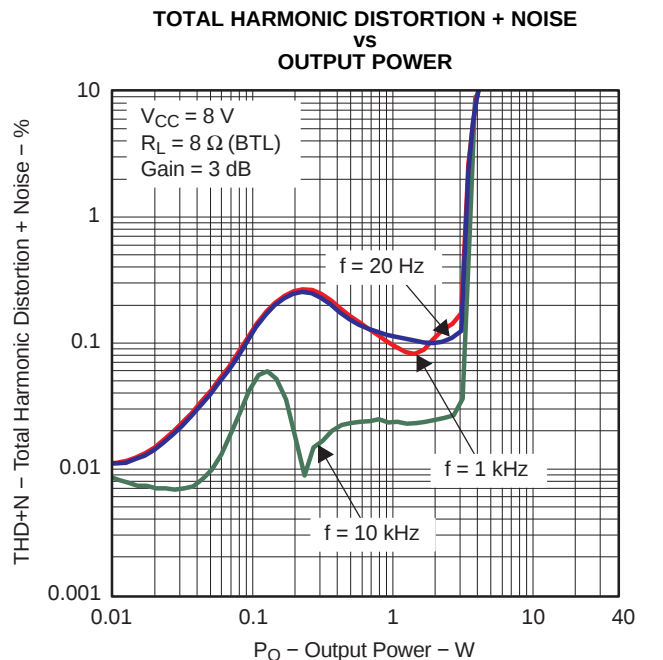


Figure 4.

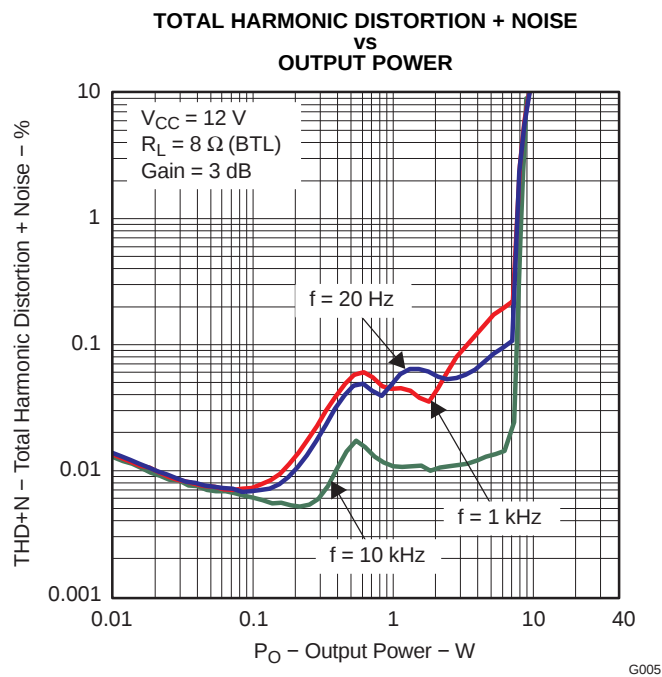


Figure 5.

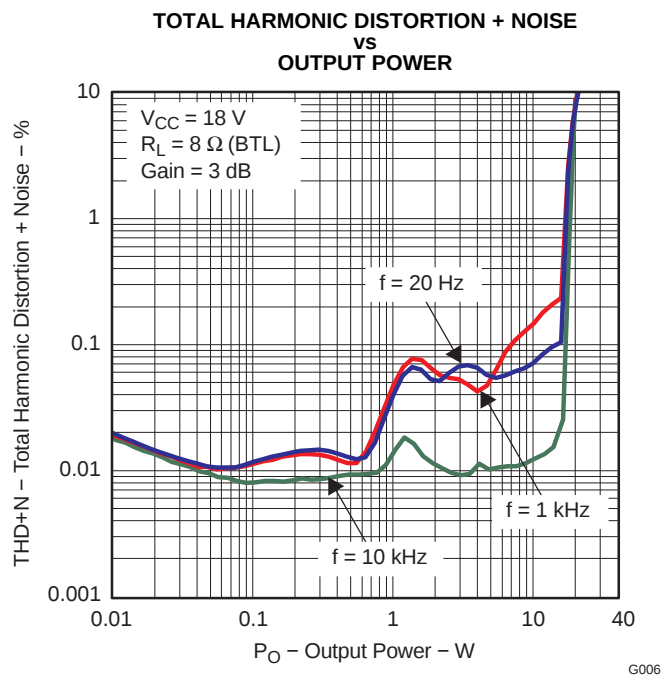


Figure 6.

## TYPICAL CHARACTERISTICS (continued)

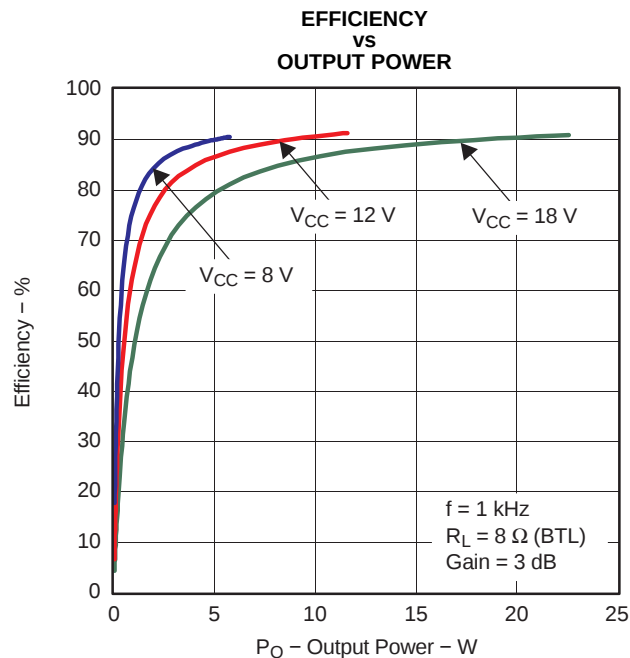


Figure 7.

G007

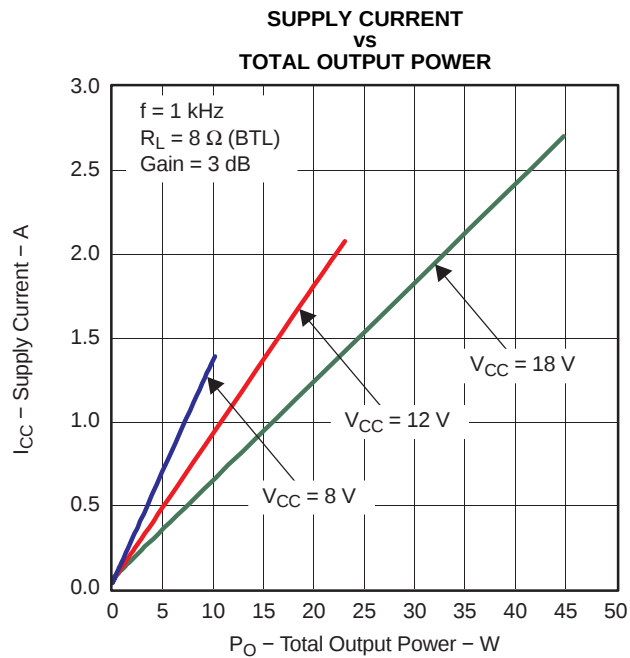


Figure 8.

G008

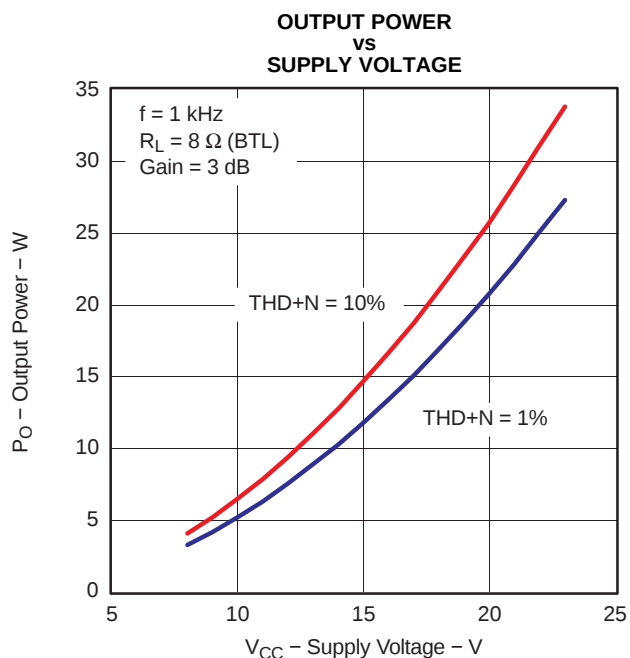


Figure 9.

G009

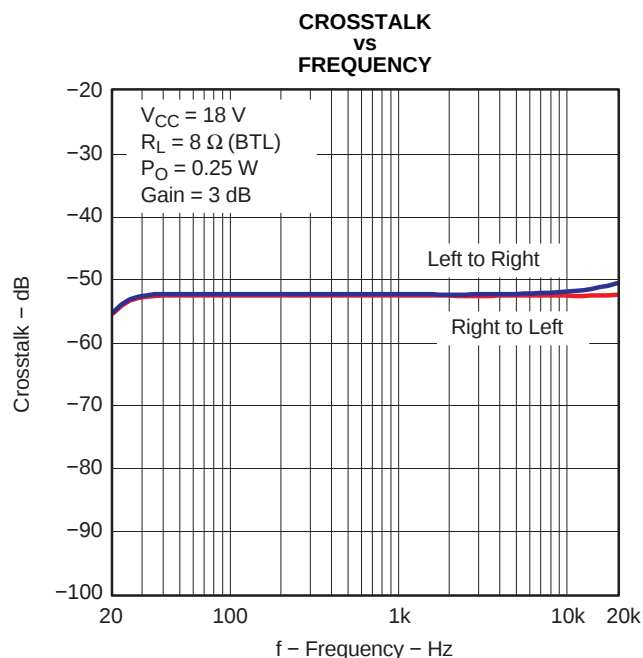


Figure 10.

G010

## TYPICAL CHARACTERISTICS (continued)

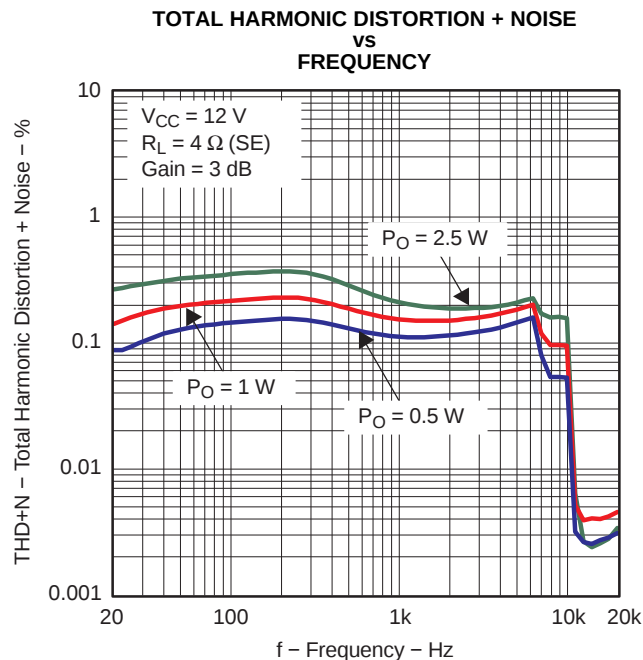


Figure 11.

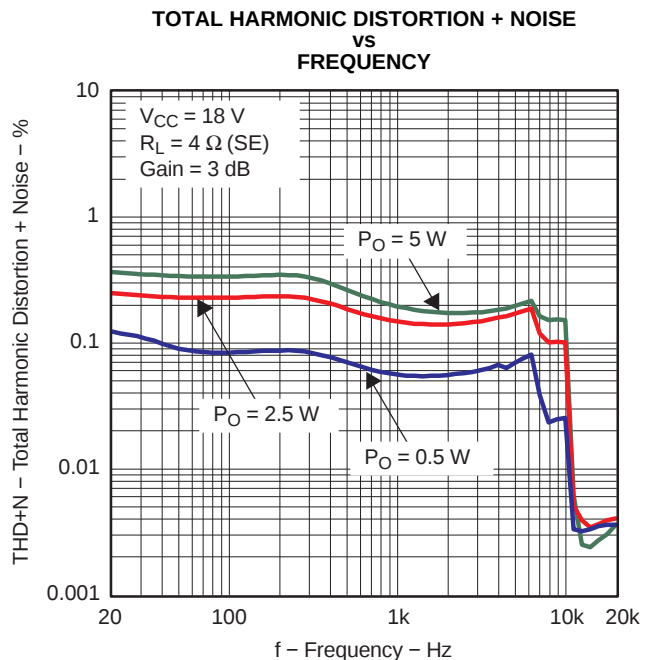


Figure 12.

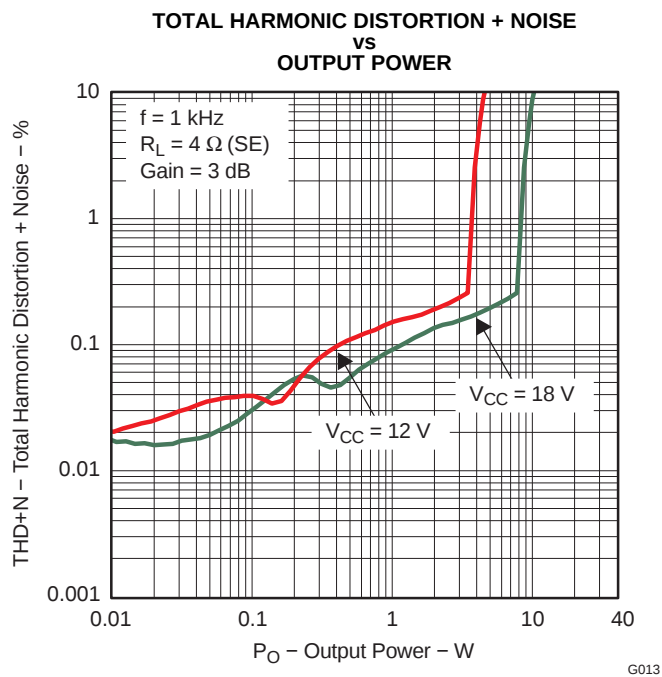


Figure 13.

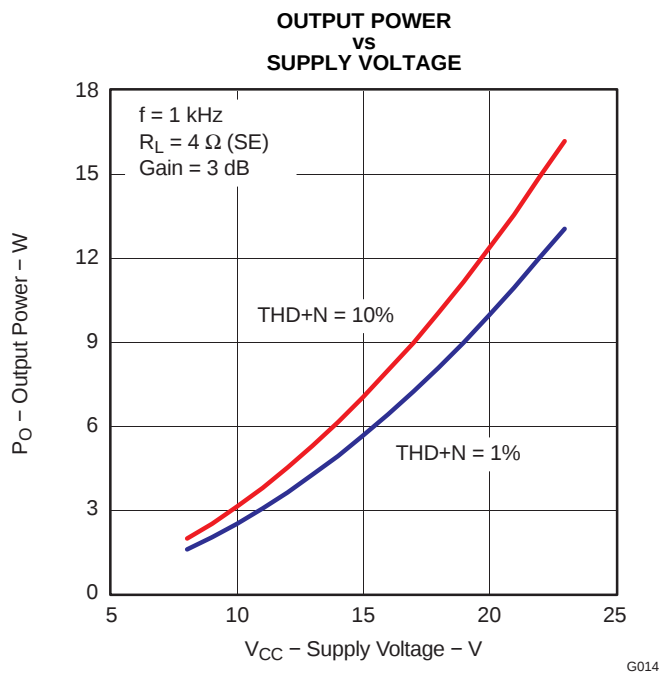


Figure 14.

## TYPICAL CHARACTERISTICS (continued)

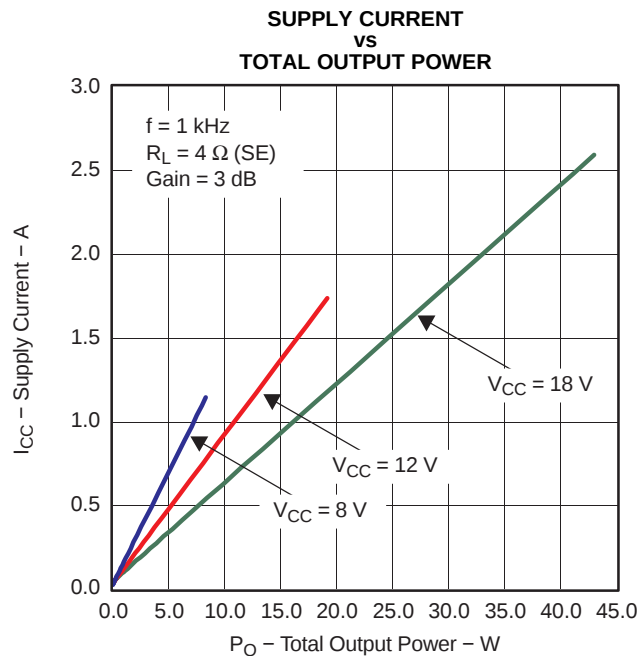


Figure 15.

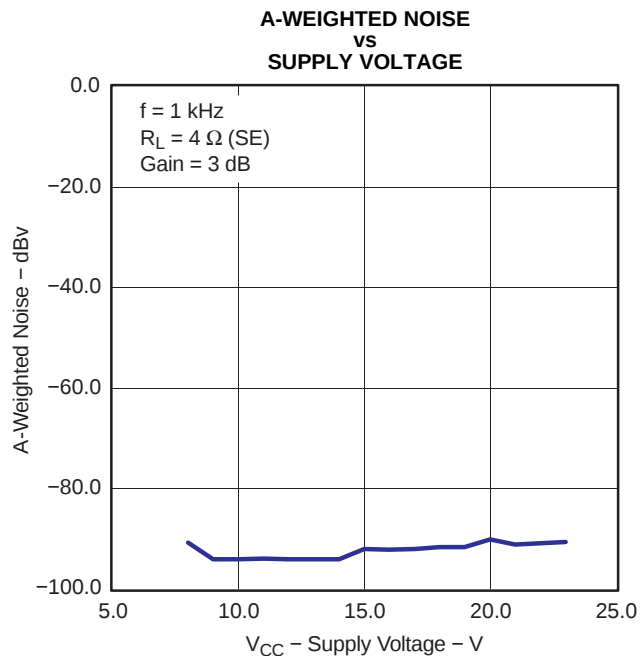


Figure 16.

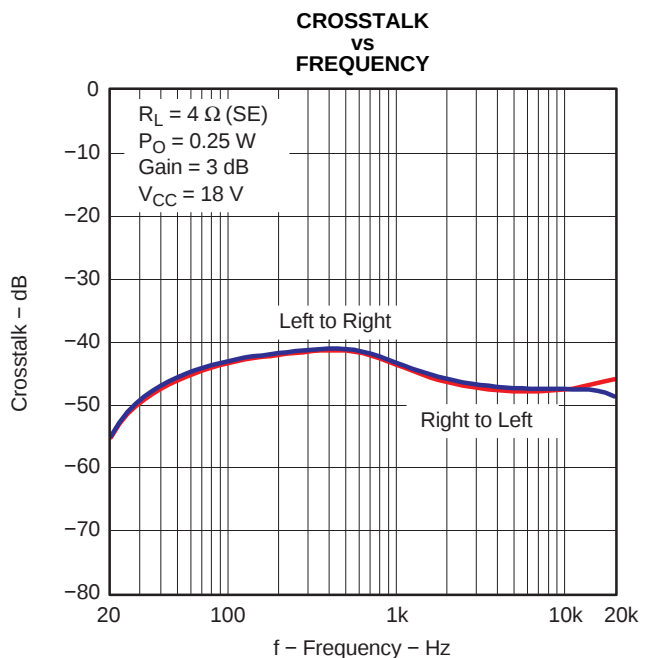


Figure 17.


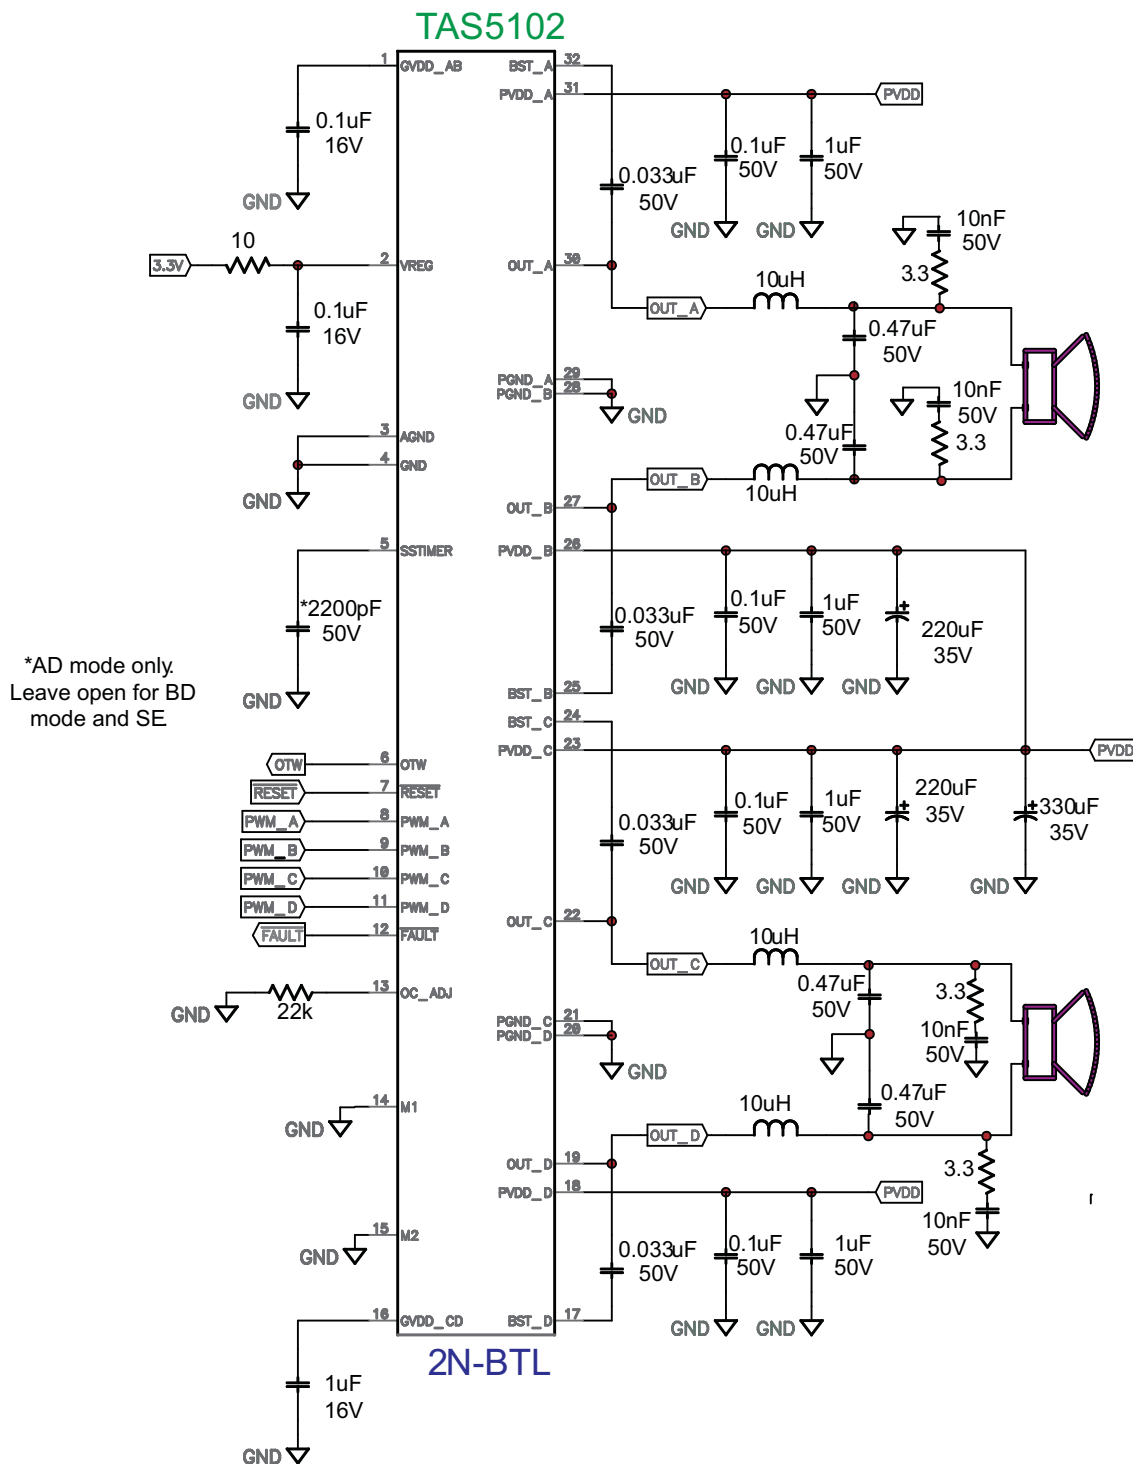


Figure 18. Typical Differential (2N) BTL Application With AD Modulation Filters



TAS5102

1N-BTL

## THEORY OF OPERATION

### POWER SUPPLIES

To facilitate system design, the TAS5102/3 needs only a 3.3-V supply in addition to the (typical) 18-V power-stage supply. An internal voltage regulator provides suitable voltage levels for the gate drive circuitry. Additionally, all circuitry requiring a floating voltage supply, e.g., the high-side gate drive, is accommodated by built-in bootstrap circuitry requiring only a few external capacitors.

In order to provide outstanding electrical and acoustical characteristics, the PWM signal path for the output stage is designed as identical, independent half-bridges. For this reason, each half-bridge has separate bootstrap pins (BST\_X), and power-stage supply pins (PVDD\_X). The gate drive voltages (GVDD\_AB and GVDD\_CD) are derived from the PVDD voltage. Separate, internal voltage regulators reduce and regulate the PVDD voltage to a voltage appropriate for efficient gate drive operation. Furthermore, an additional pin (VREG) is provided as supply for all common logic circuits. Special attention should be paid to placing all decoupling capacitors as close to their associated pins as possible. In general, inductance between the power supply pins and decoupling capacitors must be avoided. (See reference board documentation for additional information.)

For a properly functioning bootstrap circuit, a small ceramic capacitor must be connected from each bootstrap pin (BST\_X) to the power-stage output pin (OUT\_X). When the power-stage output is low, the bootstrap capacitor is charged through an internal diode connected between the gate-drive power-supply pin (GVDD\_X) and the bootstrap pin. When the power-stage output is high, the bootstrap capacitor potential is shifted above the output potential and thus provides a suitable voltage supply for the high-side gate driver. In an application with PWM switching frequencies in the range from 352 kHz to 384 kHz, it is recommended to use 33-nF ceramic capacitors, size 0603 or 0805, for the bootstrap supply. These 33-nF capacitors ensure sufficient energy storage, even during minimal PWM duty cycles, to keep the high-side power stage FET (LDMOS) fully turned on during the remaining part of the PWM cycle. In an application running at a reduced switching frequency, generally 192 kHz, the bootstrap capacitor might need to be increased in value.

Special attention should be paid to the power-stage power supply; this includes component selection, PCB placement, and routing. As indicated, each half-bridge has independent power-stage supply pins (PVDD\_X). For optimal electrical performance, EMI

compliance, and system reliability, it is important that each PVDD\_X pin is decoupled with a 100-nF ceramic capacitor placed as close as possible to each supply pin. It is recommended to follow the PCB layout of the TAS5102/3 reference design. For additional information on recommended power supply and required components, see the application diagrams given previously in this data sheet.

The 3.3-V supply should be from a low-noise, low-output-impedance voltage regulator. Likewise, the 18-V power-stage supply is assumed to have low output impedance and low noise. The power-supply sequence is not critical as facilitated by the internal power-on-reset circuit. Moreover, the TAS5102/3 is fully protected against erroneous power-stage turnon due to parasitic gate charging.

### INTEGRATED GATE DRIVE SUPPLY (GVDD)

The TAS5103 has an integrated gate drive supply, which eliminates the need for an external regulator. If the PVDD is 12 V (i.e., max PVDD < 13.2 V), it is possible to connect the PVDD to the GVDD through a ten ohm resistor. This will allow the power stage to operate as low as 7 V during dips. Otherwise the GVDD undervoltage protection will shutdown the outputs when the supply drops to 8 V. Care must be taken to not connect GVDD and PVDD together in this manner if the operating voltage is higher than 12 V.

### SYSTEM POWER-UP/POWER-DOWN SEQUENCE

#### Powering Up

The outputs of the H-bridges remain in a high-impedance state until the internal gate-drive supply voltage (GVDD\_XY) and external VREG voltages are above the undervoltage protection (UVP) voltage threshold (see the *Electrical Characteristics* section of this data sheet). Although not specifically required, it is recommended to hold RESET in a low state while powering up the device. This allows an internal circuit to charge the external bootstrap capacitors by enabling a weak pulldown of the half-bridge output. The output impedance is approximately 3K $\Omega$  under this condition, unless mode 1, 0 (Single-ended Mode), is used. This means that the TAS5102/3 should be held in reset for at least 200  $\mu$ S to ensure that the bootstrap capacitors are charged. This also assumes that the recommended 0.033- $\mu$ F bootstrap capacitors are used. Changes to bootstrap capacitor values will change the bootstrap capacitor charge time. To avoid *pops* and *clicks*, follow the recommended timing diagram in [Figure 20](#).

When the TAS5102/3 is being used with TI PWM modulators such as the TAS5086, no special attention to the state of  $\overline{\text{RESET}}$  is required, provided that the chipset is configured as recommended.

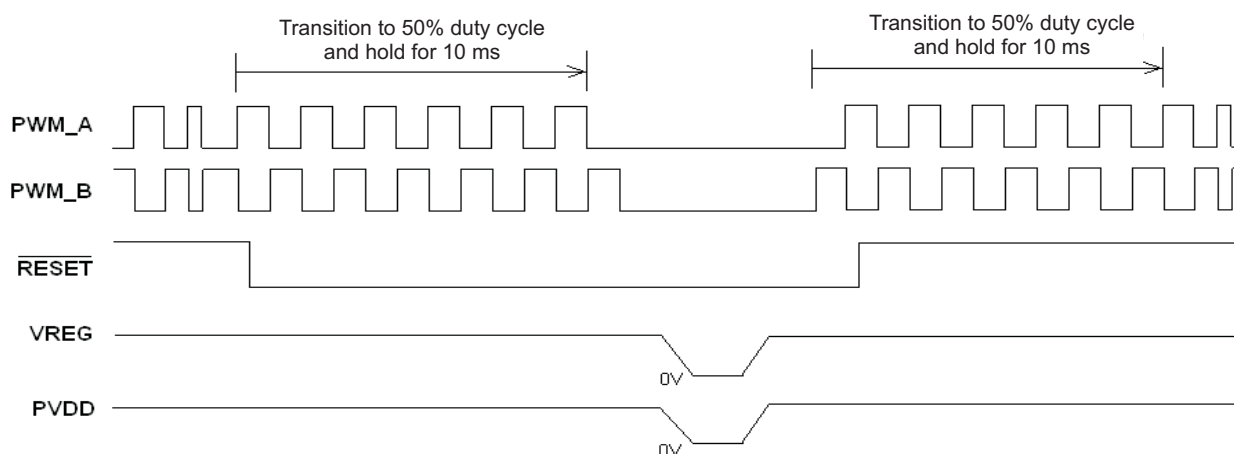


Figure 20. Power-Down/Power-Up Timing Diagram

## Powering Down

The device remains fully operational as long as the gate-drive supply voltage and VREG voltages are above the undervoltage protection (UVP) voltage threshold (see the *Electrical Characteristics* section of this data sheet). Although not specifically required, it is a good practice to hold  $\overline{\text{RESET}}$  low during power down, thus preventing audible artifacts, including *pops* or *clicks*. To avoid *pops* and *clicks*, follow the recommended timing diagram in Figure 20.

When the TAS5102/3 is being used with TI PWM modulators such as the TAS5086, no special attention to the state of  $\overline{\text{RESET}}$  is required, provided that the chipset is configured as recommended.

## ERROR REPORTING

The  $\overline{\text{FAULT}}$  pin is an active-low, open-drain output. The OTW pin is a push-pull, active-high output. Their function is for protection-mode signaling to a PWM controller or other system-control device.

Any fault resulting in device shutdown is signaled by the  $\overline{\text{FAULT}}$  pin going low. Likewise, OTW goes high when the device junction temperature exceeds 125°C (see Table 1).

Table 1.

| $\overline{\text{FAULT}}$ | OTW | DESCRIPTION                                                                   |
|---------------------------|-----|-------------------------------------------------------------------------------|
| 0                         | 0   | Overcurrent (OC) or undervoltage (UVP) warning or overtemperature error (OTE) |
| 0                         | 1   | Overtemperature warning (OTW) or overcurrent (OC) or undervoltage (UVP)       |

Table 1. (continued)

| $\overline{\text{FAULT}}$ | OTW | DESCRIPTION                                                            |
|---------------------------|-----|------------------------------------------------------------------------|
| 1                         | 0   | Junction temperature lower than 125°C and no faults (normal operation) |
| 1                         | 1   | Junction temperature higher than 125°C (overtemperature warning)       |

Note that asserting either  $\overline{\text{RESET}}$  low forces the  $\overline{\text{FAULT}}$  signal high, independent of faults being present. TI recommends monitoring the OTW signal using the system microcontroller and responding to an overtemperature warning signal by, e.g., turning down the volume to prevent further heating of the device, resulting in device shutdown (OTE).

To reduce external component count, an internal pullup resistor to 3.3 V is provided on the  $\overline{\text{FAULT}}$  output. Level compliance for 5-V logic can be obtained by adding external pullup resistors to 5 V (see the *Electrical Characteristics* section of this data sheet for further specifications).

## DEVICE PROTECTION SYSTEM

The TAS5102/3 contains advanced protection circuitry carefully designed to facilitate system integration and ease of use, as well as to safeguard the device from permanent failure due to a wide range of fault conditions such as short circuits, overtemperature, and undervoltage. The TAS5102/3 responds to a fault by immediately setting the power stage in a high-impedance (Hi-Z) state and asserting the  $\overline{\text{FAULT}}$  pin low. In situations other than overcurrent (OC) and overtemperature error (OTE), the device automatically recovers when the fault

condition has been removed. For highest possible reliability, recovering from an overcurrent fault requires external reset of the device (see the *Device Reset* section of this data sheet) no sooner than 300 ms after the shutdown.

### Use of TAS5102/3 in High-Modulation-Index Capable Systems

This device requires at least 50 ns of low time on the output per 384-kHz PWM frame rate in order to keep the bootstrap capacitors charged. As an example, if the modulation index is set to 99.2% in the TAS5086, this setting allows PWM pulse durations down to 20 ns. This signal, which does not meet the 50-ns requirement, is sent to the PWM\_X pin, and this low-state pulse time does not allow the bootstrap capacitor to stay charged. In this situation, the low voltage across the bootstrap capacitor can cause the bootstrap UVP circuitry to activate and shutdown the device. The TAS5102/3 device requires limiting the TAS5086 modulation index to 96.1% to keep the bootstrap capacitor charged under all signals and loads.

Therefore, TI strongly recommends using a TI PWM processor, such as TAS5508 or TAS5086, with the modulation index set at 96.1% to interface with TAS5102/3. This is done by writing 0x04 to the Modulation Limit Register (0x10) in the TAS5086 or 0x04 to the Modulation Limit Register (0x16) in the TAS5508.

### Overcurrent (OC) Protection With Current Limiting

The device has independent, fast-reacting current detectors on all high-side and low-side power-stage FETs. The detector outputs are closely monitored by two protection systems. The first protection system controls the power stage in order to prevent the output current further increasing, i.e., it performs a cycle-by-cycle current-limiting function, rather than prematurely shutting down during combinations of high-level music transients and extreme speaker load impedance drops. If the high-current condition situation persists, i.e., the power stage is being overloaded, a second protection system triggers a latching shutdown, resulting in the power stage being set in the high-impedance (Hi-Z) state. Current limiting and overcurrent protection are not independent for half-bridges A and B and, respectively, C and D. That is, if the bridge-tied load between half-bridges A and B causes an overcurrent fault, half-bridges A, B, C, and D are shut down.

The overcurrent protection threshold is set by a resistor to ground from the OC\_ADJ pin. A value of 22kΩ will result in an overcurrent threshold of 4.5 A.

### Overtemperature Protection

The TAS5102/3 has a two-level temperature-protection system that asserts an active-high warning signal (OTW) when the device junction temperature exceeds 125°C (nominal) and, if the device junction temperature exceeds 150°C (nominal), the device is put into thermal shutdown, resulting in all half-bridge outputs being set in the high-impedance (Hi-Z) state and FAULT being asserted low. OTE is latched in this case. To clear the OTE latch, RESET must be asserted. Thereafter, the device resumes normal operation.

### Undervoltage Protection (UVP) and Power-On Reset (POR)

The UVP and POR circuits of the TAS5102/3 fully protect the device in any power-up/down and brownout situation. While powering up, the POR circuit resets the overload circuit (OLP) and ensures that all circuits are fully operational when the GVDD\_XY and VREG supply voltages reach 5.7 V (typical) and 2.7 V, respectively. Although GVDD\_XY and VREG are independently monitored, a supply voltage drop below the UVP threshold on VREG or either GVDD\_XY pin results in all half-bridge outputs immediately being set in the high-impedance (Hi-Z) state and FAULT being asserted low. The device automatically resumes operation when all supply voltages have increased above the UVP threshold.

### DEVICE RESET

One reset pin is provided for control of half-bridges A/B/C/D. When RESET is asserted low, all four power-stage FETs in half-bridges A, B, C, and D are forced into a high-impedance (Hi-Z) state. Thus, the reset pin is well suited for hard-muting the power stage if needed.

In BTL modes, to accommodate bootstrap charging prior to switching start, asserting the reset input low enables weak pulldown of the half-bridge outputs. In the SE mode, the weak pulldowns are not enabled, and it is therefore recommended to ensure bootstrap capacitor charging by providing a low pulse on the PWM inputs when reset is asserted high.

Asserting the reset input low removes any fault information to be signaled on the FAULT output, i.e., FAULT is forced high.

A rising-edge transition on the reset input allows the device to resume operation after an overcurrent fault.

## SSTIMER FUNCTIONALITY

The SSTIMER pin uses a capacitor connected between this pin and ground to control the output duty cycle when a transition occurs on the  $\overline{\text{RESET}}$  pin. The capacitor on the SSTIMER pin is slowly charged through an internal current source, and the charge time determines the rate at which the output transitions from a near zero duty cycle to the duty cycle that is present on the inputs. This allows for a smooth transition with no audible *pop* or *click* noises when the RESET pin transitions from high-to-low or low-to-high.

For a high-to-low transition of the  $\overline{\text{RESET}}$  pin (shutdown case), it is important for the modulator to remain switching for a period of at least 10 ms (if using a 2.2 nF capacitor). Larger capacitors will increase the start-up/shutdown time, while capacitors smaller than 2.2 nF will decrease the start-up/shutdown time. The inputs MUST remain switching on the shutdown transition to allow the outputs to slowly ramp down the duty cycle to near zero before completely shutting off. The SSTIMER pin should be left floating for BD modulation and also for SE (single-ended) mode.

## THERMAL INFORMATION

The thermally augmented package provided with the TAS5102 is designed to be interfaced directly to a heatsink using a thermal interface compound (for example, Wakefield Engineering type 126 thermal grease.) The heatsink then absorbs heat from the IC and couples it to the local air. If the heatsink is carefully designed, this process can reach equilibrium

and heat can be continually removed from the IC. Because of the efficiency of the TAS5102, heatsinks can be used which are much smaller than those required for linear amplifiers of equivalent performance.

$R_{\theta JA}$  is a system thermal resistance from junction to ambient air. As such, it is a system parameter with roughly the following components:  $R_{\theta JC}$  (the thermal resistance from junction to case, or in this instance the metal pad), thermal grease thermal resistance, and heatsink thermal resistance.  $R_{\theta JC}$  has been provided in the Device Information section. The thermal grease thermal resistance can be calculated from the exposed pad area and the thermal grease manufacturer's area thermal resistance (expressed in  $^{\circ}\text{C}\cdot\text{in}^2/\text{W}$ ). The area thermal resistance of the example thermal grease with a 0.001-inch thick layer is about  $0.054\text{ }^{\circ}\text{C}\cdot\text{in}^2/\text{W}$ . The approximate exposed pad area is  $0.01164\text{ in}^2$ . Dividing the example thermal grease area resistance by the area of the pad gives the actual resistance through the thermal grease,  $3.3\text{ }^{\circ}\text{C}/\text{W}$ .

Heatsink thermal resistance is generally predicted by the heatsink vendor, modeled using a continuous flow dynamics (CFD) model, or measured.

Thus for a single IC, the system  $R_{\theta JA} = R_{\theta JC} + \text{thermal grease resistance} + \text{heatsink resistance}$ .

Thermal information for the TAS5103 Pad Down design can be found in TI document [SLMA002B](#), PowerPAD Thermally Enhanced Package Application Report. Additional material regarding thermal metrics can be found in TI document SPRA953A, IC Package Thermal Metrics (Rev. A).

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TAS5102DAD       | ACTIVE                | HTSSOP       | DAD             | 32   | 46          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5102DADG4     | ACTIVE                | HTSSOP       | DAD             | 32   | 46          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5102DADR      | ACTIVE                | HTSSOP       | DAD             | 32   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5102DADRG4    | ACTIVE                | HTSSOP       | DAD             | 32   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5103DAP       | ACTIVE                | HTSSOP       | DAP             | 32   | 46          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5103DAPG4     | ACTIVE                | HTSSOP       | DAP             | 32   | 46          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5103DAPR      | ACTIVE                | HTSSOP       | DAP             | 32   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |
| TAS5103DAPRG4    | ACTIVE                | HTSSOP       | DAP             | 32   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-3-260C-168 HR          |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


**TAPE AND REEL INFORMATION**

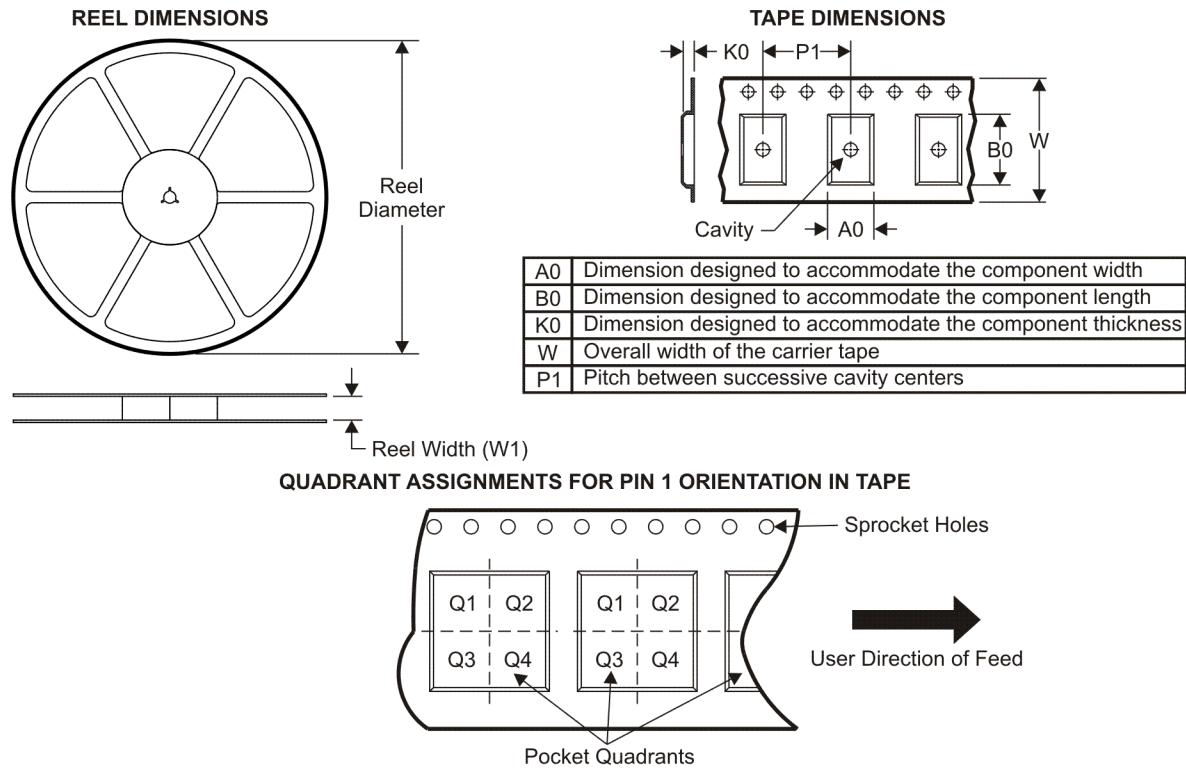

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TAS5102DADR | HTSSOP       | DAD             | 32   | 2000 | 330.0              | 24.4               | 8.6     | 11.5    | 1.6     | 12.0    | 24.0   | Q1            |
| TAS5103DAPR | HTSSOP       | DAP             | 32   | 2000 | 330.0              | 24.4               | 8.6     | 11.5    | 1.6     | 12.0    | 24.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

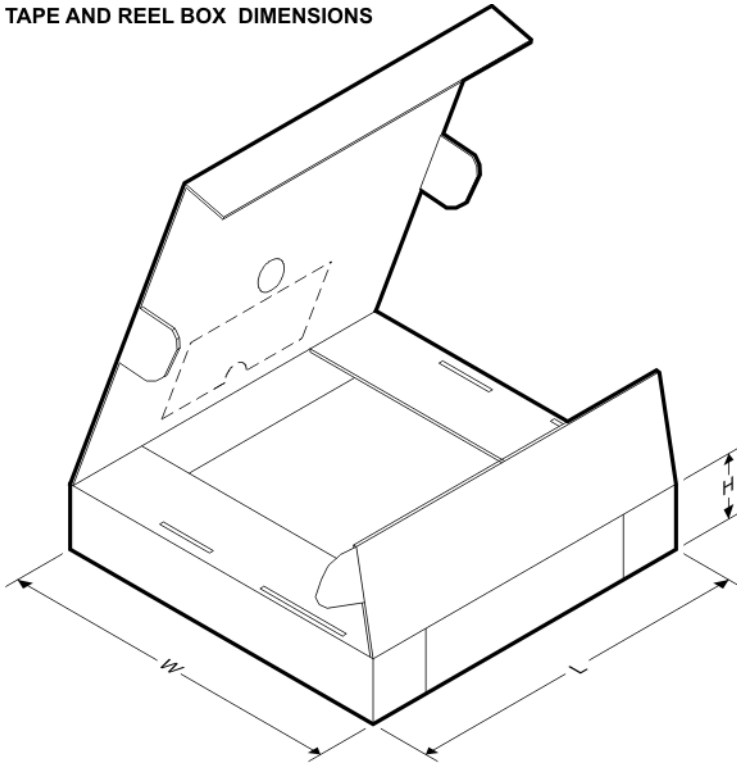


\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TAS5102DADR | HTSSOP       | DAD             | 32   | 2000 | 346.0       | 346.0      | 41.0        |
| TAS5103DAPR | HTSSOP       | DAP             | 32   | 2000 | 346.0       | 346.0      | 41.0        |

**DAD (R-PDSO-G\*\*) PowerPAD™ PLASTIC SMALL-OUTLINE (DIE DOWN)**

38 PIN SHOWN

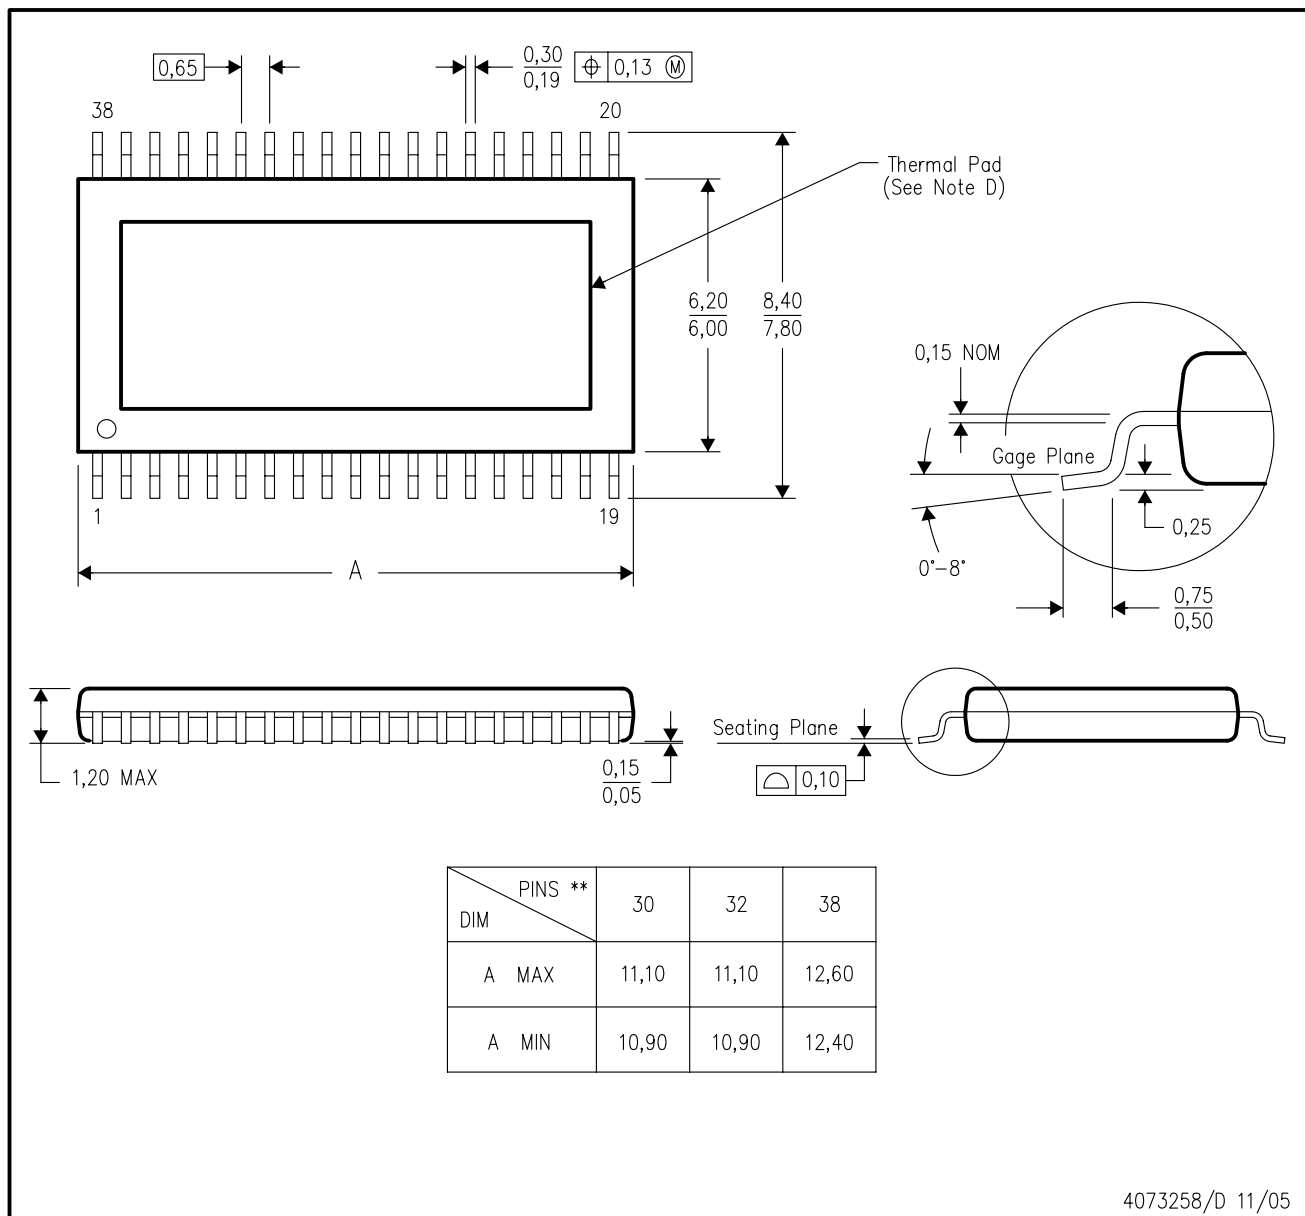

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - The package thermal performance may be enhanced by attaching an external heatsink to the thermal pad. This pad is electrically and thermally connected to the backside of the die and possibly selected leads.
  - Falls within JEDEC MO-153

PowerPAD is a trademark of Texas Instruments.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Amplifiers                  | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters             | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DSP                         | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Clocks and Timers           | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>           |
| Interface                   | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic                       | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt                  | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers            | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID                        | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| RF/IF and ZigBee® Solutions | <a href="http://www.ti.com/lprf">www.ti.com/lprf</a>               |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Medical            | <a href="http://www.ti.com/medical">www.ti.com/medical</a>               |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2008, Texas Instruments Incorporated