

Dual-Port, Differential, VDSL2 Line Driver Amplifiers

FEATURES

- **Low Power Consumption:**
 - 21mA/Port (Full Bias Mode)
 - 16.2mA/Port (Mid Bias Mode)
 - 11.2mA/Port (Low Bias Mode)
 - Low-Power Shutdown Mode
 - I_{ADJ} Pin for Variable Bias
- **Low Noise:**
 - 2.7nV/ $\sqrt{\text{Hz}}$ Voltage Noise
 - 17pA/ $\sqrt{\text{Hz}}$ Inverting Current Noise
 - 1.2pA/ $\sqrt{\text{Hz}}$ Noninverting Current Noise
- **Low MTPR Distortion:**
 - 70dB with +20.5dBm G.993.2—Profile 8b
- –93dBc HD3 (1MHz, 100 Ω Differential)
- High Output Current: > 416mA (25 Ω Load)
- Wide Output Swing: 43.2V_{PP} ($\pm 12\text{V}$, 100 Ω Differential Load)
- Wide Bandwidth: 150MHz ($G_{DIFF} = 10\text{V/V}$)
- PSRR: 50dB at 1MHz for Good Isolation
- Wide Power-Supply Range: 10V to 28V

APPLICATIONS

- Ideal For VDSL2 Systems
- Backwards-Compatible with ADSL/ADSL2+/ADSL2++ Systems

DESCRIPTION

The THS6214 is a dual-port, current-feedback architecture, differential line driver amplifier system ideal for xDSL systems. The device is targeted for use in VDSL2 (very-high-bit-rate digital subscriber line 2) line driver systems that enable greater than +14.5dBm line power, supporting the G.993.2 VDSL2 17a profile. It is also fast enough to support central-office transmissions of +14.5dBm line power up to 30MHz.

The unique architecture of the THS6214 uses minimal quiescent current while still achieving very high linearity. Differential distortion, under full bias conditions, is –93dBc at 1MHz and reduces to only –73dBc at 10MHz. Fixed multiple bias settings of the amplifiers allow for enhanced power savings for line lengths where the full performance of the amplifier is not required. To allow for even more flexibility and power savings, an adjustable current pin (I_{ADJ}) is available to further lower the bias currents.

The wide output swing of 43.2V_{PP} (100 Ω differential load) with $\pm 12\text{V}$ power supplies, coupled with over 416mA current drive (25 Ω load), allows for wide dynamic headroom, keeping distortion minimal.

The THS6214 is available in a QFN-24 or a TSSOP-24 PowerPAD™ package.

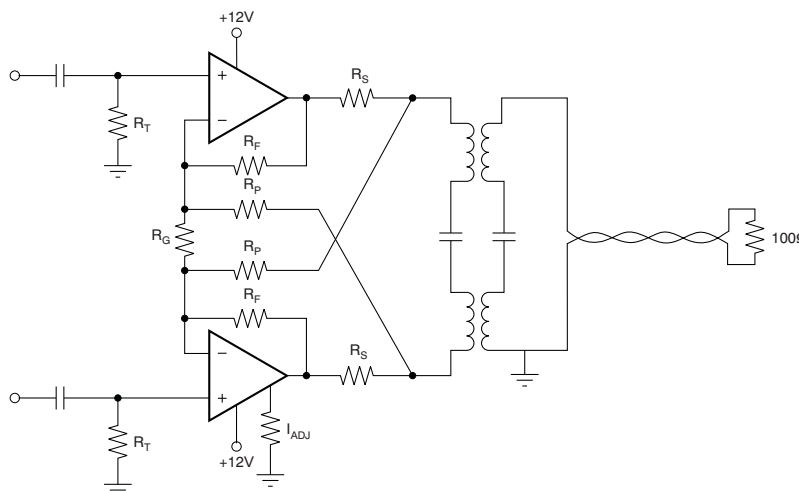


Figure 1. Typical VDSL2 Line Driver Circuit Using One Port of the THS6214



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments, Inc.
All other trademarks are the property of their respective owners.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ORDERING INFORMATION⁽¹⁾

| PRODUCT | PACKAGE-LEAD ⁽²⁾ | PACKAGE DESIGNATOR | SPECIFIED TEMPERATURE RANGE | PACKAGE MARKING | ORDERING NUMBER | TRANSPORT MEDIA, QUANTITY |
|---------|-----------------------------|--------------------|-----------------------------|-----------------|-----------------|---------------------------|
| THS6214 | QFN-24 | RHF | –40°C to +85°C | 6214 | THS6214IRHFT | Tape and reel, 250 |
| | | | | | THS6214IRHFR | Tape and reel, 3000 |
| THS6214 | TSSOP-24 | PWP | –40°C to +85°C | THS6214 | THS6214IPWP | Tape and reel, 60 |
| | | | | | THS6214IPWPR | Tape and reel, 2000 |

(1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

(2) The PowerPAD™ is electrically isolated from all other pins.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Over operating free-air temperature range, unless otherwise noted.

| | | THS6214 | UNIT |
|--|--|---|------|
| Supply voltage, V_{S-} to V_{S+} | | 28 | V |
| Input voltage, V_I | | $\pm V_S$ | V |
| Differential input voltage, V_{ID} | | ± 2 | V |
| Output current, I_O : Static dc ⁽²⁾ | | ± 500 | mA |
| Continuous power dissipation | | See Dissipation Ratings Table | |
| Maximum junction temperature, T_J | Under any condition ⁽³⁾ | +150 | °C |
| | Continuous operation, long-term reliability ⁽⁴⁾ RHF package only | +130 | °C |
| | Continuous operation, long-term reliability ⁽⁴⁾ PWP package only | +140 | °C |
| Storage temperature range, T_{STG} | | –65 to +150 | °C |
| ESD ratings | Human body model (HBM) | 2000 | V |
| | Charged device model (CDM) | 500 | V |
| | Machine model (MM) | 100 | V |

(1) Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated is not implied. Exposure to absolute maximum rated conditions for extended periods may degrade device reliability.

(2) The THS6214 incorporates a PowerPAD on the underside of the chip. This pad acts as a heatsink and must be connected to a thermally dissipating plane for proper power dissipation. Failure to do so may result in exceeding the maximum junction temperature, which could permanently damage the device. See TI Technical Brief [SLMA002](#) for more information about utilizing the PowerPAD thermally-enhanced package. Under high-frequency ac operation (greater than 10kHz), the short-term output current capability is much greater than the continuous dc output current rating. This short-term output current rating is about 8.5 times the dc capability, or about ± 850 mA.

(3) The absolute maximum junction temperature under any condition is limited by the constraints of the silicon process.



(4) The absolute maximum junction temperature for continuous operation is limited by the package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

DISSIPATION RATINGS

| PACKAGE | θ_{JP} (°C/W) | θ_{JA} (°C/W) ⁽¹⁾ |
|-----------------|----------------------|-------------------------------------|
| QFN-24 (RHF) | 5 | 30 |
| HTSSOP-24 (PWP) | 7 | 45 |

(1) For high power dissipation applications, soldering the PowerPAD to the PCB is required. Failure to do so may result in reduced reliability and/or lifetime of the device. See TI technical brief [SLMA002](#) for more information about using the PowerPAD thermally enhanced package.

PIN CONFIGURATIONS⁽¹⁾⁽²⁾

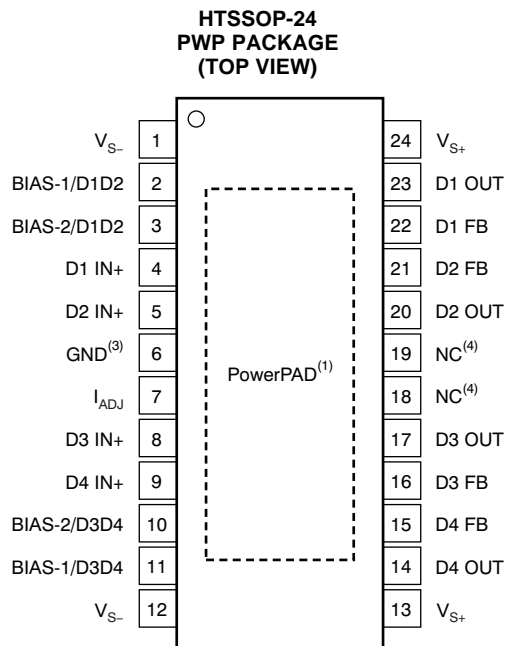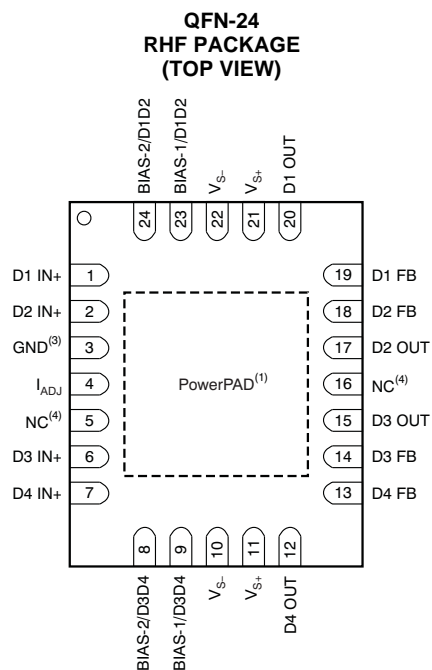

- (1) The PowerPAD is electrically isolated from all other pins and can be connected to any potential voltage range from V_{S-} to V_{S+}. Typically, the PowerPAD is connected to the GND plane because this plane tends to physically be the largest and is able to dissipate the most amount of heat.
- (2) The THS6214 defaults to the shutdown (disable) state if no signal is present on the bias pins.
- (3) The GND pin range is from V_{S-} to (V_{S+} – 5V).
- (4) NC = no connection.

ELECTRICAL CHARACTERISTICS: $V_S = \pm 12V$

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +10V/V$ with $R_L = 100\Omega$ differential load, $R_{\text{ADJ}} = 0\Omega$, active impedance circuit configuration, and full bias, unless otherwise noted. Each port is independently tested. **Boldface** values are 100% tested at $+25^\circ\text{C}$.

| PARAMETER | CONDITIONS | THS6214IRHF, IPWP | | | UNIT | TEST LEVEL ⁽¹⁾ |
|---|--|-------------------|------|------|--------|---------------------------|
| | | MIN | TYP | MAX | | |
| AC PERFORMANCE | | | | | | |
| Small-signal bandwidth, −3dB | G _{DIFF} = +5V/V , R _F = 1.5kΩ, V _O = 2V _{PP} | | 160 | | MHz | C |
| | G _{DIFF} = +10V/V , R _F = 1.5kΩ, V _O = 2V _{PP} | 120 | 150 | | MHz | B |
| | Over −40°C to +85°C temperature range | 100 | | | MHz | B |
| 0.1dB bandwidth flatness | G _{DIFF} = +10V/V , R _F = 1.24kΩ | | 114 | | MHz | C |
| Large-signal bandwidth | G _{DIFF} = +10V/V , R _F = 1.24kΩ, V _O = 20V _{PP} | | 120 | | MHz | C |
| Slew rate (10% to 90% level) | G _{DIFF} = +10V/V, V _O = 20V step, differential | 3200 | 3800 | | V/μs | B |
| | T _A = −40°C to +85°C | 3000 | | | V/μs | B |
| Rise and fall time | G _{DIFF} = +10V/V, V _O = 2V _{PP} | | 5 | | ns | C |
| Harmonic distortion | G _{DIFF} = +10V/V, V _O = 2V _{PP} , R _L = 100Ω differential | | | | | C |
| 2nd harmonic | Full bias, f = 1MHz | | −100 | −95 | dBc | B |
| | T _A = −40°C to +85°C | | | −90 | dBc | B |
| | Low bias, f = 1Mhz | | −96 | | dBc | C |
| 3rd harmonic | Full bias, f = 1MHz | | −89 | −85 | dBc | B |
| | T _A = −40°C to +85°C | | | −80 | dBc | B |
| | Low bias, f = 1MHz | | −85 | | dBc | C |
| 2nd harmonic | Full bias, f = 10MHz | | −75 | −70 | dBc | B |
| | T _A = −40°C to +85°C | | | −65 | dBc | B |
| | Low bias, f = 10MHz | | −72 | | dBc | C |
| 3rd harmonic | Full bias, f = 10MHz | | −73 | −65 | dBc | B |
| | T _A = −40°C to +85°C | | | −53 | dBc | B |
| | Low bias, f = 10MHz | | −58 | | dBc | C |
| Differential input voltage noise | f = 1MHz, input-referred | | 2.7 | 3.2 | nV/√Hz | B |
| | T _A = −40°C to +85°C | | | 3.5 | nV/√Hz | B |
| Differential noninverting current noise | f = 1MHz | | 1.2 | 1.4 | pA/√Hz | B |
| | T _A = −40°C to +85°C | | | 1.6 | pA/√Hz | B |
| Differential inverting current noise | f = 1MHz | | 17 | 20 | pA/√Hz | B |
| | T _A = −40°C to +85°C | | | 24 | pA/√Hz | B |
| DC PERFORMANCE | | | | | | |
| Open-loop transimpedance gain | R _L = 100Ω | 330 | 700 | | kΩ | A |
| | | 300 | | | kΩ | B |
| Input offset voltage | | | ±15 | ±50 | mV | A |
| | T _A = −40°C to +85°C | | | ±60 | mV | B |
| Input offset voltage drift | T _A = −40°C to +85°C | | | ±155 | μV/°C | B |
| Input offset voltage matching | Channels 1 to 2 and 3 to 4 only | | ±0.5 | ±5 | mV | A |
| | T _A = −40°C to +85°C | | | ±7 | mV | B |
| Noninverting input bias current | | | ±1 | ±3.5 | μA | A |
| | T _A = −40°C to +85°C | | | ±5.5 | μA | B |
| Noninverting input bias current drift | T _A = −40°C to +85°C | | | ±30 | nA/°C | B |
| Inverting input bias current | | | ±8 | ±45 | μA | A |
| | T _A = −40°C to +85°C | | | ±55 | μA | B |
| Inverting input bias current drift | T _A = −40°C to +85°C | | | ±154 | nA/°C | B |
| Inverting input bias current matching | | | ±8 | ±30 | μA | A |
| | T _A = −40°C to +85°C | | | ±40 | μA | B |

(1) Test levels: (A) 100% tested at $+25^\circ\text{C}$. Over-temperature limits set by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

ELECTRICAL CHARACTERISTICS: $V_S = \pm 12V$ (continued)

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +10V/V$ with $R_L = 100\Omega$ differential load, $R_{\text{ADJ}} = 0\Omega$, active impedance circuit configuration, and full bias, unless otherwise noted. Each port is independently tested. **Boldface** values are 100% tested at $+25^\circ\text{C}$.

| PARAMETER | CONDITIONS | THS6214IRHF, IPWP | | | UNIT | TEST LEVEL ⁽¹⁾ | |
|---|--|--|----------|------|----------|---------------------------|---|
| | | MIN | TYP | MAX | | | |
| INPUT CHARACTERISTICS | | | | | | | |
| Common-mode input range | Each input | ±9 | ±9.5 | | V | A | |
| | T _A = −40°C to +85°C | ±8.6 | | | V | B | |
| Common-mode rejection ratio | Each input | 53 | 65 | | dB | A | |
| | T _A = −40°C to +85°C | 49 | | | dB | B | |
| Noninverting input resistance | | | 500 2 | | kΩ pF | C | |
| Inverting input resistance | | | 50 | | Ω | C | |
| OUTPUT CHARACTERISTICS ⁽²⁾ | | | | | | | |
| Output voltage swing | R _L = 100Ω, each output | | ±10.9 | | V | C | |
| | R _L = 50Ω, each output | ±10.6 | ±10.8 | | V | A | |
| | T _A = −40°C to +85°C | ±10.4 | | | V | B | |
| | R _L = 25Ω, each output | ±10.2 | ±10.4 | | V | A | |
| | T _A = −40°C to +85°C | ±10 | | | V | B | |
| Output current (sourcing and sinking) | R _L = 25Ω, based on V _{OUT} tests | ±408 | ±416 | | mA | A | |
| | T _A = −40°C to +85°C | ±400 | | | mA | B | |
| Short-circuit output current | | | 1 | | A | C | |
| Output impedance | f = 1MHz, differential | | 0.2 | | Ω | C | |
| Crosstalk | f = 1MHz, V _{OUT} = 2V _{PP} , Port 1 to Port 2 | | −90 | | dB | C | |
| POWER SUPPLY | | | | | | | |
| Operating voltage | | ±5 | ±12 | ±14 | V | A | |
| | T _A = −40°C to +85°C | ±5 | | ±14 | V | C | |
| I _{S+} Quiescent current | Per port, full bias (Bias-1 = 0, Bias-2 = 0) | 19.5 | 21 | 22.5 | mA | A | |
| | T _A = −40°C to +85°C | 17 | | 24 | mA | B | |
| | Per port, mid bias (Bias-1 = 1, Bias-2 = 0) | 15 | 16.2 | 17.4 | mA | A | |
| | T _A = −40°C to +85°C | 12.8 | | 18.6 | mA | B | |
| | Per port, low bias (Bias-1 = 0, Bias-2 = 1) | 10 | 11.2 | 12.4 | mA | A | |
| | T _A = −40°C to +85°C | 8.1 | | 13.2 | mA | B | |
| | Per port, bias off (Bias-1 = 1, Bias-2 = 1) | | 0.4 | 0.8 | mA | A | |
| | T _A = −40°C to +85°C | | | 1 | mA | B | |
| | I _{S−} Quiescent current | Per port, full bias (Bias-1 = 0, Bias-2 = 0) | 18.5 | 20 | 21.5 | mA | A |
| | | T _A = −40°C to +85°C | 16 | | 23 | mA | B |
| Per port, mid bias (Bias-1 = 1, Bias-2 = 0) | | 14 | 15.2 | 16.4 | mA | A | |
| T _A = −40°C to +85°C | | 11.8 | | 17.6 | mA | B | |
| Per port, low bias (Bias-1 = 0, Bias-2 = 1) | | 9 | 10.2 | 11.6 | mA | A | |
| T _A = −40°C to +85°C | | 7.1 | | 11.4 | mA | B | |
| Per port, bias off (Bias-1 = 1, Bias-2 = 1) | | | 0.1 | 0.3 | mA | A | |
| T _A = −40°C to +85°C | | | | 0.8 | mA | B | |
| Current through GND pin | | Per port, full bias (Bias-1 = 0, Bias-2 = 0) | | 1 | | mA | C |
| Power-supply rejection ratio (+PSRR) | | Differential | 54 | 66 | | dB | A |
| | T _A = −40°C to +85°C | 52 | | | dB | B | |
| Power-supply rejection ratio (−PSRR) | Differential | 52 | 65 | | dB | A | |
| | T _A = −40°C to +85°C | 50 | | | dB | B | |

(2) Test circuit is shown in [Figure 1](#).

ELECTRICAL CHARACTERISTICS: $V_S = \pm 12V$ (continued)

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +10\text{V/V}$ with $R_L = 100\Omega$ differential load, $R_{\text{ADJ}} = 0\Omega$, active impedance circuit configuration, and full bias, unless otherwise noted. Each port is independently tested. **Boldface** values are 100% tested at $+25^\circ\text{C}$.

| PARAMETER | CONDITIONS | THS6214IRHF, IPWP | | | UNIT | TEST LEVEL ⁽¹⁾ |
|--|--|-------------------|---------|-----------|------------------|---------------------------|
| | | MIN | TYP | MAX | | |
| LOGIC | | | | | | |
| Bias control pin logic threshold | Logic 1, with respect to GND ⁽³⁾ , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | 1.9 | | | V | B |
| | Logic 0, with respect to GND ⁽³⁾ , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | | 0.8 | V | B |
| Bias pin quiescent current | Bias-1, Bias-2 = 0.5V (logic 0) | | 20 | 30 | μA | A |
| | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | | 35 | μA | B |
| | Bias-1, Bias-2 = 3.3V (logic 1) | | 0.3 | 1 | μA | A |
| | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | | 1.2 | μA | B |
| | | | | | | |
| Turn-on time delay (t_{ON}) | Time for I_S to reach 50% of final value | | 1 | | μs | C |
| Turn-off time delay (t_{OFF}) | Time for I_S to reach 50% of final value | | 1 | | μs | C |
| Bias pin input impedance | | | 50 | | k Ω | C |
| Amplifier output impedance | Off bias (Bias-1 = 1, Bias-2 = 1) | | 10 5 | | k Ω pF | C |

(3) The GND pin usable range is from V_{S-} to $(V_{S+} - 5V)$.

ELECTRICAL CHARACTERISTICS: $V_S = \pm 6V$

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +5V/V$ with $R_L = 100\Omega$ differential load, $R_{\text{ADJ}} = 0\Omega$, active impedance circuit configuration, and full bias, unless otherwise noted. Each port is independently tested.

| PARAMETER | CONDITIONS | THS6214IRHF, IPWP | | | UNIT | TEST LEVEL ⁽¹⁾ |
|---|--|-------------------|------|------|--------|---------------------------|
| | | MIN | TYP | MAX | | |
| AC PERFORMANCE | | | | | | |
| Small-signal bandwidth, –3dB (V _O = 2V _{PP}) | G _{DIFF} = +5V/V , R _F = 1.5kΩ, V _O = 2V _{PP} | | 140 | | MHz | C |
| | G _{DIFF} = +10V/V , R _F = 1.5kΩ, V _O = 2V _{PP} | 110 | 140 | | MHz | B |
| | T _A = –40°C to +85°C | 95 | | | MHz | B |
| 0.1dB bandwidth flatness | G _{DIFF} = +10V/V , R _F = 1.24kΩ | | 100 | | MHz | C |
| Large-signal bandwidth | G _{DIFF} = +5V/V , R _F = 1.24kΩ, V _O = 20V _{PP} | | 120 | | MHz | C |
| Slew rate (10% to 90% level) | G _{DIFF} = +10V/V, V _O = 20V step, differential | 1200 | 1600 | | V/μs | B |
| | Over –40°C to +85°C temperature range | 1000 | | | V/μs | B |
| Rise and fall time | G _{DIFF} = +10V/V, V _O = 2V _{PP} | | 5 | | ns | C |
| Harmonic distortion | G _{DIFF} = +10V/V, V _O = 2V _{PP} , f = 1MHz, R _L = 100Ω differential | | | | | C |
| 2nd harmonic | Full bias | | –98 | -92 | dBc | B |
| | T _A = –40°C to +85°C | | | -87 | dBc | B |
| | Low bias | | –93 | | dBc | C |
| 3rd harmonic | Full bias | | –93 | -84 | dBc | B |
| | T _A = –40°C to +85°C | | | -79 | dBc | B |
| | Low bias | | –89 | | dBc | C |
| 2nd harmonic | Full bias | | –80 | -75 | dBc | B |
| | T _A = –40°C to +85°C | | | -68 | dBc | B |
| | Low bias | | –74 | | dBc | C |
| 3rd harmonic | Full bias | | –66 | -60 | dBc | B |
| | T _A = –40°C to +85°C | | | -54 | dBc | B |
| | Low bias | | –55 | | dBc | C |
| Differential input voltage noise | f = 1MHz, input-referred | | 2.5 | 3.0 | nV/√Hz | B |
| | T _A = –40°C to +85°C | | | 3.3 | nV/√Hz | B |
| Differential noninverting current noise | f = 1MHz | | 1.2 | 1.4 | pA/√Hz | B |
| | T _A = –40°C to +85°C | | | 1.6 | pA/√Hz | B |
| Differential inverting current noise | f = 1MHz | | 17 | 20 | pA/√Hz | B |
| | T _A = –40°C to +85°C | | | 24 | pA/√Hz | B |
| DC PERFORMANCE | | | | | | |
| Open-loop transimpedance gain | R _L = 100Ω | 330 | 650 | | kΩ | A |
| | T _A = –40°C to +85°C | 300 | | | kΩ | B |
| Input offset voltage | T _A = –40°C to +85°C | | ±10 | ±45 | mV | A |
| | | | | ±55 | mV | B |
| Input offset voltage drift | T _A = –40°C to +85°C | | | ±155 | μV/°C | B |
| Input offset voltage matching | Channels 1 to 2 and 3 to 4 only | | ±0.5 | ±5 | mV | A |
| | T _A = –40°C to +85°C | | | ±7 | mV | B |
| Noninverting input bias current | T _A = –40°C to +85°C | | ±1 | ±3.5 | μA | A |
| | | | | ±5.5 | μA | B |
| Noninverting input bias current drift | T _A = –40°C to +85°C | | | ±30 | nA/°C | B |
| Inverting input bias current | T _A = –40°C to +85°C | | ±8 | ±45 | μA | A |
| | | | | ±55 | μA | B |
| Inverting input bias current drift | T _A = –40°C to +85°C | | | ±135 | nA/°C | B |
| | | | ±8 | ±30 | μA | A |
| Inverting input bias current matching | T _A = –40°C to +85°C | | | ±40 | μA | B |

(1) Test levels: (A) 100% tested at $+25^\circ\text{C}$. Over-temperature limits set by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

ELECTRICAL CHARACTERISTICS: $V_S = \pm 6V$ (continued)

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +5V/V$ with $R_L = 100\Omega$ differential load, $R_{\text{ADJ}} = 0\Omega$, active impedance circuit configuration, and full bias, unless otherwise noted. Each port is independently tested.

| PARAMETER | CONDITIONS | THS6214IRHF, IPWP | | | UNIT | TEST LEVEL ⁽¹⁾ |
|---------------------------------------|--|-------------------|----------|------|----------|---------------------------|
| | | MIN | TYP | MAX | | |
| INPUT CHARACTERISTICS | | | | | | |
| Common-mode input range | Each input | ±2.9 | ±3.0 | | V | A |
| | T _A = −40°C to +85°C | ±2.7 | | | V | B |
| Common-mode rejection ratio | Each input | 51 | 62 | | dB | A |
| | T _A = −40°C to +85°C | 47 | | | dB | B |
| Noninverting input resistance | | | 500 2 | | kΩ pF | C |
| Inverting input resistance | | | 55 | | Ω | C |
| OUTPUT CHARACTERISTICS ⁽²⁾ | | | | | | |
| Output voltage swing | R _L = 100Ω, each output | | ±4.9 | | V | C |
| | R _L = 50Ω, each output | ±4.75 | ±4.9 | | V | A |
| | T _A = −40°C to +85°C | ±4.6 | | | V | B |
| | R _L = 25Ω, each output | ±4.55 | ±4.7 | | V | A |
| | T _A = −40°C to +85°C | ±4.4 | | | V | B |
| | R _L = 25Ω, based on V _{OUT} tests | ±182 | ±188 | | mA | A |
| Output current (sourcing and sinking) | T _A = −40°C to +85°C | ±176 | | | mA | B |
| Short-circuit output current | | | ±1 | | A | C |
| Output impedance | f = 1MHz, differential | | 0.2 | | Ω | C |
| Crosstalk | f = 1MHz, V _{OUT} = 2V _{PP} , Port 1 to Port 2 | | -90 | | dB | C |
| POWER SUPPLY | | | | | | |
| Operating voltage | | ±5 | ±6 | ±14 | V | A |
| | T _A = −40°C to +85°C | ±5 | | ±14 | V | C |
| I _{S+} Quiescent current | Per port, full bias (Bias-1 = 0, Bias-2 = 0) | 13 | 17 | 21 | mA | A |
| | T _A = −40°C to +85°C | 10 | | 22 | mA | B |
| | Per port, mid bias (Bias-1 = 1, Bias-2 = 0) | 10.2 | 13.2 | 16.2 | mA | A |
| | T _A = −40°C to +85°C | 9.3 | | 16.4 | mA | B |
| | Per port, low bias (Bias-1 = 0, Bias-2 = 1) | 7.4 | 9.4 | 11.4 | mA | A |
| | T _A = −40°C to +85°C | 6.7 | | 11.6 | mA | B |
| | Per port, bias off (Bias-1 = 1, Bias-2 = 1) | | 0.5 | 0.8 | mA | A |
| | T _A = −40°C to +85°C | | | 0.9 | mA | B |
| | Per port, full bias (Bias-1 = 0, Bias-2 = 0) | 12 | 16 | 20 | mA | A |
| | T _A = −40°C to +85°C | 9 | | 21 | mA | B |
| I _{S−} Quiescent current | Per port, mid bias (Bias-1 = 1, Bias-2 = 0) | 9.2 | 12.2 | 15.2 | mA | A |
| | T _A = −40°C to +85°C | 8.3 | | 15.4 | mA | B |
| | Per port, low bias (Bias-1 = 0, Bias-2 = 1) | 6.4 | 8.4 | 10.4 | mA | A |
| | T _A = −40°C to +85°C | 5.7 | | 10.6 | mA | B |
| | Per port, bias off (Bias-1 = 1, Bias-2 = 1) | | 0.1 | 0.3 | mA | A |
| | T _A = −40°C to +85°C | | | 0.5 | mA | B |
| Current through GND pin | Per port, full bias (Bias-1 = 0, Bias-2 = 0) | | 1 | | mA | C |
| Power-supply rejection ratio (+PSRR) | Differential | 54 | 64 | | dB | A |
| | T _A = −40°C to +85°C | 52 | | | dB | B |
| Power-supply rejection ratio (−PSRR) | Differential | 52 | 63 | | dB | A |
| | T _A = −40°C to +85°C | 50 | | | dB | B |

(2) Test circuit is shown in [Figure 1](#).

ELECTRICAL CHARACTERISTICS: $V_S = \pm 6V$ (continued)

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +5V/V$ with $R_L = 100\Omega$ differential load, $R_{\text{ADJ}} = 0\Omega$, active impedance circuit configuration, and full bias, unless otherwise noted. Each port is independently tested.

| PARAMETER | CONDITIONS | THS6214IRHF, IPWP | | | UNIT | TEST LEVEL ⁽¹⁾ |
|--|--|-------------------|---------|-----------|------------------|---------------------------|
| | | MIN | TYP | MAX | | |
| LOGIC | | | | | | |
| Bias control pin logic threshold | Logic 1, with respect to GND ⁽³⁾ , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | 1.9 | | | V | B |
| | Logic 0, with respect to GND ⁽³⁾ , $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | | 0.8 | V | B |
| Bias pin quiescent current | Bias-1, Bias-2 = 0.5V (logic 0) | | 20 | 30 | μA | A |
| | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | | 35 | μA | B |
| | Bias-1, Bias-2 = 3.3V (logic 1) | | 0.3 | 1 | μA | A |
| | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ | | | 1.2 | μA | B |
| Turn-on time delay (t_{ON}) | Time for I_S to reach 50% of final value | | 1 | | μs | C |
| Turn-off time delay (t_{OFF}) | Time for I_S to reach 50% of final value | | 1 | | μs | C |
| Bias pin input impedance | | | 50 | | k Ω | C |
| Amplifier output impedance | Off bias (Bias-1 = 1, Bias-2 = 1) | | 10 5 | | k Ω pF | C |

(3) The GND pin usable range is from V_{S-} to $(V_{S+} - 5V)$.

Table 1. Logic Table

| BIAS-1 | BIAS-2 | FUNCTION | DESCRIPTION |
|--------|--------|-----------------------|--|
| 0 | 0 | Full bias mode (100%) | Amplifiers on with lowest distortion possible (default state) |
| 1 | 0 | Mid bias mode (75%) | Amplifiers on with power savings and a reduction in distortion performance |
| 0 | 1 | Low bias mode (50%) | Amplifiers on with enhanced power savings and a reduction of overall performance |
| 1 | 1 | Shutdown mode | Amplifiers off and output has high impedance |

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Full Bias

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

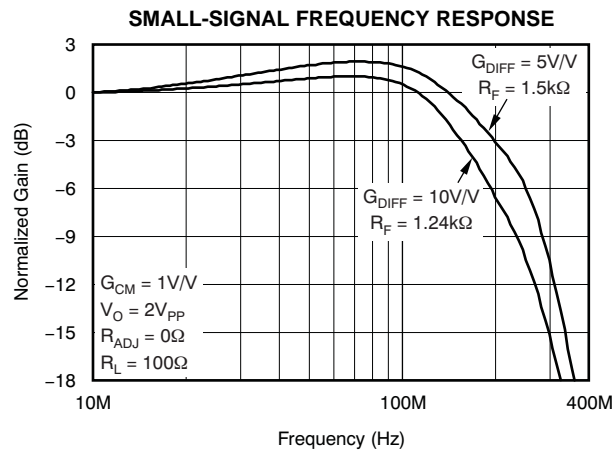


Figure 2.

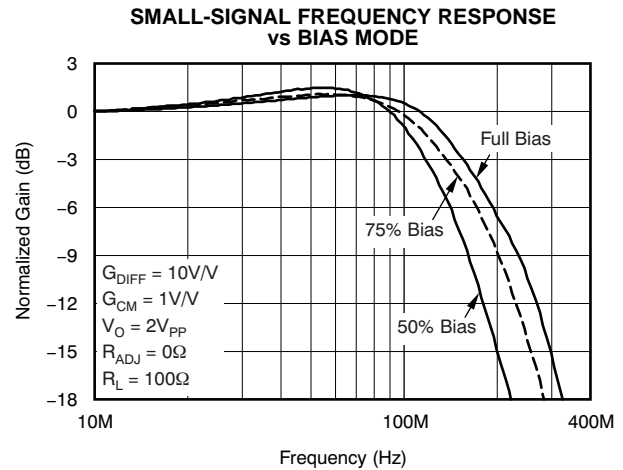


Figure 3.

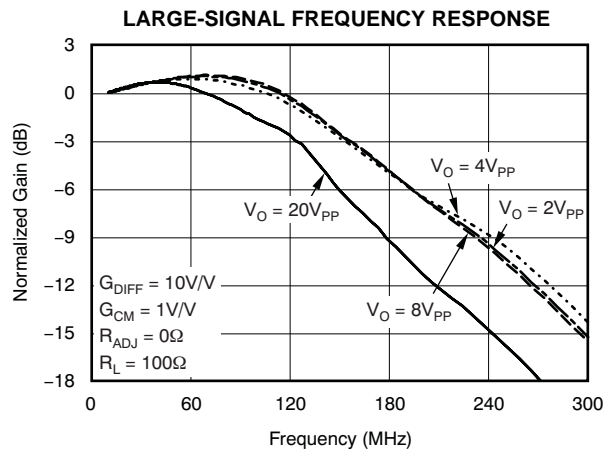


Figure 4.

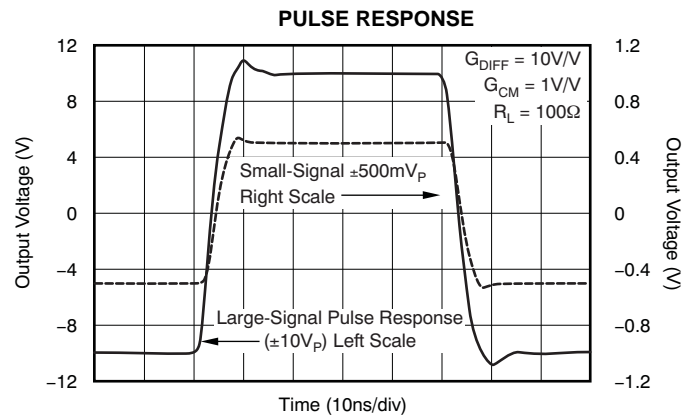


Figure 5.

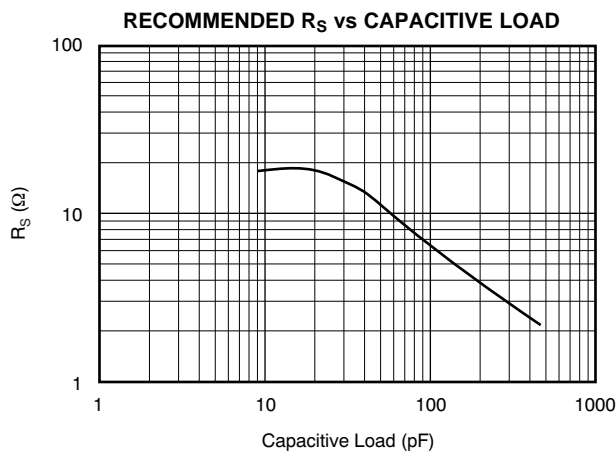


Figure 6.

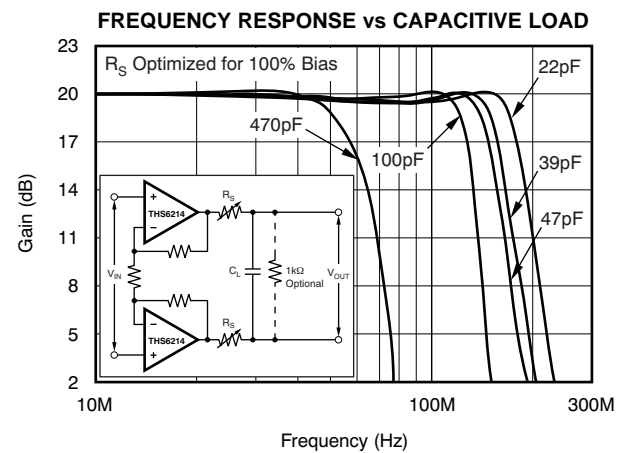


Figure 7.

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Full Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

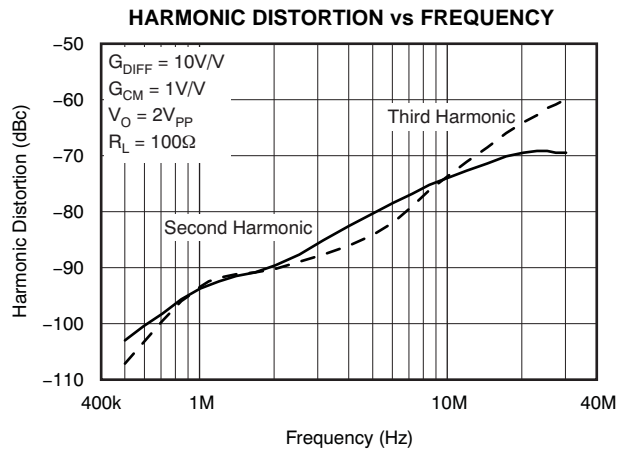


Figure 8.

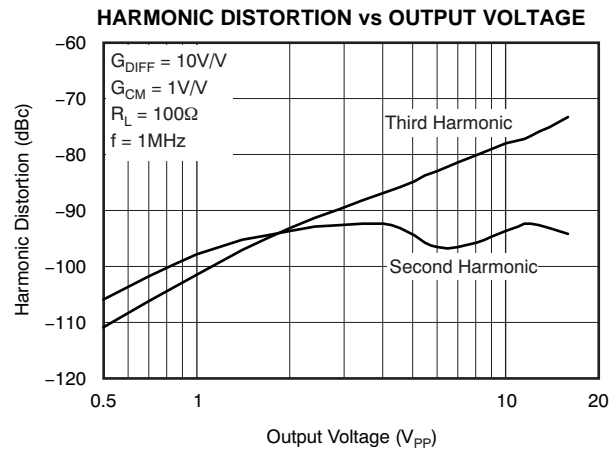


Figure 9.

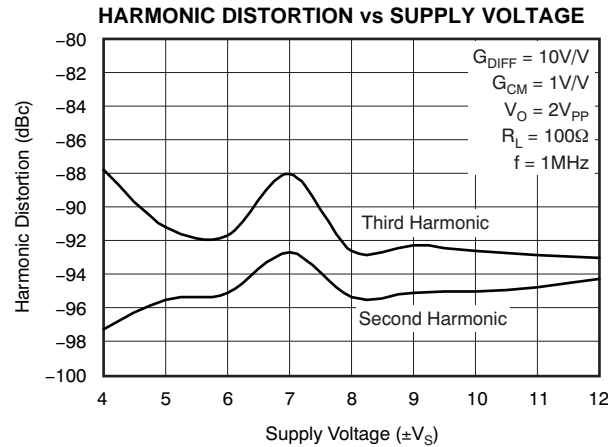


Figure 10.

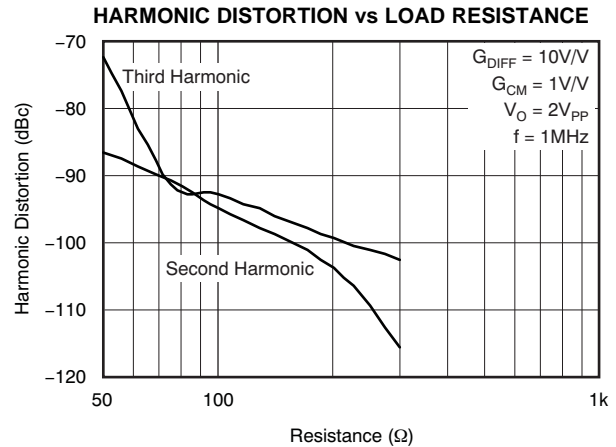


Figure 11.

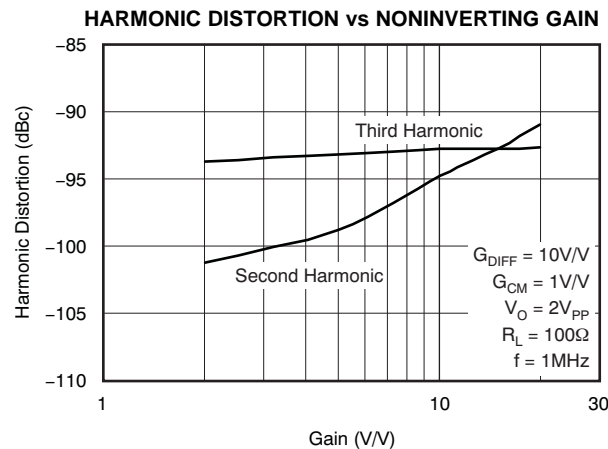


Figure 12.

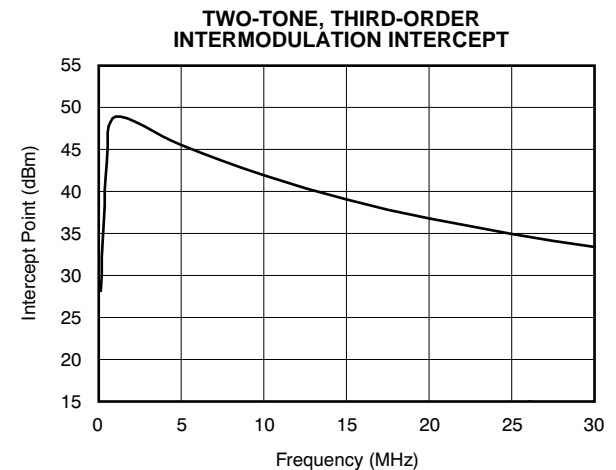


Figure 13.

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Full Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

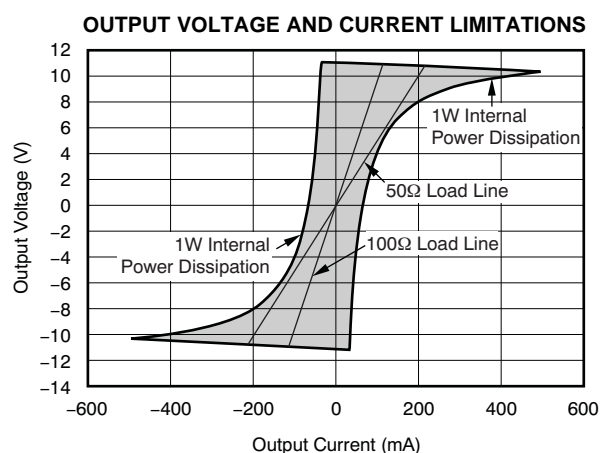


Figure 14.

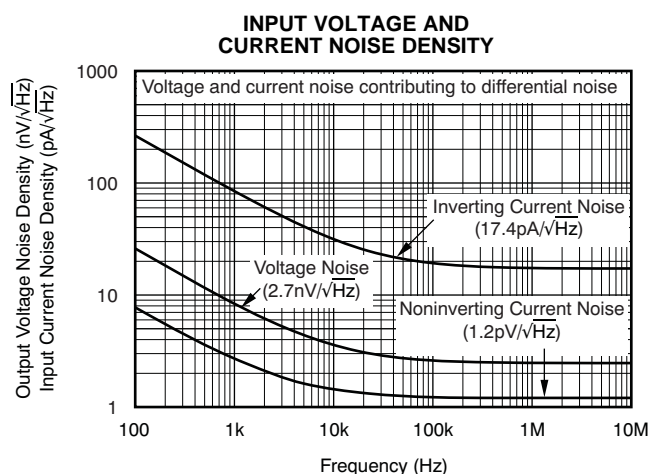


Figure 15.

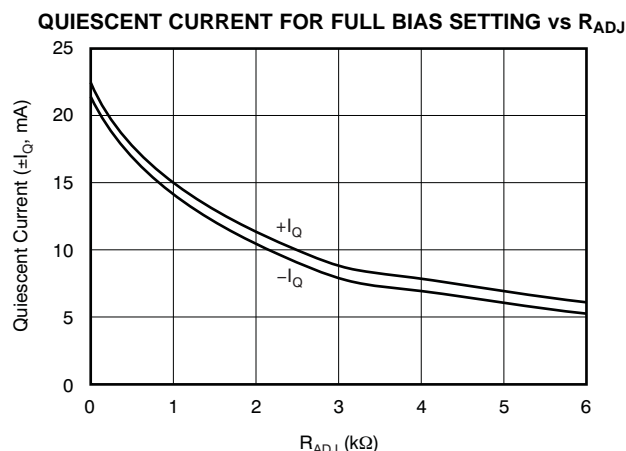


Figure 16.

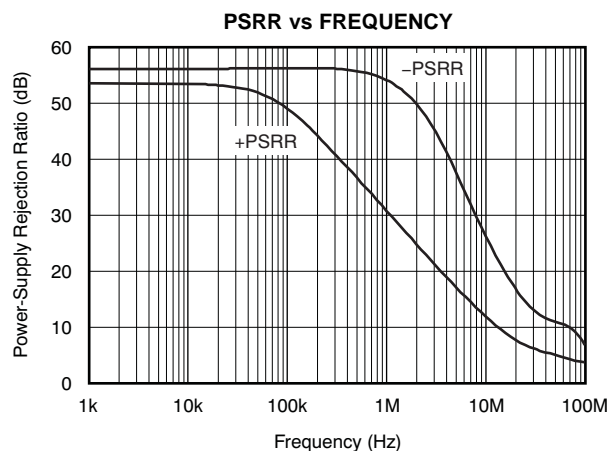


Figure 17.

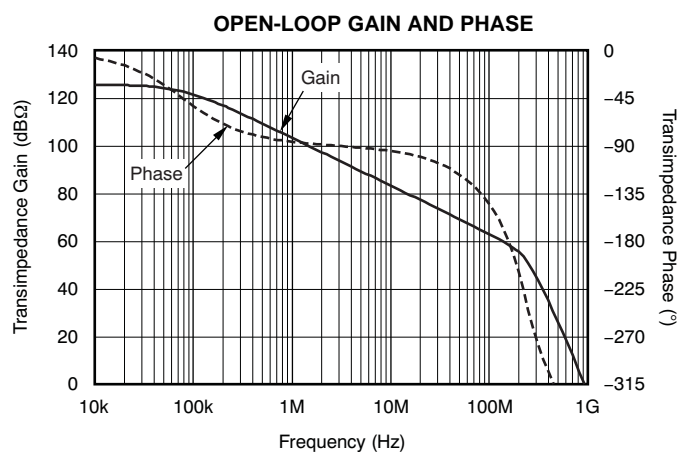


Figure 18.

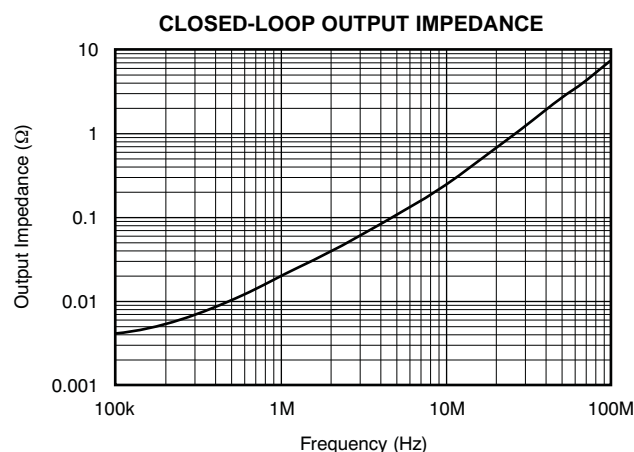


Figure 19.

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Mid Bias

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

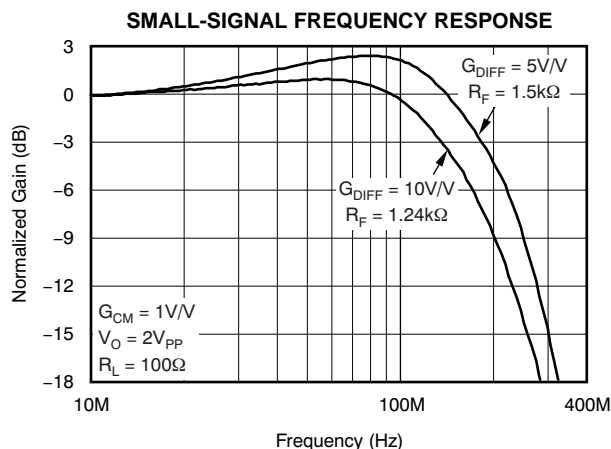


Figure 20.

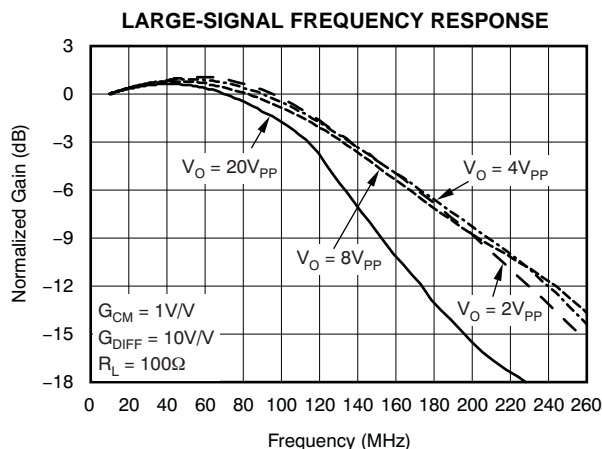


Figure 21.

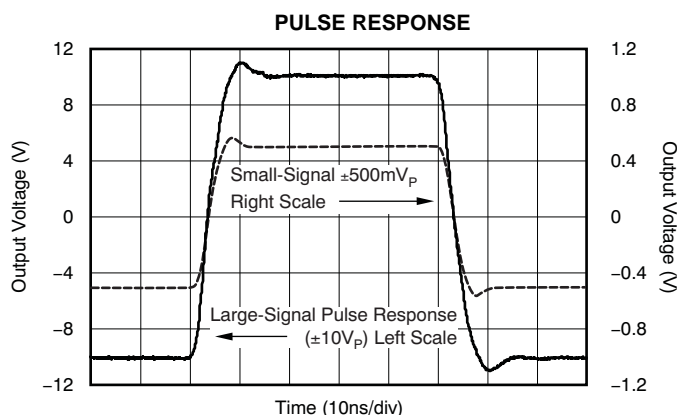


Figure 22.

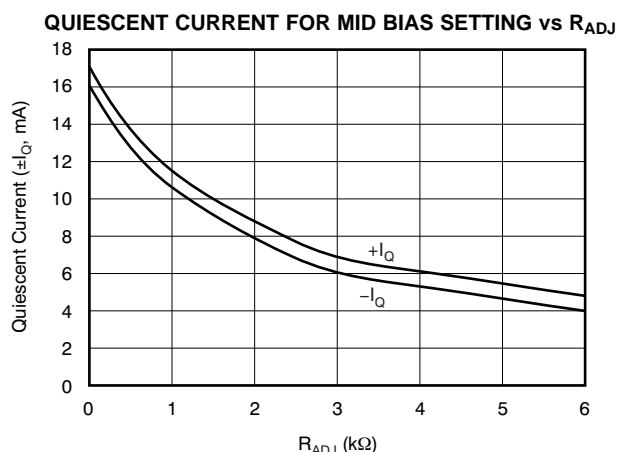


Figure 23.

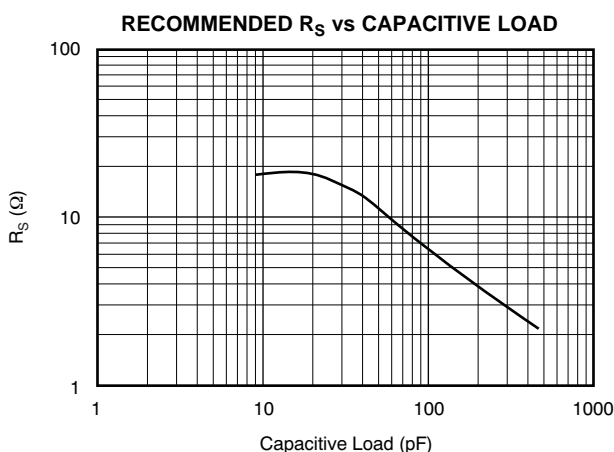


Figure 24.

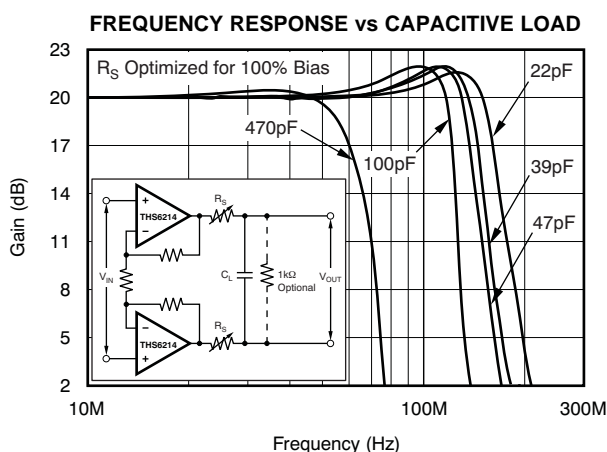


Figure 25.

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Mid Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

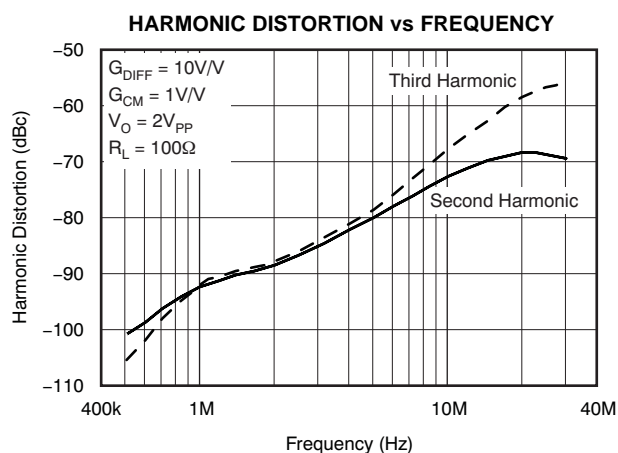


Figure 26.

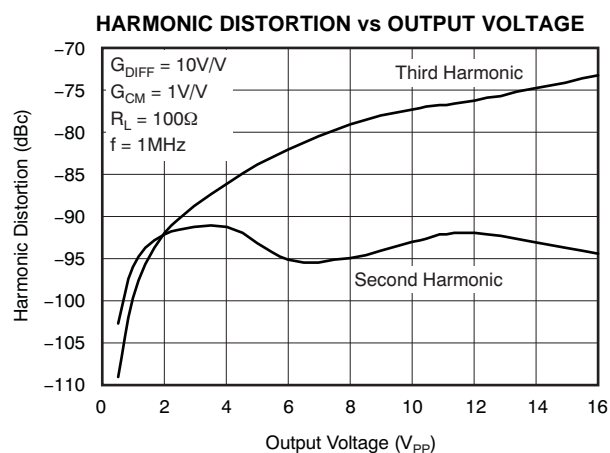


Figure 27.

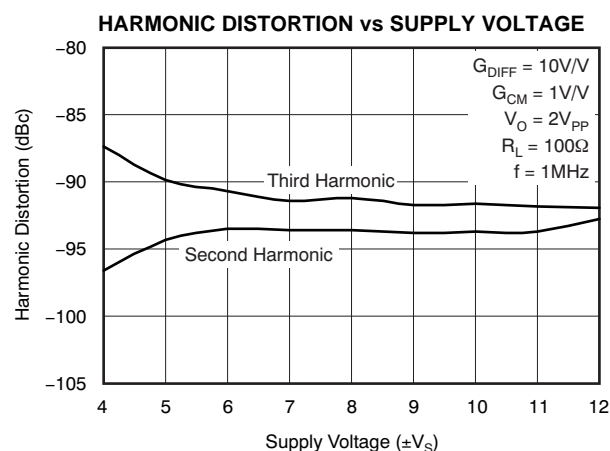


Figure 28.

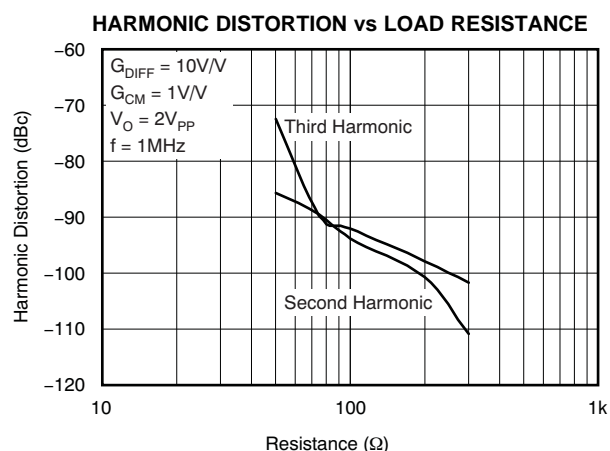


Figure 29.

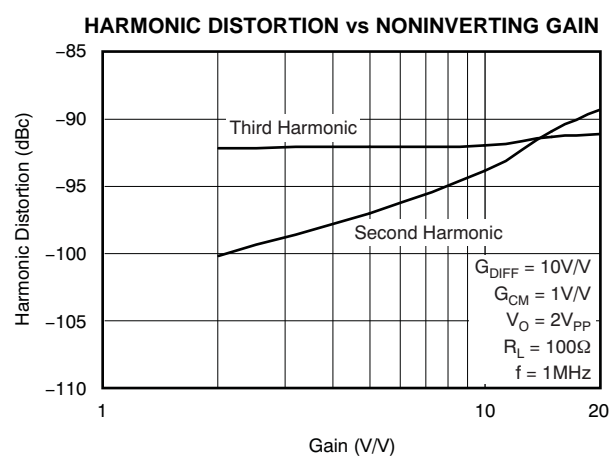


Figure 30.

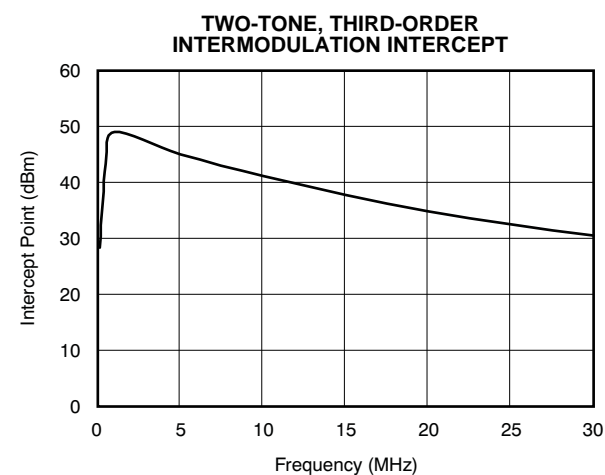


Figure 31.

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Low Bias

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

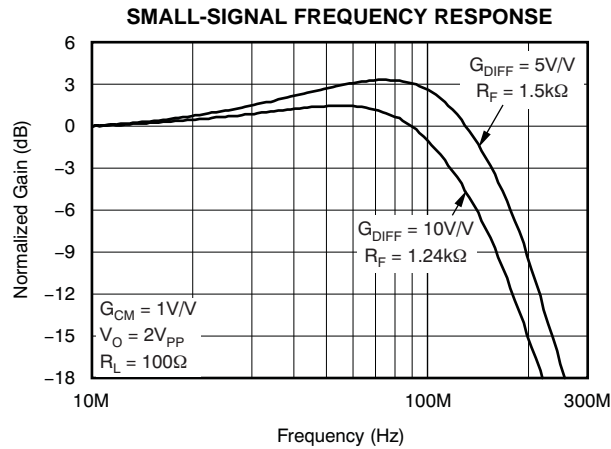


Figure 32.

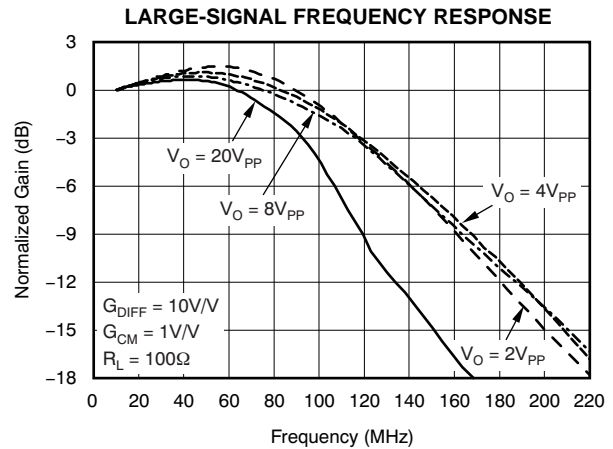


Figure 33.

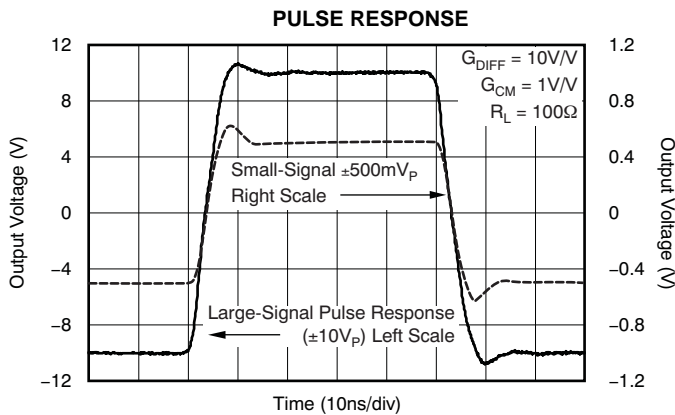


Figure 34.

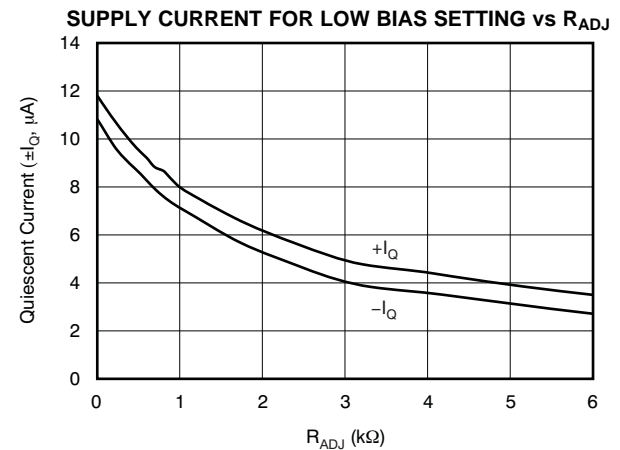


Figure 35.

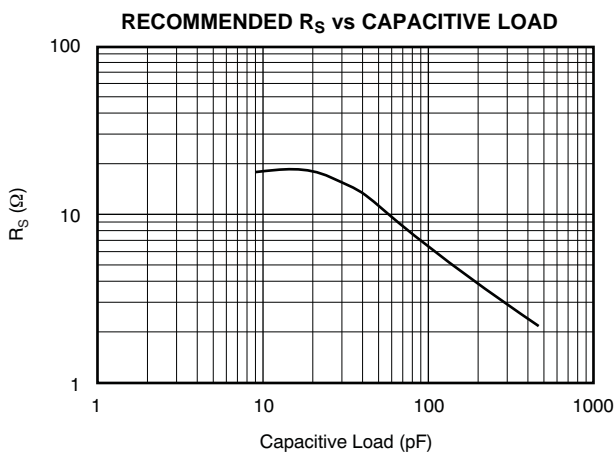


Figure 36.

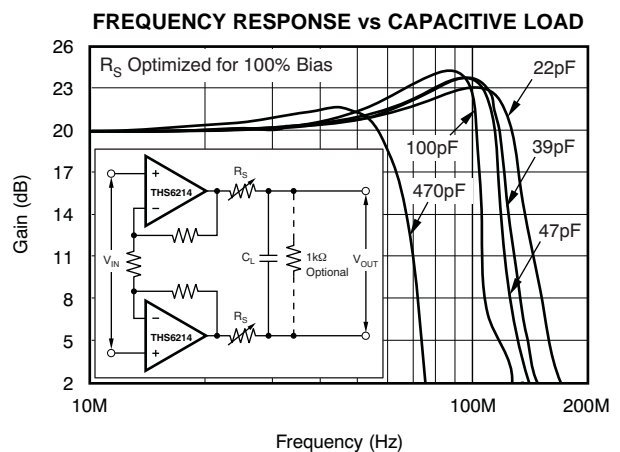


Figure 37.

TYPICAL CHARACTERISTICS: $V_S = \pm 12V$, Low Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +10V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.24k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

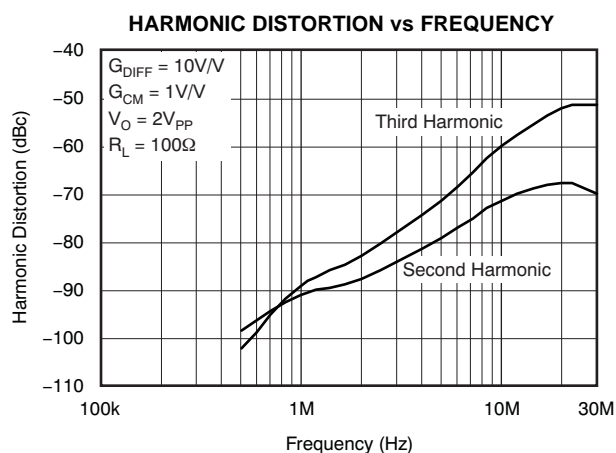


Figure 38.

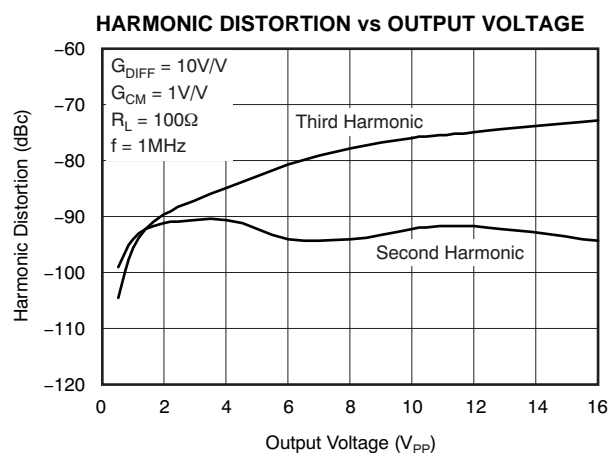


Figure 39.

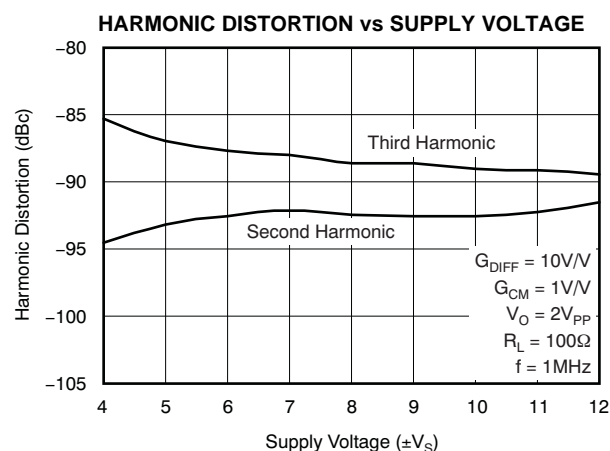


Figure 40.

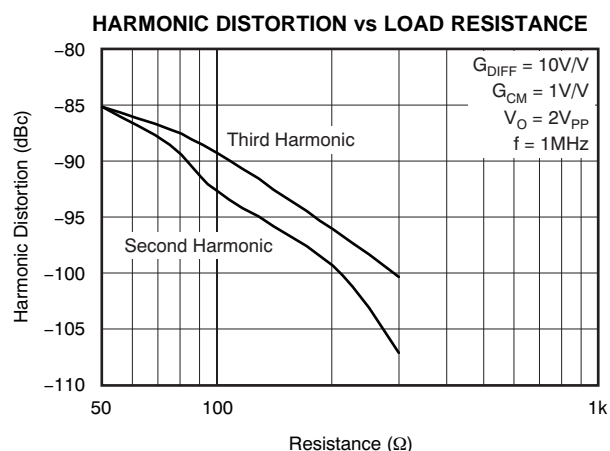


Figure 41.

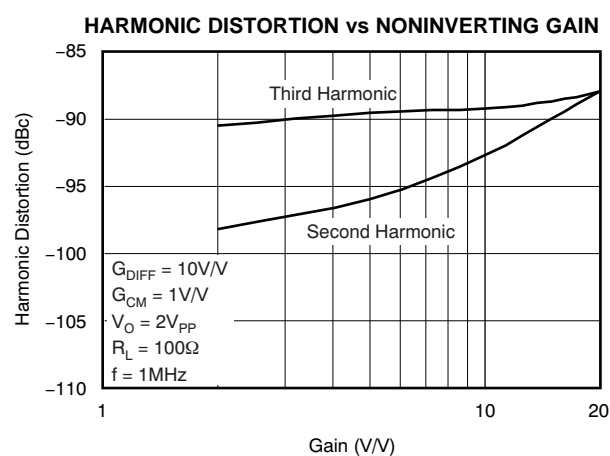


Figure 42.

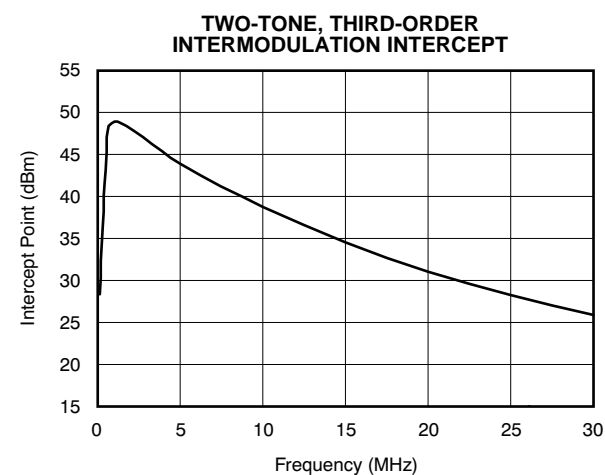


Figure 43.

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Full Bias

At $T_A = +25^\circ C$, $G_{DIFF} = +5V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

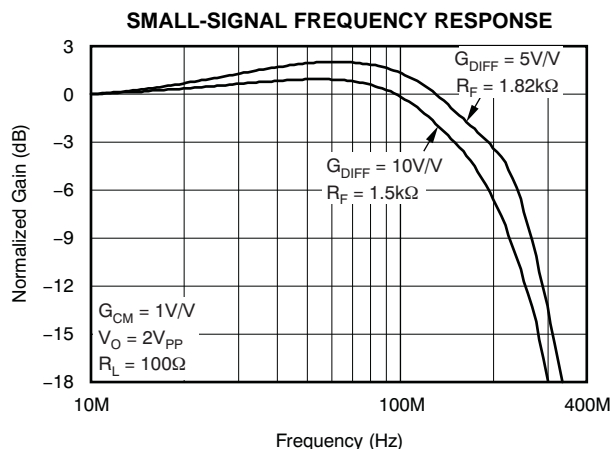


Figure 44.

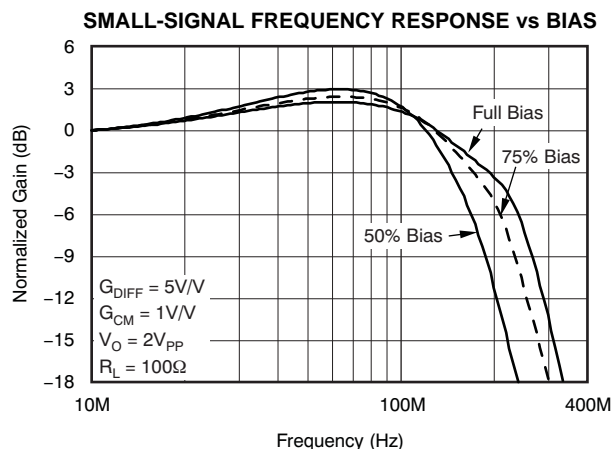


Figure 45.

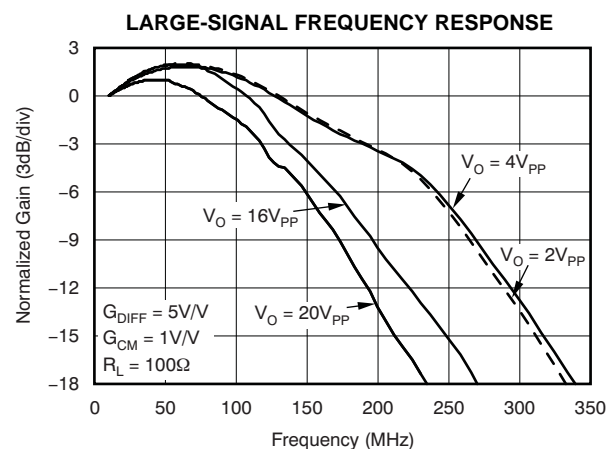


Figure 46.

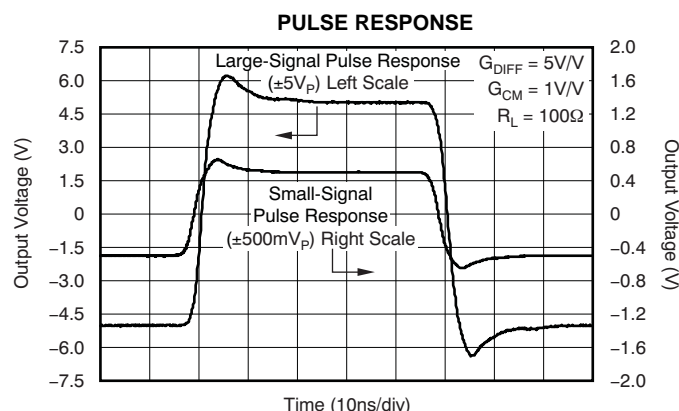


Figure 47.

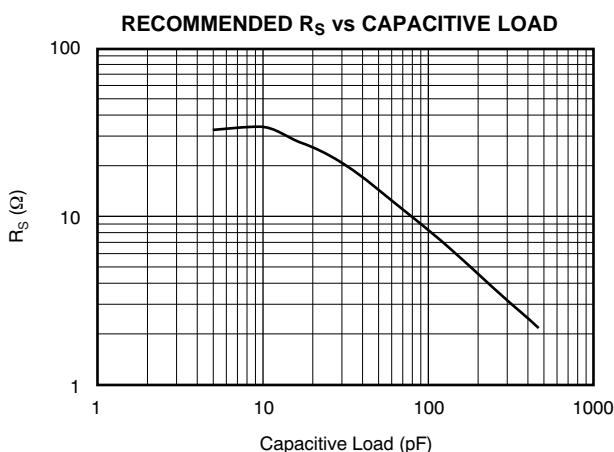


Figure 48.

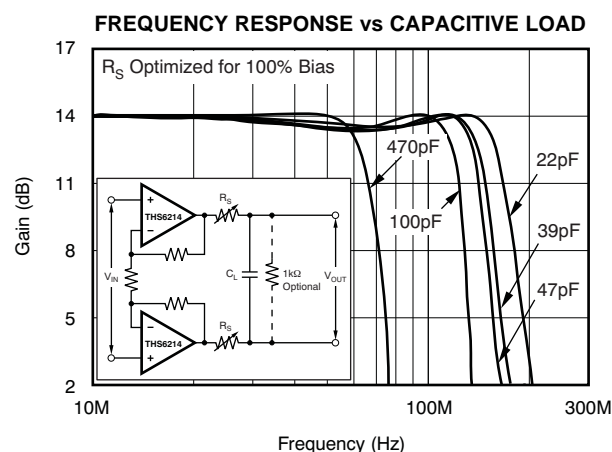


Figure 49.

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Full Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +5V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

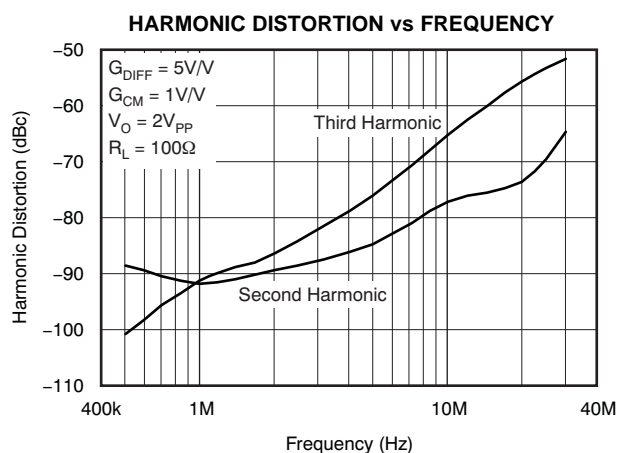


Figure 50.

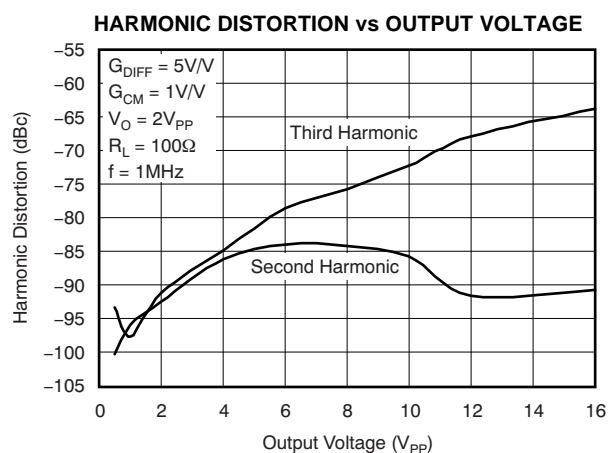


Figure 51.

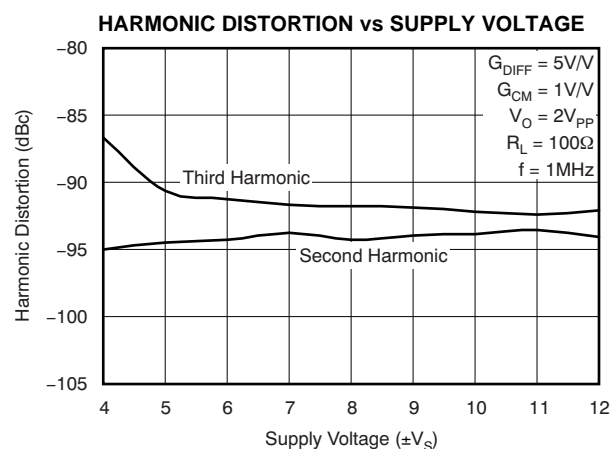


Figure 52.

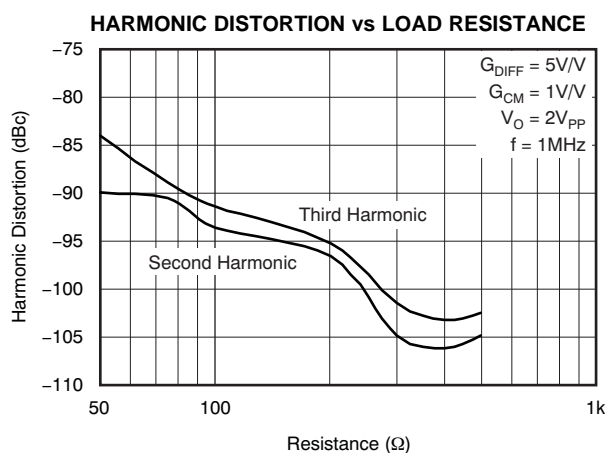


Figure 53.

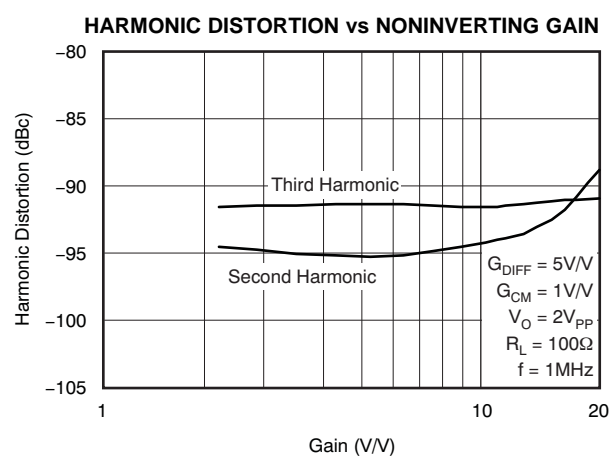


Figure 54.


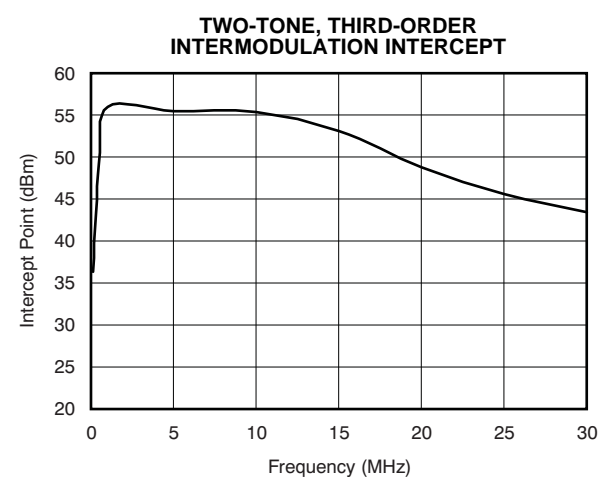


Figure 55.

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Full Bias (continued)

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +5V/V$, $G_{\text{CM}} = 1V/V$, $R_{\text{ADJ}} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

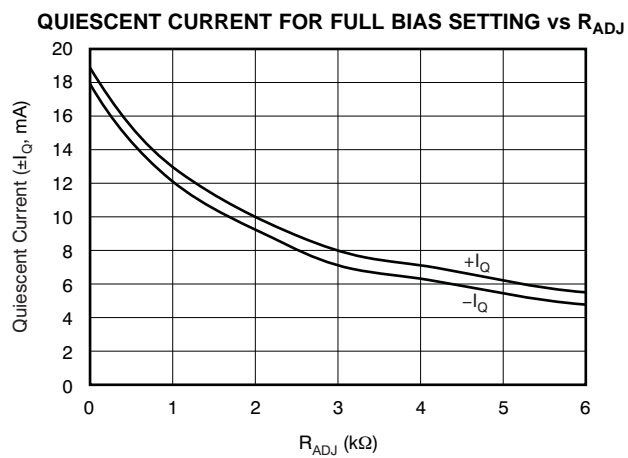

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Mid Bias

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +5V/V$, $G_{\text{CM}} = 1V/V$, $R_{\text{ADJ}} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

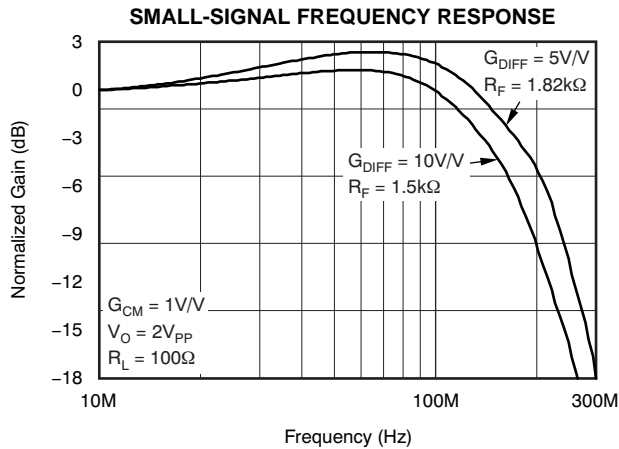


Figure 57.

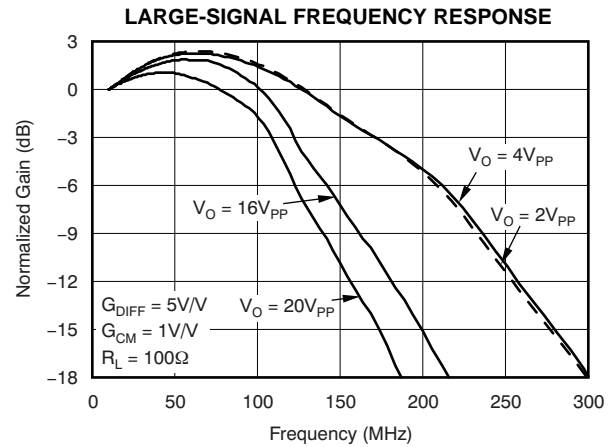


Figure 58.

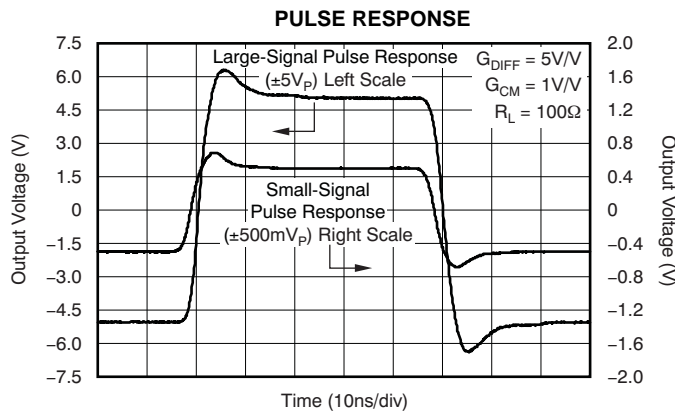


Figure 59.

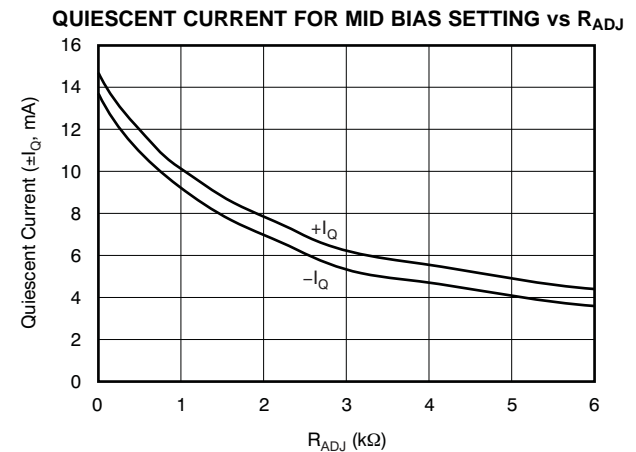


Figure 60.

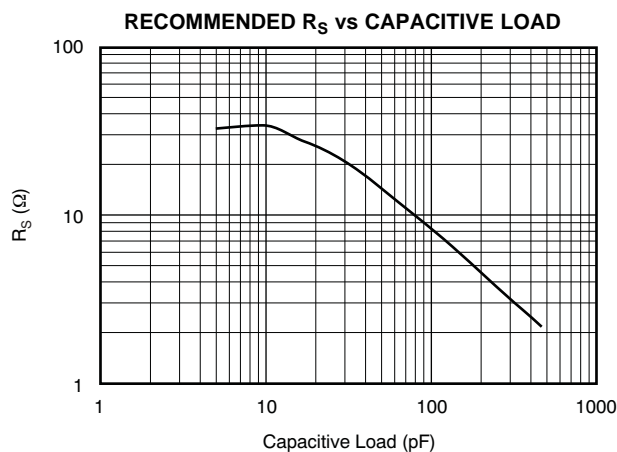


Figure 61.

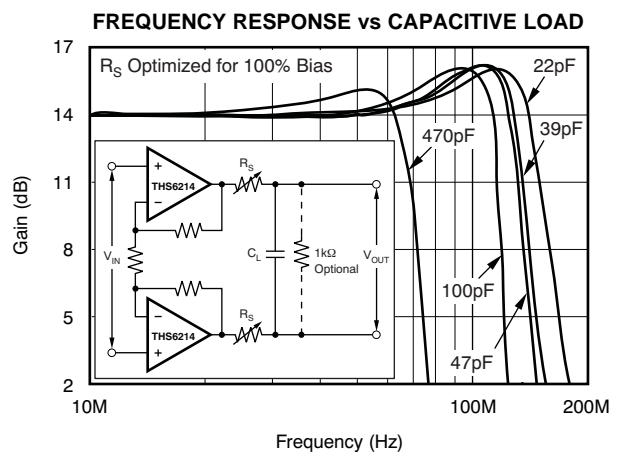


Figure 62.

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Mid Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +5V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

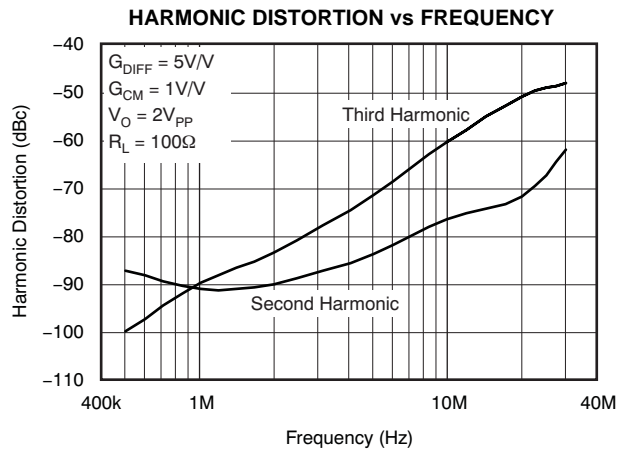


Figure 63.

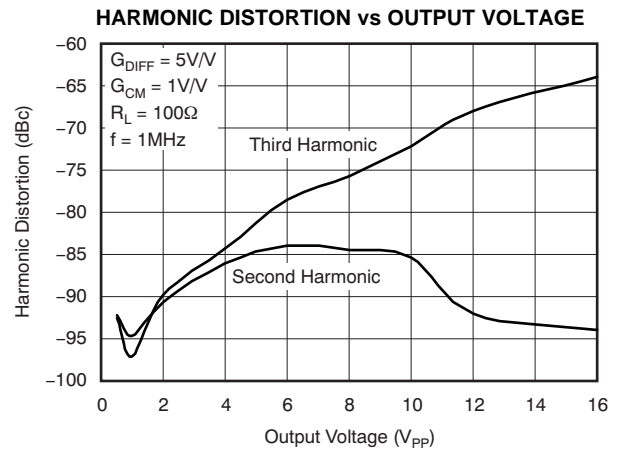


Figure 64.

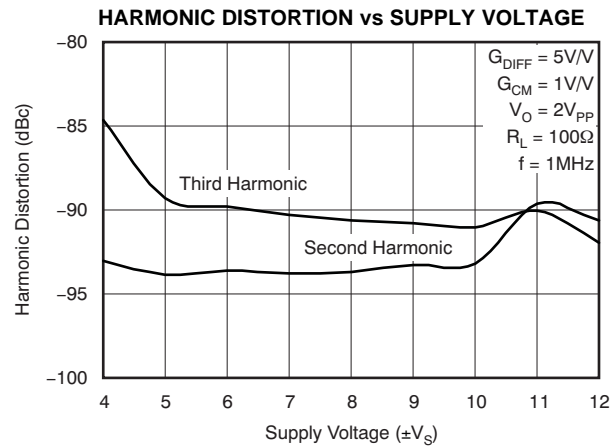


Figure 65.

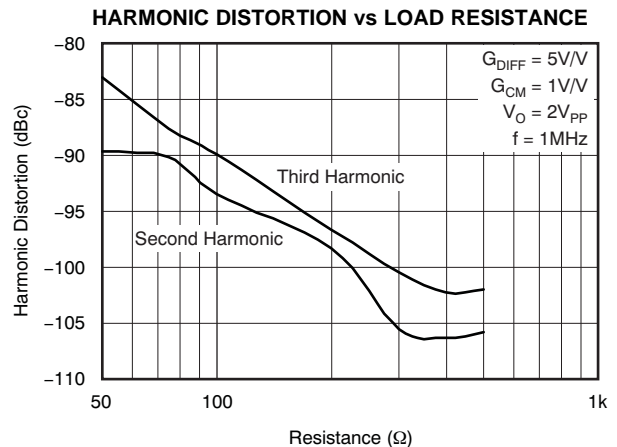


Figure 66.

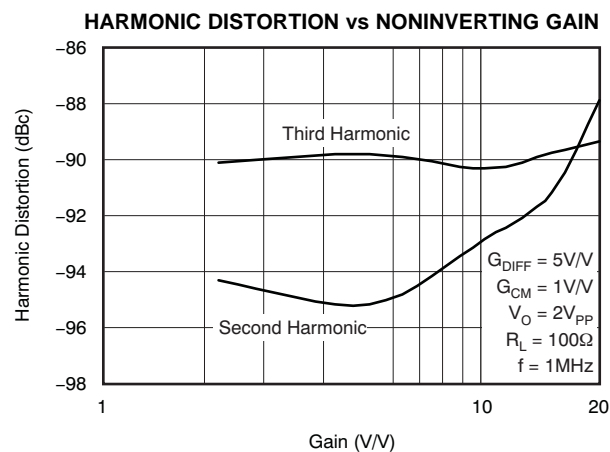


Figure 67.

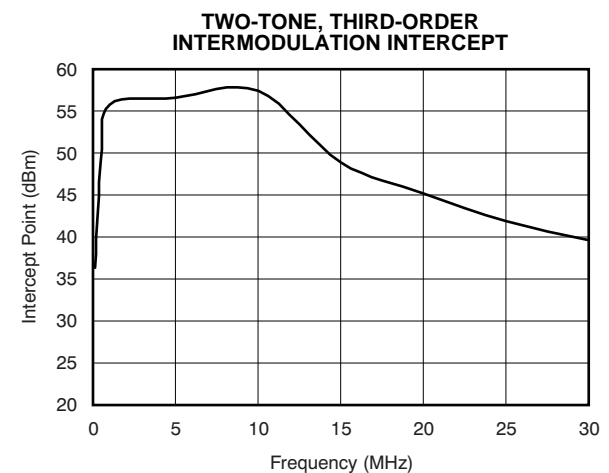


Figure 68.

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Low Bias

At $T_A = +25^\circ\text{C}$, $G_{\text{DIFF}} = +5V/V$, $G_{\text{CM}} = 1V/V$, $R_{\text{ADJ}} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

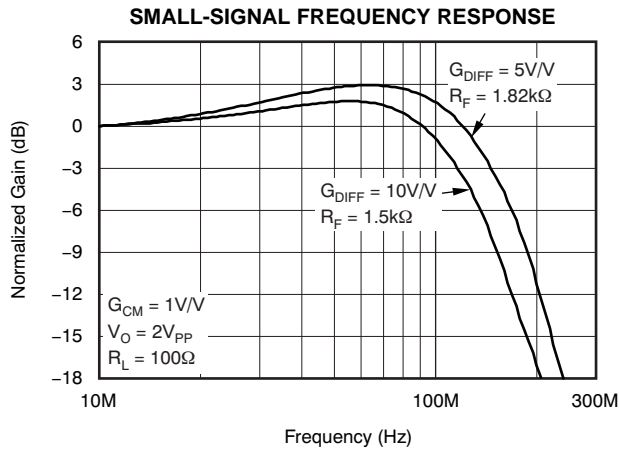


Figure 69.

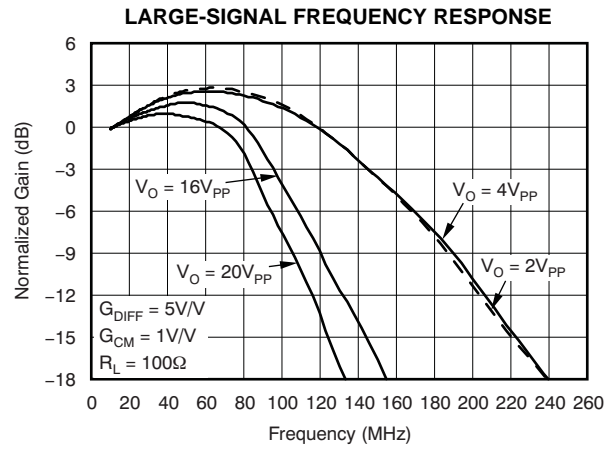


Figure 70.

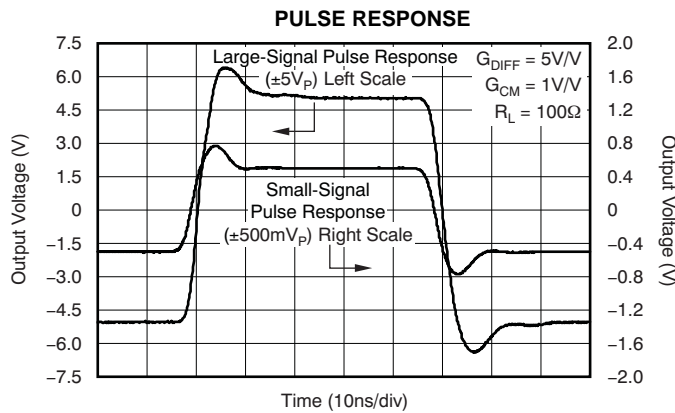


Figure 71.

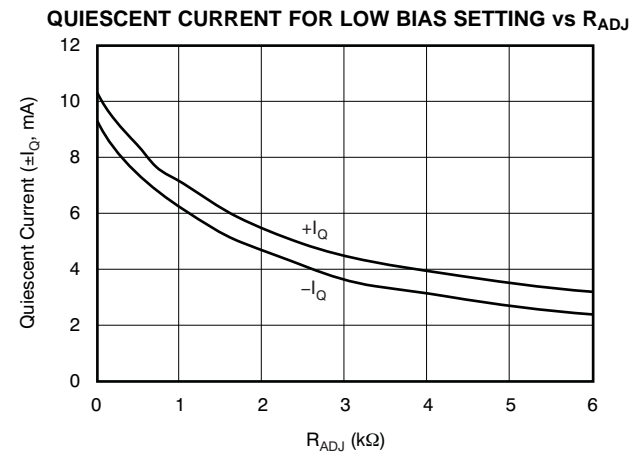


Figure 72.

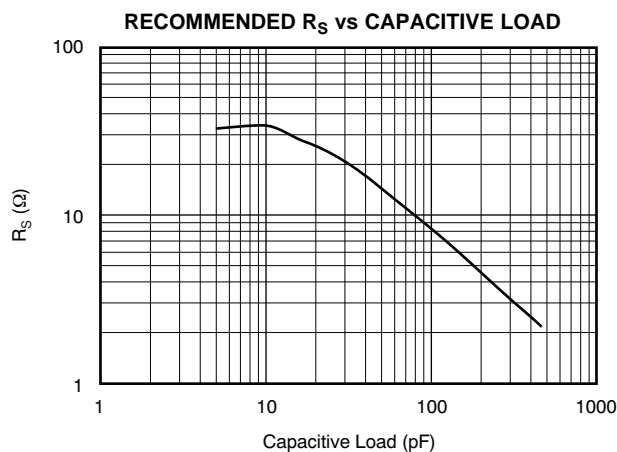


Figure 73.

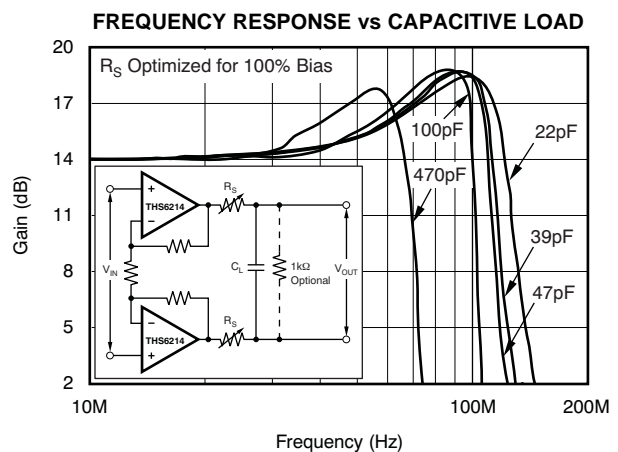


Figure 74.

TYPICAL CHARACTERISTICS: $V_S = \pm 6V$, Low Bias (continued)

At $T_A = +25^\circ C$, $G_{DIFF} = +5V/V$, $G_{CM} = 1V/V$, $R_{ADJ} = 0\Omega$, $R_F = 1.82k\Omega$, and $R_L = 100\Omega$, unless otherwise noted.

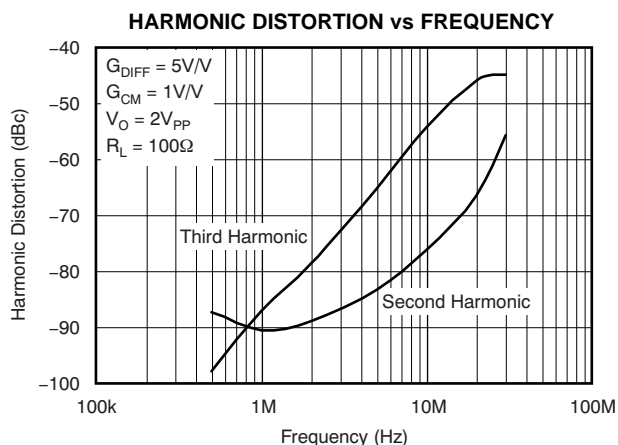


Figure 75.

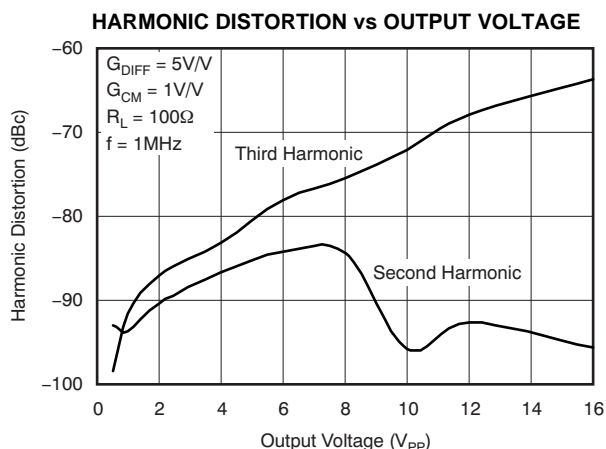


Figure 76.

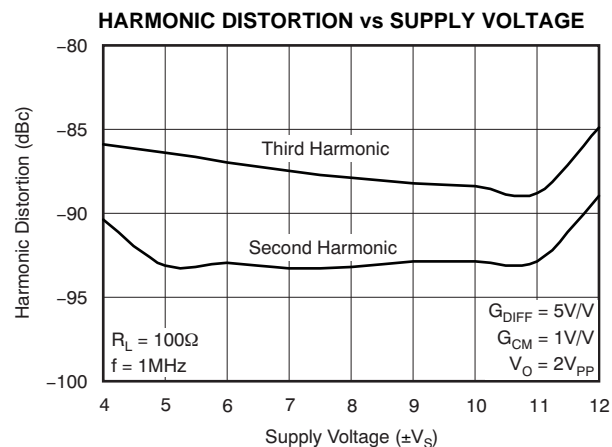


Figure 77.

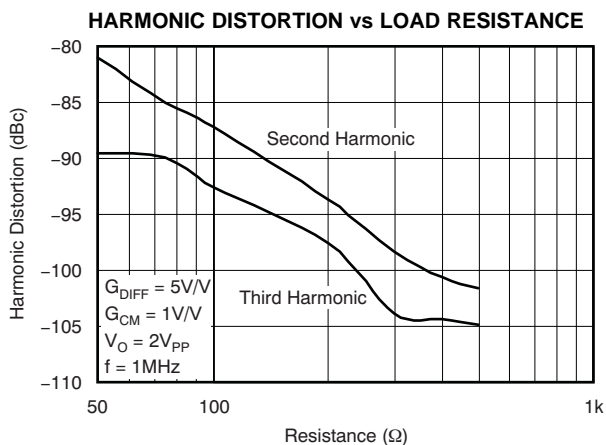


Figure 78.

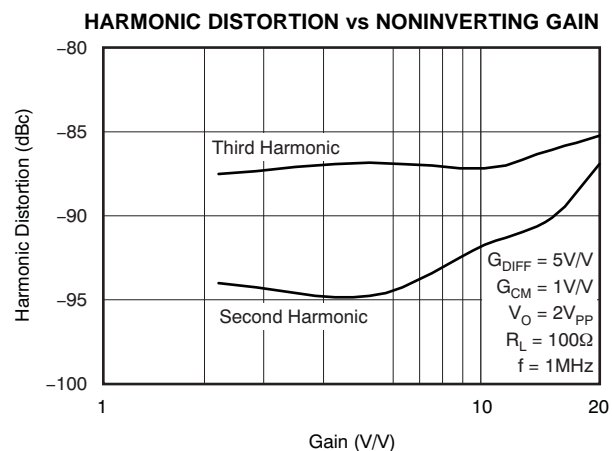


Figure 79.

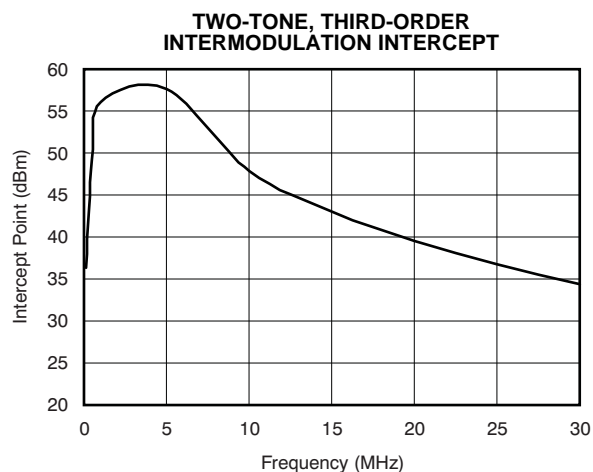


Figure 80.

APPLICATION INFORMATION

WIDEBAND CURRENT-FEEDBACK OPERATION

The THS6214 provides the exceptional ac performance of a wideband current-feedback op amp with a highly linear, high-power output stage. Requiring only 21mA/port quiescent current, the THS6214 swings to within 1.9V of either supply rail on a 100Ω load and delivers in excess of 416mA at room temperature. This low-output headroom requirement, along with supply voltage independent biasing, provides remarkable ±6V supply operation. The THS6214 delivers greater than 140MHz bandwidth driving a 2V_{PP} output into 100Ω on a ±6V supply. Previous boosted output stage amplifiers typically suffer from very poor crossover distortion as the output current goes through zero. The THS6214 achieves a comparable power gain with much better linearity. The primary advantage of a current-feedback op amp over a voltage-feedback op amp is that ac performance (bandwidth and distortion) is relatively independent of signal gain. Figure 81 shows the dc-coupled, gain of +10V/V, dual power-supply circuit configuration used as the basis of the ±12V Electrical and Typical Characteristics. For test purposes, the input impedance is set to 50Ω with a resistor to ground and the output impedance is set to 50Ω with a series output resistor. Voltage swings reported in the Electrical Characteristics are taken directly at the input and output pins, whereas load powers (dBm) are defined at a matched 50Ω load. For the circuit of Figure 81, the total effective load is 100Ω || 1.24kΩ || 1.24kΩ = 86.1Ω.

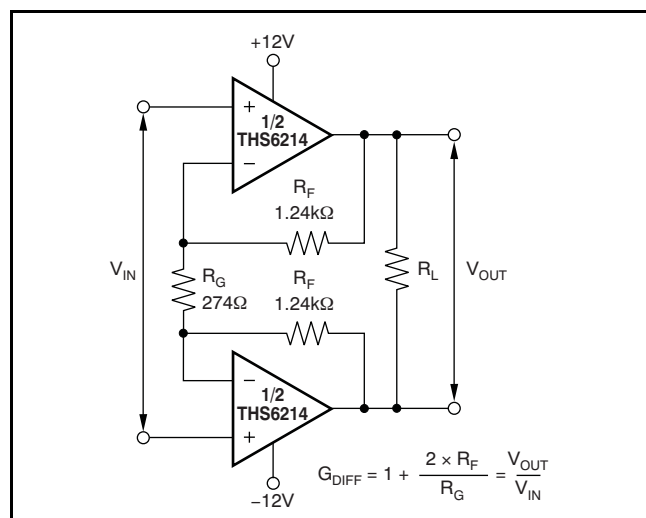


Figure 81. Noninverting Differential I/O Amplifier

This approach allows the user to set a source termination impedance at the input that is independent of the signal gain. For instance, simple differential filters may be included in the signal path right up to the noninverting inputs with no interaction with the gain setting. The differential signal gain for the circuit of Figure 81 is:

$$A_D = 1 + 2 \times \frac{R_F}{R_G} \quad (1)$$

Where A_D = differential gain.

Figure 81 shows a value of 274Ω for the $A_D = +10V/V$ design. Because the THS6214 is a current feedback (CFB) amplifier, its bandwidth is primarily controlled with the feedback resistor value; the differential gain, however, may be adjusted with considerable freedom using just the R_G resistor. In fact, R_G may be reduced by a reactive network that provides a very isolated shaping to the differential frequency response.

Various combinations of single-supply or ac-coupled gain can also be delivered using the basic circuit of Figure 81. Common-mode bias voltages on the two noninverting inputs pass on to the output with a gain of +1V/V because an equal dc voltage at each inverting node creates no current through R_G . This circuit does show a common-mode gain of +1V/V from input to output. The source connection should either remove this common-mode signal if undesired (using an input transformer can provide this function), or the common-mode voltage at the inputs can be used to set the output common-mode bias. If the low common-mode rejection of this circuit is a problem, the output interface can also be used to reject that common-mode. For instance, most modern differential input analog-to-digital converters (ADCs) reject common-mode signals very well, while a line driver application through a transformer also attenuates the common-mode signal through to the line.

DUAL-SUPPLY VDSL DOWNSTREAM

Figure 82 shows an example of a dual-supply VDSL downstream driver. Both channels of the THS6214 are configured as a differential gain stage to provide signal drive to the primary winding of the transformer (in Figure 82, a step-up transformer with a turns ratio of 1:1.1). The main advantage of this configuration is the cancellation of all even harmonic-distortion products. Another important advantage for VDSL is that each amplifier must only swing half of the total output required driving the load.

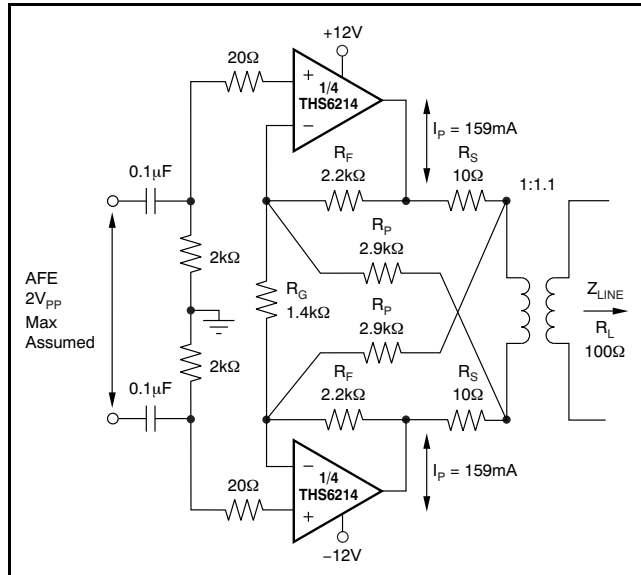


Figure 82. Dual-Supply VDSL Downstream Driver

The analog front-end (AFE) signal is ac-coupled to the driver, and the noninverting input of each amplifier is biased to the mid-supply voltage (ground in this case). In addition to providing the proper biasing to the amplifier, this approach also provides a high-pass filtering with a corner frequency, set here at 5kHz. Because the signal bandwidth starts at 26kHz, this high-pass filter does not generate any problem and has the advantage of filtering out unwanted lower frequencies.

The input signal is amplified with a gain set by the following equation:

$$G_D = 1 + \frac{2 \times R_F}{R_G} \quad (2)$$

With $R_F = 2.2\text{k}\Omega$ and $R_G = 1.4\text{k}\Omega$, the gain for this differential amplifier is $R_P = 2.9\text{k}\Omega$. This gain boosts the AFE signal, assumed to be a maximum of $2V_{PP}$, to a maximum of $3V_{PP}$.

The two back-termination resistors ($R_S = 10\Omega$ each) added at each terminal of the transformer make the impedance of the modem match the impedance of the phone line, and also provide a means of detecting the received signal for the receiver. The value of these resistors (R_M) is a function of the line impedance and the transformer turns ratio (n), given by the following equation:

$$R_M = \frac{Z_{LINE}}{2n^2} \quad (3)$$

LINE DRIVER HEADROOM MODEL

The first step in a transformer-coupled, twisted-pair driver design is to compute the peak-to-peak output voltage from the target specifications. This calculation is done using the following equations:

$$P_L = 10 \times \log \frac{V_{RMS}^2}{(1\text{mW}) \times R_L} \quad (4)$$

with:

- P_L = power at the load
- V_{RMS} = voltage at the load
- R_L = load impedance

These values produce the following:

$$V_{RMS} = \sqrt{(1\text{mW}) \times R_L \times 10 \frac{P_L}{10}} \quad (5)$$

$$V_P = \text{CrestFactor} \times V_{RMS} = CF \times V_{RMS} \quad (6)$$

with:

- V_P = peak voltage at the load
- CF = Crest Factor

$$V_{LPP} = 2 \times CF \times V_{RMS} \quad (7)$$

with V_{LPP} = peak-to-peak voltage at the load.

Consolidating Equation 4 through Equation 7 allows us to express the required peak-to-peak voltage at the load as a function of the crest factor, the load impedance, and the power at the load. Thus:

$$V_{LPP} = 2 \times CF \times \sqrt{(1\text{mW}) \times R_L \times 10 \frac{P_L}{10}} \quad (8)$$

V_{LPP} is usually computed for a nominal line impedance and may be taken as a fixed design target.

The next step in the design is to compute the individual amplifier output voltage and currents as a function of peak-to-peak voltage on the line and transformer turns ratio.

As this turns ratio changes, the minimum allowed supply voltage changes along with it. The peak current in the amplifier output is given by:

$$\pm I_P = \frac{1}{2} \times \frac{2 \times V_{LPP}}{n} \times \frac{1}{4R_M} \quad (9)$$

with V_{PP} as defined in Equation 8, and R_M as defined in Equation 3 and shown in Figure 83.

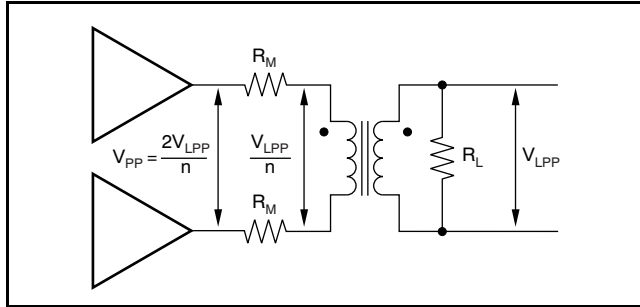


Figure 83. Driver Peak Output Voltage

With the previous information available, it is now possible to select a supply voltage and the turns ratio desired for the transformer, as well as calculate the headroom for the THS6214.

The model, shown in Figure 84, can be described with the following set of equations:

1. As the available output swing:

$$V_{PP} = V_{CC} - (V_1 + V_2) - I_P \times (R_1 + R_2) \quad (10)$$

2. Or as the required supply voltage:

$$V_{CC} = V_{PP} + (V_1 + V_2) + I_P \times (R_1 + R_2) \quad (11)$$

The minimum supply voltage for power and load requirements is given by Equation 11.

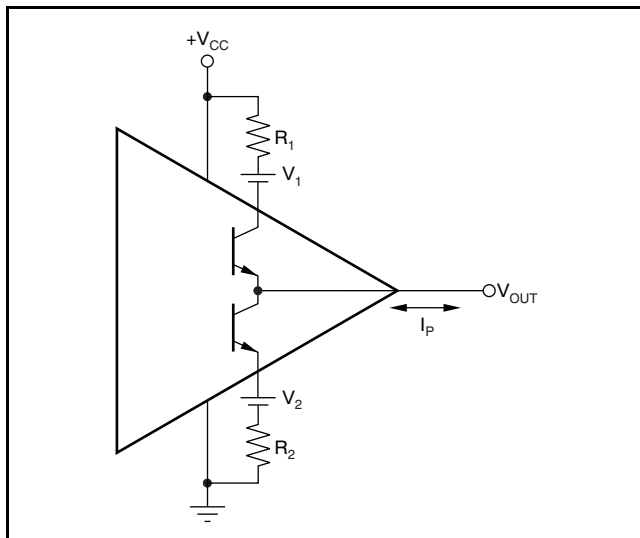


Figure 84. Line Driver Headroom Model

V_1 , V_2 , R_1 , and R_2 are given in Table 2 for $\pm 12V$ operation.

Table 2. Line Driver Headroom Model Values

| | V_1 | R_1 | V_2 | R_2 |
|-----------|-------|-------------|-------|-------------|
| $\pm 12V$ | 1V | 0.6Ω | 1V | 1.2Ω |

When using a synthetic output impedance circuit (see Figure 82), a significant drop is noticed in bandwidth from the specification that appears in the Electrical Characteristics tables. This apparent drop in bandwidth for the differential signal is a result of the apparent increase in the feedback transimpedance as seen for each amplifier. This feedback transimpedance equation is given below.

$$Z_{FB} = R_F \times \frac{1 + 2 \times \frac{R_S}{R_L} + \frac{R_S}{R_P}}{1 + 2 \times \frac{R_S}{R_L} + \frac{R_S}{R_P} - \frac{R_F}{R_P}} \quad (12)$$

To increase 0.1dB flatness to the frequency of interest, adding a serial RC in parallel with the gain resistor may be needed, as shown in Figure 85.

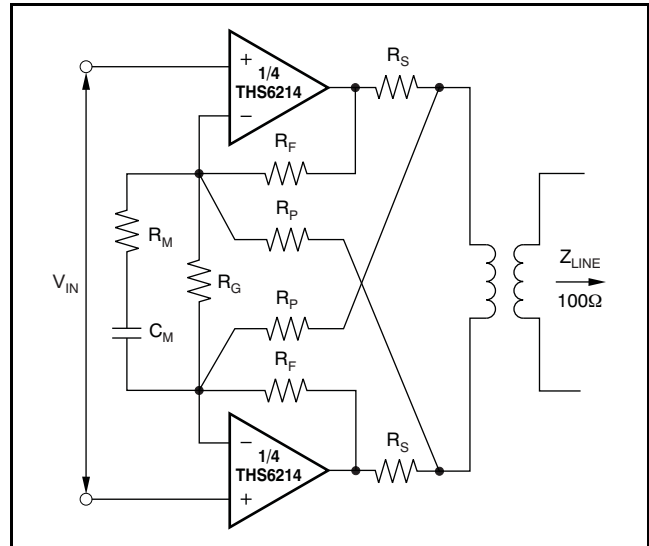


Figure 85. +0.1dB Flatness Compensation Circuit

TOTAL DRIVER POWER FOR xDSL APPLICATIONS

The total internal power dissipation for the THS6214 in an xDSL line driver application is the sum of the quiescent power and the output stage power. The THS6214 holds a relatively constant quiescent current versus supply voltage—giving a power contribution that is simply the quiescent current times the supply voltage used (the supply voltage is greater than the solution given in Equation 11). The total output stage power can be computed with reference to Figure 86.

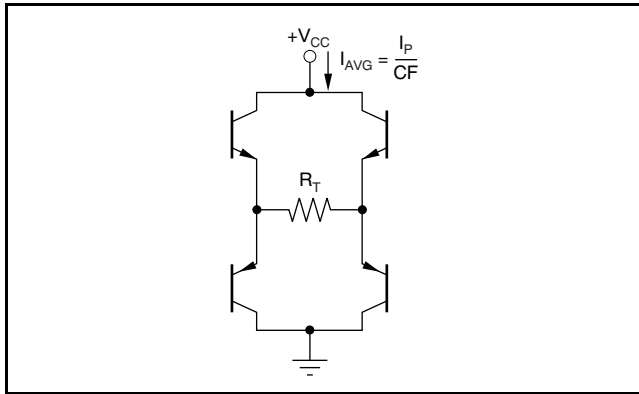


Figure 86. Output Stage Power Model

The two output stages used to drive the load of Figure 83 can be seen as an H-Bridge in Figure 86. The average current drawn from the supply into this H-Bridge and load is the peak current in the load given by Equation 9 divided by the crest factor (CF) for the xDSL modulation. This total power from the supply is then reduced by the power in R_T , leaving the power dissipated internal to the drivers in the four output stage transistors. That power is simply the target line power used in Equation 4 plus the power lost in the matching elements (R_M). In the following examples, a perfect match is targeted giving the same power in the matching elements as in the load. The output stage power is then set by Equation 13.

$$P_{OUT} = \frac{I_P}{CF} \times V_{CC} - 2P_L \quad (13)$$

The total amplifier power is then:

$$P_{TOT} = I_Q \times V_{CC} + \frac{I_P}{CF} \times V_{CC} - 2P_L \quad (14)$$

For the ADSL CO driver design of Figure 82, the peak current is 159mA for a signal that requires a crest factor of 5.6 with a target line power of 20.5dBm into a 100Ω load (115mW).

With a typical quiescent current of 21mA and a nominal supply voltage of ±12V, the total internal power dissipation for the solution of Figure 82 is:

$$P_{TOT} = 21\text{mA} (24\text{V}) + \frac{159\text{mA}}{5.6} (24\text{V}) - 2(115\text{mW}) = 955\text{mW} \quad (15)$$

OUTPUT CURRENT AND VOLTAGE

The THS6214 provides output voltage and current capabilities that are unsurpassed in a low-cost, dual monolithic op amp. Under no-load conditions at +25°C, the output voltage typically swings closer than 1.1V to either supply rail; tested at +25°C, the swing limit is within 1.4V of either rail into a 100Ω differential load. Into a 25Ω load (the minimum tested load), the amplifier delivers more than ±408mA continuous and greater than ±1A peak output current.

The specifications described above, though familiar in the industry, consider voltage and current limits separately. In many applications, it is the voltage times current (or V-I product) that is more relevant to circuit operation. Refer to the *Output Voltage and Current Limitations* plot (Figure 14) in the Typical Characteristics. The X- and Y-axes of this graph show the zero-voltage output current limit and the zero-current output voltage limit, respectively. The four quadrants give a more detailed view of the THS6214 output drive capabilities, noting that the graph is bounded by a safe operating area of 1W maximum internal power dissipation (in this case, for one channel only). Superimposing resistor load lines onto the plot shows that the THS6214 can drive ±10.9V into 100Ω or ±10.5V into 50Ω without exceeding the output capabilities or the 1W dissipation limit. A 100Ω load line (the standard test circuit load) shows the full ±12V output swing capability, as shown in the *Electrical Characteristics* tables. The minimum specified output voltage and current over temperature are set by worst-case simulations at the cold temperature extreme. Only at cold startup do the output current and voltage decrease to the numbers shown in the *Electrical Characteristics* tables. As the output transistors deliver power, the junction temperature increases, decreasing the V_{BE} s (increasing the available output voltage swing), and increasing the current gains (increasing the available output current). In steady-state operation, the available output voltage and current are always greater than that shown in the over-temperature specifications, because the output stage junction temperatures are higher than the minimum specified operating ambient temperature. To maintain maximum output stage linearity, no output short-circuit protection is provided. This absence of short-circuit protection is normally not a problem because most applications include a series-matching resistor at the output that limits the internal power dissipation if the output side of this

resistor is shorted to ground. However, shorting the output pin directly to the adjacent positive power-supply pin (24-pin package), in most cases, destroys the amplifier. If additional short-circuit protection is required, a small series resistor may be included in the supply lines. Under heavy output loads, this additional resistor reduces the available output voltage swing. A 5Ω series resistor in each power-supply lead limits the internal power dissipation to less than 1W for an output short-circuit, while decreasing the available output voltage swing only 0.5V for up to 100mA desired load currents. Always place the $0.1\mu\text{F}$ power-supply decoupling capacitors after these supply current limiting resistors, directly on the supply pins.

DRIVING CAPACITIVE LOADS

One of the most demanding and yet very common load conditions for an op amp is capacitive loading. Often, the capacitive load is the input of an ADC—including additional external capacitance that may be recommended to improve the ADC linearity. A high-speed, high open-loop gain amplifier such as the THS6214 can be very susceptible to decreased stability and closed-loop response peaking when a capacitive load is placed directly on the output pin. When the amplifier open-loop output resistance is considered, this capacitive load introduces an additional pole in the signal path that can decrease the phase margin. Several external solutions to this problem have been suggested.

When the primary considerations are frequency response flatness, pulse response fidelity, and/or distortion, the simplest and most effective solution is to isolate the capacitive load from the feedback loop by inserting a series isolation resistor between the amplifier output and the capacitive load. This series resistor does not eliminate the pole from the loop response, but shifts it and adds a zero at a higher frequency. The additional zero acts to cancel the phase lag from the capacitive load pole, thus increasing the phase margin and improving stability. The [Typical Characteristics](#) show the recommended R_S vs *Capacitive Load* (see [Figure 6](#), [Figure 24](#), [Figure 36](#), [Figure 48](#), [Figure 61](#), and [Figure 73](#)) and the resulting frequency response at the load. Parasitic

capacitive loads greater than 2pF can begin to degrade device performance. Long printed-circuit board (PCB) traces, unmatched cables, and connections to multiple devices can easily cause this value to be exceeded. Always consider this effect carefully, and add the recommended series resistor as close as possible to the THS6214 output pin (see the [Board Layout Guidelines](#) section).

DISTORTION PERFORMANCE

The THS6214 provides good distortion performance into a 100Ω load on $\pm 12\text{V}$ supplies. Relative to alternative solutions, the amplifier provides exceptional performance into lighter loads and/or operation on a dual $\pm 6\text{V}$ supply. Generally, until the fundamental signal reaches very high frequency or power levels, the second harmonic dominates the distortion with a negligible third-harmonic component. Focusing then on the second harmonic, increasing the load impedance improves distortion directly. Remember that the total load includes the feedback network—in the noninverting configuration (see [Figure 81](#)), this value is the sum of $R_F + R_G$, whereas in the inverting configuration it is just R_F . Also, providing an additional supply decoupling capacitor ($0.01\mu\text{F}$) between the supply pins (for bipolar operation) improves the second-order distortion slightly (from 3dB to 6dB).

In most op amps, increasing the output voltage swing directly increases harmonic distortion. The [Typical Characteristics](#) show the second harmonic increasing at a little less than the expected 2x rate, whereas the third harmonic increases at a little less than the expected 3x rate. Where the test power doubles, the difference between it and the second harmonic decreases less than the expected 6dB, whereas the difference between it and the third harmonic decreases by less than the expected 12dB. This difference also shows up in the two-tone, third-order intermodulation spurious (IM3) response curves. The third-order spurious levels are extremely low at low-output power levels. The output stage continues to hold them low even as the fundamental power reaches very high levels.

DIFFERENTIAL NOISE PERFORMANCE

The THS6214 is designed to be used as a differential driver in xDSL applications. Therefore, it is important to analyze the noise in such a configuration. Figure 87 shows the op amp noise model for the differential configuration.

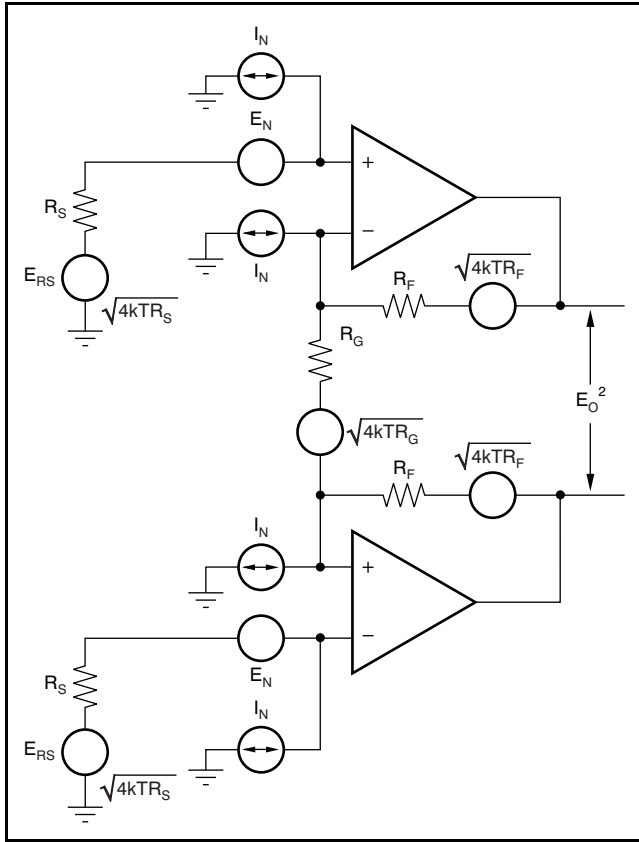


Figure 87. Differential Op Amp Noise Analysis Model

As a reminder, the differential gain is expressed as:

$$G_D = 1 + \frac{2 \times R_F}{R_G} \quad (16)$$

The output noise can be expressed as shown below:

$$E_O = \sqrt{2 \times G_D^2 \times \left[e_N^2 + (i_N \times R_S)^2 + 4kTR_S \right] + 2 \left(\frac{i_i R_F}{G_D} \right)^2 + 2(4kTR_F G_D)} \quad (17)$$

Dividing this expression by the differential noise gain ($G_D = (1 + 2R_F/R_G)$) gives the equivalent input referred spot noise voltage at the noninverting input, as shown in Equation 18.

$$E_O = \sqrt{2 \times \left[e_N^2 + (i_N \times R_S)^2 + 4kTR_S \right] + 2 \left(\frac{i_i R_F}{G_D} \right)^2 + 2 \left(\frac{4kTR_F}{G_D} \right)} \quad (18)$$

Evaluating these equations for the THS6214 ADSL circuit and component values of Figure 82 gives a total output spot noise voltage of 38.9nV/√Hz and a total equivalent input spot noise voltage of 7nV/√Hz.

In order to minimize the output noise as a result of the noninverting input bias current noise, it is recommended to keep the noninverting source impedance as low as possible.

DC ACCURACY AND OFFSET CONTROL

A current-feedback op amp such as the THS6214 provides exceptional bandwidth in high gains, giving fast pulse settling but only moderate dc accuracy. The Electrical Characteristics show an input offset voltage comparable to high-speed, voltage-feedback amplifiers; however, the two input bias currents are somewhat higher and are unmatched. While bias current cancellation techniques are very effective with most voltage-feedback op amps, they do not generally reduce the output dc offset for wideband current-feedback op amps. Because the two input bias currents are unrelated in both magnitude and polarity, matching the input source impedance to reduce error contribution to the output is ineffective. Evaluating the configuration of Figure 81, using a worst-case condition at +25°C input offset voltage and the two input bias currents, gives a worst-case output offset range equal to:

$$V_{OFF} = \pm(NG \times V_{OS(MAX)}) + (I_{BN} \times R_S/2 \times NG) \pm(I_{BI} \times R_F)$$

where NG = noninverting signal gain

$$= \pm(10 \times 5mV) + (3.5\mu A \times 25\Omega \times 10) \pm(1.24k\Omega \times 45\mu A)$$

$$= \pm 50mV + 0.875mV \pm 55.8mV$$

$$V_{OFF} = -104.92mV \text{ to } +106.67mV$$

BOARD LAYOUT GUIDELINES

Achieving optimum performance with a high-frequency amplifier such as the THS6214 requires careful attention to board layout parasitic and external component types. Recommendations that optimize performance include:

a) Minimize parasitic capacitance to any ac ground for all of the signal I/O pins. Parasitic capacitance on the output and inverting input pins can cause instability; on the noninverting input, it can react with the source impedance to cause unintentional band limiting. To reduce unwanted capacitance, a window around the signal I/O pins should be opened in all of the ground and power planes around those pins. Otherwise, ground and power planes should be unbroken elsewhere on the board.

b) Minimize the distance (less than 0.25in, or 6.35mm) from the power-supply pins to high-frequency 0.1 μ F decoupling capacitors. At the device pins, the ground and power plane layout should not be in close proximity to the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. The power-supply connections should always be decoupled with these capacitors. An optional supply decoupling capacitor across the two power supplies (for bipolar operation) improves second-harmonic distortion performance. Larger (2.2 μ F to 6.8 μ F) decoupling capacitors, effective at lower frequencies, should also be used on the main supply pins. These capacitors can be placed somewhat farther from the device and may be shared among several devices in the same area of the PCB.

c) Careful selection and placement of external components preserve the high-frequency performance of the THS6214. Resistors should be a very low reactance type. Surface-mount resistors work best and allow a tighter overall layout. Metal film and carbon composition, axially-leaded resistors can also provide good high-frequency performance.

Again, keep leads and PCB trace length as short as possible. Never use wire-wound type resistors in a high-frequency application. Although the output pin and inverting input pin are the most sensitive to parasitic capacitance, always position the feedback and series output resistor, if any, as close as possible to the output pin. Other network components, such as noninverting input termination resistors, should also be placed close to the package. Where double-side component mounting is allowed, place the feedback resistor directly under the package on the other side of the board between the output and inverting input pins. The frequency response is primarily determined by the feedback resistor value as described previously. Increasing the value reduces the bandwidth, whereas decreasing it leads to a more

peaked frequency response. The 1.24k Ω feedback resistor used in the [Typical Characteristics](#) at a gain of +10V/V on \pm 12V supplies is a good starting point for design. Note that a 1.5k Ω feedback resistor, rather than a direct short, is recommended for a unity-gain follower application. A current-feedback op amp requires a feedback resistor to control stability even in the unity-gain follower configuration.

d) Connections to other wideband devices on the board may be made with short direct traces or through onboard transmission lines. For short connections, consider the trace and the input to the next device as a lumped capacitive load. Relatively wide traces (50mils to 100mils [.050in to .100in, or 1.27mm to 2.54mm]) should be used, preferably with ground and power planes opened up around them. Estimate the total capacitive load and set R_S from the plot of *Recommended R_S vs Capacitive Load* (see [Figure 6](#), [Figure 24](#), [Figure 36](#), [Figure 48](#), [Figure 61](#), and [Figure 73](#)). Low parasitic capacitive loads (less than 5pF) may not need an isolation resistor because the THS6214 is nominally compensated to operate with a 2pF parasitic load. If a long trace is required, and the 6dB signal loss intrinsic to a doubly-terminated transmission line is acceptable, implement a matched-impedance transmission line using microstrip or stripline techniques (consult an ECL design handbook for microstrip and stripline layout techniques). A 50 Ω environment is not necessary on board; in fact, a higher impedance environment improves distortion (see the distortion versus load plots). With a characteristic board trace impedance defined based on board material and trace dimensions, a matching series resistor into the trace from the output of the THS6214 is used, as well as a terminating shunt resistor at the input of the destination device. Remember also that the terminating impedance is the parallel combination of the shunt resistor and the input impedance of the destination device.

This total effective impedance should be set to match the trace impedance. The high output voltage and current capability of the THS6214 allows multiple destination devices to be handled as separate transmission lines, each with their own series and shunt terminations. If the 6dB attenuation of a doubly-terminated transmission line is unacceptable, a long trace can be series-terminated at the source end only.

Treat the trace as a capacitive load in this case and set the series resistor value as shown in the plot of *R_S vs Capacitive Load*. However, this configuration does not preserve signal integrity as well as a doubly-terminated line. If the input impedance of the destination device is low, there is some signal attenuation as a result of the voltage divider formed by the series output into the terminating impedance.

e) Socketing a high-speed part such as the THS6214 is not recommended. The additional lead length and pin-to-pin capacitance introduced by the socket can create an extremely troublesome parasitic network, which can make it almost impossible to achieve a smooth, stable frequency response. Best results are obtained by soldering the THS6214 directly onto the board.

f) Use the $-V_S$ plane to conduct heat out of the QFN-24 and TSSOP-24 PowerPAD packages. These packages attach the die directly to an exposed thermal pad on the bottom, which should be soldered to the board. This pad must be connected electrically to the same voltage plane as the most negative supply applied to the THS6214 (in [Figure 82](#), this supply is $-12V$).

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| THS6214IPWP | ACTIVE | HTSSOP | PWP | 24 | 60 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| THS6214IPWPR | ACTIVE | HTSSOP | PWP | 24 | 2000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| THS6214IRHFR | ACTIVE | QFN | RHF | 24 | 3000 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| THS6214IRHFT | ACTIVE | QFN | RHF | 24 | 250 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal


| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| THS6214IPWPR | HTSSOP | PWP | 24 | 2000 | 330.0 | 16.4 | 6.95 | 8.3 | 1.6 | 8.0 | 16.0 | Q1 |
| THS6214IRHFR | QFN | RHF | 24 | 3000 | 330.0 | 12.4 | 4.3 | 5.3 | 1.3 | 8.0 | 12.0 | Q1 |
| THS6214IRHFT | QFN | RHF | 24 | 250 | 180.0 | 12.4 | 4.3 | 5.3 | 1.3 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| THS6214IPWPR | HTSSOP | PWP | 24 | 2000 | 346.0 | 346.0 | 33.0 |
| THS6214IRHFR | QFN | RHF | 24 | 3000 | 346.0 | 346.0 | 29.0 |
| THS6214IRHFT | QFN | RHF | 24 | 250 | 190.5 | 212.7 | 31.8 |

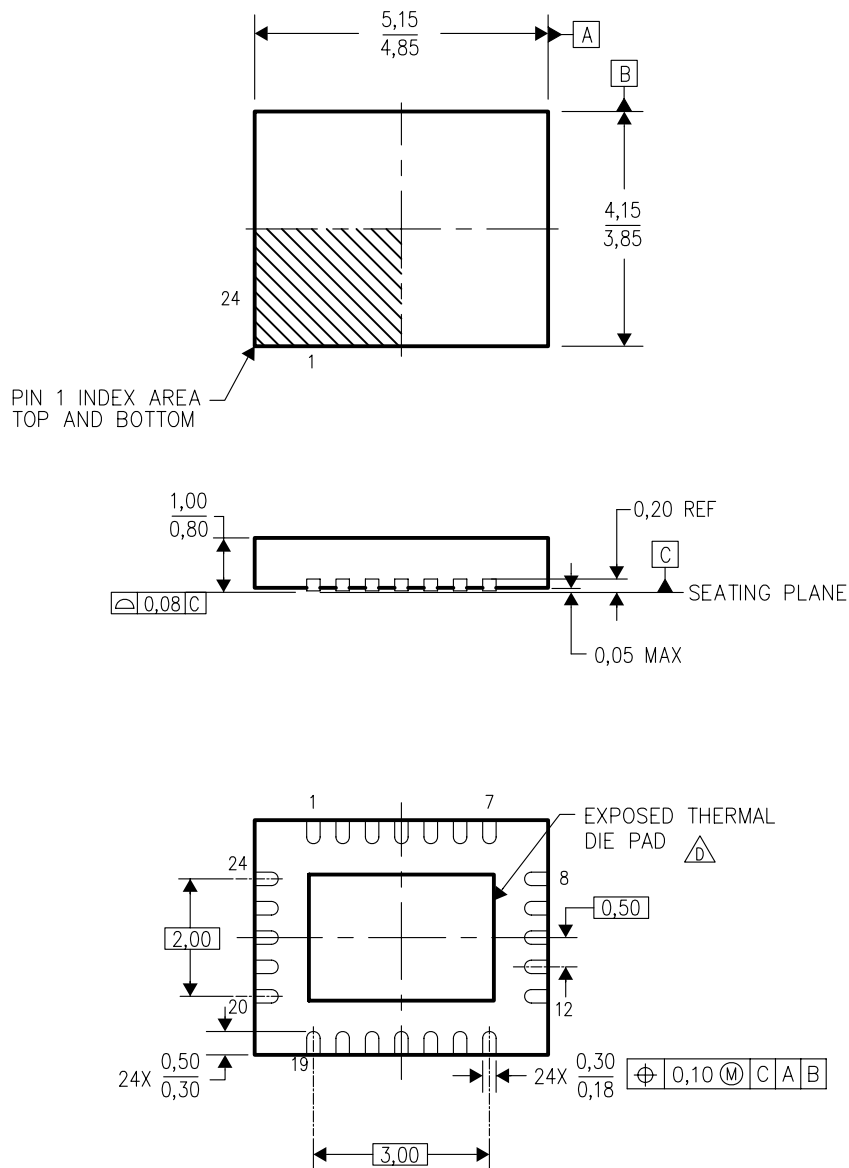

4204845/E 08/06


- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. QFN (Quad Flatpack No-Lead) Package configuration.
 -  D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
 - E. Falls within JEDEC MO-220.

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, Quad Flatpack No-Lead Logic Packages, Texas Instruments Literature No. SCBA017. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

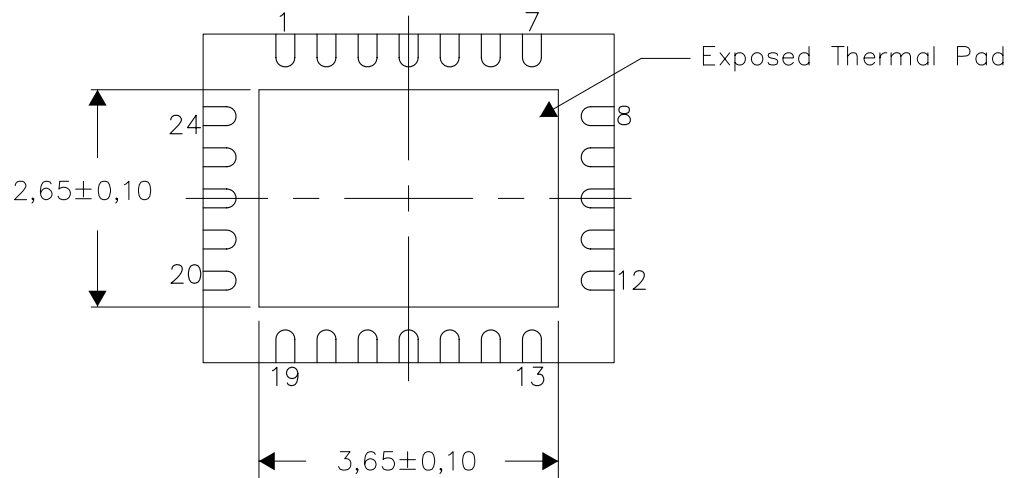


Bottom View

NOTE: All linear dimensions are in millimeters


Exposed Thermal Pad Dimensions

RHF (S-PVQFN-N24)

Example Board Layout

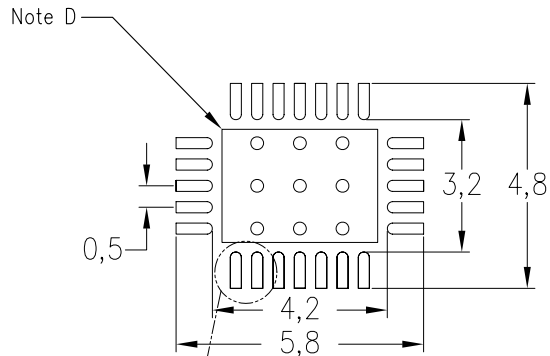


Example Stencil Design
0.125mm Stencil Thickness
(Note E)

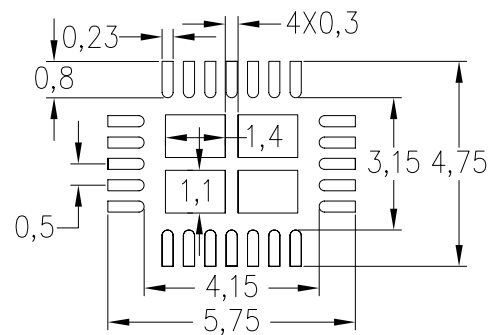


64% solder coverage on center pad

Non Solder Mask
Defined Pad

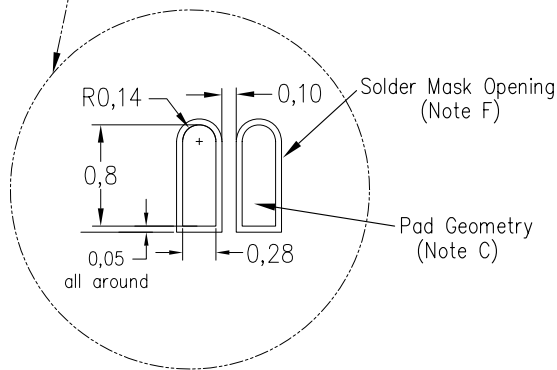

Example Via Layout
(Note D)

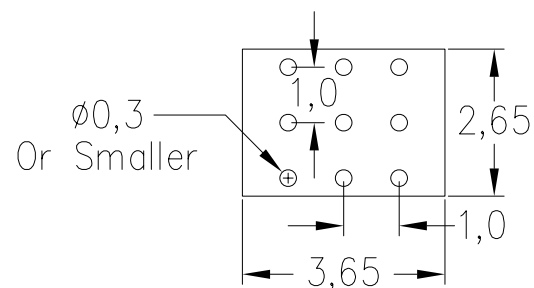

4209374/B 07/08


- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SCBA017, SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - F. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in thermal pad.

MECHANICAL DATA

PWP (R-PDSO-G**)

PowerPAD™ PLASTIC SMALL-OUTLINE PACKAGE

20 PIN SHOWN

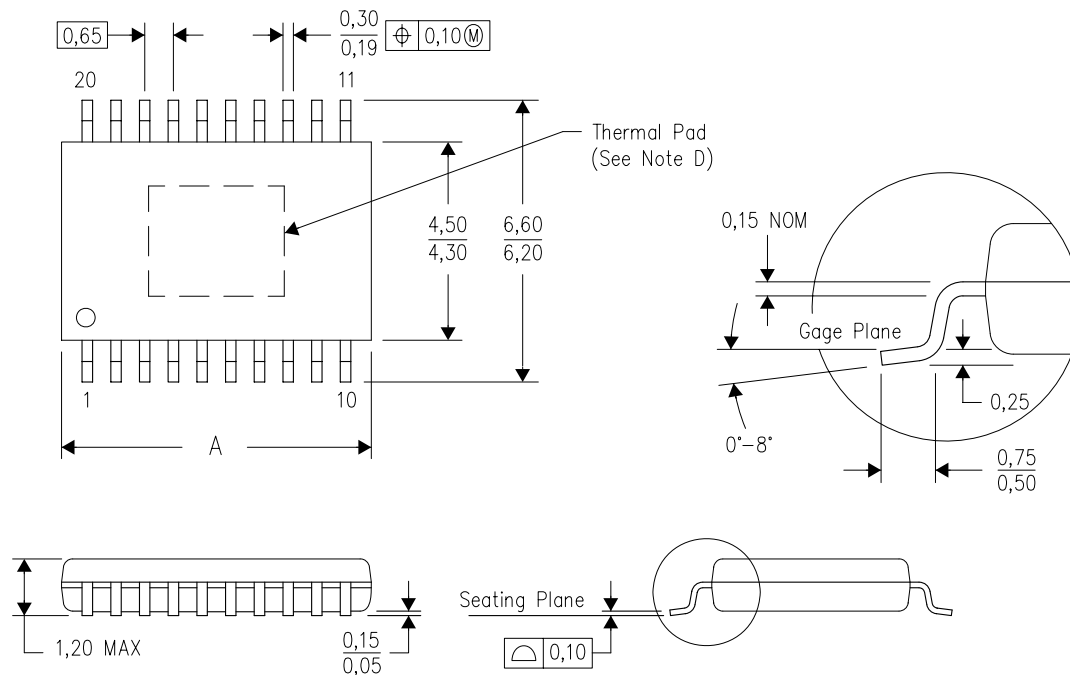

| PINS ** | 14 | 16 | 20 | 24 | 28 |
|---------|------|------|------|------|------|
| DIM | | | | | |
| A MAX | 5,10 | 5,10 | 6,60 | 7,90 | 9,80 |
| A MIN | 4,90 | 4,90 | 6,40 | 7,70 | 9,60 |

4073225/H 12/05

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusions. Mold flash and protrusion shall not exceed 0.15 per side.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at www.ti.com <<http://www.ti.com>>.
 - Falls within JEDEC MO-153


PowerPAD is a trademark of Texas Instruments.

THERMAL INFORMATION

This PowerPAD™ package incorporates an exposed thermal pad that is designed to be attached to a printed circuit board (PCB). The thermal pad must be soldered directly to the PCB. After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the PowerPAD package and how to take advantage of its heat dissipating abilities, refer to Technical Brief, PowerPAD Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 and Application Brief, PowerPAD Made Easy, Texas Instruments Literature No. SLMA004. Both documents are available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

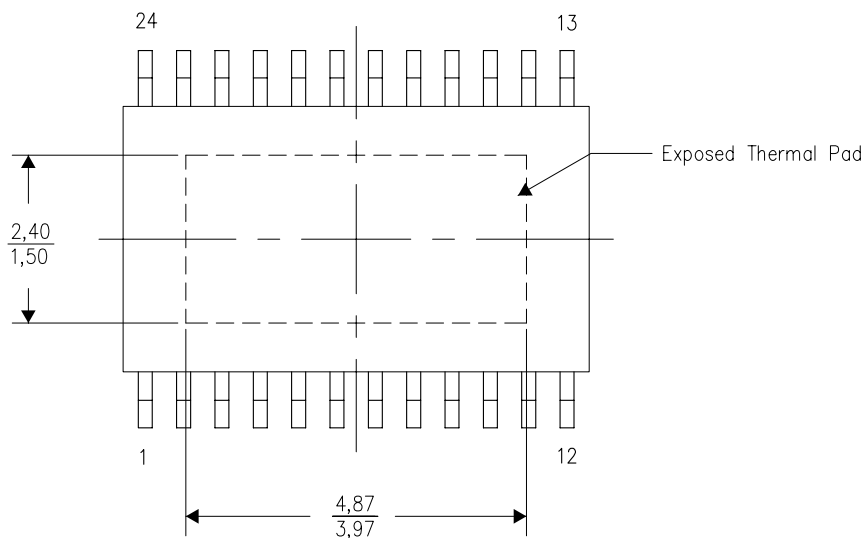


Top View

NOTE: All linear dimensions are in millimeters

Exposed Thermal Pad Dimensions

PWP (R-PDSO-G24) PowerPAD™

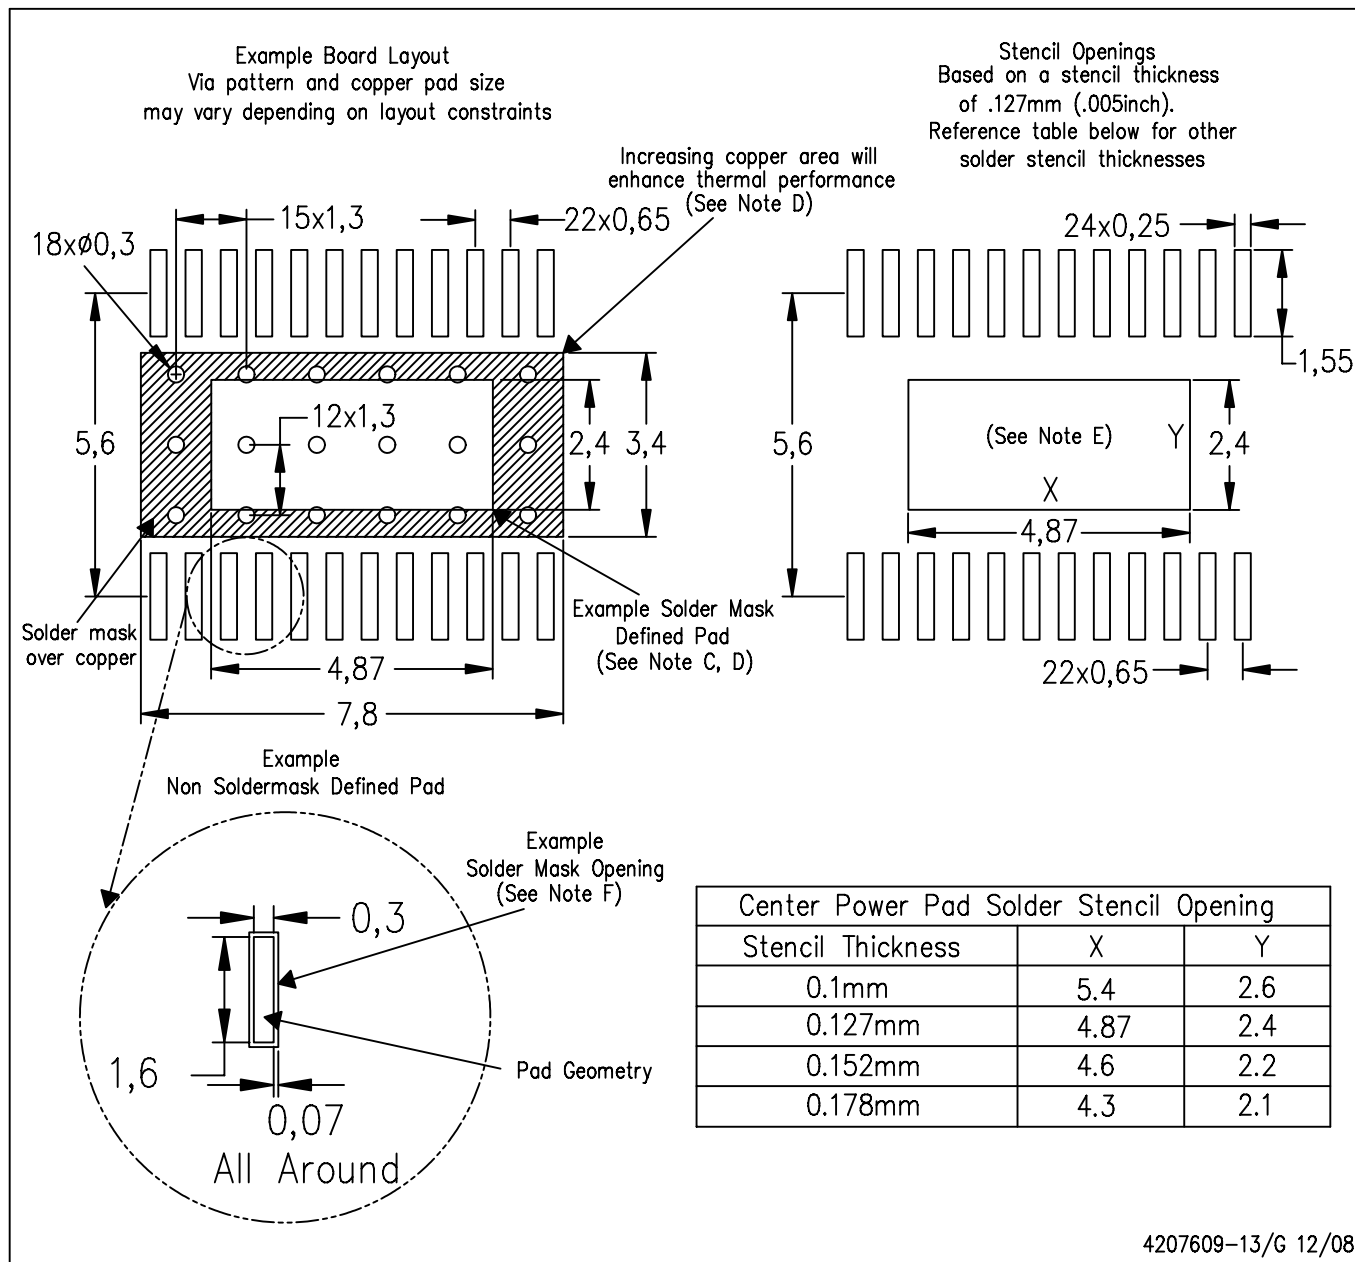

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002, SLMA004, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>. Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.
 - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PowerPAD is a trademark of Texas Instruments.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

| | |
|-----------------------------|--|
| Amplifiers | amplifier.ti.com |
| Data Converters | dataconverter.ti.com |
| DLP® Products | www.dlp.com |
| DSP | dsp.ti.com |
| Clocks and Timers | www.ti.com/clocks |
| Interface | interface.ti.com |
| Logic | logic.ti.com |
| Power Mgmt | power.ti.com |
| Microcontrollers | microcontroller.ti.com |
| RFID | www.ti-rfid.com |
| RF/IF and ZigBee® Solutions | www.ti.com/lprf |

Applications

| | |
|--------------------|--|
| Audio | www.ti.com/audio |
| Automotive | www.ti.com/automotive |
| Broadband | www.ti.com/broadband |
| Digital Control | www.ti.com/digitalcontrol |
| Medical | www.ti.com/medical |
| Military | www.ti.com/military |
| Optical Networking | www.ti.com/opticalnetwork |
| Security | www.ti.com/security |
| Telephony | www.ti.com/telephony |
| Video & Imaging | www.ti.com/video |
| Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2009, Texas Instruments Incorporated