




## HyperJack™ 1000 (Gigabit) stacked 85572

Molex's new HyperJack 1000 is designed for Ethernet 1000 BaseT applications such as switches, hubs and line cards. Due to its unique modular housing design the product can be offered in various port configurations, from 1/1 to 12/12. The product is compliant with IEEE802.3, FFC 68 and IEC 603-7. LED integration is prepared and will be released soon.



### Features and Benefits

- The integrated magnetics provide a high signal integrity
- Standard offer is 8 core solution with various configurations depending on the PHY.  
12 core solution is an option.
- The unique modular housing design allows to offer port configurations from 1/1,2/2, 3/3...to 12/12.
- Excellent EMI/RFI performance due to high shield effectiveness and special magnetic configuration
- The IEEE 802.3 compliance assures Ethernet 10/100 backwards compatibility
- Industry standard footprint

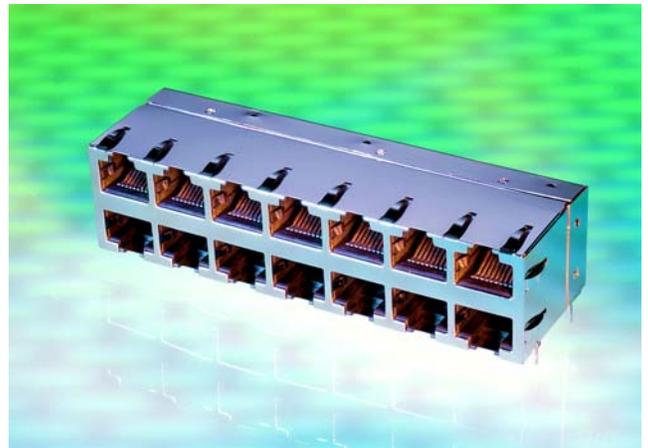

### Markets and Applications

- Telecom and Networking
- Adapter cards
- Enterprise switch
- Hub
- Line cards

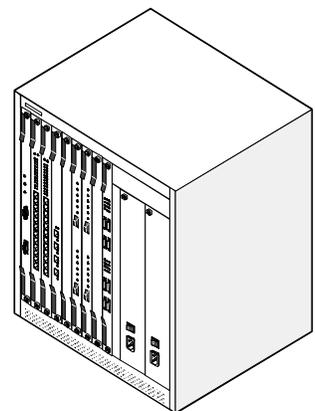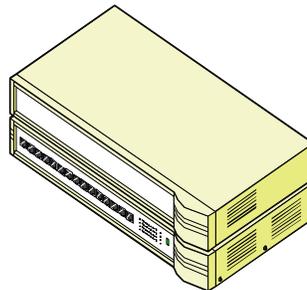



# HyperJack™ 1000 (Gigabit) stacked 85572

## Reference Information

Packaging: Trays in boxes  
UL File No.: pending  
CSA File No.: pending  
Mates With: FCC 68.5 plugs, Molex 85568, 9043, 90075 series

## Electrical


Current: 350 miliamps max  
Contact Resistance: 20 miliohms  
Dielectric Withstanding Voltage: 2250 Volt DC, 60 sec.  
Insertion loss: -1.20 dB  
Return loss: 18 dB  
Crosstalk: -40 dB  
Common Mode Rejection: -30 dB

## Physical

Housing: Thermoplast UL 94-V0  
Contact: Gold over Nickel  
Underplating: Ni  
Shield: Brass Ni plated  
Durability: 750 cycles

## Environmental

Operating Temperature: 0°C to +70°C

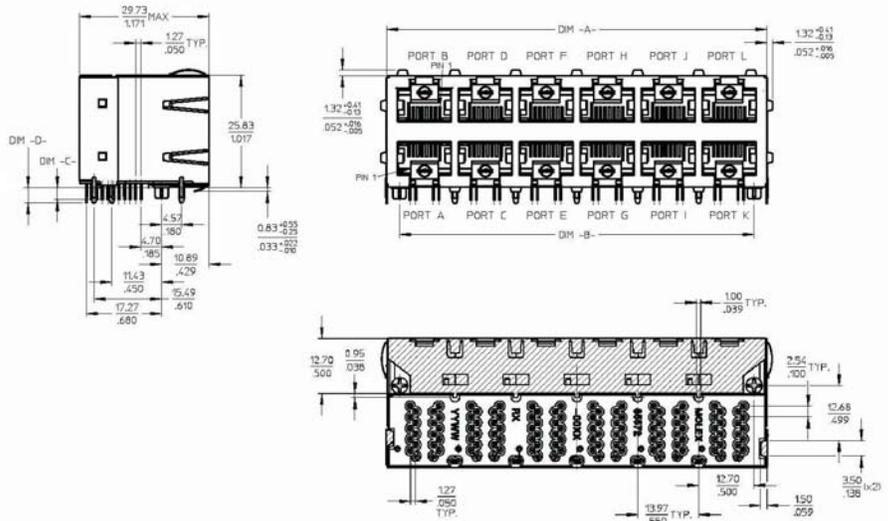

Part Number	Number of Ports	Solder tail length						
85572-0114	1/1	85572-0102	2/2	85572-0116	3/3	85572-0104	4/4	4.00 mm
85572-0115	1/1	85572-0103	2/2	85572-0117	3/3	85572-0105	4/4	2.70 mm
85572-0118	5/5	85572-0106	6/6	85572-0120	7/7	85572-0108	8/8	4.00 mm
85572-0119	5/5	85572-0107	6/6	85572-0121	7/7	85572-0109	8/8	2.70 mm
85572-0122	9/9	85572-0110	10/10	85572-0124	11/11	85572-0112	12/12	4.00 mm
85572-0123	9/9	85572-0111	10/10	85572-0125	11/11	85572-0113	12/12	2.70 mm

**Americas Headquarters**  
2222 Wellington Ct.  
Lisle, Illinois 60532 USA  
1-800-78MOLEX  
amerinfo@molex.com

**Far East North Headquarters**  
Yamato, Kanagawa, Japan  
81-462-65-2324  
feninfo@molex.com

**Far East South Headquarters**  
Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**  
Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, Illinois 60532 USA  
630-969-4550  
www.molex.com