



SANYO Semiconductors

DATA SHEET

LA76600M — Monolithic Linear IC

Video Signal Y/C Separator IC

Overview

The LA76600M separates a video signal into Y and C components. It includes an on-chip 2H CCD delay line and achieves a significant reduction in flicker and noise by using a 3-line Y/C separation circuit.

Functions

- For Y/C Separate (Digital Clocked CCD 3Line Comb Filter).

Specifications

Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply rating	V _{CC} max		6.0	V
Allowable power dissipation	Pd max	Ta ≤ 65°C	400 (*1)	mW
Operating temperature	Topr		-10 to +65	°C
Storage temperature	Tstg		-40 to +125	°C

* Mounted on a 114.3×76.1×1.6mm glass epoxy 4-layer circuit board

Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V _{CC}		5.0	V
Allowable operating supply voltage range	V _{CC} opg		4.8 to 5.2	V

■ Any and all SANYO Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO Semiconductor representative nearest you before using any SANYO Semiconductor products described or contained herein in such applications.

■ SANYO Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor products described or contained herein.

SANYO Semiconductor Co., Ltd.

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LA76600M

Electrical Characteristics at Ta = 25°C, VCC = 5.0V

Parameter	Symbol	Input	Output	Conditions	Ratings			Unit
					min	typ	max	
Analog Supply Current	I _{CC}			Measure the current at 5PIN.	25	30	35	mA
Digital Supply Current	I _{DD}			Measure the current at 6PIN.	25	30	35	mA
REG Voltage	REG		T7	Measure the output voltage.	3.8	4	4.2	V
VCO Voltage	VCO		T8	Measure the output voltage.	2.1	2.3	2.5	V
RD Voltage	RD		T12	Measure the output voltage.	9	10	11	V
PLL Voltage	PLL		T13	Measure the output voltage.	3	3.5	4	V
YIN1 Input Level	Y _{IN1}	T14A	T14	VIN = 1Vp-p, Video signal SW2:2 Measure the input level.	0.8	1	1.2	Vp-p
YIN2 Input Level	Y _{IN2}	T3A	T3	VIN = 1Vp-p, Video signal SW2:1 Measure the input level.	0.8	1	1.2	Vp-p
Chroma Input Level	C _{IN}	T1A	T1	VIN = 0.7Vp-p, Chroma signal Measure the input level.	0.5	0.7	0.9	Vp-p
FSC Input Level	FSC _{IN}	T11A	T11	VIN = 0.3Vp-p, SIN Signal Measure the input level.	0.2	0.3	0.5	Vp-p
Yout Level 1 (COMB Mode)	Y _{LVC}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the output level.	0.89	1	1.12	Vp-p
Yout Level 2 (THR Mode)	Y _{LVT}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:1 Measure the output level.	0.89	1	1.12	Vp-p
Yout f-Character (COMB Mode)	Y _{FC1}	T14A T3A	T16	VIN = 1Vp-p, 5MHz, CW signal SW1:2 Measure the Gain between the input and the output.	-3	0	3	dB
Yout f-Character (COMB Mode)	Y _{FC2}	T14A T3A	T16	VIN = 1Vp-p, 7MHz, CW signal SW1:2 Measure the Gain between the input and the output.		-20	-15	dB
Yout f-Character (THR Mode)	Y _{FT}	T14A T3A	T16	VIN = 1Vp-p, 10MHz, CW signal SW1:1 Measure the Gain between the input and the output.	-3	0	3	dB
Y Signal Delay 1 (COMB Mode)	Y _{DLYC}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the delay between the input and the output of Y signal.	200	400	600	ns
Y Signal Delay 2 (THR Mode)	Y _{DLYT}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:1 Measure the delay between the input and the output of Y signal.	0	10	50	ns
Output Clamp Level 1 (COMB Mode)	Y _{CLPC}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the clamp level of output signal.	1.5	2	2.5	V
Output Clamp Level 2 (THR Mode)	Y _{CLPT}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:1 Measure the clamp level of output signal.	1.5	2	2.5	V
Y Signal S/N ratio 1 (COMB Mode)	Y _{SNC}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the S/N ratio of Y signal.			-50	dB
Y Signal S/N ratio 2 (THR Mode)	Y _{SNT}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:1 Measure the S/N ratio of Y signal.			-50	dB
Clock Leak (COMB Mode)	Y _{CLKC}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the clock leak.			-40	dB
Clock Leak (THR Mode)	Y _{CLKT}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:1 Measure the clock leak.			-60	dB
Y_Comb Depth 1	Y _{COMB1}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the comb depth at Fsc.		-35	-30	dB
Y_Comb Depth 2	Y _{COMB2}	T14A T3A	T16	VIN = 1Vp-p, Video signal SW1:2 Measure the comb depth at (227.5-59)/227.5Fsc.		-15	-10	dB
Y_Comb Depth 3	Y _{COMB3}	T14A T3A	T16	VIN= 1Vp-p, Video signal SW1:2 Measure the comb depth at (227.5+59)/227.5Fsc.		-15	-10	dB

Continued on next page.

LA76600M

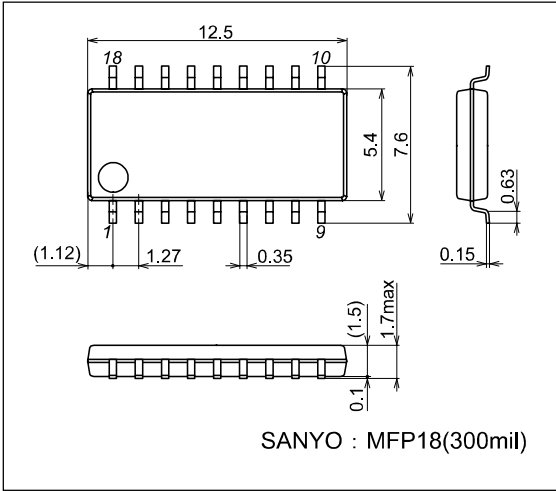
Continued from preceding page.

Parameter	Symbol	Input	Output	Conditions	Ratings			Unit
					min	typ	max	
Chroma Out Level (COMB Mode)	C _{LV}	T14A T3A	T18	VIN = 0.7Vp-p, Video signal SW1:2 Measure the output level.	0.5	0.7	0.9	Vp-p
Chroma Out Level (THR Mode)	C _{LV}	T1A	T18	VIN = 0.7Vp-p, Video signal SW1:1 Measure the output level.	0.5	0.7	0.9	Vp-p
Chroma f-Character 1 (COMB Mode)	C _{FC1}	T14A T3A	T18	VIN = 1Vp-p, 1.5MHz, CW signal SW1:2 Measure the Gain between the input and the Output.	-6	-3	0	dB
Chroma f-Character 2 (COMB Mode)	C _{FC2}	T14A T3A	T18	VIN = 1Vp-p, 4.5MHz, CW signal SW1:2 Measure the Gain between the input and the Output.	-6	-3	0	dB
Chroma f-Character 3 (THR Mode)	C _{FC3}	T1A	T18	VIN = 1Vp-p, 10MHz, CW signal SW1:1 Measure the Gain between the input and the Output.	-3	0	3	dB
Chrominance Output DC Level 1 (COMB Mode)	C _{DCC}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the chrominance output DC level.	2	2.5	3	V
Chrominance Output DC Level 2 (THR Mode)	C _{DCT}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:1 Measure the chrominance output DC level.	2	2.5	3	V
C Signal S/N ratio 1 (COMB Mode)	C _{SNC}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the S/N ratio of C signal.			-50	dB
C Signal S/N ratio 2 (THR Mode)	C _{SNT}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:1 Measure the S/N ratio of C signal.			-50	dB
Clock Leak (COMB Mode)	C _{CLKC}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the clock leak.			-30	dB
Clock Leak (THR Mode)	C _{CLKT}	T14A T3A	T18	VIN = 1Vpp, Video signal SW1:1 Measure the clock leak.			-60	dB
C Signal Delay (COMB mode)	C _{DLYC}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the delay between the input and the output of C signal.	200	400	600	ns
C Signal Delay (THR Mode)	C _{DLYT}	T1A	T18	VIN = 1Vp-p, Video chroma SW1:1 Measure the delay between the input and the output of C signal.	0	10	50	ns
C_Comb Depth 1	C _{COMB1}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the comb depth at Fsc.		-35	-30	dB
C_Comb Depth 2	C _{COMB2}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the comb depth at (227.5-59)/227.5Fsc.		-15	-10	dB
C_Comb Depth 3	C _{COMB3}	T14A T3A	T18	VIN = 1Vp-p, Video signal SW1:2 Measure the comb depth at (227.5+59)/227.5Fsc.		-15	-10	dB
Difference Of Delay Between Y and C	Y _{CDLY}	T14A T3A	T16 T18	VIN = 1Vp-p, Video signal SW1:2 Measure the difference of delay between the Y output and C output.	-20	0	20	ns
INPUTSEL_L (YIN1)	IN _{SELL}	T2	T2	YIN1 ON, measure the SW voltage.		0	1	V
INPUTSEL_H (YIN2)	IN _{SELH}	T2	T2	YIN2 ON, measure the SW voltage.	2.5	5		V
OUTPUTSEL_H (COMB Mode)	OUT _{SELH}	T17	T17	COMB Mode, measure the SW voltage.		0	1	V
OUTPUTSEL_L (THR Mode)	OUT _{SELL}	T17	T17	COMB Mode, measure the SW voltage.	2.5	5		V
Cross talk between Different input 1	IN _{CRS}	T14A	T16 T18	VIN = 1Vp-p, Video signal SW2:2 Measure the cross talk between different input.			-50	dB
Cross talk between Different input 2	IN _{CRS}	T3A	T16 T18	VIN = 1Vp-p, Video signal SW2:1 Measure the cross talk between different input.			-50	dB

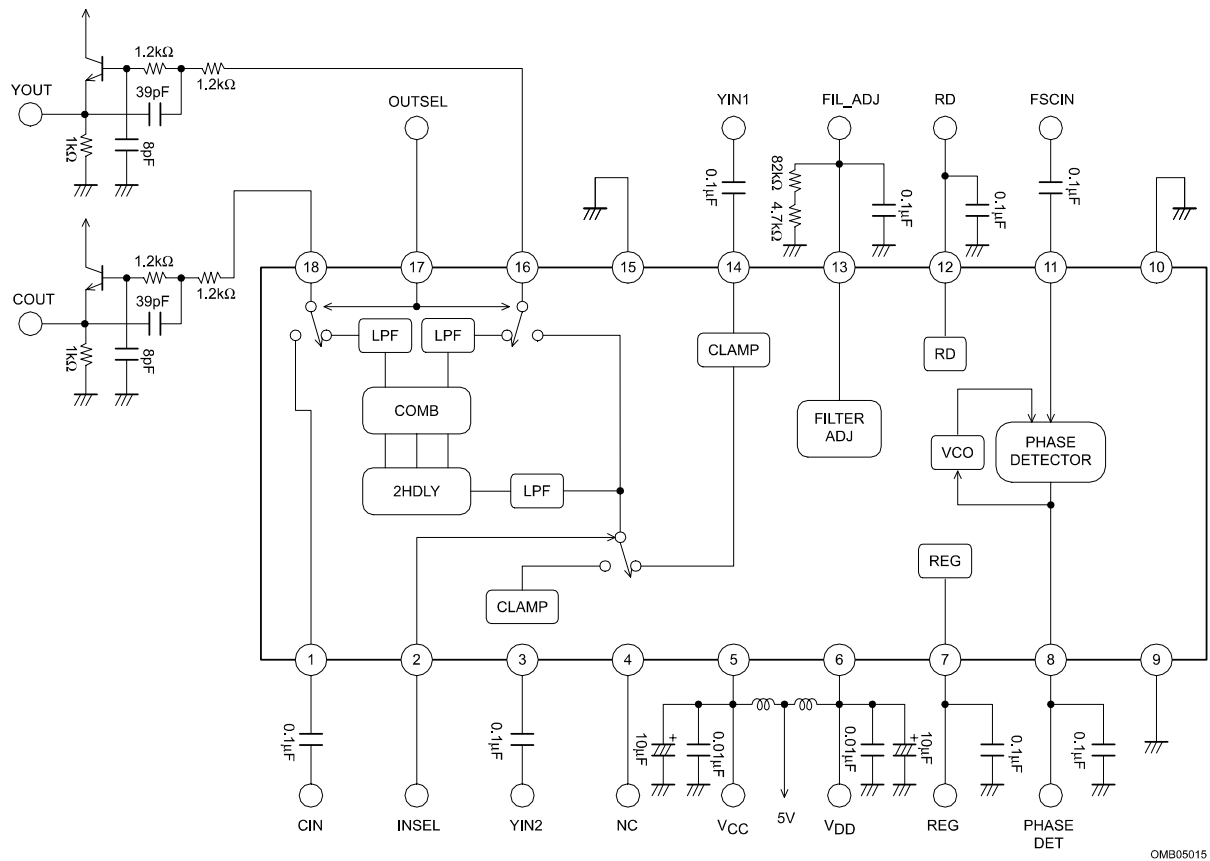
Package Dimensions

unit: mm

3095A


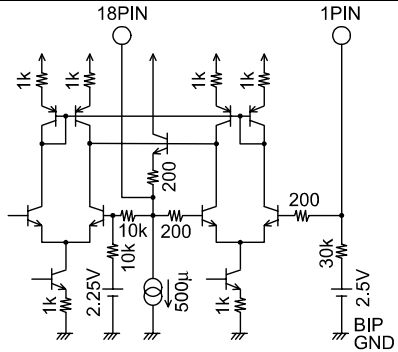
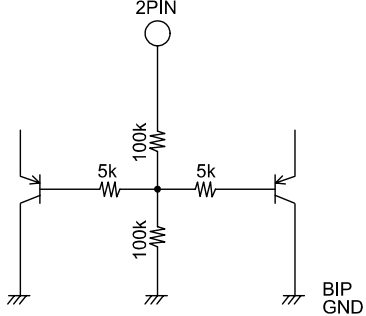

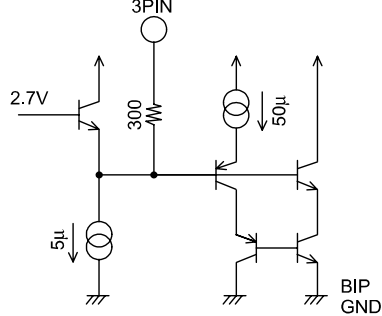
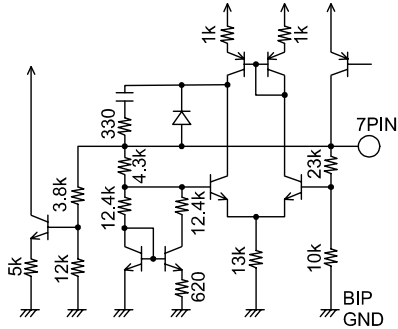


Block Diagram



Pin Function

(unit: Ω)

Pin No.	Pin name	DC voltage	Signal waveform	Input/Output form
1	CIN	2.5V	CHROMA-SIGNAL 	
2	INSEL		GND: YIN2 V_{CC}: YIN1	
3	YIN2	2.5V	VIDEO-SIGNAL 	
5	BIP-V _{CC}	5V	DC	
6	CCD-V _{CC}	5V	DC	
7	REG	4V	DC	

Continued on next page.

LA76600M

Continued from preceding page.

(unit: Ω)


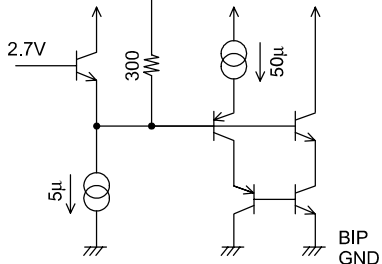

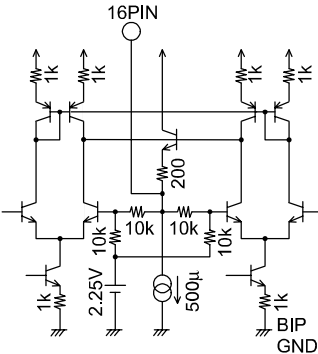
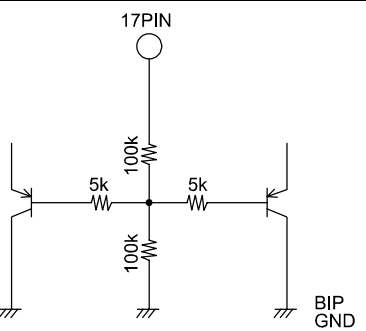
Pin No.	Pin name	DC voltage	Signal waveform	Input/Output form
8	PHASEDET	2.3V	DC	
9	CCD-GND	GND		
10	CCD-GND	GND		
11	FSC_IN	0.8V	SIN-WAVE:3.58MHz	
12	RD	10V	DC	
13	AFC	3.5V	DC	

Continued on next page.

LA76600M

Continued from preceding page.

(unit: Ω)

Pin No.	Pin name	DC voltage	Signal waveform	Input/Output form
14	YIN1		VIDEO-SIGNAL 	
15	BIP-GND	GND		
16	YOUT	2.5V	Y-SIGNAL 	
17	OUTSEL		GND: COMB V_{CC}: THROUGH	
18	COUT	2.5V	CHROMA-SIGNAL 