





1. Mechanical Dimensions:

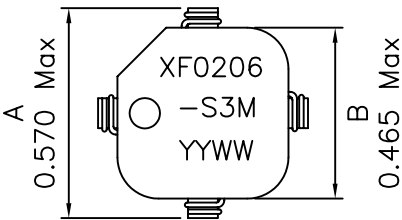


BOTTOM VIEW

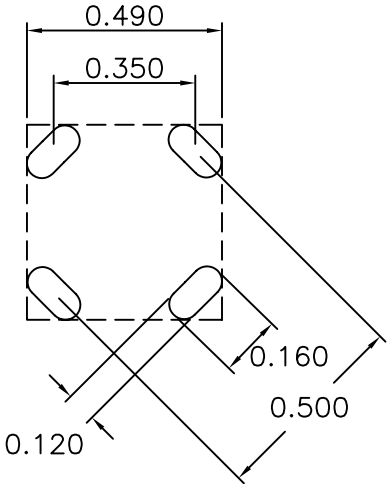


RECOMMENDED LAYOUT PATTERN
(TOP VIEW)


2. Schematic:



PARALLEL



SERIES



TRANSFORMER

Core: CSC CM 078 125

3. Electrical Specifications: @25°C

	PARALLEL	SERIES	10KHz	1.0V
OCL(NO DC):	19.60uH Typ	78.40uH Typ		
MAX DC I:	2.10Adc	1.05Adc		
DC RES:	0.055 OHMS MAX	0.220 OHMS MAX		
Isolation:	500 Vrms			

- Notes:
- 1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
 - 2. Flammability: UL94V-0
 - 3. ASTM oxygen index: > 28%
 - 4. Temperature rating: 155°C. UL file E151556
 - 5. Operating Temperature Range: 0°C to +70°C

DOC REV: A/2

XFMRS Inc.		Title: DUAL SURFACE MOUNT INDUCTOR		
UNLESS OTHERWISE SPECIFIED		P/N: 7XF0206-S3M	REV. A	
TOLERANCES: .xxx ±0.010		DWN.	罗振江	Aug-05-03
Dimensions in Inch		CHK.	廖玉坤	Aug-05-03
SCALE 2:1 SHT 1 OF 1		APP.	Isaiah M	Aug-05-03