

### FEATURES

- Controls supply rails from 2.7 V to 16.5 V
- Allows protected board removal and insertion to a live backplane
- External sense resistor provides adjustable analog current limit with circuit breaker
- Peak fault current limited with fast response
- Charge pumped gate drive for external N-FET switch
- Current sense output
- Soft start inrush current control
- Automatic retry or latch-off during current fault
- Undervoltage lockout
- 8-lead, TSOT package

### APPLICATIONS

- Hot swap board insertion: line cards, raid systems
- Industrial high-side switches/circuit breakers
- Electronic circuit breakers

### GENERAL DESCRIPTION

The ADM1171 is a hot swap controller that safely enables a printed circuit board to be removed and inserted to a live backplane. This is achieved using an external N-channel power MOSFET with a current control loop that monitors the load current through a sense resistor. An internal charge pump is used to enhance the gate of the N-channel FET. When an overcurrent condition is detected, the gate voltage of the FET is reduced to limit the current flowing through the sense resistor. During an overcurrent condition, the TIMER cap determines the amount of time the FET remains at a current limiting mode of operation until it is shut down. The ON (ON-CLR) pin is the enable input for the device and can be used to monitor the input supply voltage. The ADM1171 operates with a supply voltage ranging from 2.7 V to 16.5 V.

The ADM1171 features soft start to provide the user with a capacitor programmable ramping reference to the internal current sense comparator. This provides a linearly increasing current limit at startup at a rate set by  $C_{SS}$ . This helps to reduce and limit large inrush currents.

The ADM1171 also features a current sense output (CSOUT) pin. The voltage on the CSOUT pin represents the voltage drop across the sense resistor gained up by a factor of 20.

This device is available in two options: the ADM1171-1 with automatic retry for overcurrent fault and the ADM1171-2 with latch-off for an overcurrent fault. Toggling the ON (ON-CLR) pin resets a latched fault. The ADM1171 is packaged in an 8-lead TSOT.

### FUNCTIONAL BLOCK DIAGRAM

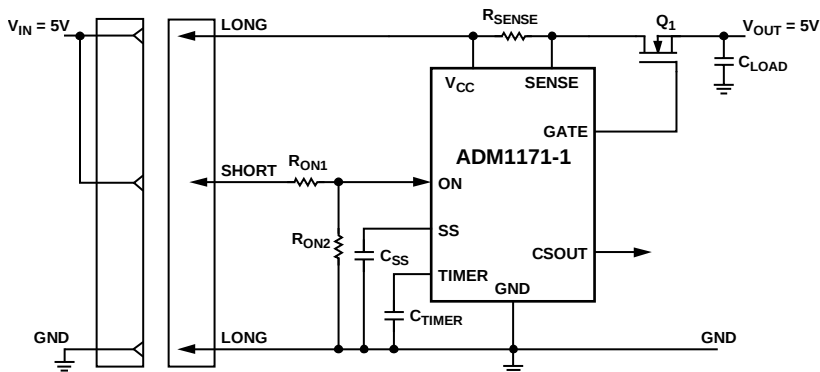


Figure 1.

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
Tel: 781.329.4700 [www.analog.com](http://www.analog.com)  
Fax: 781.461.3113 ©2006 Analog Devices, Inc. All rights reserved.

TABLE OF CONTENTS

|                                                    |    |                                            |    |
|----------------------------------------------------|----|--------------------------------------------|----|
| Features .....                                     | 1  | ON (ON- $\overline{\text{CLR}}$ ) Pin..... | 12 |
| Applications.....                                  | 1  | GATE .....                                 | 12 |
| General Description .....                          | 1  | Current Limit Function .....               | 12 |
| Functional Block Diagram .....                     | 1  | Calculating the Current Limit .....        | 12 |
| Revision History .....                             | 2  | Circuit Breaker Function.....              | 12 |
| Specifications.....                                | 3  | Timer Function.....                        | 13 |
| Absolute Maximum Ratings.....                      | 4  | Power-Up Timing Cycle .....                | 13 |
| Thermal Characteristics .....                      | 4  | Circuit Breaker Timing Cycle.....          | 13 |
| ESD Caution.....                                   | 4  | Automatic Retry or Latched Off.....        | 14 |
| Pin Configurations and Function Descriptions ..... | 5  | Soft Start .....                           | 14 |
| Typical Performance Characteristics .....          | 6  | CSOUT Pin .....                            | 14 |
| Theory of Operation .....                          | 12 | Outline Dimensions .....                   | 15 |
| Overview.....                                      | 12 | Ordering Guide .....                       | 15 |
| UVLO.....                                          | 12 |                                            |    |

REVISION HISTORY

7/06—Revision 0: Initial Version

## SPECIFICATIONS

$V_{CC} = 2.7\text{ V}$  to  $16.5\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ , typical values at  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

**Table 1.**

| Parameter                                        | Symbol               | Min  | Typ   | Max   | Unit | Conditions                                                                              |
|--------------------------------------------------|----------------------|------|-------|-------|------|-----------------------------------------------------------------------------------------|
| V <sub>CC</sub> PIN                              |                      |      |       |       |      |                                                                                         |
| Operating Voltage Range                          | V <sub>CC</sub>      | 2.7  |       | 16.5  | V    | V <sub>CC</sub> rising                                                                  |
| Supply Current                                   | I <sub>CC</sub>      |      | 0.65  | 0.8   | mA   |                                                                                         |
| Undervoltage Lockout                             | V <sub>UVLO</sub>    | 2.4  | 2.525 | 2.65  | V    |                                                                                         |
| Undervoltage Lockout Hysteresis                  | V <sub>UVLOHYS</sub> |      | 40    |       | mV   |                                                                                         |
| ON (ON-CL $\overline{\text{R}}$ ) PIN            |                      |      |       |       |      |                                                                                         |
| Input Current                                    | I <sub>INON</sub>    | −1   | 0     | +1    | μA   | ON rising                                                                               |
| Threshold                                        | V <sub>ON</sub>      | 1.22 | 1.3   | 1.38  | V    |                                                                                         |
| Threshold Hysteresis                             | V <sub>ONHYST</sub>  |      | 50    |       | mV   |                                                                                         |
| SENSE PIN                                        |                      |      |       |       |      |                                                                                         |
| Hot Swap Operating Range                         |                      | 2.7  |       | 16.5  | V    | V <sub>CB</sub> = (V <sub>CC</sub> − V <sub>SENSE</sub> )                               |
| Input Current                                    | I <sub>INSENSE</sub> | 5    | 10    | 15    | μA   |                                                                                         |
| Circuit Breaker Limit Voltage                    | V <sub>CB</sub>      | 44   | 50    | 56    | mV   |                                                                                         |
|                                                  |                      |      |       |       |      |                                                                                         |
| GATE PIN                                         |                      |      |       |       |      |                                                                                         |
| Drive Voltage                                    | V <sub>GATE</sub>    | 4.6  | 7.5   | 10    | V    | V <sub>GATE</sub> − V <sub>CC</sub> , V <sub>CC</sub> = 3.0 V                           |
|                                                  |                      | 6.0  | 8     | 12    | V    | V <sub>GATE</sub> − V <sub>CC</sub> , V <sub>CC</sub> = 3.3 V                           |
|                                                  |                      | 8.75 | 10    | 12    | V    | V <sub>GATE</sub> − V <sub>CC</sub> , V <sub>CC</sub> = 5 V                             |
|                                                  |                      | 7.5  | 9     | 12    | V    | V <sub>GATE</sub> − V <sub>CC</sub> , V <sub>CC</sub> = 12 V                            |
|                                                  |                      | 5.56 | 8     | 12    | V    | V <sub>GATE</sub> − V <sub>CC</sub> , V <sub>CC</sub> = 15 V                            |
| Pull-Up Current                                  |                      | −6.5 | −12   | −14.5 | μA   | V <sub>GATE</sub> = 0 V                                                                 |
| Pull-Down Current                                |                      |      | 4     |       | mA   | V <sub>GATE</sub> = 3 V, V <sub>CC</sub> = 5 V, ON (ON-CL $\overline{\text{R}}$ ) = low |
| Pull-Down Current                                |                      |      | 25    |       | mA   | V <sub>GATE</sub> = 3 V, V <sub>CC</sub> < UVLO                                         |
| TIMER PIN                                        |                      |      |       |       |      |                                                                                         |
| Pull-Up Current                                  | I <sub>TIMERUP</sub> | −2   | −5    | −8.5  | μA   | Initial cycle, V <sub>TIMER</sub> = 1 V                                                 |
|                                                  |                      | −25  | −60   | −100  | μA   | During current fault, V <sub>TIMER</sub> = 1 V                                          |
| Pull-Down Current                                | I <sub>TIMERDN</sub> |      | 2     | 3.5   | μA   | After Cct breaker tip, V <sub>TIMER</sub> = 1 V                                         |
|                                                  |                      |      | 100   |       | μA   | Normal operation, V <sub>TIMER</sub> = 1 V                                              |
|                                                  |                      |      |       |       |      |                                                                                         |
| Threshold High                                   | V <sub>TIMERH</sub>  | 1.22 | 1.3   | 1.38  | V    | TIMER rising                                                                            |
| Threshold Low                                    | V <sub>TIMERL</sub>  | 0.15 | 0.2   | 0.25  | V    | TIMER falling                                                                           |
| SS PIN                                           |                      |      |       |       |      |                                                                                         |
| Soft Start Pull-up Current                       |                      |      | 10    |       | μA   | V <sub>SS</sub> /V <sub>SENSE</sub>                                                     |
| Current Setting Gain                             |                      |      | 20    |       | V/V  |                                                                                         |
| Soft Start Completion Voltage                    |                      |      | 1     |       | V    | During fault                                                                            |
| Pull-Down Current                                |                      |      | 50    |       | μA   |                                                                                         |
| CSOUT PIN                                        |                      |      |       |       |      |                                                                                         |
| Total Output Voltage Error                       |                      | −5   | 0     | +5    | %    | V <sub>CC</sub> − SENSE = 50 mV                                                         |
| Gain                                             |                      |      | 20    |       | V/V  | V <sub>CC</sub> − SENSE = 10 mV to 50 mV                                                |
| Gain Accuracy                                    |                      |      | 0     | ±2.5  | %    |                                                                                         |
| Offset                                           |                      |      | ±1    |       | mV   |                                                                                         |
| Output Impedance                                 |                      |      | 14    |       | kΩ   |                                                                                         |
| t <sub>OFF</sub>                                 |                      |      |       |       |      |                                                                                         |
| Turn-Off Time (TIMER Rise to GATE Fall)          |                      |      | 2     |       | μs   | V <sub>TIMER</sub> = 0 V to 2 V step, V <sub>CC</sub> = V <sub>ON</sub> = 5 V           |
| Turn-Off Time (ON Fall to GATE Fall)             |                      |      | 40    |       | μs   | V <sub>ON</sub> = 5 V to 0 V step, V <sub>CC</sub> = 5 V                                |
| Turn-Off Time (V <sub>CC</sub> Fall to IC Reset) |                      |      | 40    |       | μs   | V <sub>CC</sub> = 5 V to 2 V step, V <sub>ON</sub> = 5 V                                |

## ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter                                    | Rating                        |
|----------------------------------------------|-------------------------------|
| $V_{CC}$ Pin                                 | –0.3 V to +20 V               |
| SENSE Pin                                    | –0.3 V to +20 V               |
| $V_{CC} - \text{SENSE}$                      | $\pm 5$ V                     |
| TIMER Pin                                    | –0.3 V to ( $V_{CC} + 0.3$ V) |
| ON ( $\text{ON-}\overline{\text{CLR}}$ ) Pin | –0.3 V to +20 V               |
| SS Pin                                       | –0.3 V to ( $V_{CC} + 0.3$ V) |
| CSOUT Pin                                    | –0.3 V to ( $V_{CC} + 0.3$ V) |
| GATE Pin                                     | –0.3 V to ( $V_{CC} + 11$ V)  |
| Storage Temperature Range                    | –65°C to +125°C               |
| Operating Temperature Range                  | –40°C to +85°C                |
| Lead Temperature (10 sec)                    | 300°C                         |
| Junction Temperature                         | 150°C                         |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## THERMAL CHARACTERISTICS

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 3. Thermal Resistance

| Package Type | $\theta_{JA}$ | Unit |
|--------------|---------------|------|
| 8-Lead TSOT  | 152.9         | °C/W |

## ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



## PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS




Figure 2. Pin Configuration, 1AUJ Model




Figure 3. Pin Configuration, 2AUJ Model

**Table 4. Pin Function Descriptions**

| Pin No. | Mnemonic                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | TIMER                             | Timer Input Pin. The initial and circuit breaker timing cycles are set by this external capacitor. The initial timing delay is 272.9 ms/ $\mu$ F, and 21.7 ms/ $\mu$ F for a circuit breaker delay. When the TIMER pin is pulled beyond the upper threshold, the GATE turns off.                                                                                                                                                                                          |
| 2       | GND                               | Chip Ground Pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 3       | SS                                | Soft Start Pin. An external capacitor between the SS pin and GND sets the ramp rate of the current limit reference.                                                                                                                                                                                                                                                                                                                                                       |
| 4       | ON (ON- $\overline{\text{CLR}}$ ) | Input Pin. The ON (ON- $\overline{\text{CLR}}$ ) pin is an input to a comparator that has a low-to-high threshold of 1.3 V with 80 mV hysteresis and a glitch filter. The ADM1171 is reset when the ON (ON- $\overline{\text{CLR}}$ ) pin is low. When the ON (ON- $\overline{\text{CLR}}$ ) pin is high, the ADM1171 is enabled. A rising edge on this pin has the added function of clearing a fault and restarting the device on the latched off model, the ADM1171-2. |
| 5       | GATE                              | Gate Output Pin. An internal charge pump provides a 12 $\mu$ A pull-up current to drive the gate of an N-channel MOSFET. In an overcurrent condition, the ADM1171 controls the external FET to maintain a constant load current.                                                                                                                                                                                                                                          |
| 6       | CSOUT                             | Current Sense Output. The voltage on this pin represents the differential voltage across the $V_{CC}$ and SENSE pins gained up by a factor of 20.                                                                                                                                                                                                                                                                                                                         |
| 7       | SENSE                             | Current Limit Sense Input Pin. The current limit is set via a sense resistor between the $V_{CC}$ and SENSE pin. In an overcurrent condition, the gate of the FET is controlled to maintain the SENSE voltage at 50 mV. When this limit is reached, the TIMER circuit breaker mode is activated. The circuit breaker limit can be disabled by connecting the $V_{CC}$ pin and SENSE pin together.                                                                         |
| 8       | $V_{CC}$                          | Positive Supply Input Pin. The ADM1171 operates between 2.7 V to 16.5 V. An undervoltage lockout (UVLO) circuit with a glitch filter resets the ADM1171 when the supply voltage drops below the specified UVLO limit.                                                                                                                                                                                                                                                     |

## TYPICAL PERFORMANCE CHARACTERISTICS

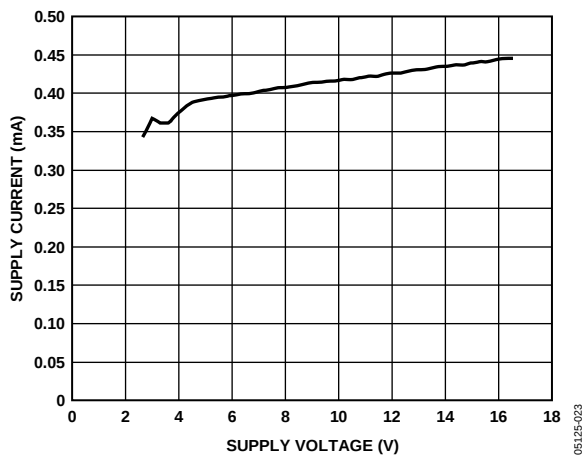


Figure 4. Supply Current vs. Supply Voltage (GATE off)

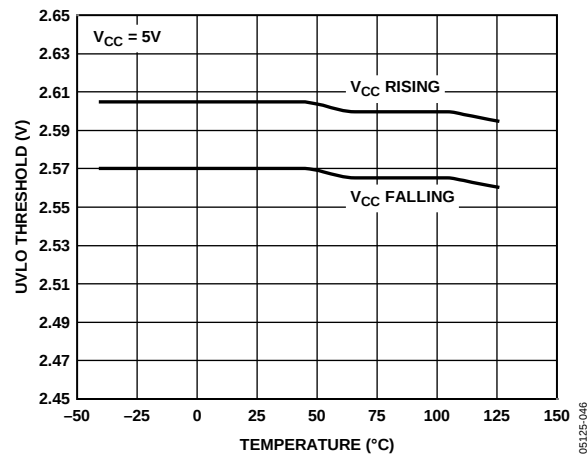


Figure 7. UVLO Threshold vs. Temperature

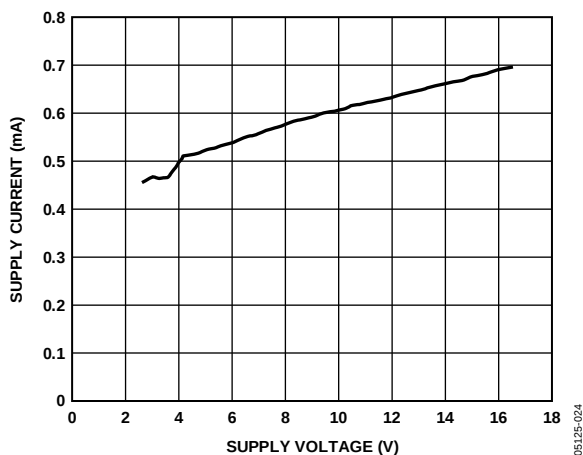


Figure 5. Supply Current vs. Supply Voltage (GATE on)

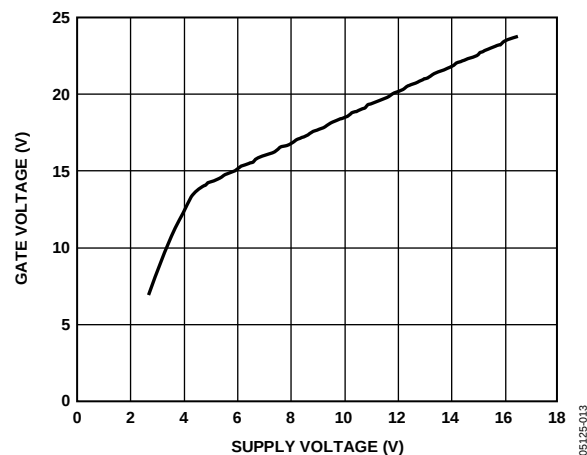


Figure 8. GATE Voltage vs. Supply Voltage

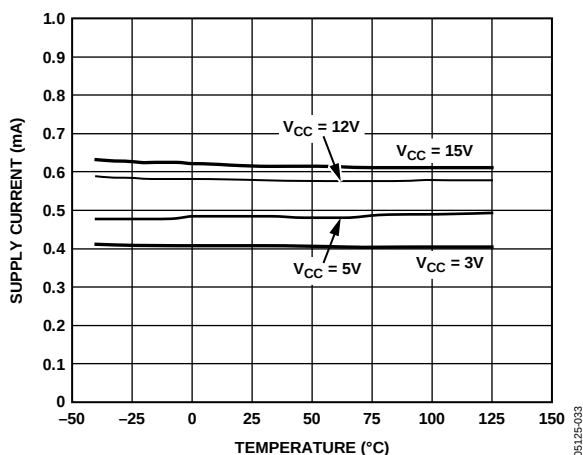


Figure 6. Supply Current vs. Temperature

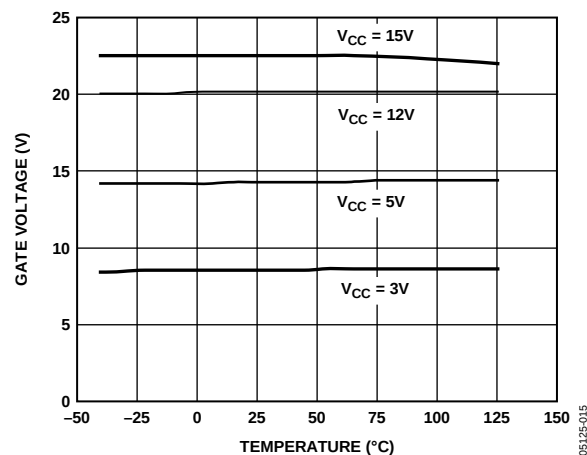


Figure 9. GATE Voltage vs. Temperature

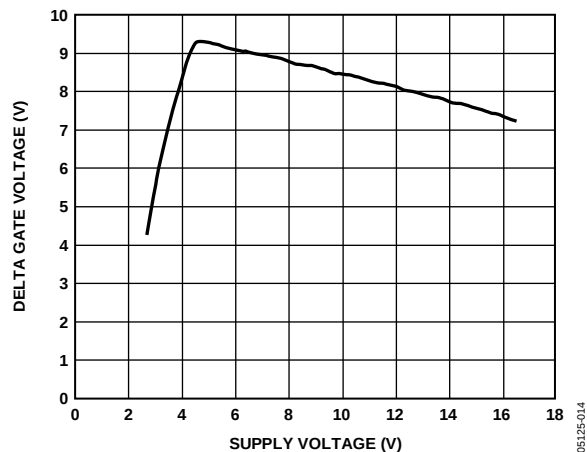


Figure 10. Delta GATE Voltage vs. Supply Voltage

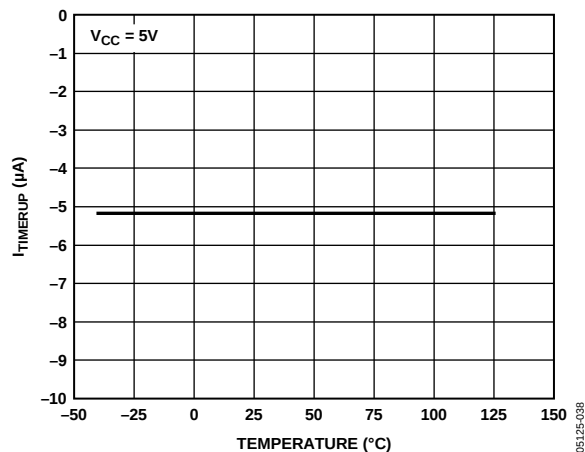


Figure 13.  $I_{TIMERUP}$  (in Initial Cycle) vs. Temperature

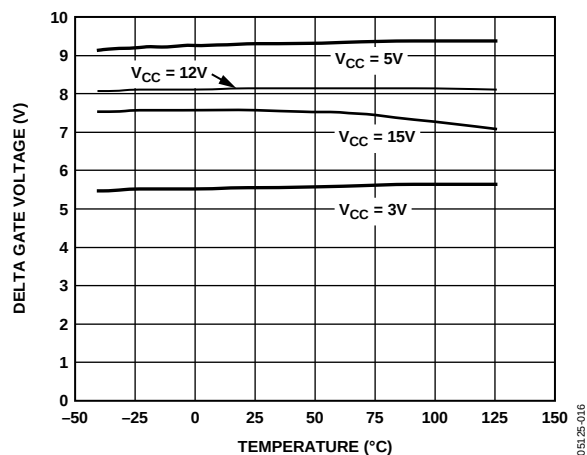


Figure 11. Delta GATE Voltage vs. Temperature

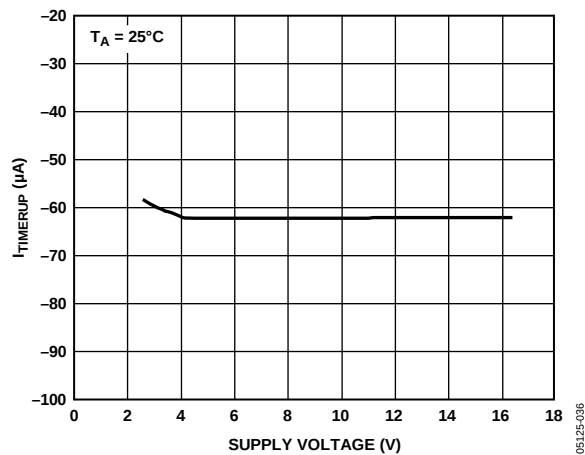


Figure 14.  $I_{TIMERUP}$  (During Cct Breaker Delay) vs. Supply Voltage

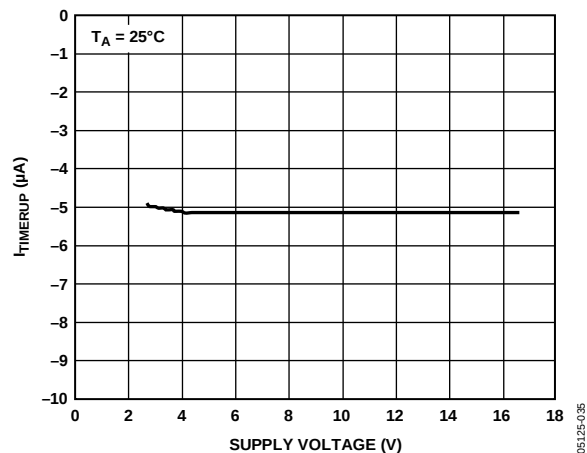


Figure 12.  $I_{TIMERUP}$  (in Initial Cycle) vs. Supply Voltage

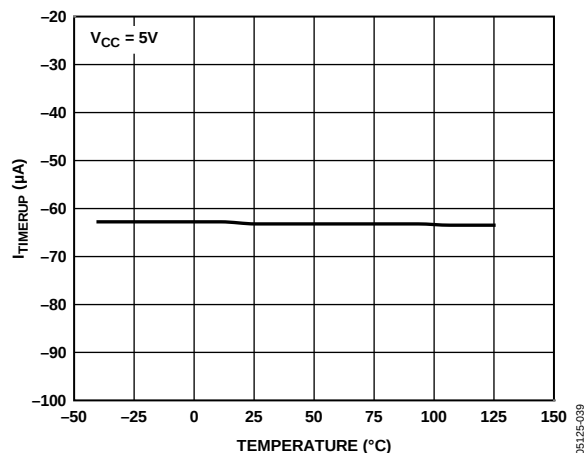


Figure 15.  $I_{TIMERUP}$  (During Cct Breaker Delay) vs. Temperature

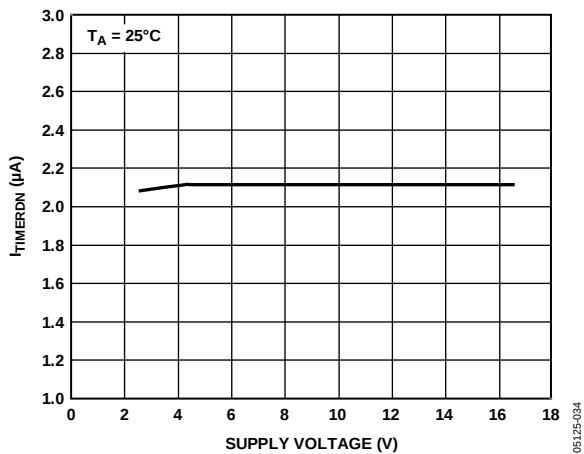


Figure 16.  $I_{TIMERDN}$  (in Cool-Off Cycle) vs. Supply Voltage

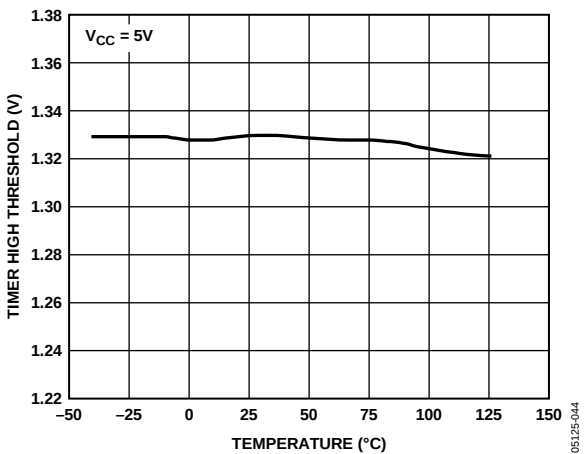


Figure 19. TIMER High Threshold vs. Temperature

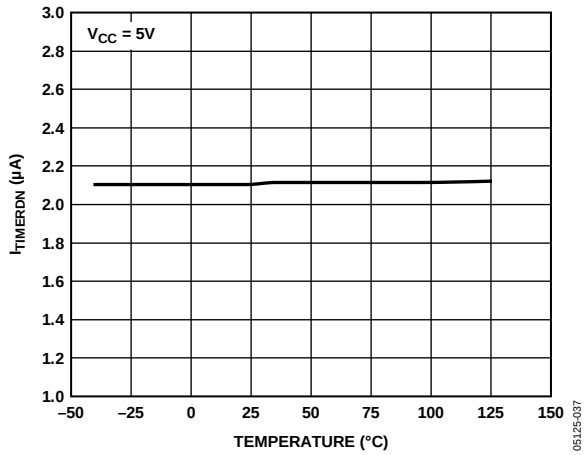


Figure 17.  $I_{TIMERDN}$  (in Cool-Off Cycle) vs. Temperature

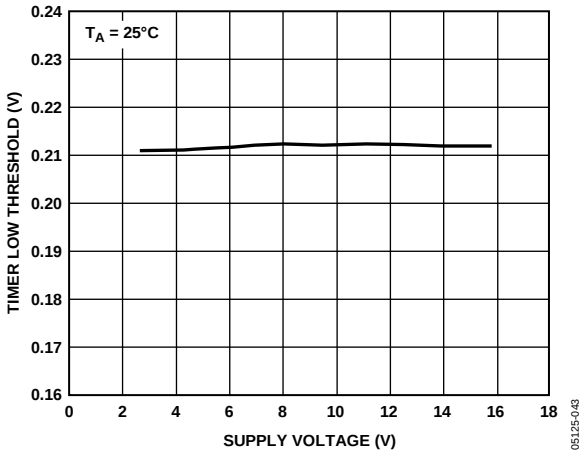


Figure 20. TIMER Low Threshold vs. Supply Voltage

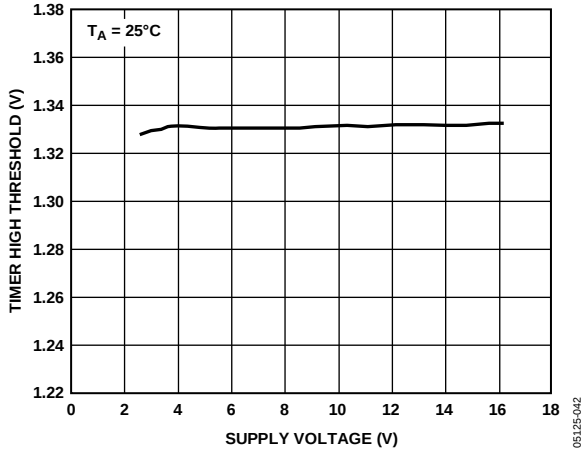


Figure 18. TIMER High Threshold vs. Supply Voltage

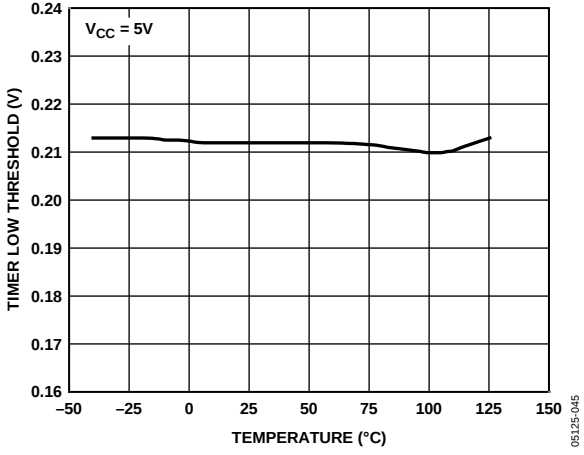


Figure 21. TIMER Low Threshold vs. Temperature

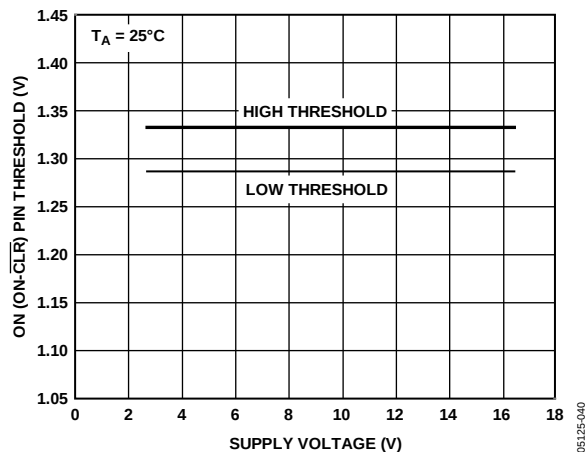


Figure 22. ON (ON-CLR) Pin Threshold vs. Supply Voltage

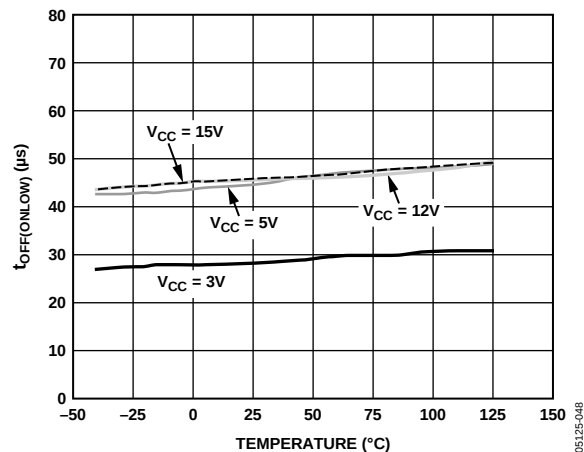


Figure 25.  $t_{OFF(ONLOW)}$  vs. Temperature

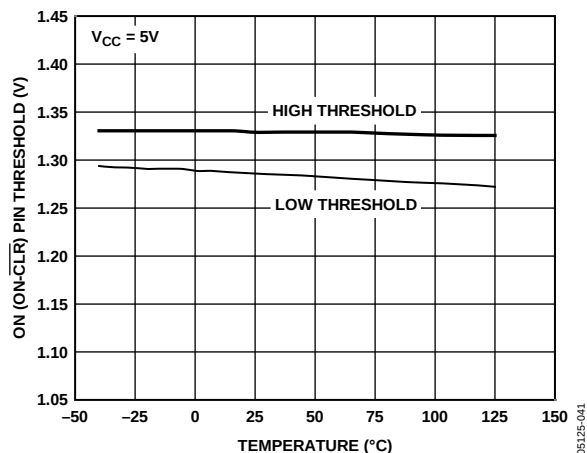


Figure 23. ON (ON-CLR) Pin Threshold vs. Temperature

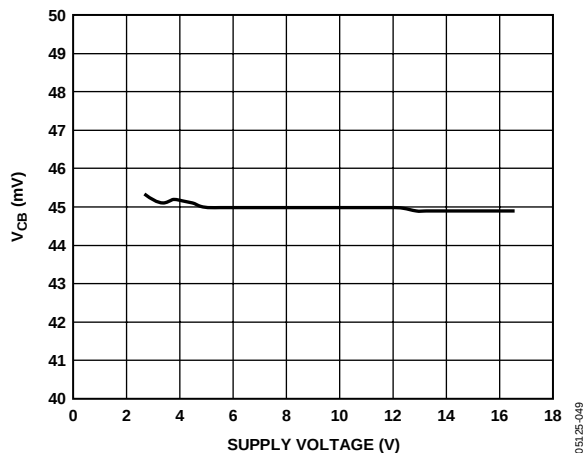


Figure 26. Cct Breaker Voltage vs. Supply Voltage

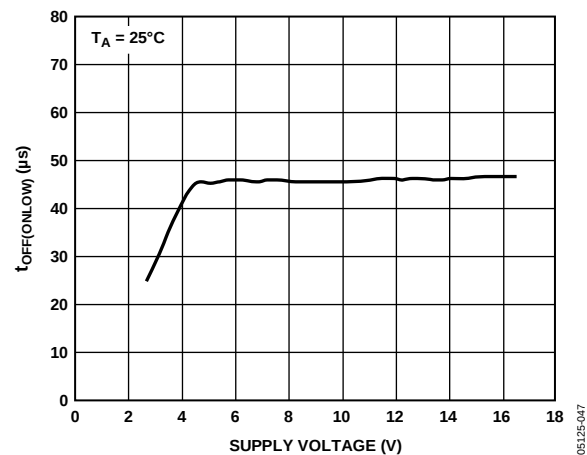


Figure 24.  $t_{OFF(ONLOW)}$  vs. Supply Voltage

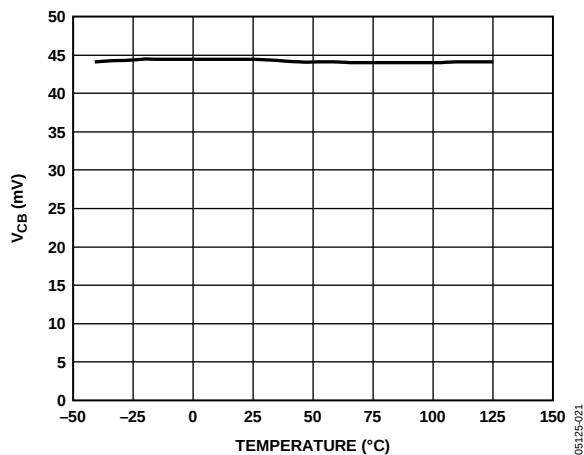


Figure 27. Cct Breaker Voltage vs. Temperature

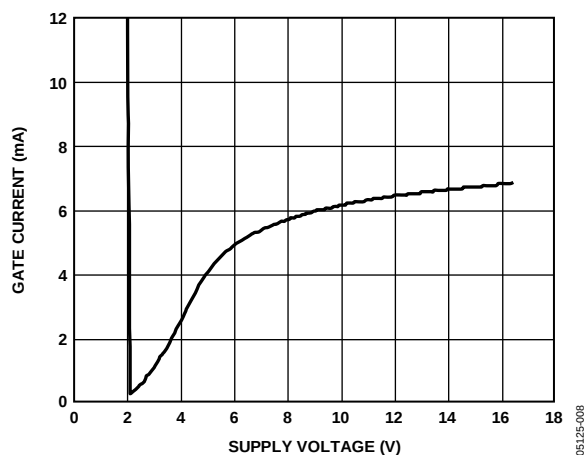


Figure 28. GATE Current (down) vs. Supply Voltage

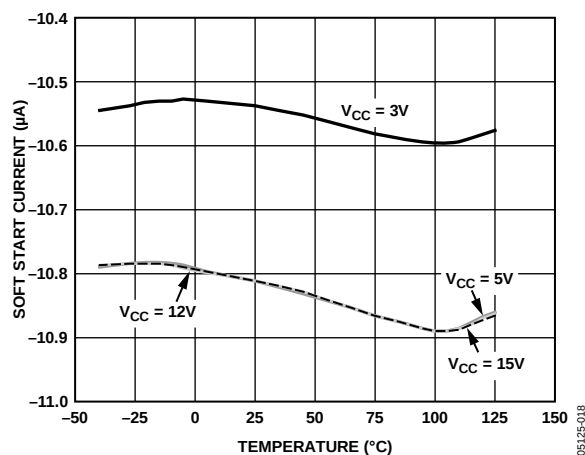


Figure 31. Soft Start Current vs. Temperature

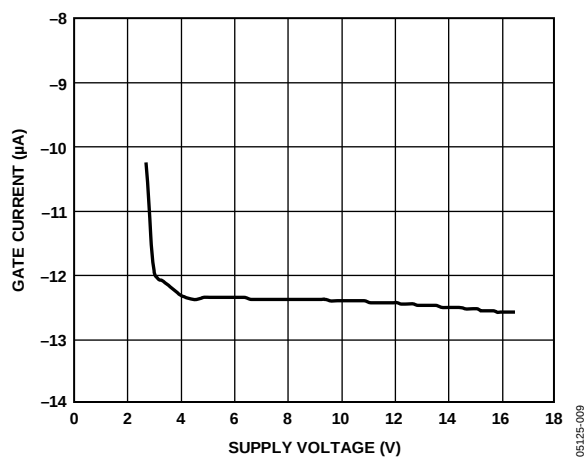


Figure 29. GATE Current (up) vs. Supply Voltage

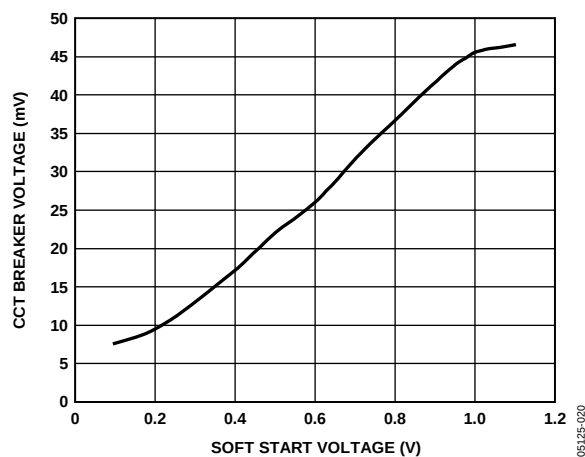


Figure 32. Circuit Breaker Voltage vs. Soft Start Voltage

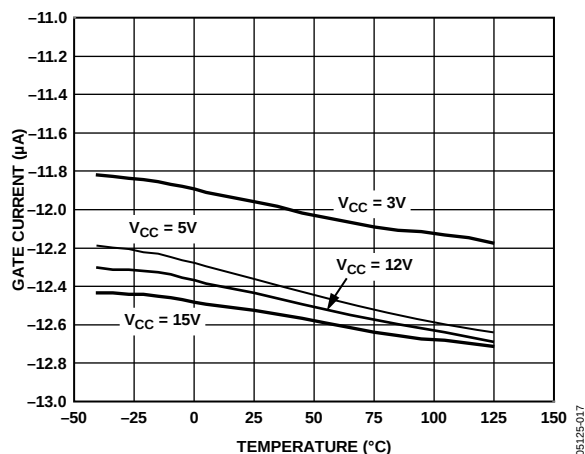


Figure 30. GATE Current (up) vs. Temperature

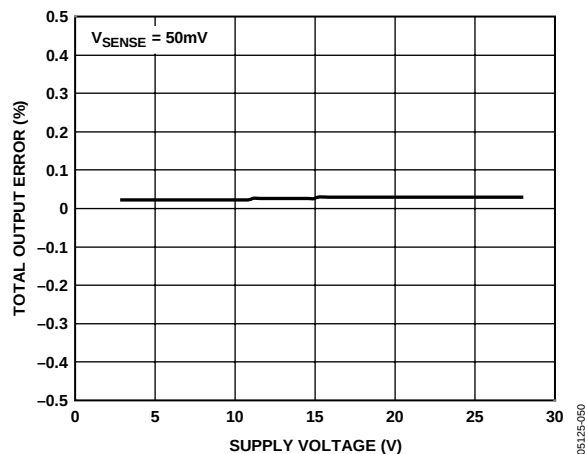


Figure 33 CSOUT Total Output Error vs. Supply Voltage

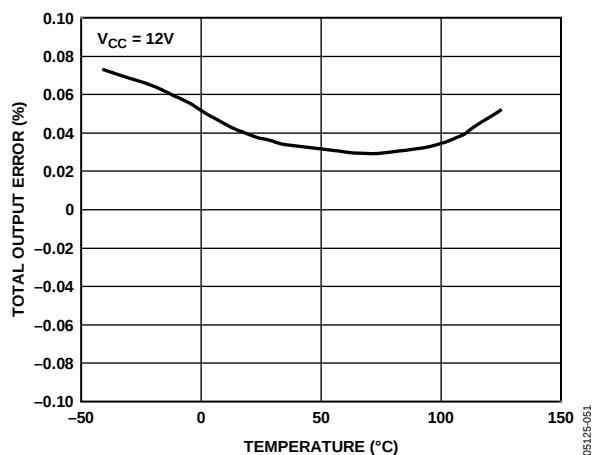


Figure 34. CSOUT Total Output Error vs. Temperature

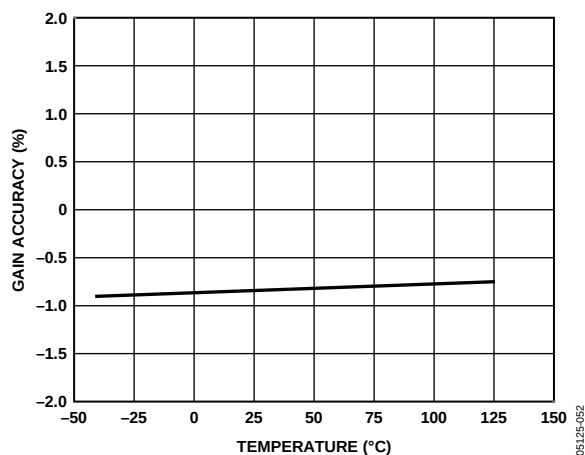


Figure 35. CSOUT Gain Accuracy vs. Temperature

## THEORY OF OPERATION

Many systems require the insertion or removal of circuit boards to live backplanes. During this event, the supply bypass and hold-up capacitors can require substantial transient currents from the backplane power supply as they charge. These currents can cause permanent damage to connector pins or undesirable glitches and resets to the system.

The ADM1171 is intended to control the powering of a system (on and off) in a controlled manner, allowing the board to be removed from, or inserted into, a live backplane by protecting it from excess currents. The ADM1171 can reside either on the backplane or on the removable board.

### OVERVIEW

The ADM1171 operates over a supply range of 2.7 V to 16.5 V. As the supply voltage is coming up, an undervoltage lockout circuit checks if sufficient supply voltage is present for proper operation. During this period, the FET is held off by the GATE pin being held to GND. When the supply voltage reaches a level above UVLO and the ON (ON-CLR) pin is high, an initial timing cycle ensures that the board is fully inserted in the backplane before turning on the FET. The TIMER pin capacitor sets the periods for all of the TIMER pin functions. After the initial timing cycle, the ADM1171 monitors the inrush current through an external sense resistor. Overcurrent conditions are actively limited to  $50 \text{ mV}/R_{\text{SENSE}}$  for the circuit breaker timer limit. The ADM1171-1 automatically retries after a current limit fault and the ADM1171-2 latches off. The retry duty cycle on the ADM1171-1 timer function is limited to 3.8% for FET cooling.

### UVLO

If the  $V_{\text{CC}}$  supply is too low for normal operation, an undervoltage lockout circuit holds the ADM1171 in reset. The GATE pin is held to GND during this period. When the supply reaches this UVLO voltage, the ADM1171 starts when the ON (ON-CLR) pin condition is satisfied.

### ON (ON-CLR) PIN

The ON (ON-CLR) pin is the enable pin. It is connected to a comparator that has a low-to-high threshold of 1.3 V with 80 mV hysteresis and a glitch filter. The ADM1171 is reset when the ON (ON-CLR) pin is low. When the ON (ON-CLR) pin is high, the ADM1171 is enabled. A rising edge on this pin has the added function of clearing a fault and restarting the device on the latched off model, the ADM1171-2. A low input on the ON (ON-CLR) pin turns off the external FET by pulling the GATE pin to ground and resets the timer. An external resistor divider at the ON (ON-CLR) pin can be used to program an undervoltage lockout value higher than the internal UVLO circuit. There is a glitch filter delay of approximately  $3 \mu\text{s}$  on rising allowing the addition of an RC filter at the ON (ON-CLR) pin to increase the

delay time at card insertion. If using a short pin system to enable the device, a pull-down resistor should be used to hold the device prior to insertion.

### GATE

Gate drive for the external N-channel MOSFET is achieved using an internal charge pump. The gate driver consists of a  $12 \mu\text{A}$  pull-up from the internal charge pump. There are various pull-down devices on this pin. At a hotswap condition the board is hot inserted to the supply bus. During this event, it is possible for the external FET GATE capacitance to be charged up by the sudden presence of the supply voltage. This can cause uncontrolled inrush currents. An internal strong pull-down circuit holds GATE low while in UVLO. This reduces current surges at insertion. After the initial timing cycle, the GATE is then pulled high. During an overcurrent condition, the ADM1171 servos the GATE pin in an attempt to maintain a constant current to the load until the circuit breaker timeout completes. In the event of a timeout, the GATE pin abruptly shuts down using the 4 mA pull-down device. Care must be taken not to load the GATE pin resistively because this reduces the gate drive capability.

### CURRENT LIMIT FUNCTION

The ADM1171 features a fast response current control loop that actively limits the current by reducing the gate voltage of the external FET. This current is measured by monitoring the voltage drop across an external sense resistor. The ADM1171 tries to regulate the gate of the FET to achieve a 50 mV voltage drop across the sense resistor.

### CALCULATING THE CURRENT LIMIT

The sense resistor connected between  $V_{\text{CC}}$  and the SENSE pin is used to determine the nominal fault current limit. This is given by the following equation:

$$I_{\text{LIMIT}_{\text{NOM}}} = V_{\text{CB}_{\text{NOM}}}/R_{\text{SENSE}_{\text{NOM}}} \quad (1)$$

The minimum load current is given by Equation 2

$$I_{\text{LIMIT}_{\text{MIN}}} = V_{\text{CB}_{\text{MIN}}}/R_{\text{SENSE}_{\text{MAX}}} \quad (2)$$

The maximum load current is given by Equation 3.

$$I_{\text{LIMIT}_{\text{MAX}}} = V_{\text{CB}_{\text{MAX}}}/R_{\text{SENSE}_{\text{MIN}}} \quad (3)$$

For proper operation, the minimum current limit must exceed the circuit maximum operating load current with margin. The sense resistor power rating must exceed

$$(V_{\text{CB}_{\text{MAX}}})^2/R_{\text{SENSE}_{\text{MIN}}}$$

### CIRCUIT BREAKER FUNCTION

When the supply experiences a sudden current surge, such as a low impedance fault on load, the bus supply voltage can drop significantly to a point where the power to an adjacent card is affected, potentially causing system malfunctions. The ADM1171 limits the current drawn by the fault by reducing the

gate voltage of the external FET. This minimizes the bus supply voltage drop caused by the fault and protects neighboring cards.

As the voltage across the sense resistor approaches the current limit, a timer activates. This timer resets again if the sense voltage returns below this level. If the sense voltage is any voltage below 44 mV, the timer is guaranteed to be off. Should the current continue to increase, the ADM1171 tries to regulate the gate of the FET to achieve a limit of 50 mV across the sense resistor. However, if the device is unable to regulate the fault current and the sense voltage further increases, a larger pull-down, in the order of milliamperes, is enabled to compensate for fast current surges. If the sense voltage is any voltage greater than 56 mV, this pull-down is guaranteed to be on. When the timer expires, the GATE pin shuts down.

## TIMER FUNCTION

The TIMER pin is responsible for several key functions on the ADM1171. A capacitor controls the initial power on reset time and the amount of time an overcurrent condition lasts before the FET shuts down. On the ADM1171-1, the timer pin also controls the time between auto retry pulses. There are pull-up and pull-down currents internally available to control the timer functions. The voltage on the TIMER pin is compared with two threshold voltages: COMP1 (0.2 V) and COMP2 (1.3 V). The four timing currents are listed in Table 5.

Table 5.

| Timing Current | Level (μA) |
|----------------|------------|
| Pull-up        | 5          |
| Pull-up        | 60         |
| Pull-down      | 2          |
| Pull-down      | 100        |

## POWER-UP TIMING CYCLE

The ADM1171 is in reset when the ON (ON-CLR) pin is held low. The GATE pin is pulled low and the TIMER pin is pulled low with a 100 μA pull-down. At Time Point 2 in Figure 36, the ON (ON-CLR) pin is pulled high. For the device to startup correctly, the supply voltage must be above UVLO, the ON (ON-CLR) pin must be above 1.3 V, and the TIMER pin voltage must be less than 0.2 V. The initial timing cycle begins when these three conditions are met, and the TIMER pin is pulled high with 5 μA. At Time Point 3, the TIMER reaches the COMP2 threshold.

This is the end of the first section of the initial cycle. The 100 μA current source then pulls down the TIMER pin until it reaches 0.2 V at Time Point 4. The initial cycle delay (Time Point 2 to Time Point 4) relates to  $C_{TIMER}$  by equation

$$t_{INITIAL} = 1.3 \times C_{TIMER} / 5 \mu A \quad (4)$$

When the initial cycle ends, a start-up cycle activates and the GATE pin is pulled high; the TIMER pin continues to pull down.

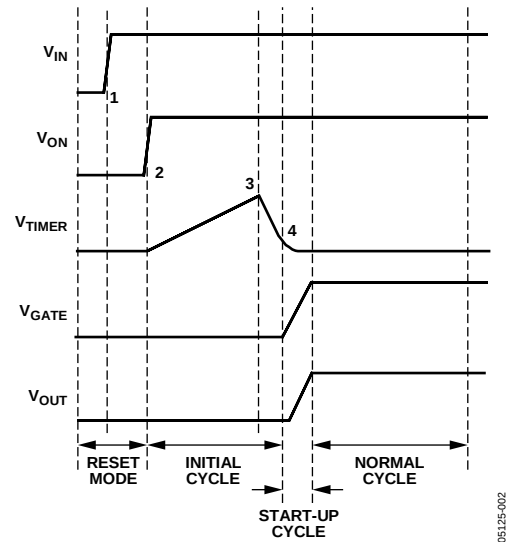


Figure 36. Power-Up Timing

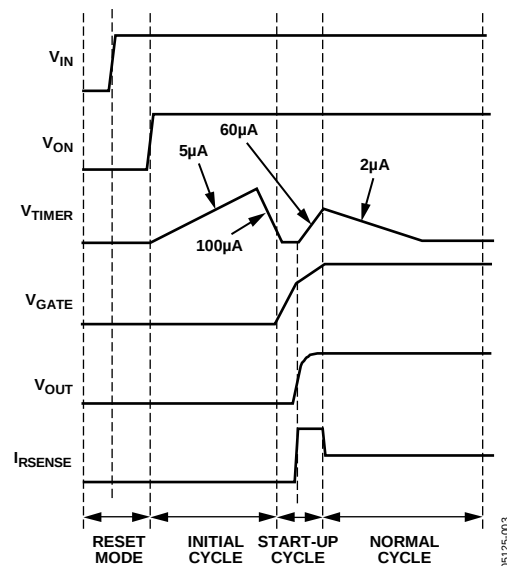


Figure 37. Power-Up into Capacitor

## CIRCUIT BREAKER TIMING CYCLE

When the voltage across the sense resistor exceeds the circuit breaker trip voltage, the 60 μA timer pull-up current is activated. If the sense voltage falls below this level before the TIMER pin reaches 1.3 V, the 60 μA pull-up is disabled and the 2 μA pull-down is enabled. This is likely to happen if the overcurrent fault is only transient, such as an inrush current. This is shown in Figure 37. However, if the overcurrent condition is continuous and the sense voltage remains above the circuit breaker trip voltage, the 60 μA pull-up remains active. This allows the TIMER pin to reach the high trip point of 1.3 V and initiate the GATE shutdown. On the ADM1171-2, the TIMER pin continues pulling up but switches to the 5 μA pull-up when it reaches the 1.3 V

threshold. The device can be reset by toggling the  $\overline{\text{ON-CLR}}$  pin or by manually pulling the  $\text{TIMER}$  pin low. On the ADM1171-1, the  $\text{TIMER}$  pin activates the  $2\ \mu\text{A}$  pull-down once the  $1.3\ \text{V}$  threshold is reached, and continues to pull down until it reaches the  $0.2\ \text{V}$  threshold. At this point, the  $100\ \mu\text{A}$  pull-down is activated and the  $\text{GATE}$  pin is enabled. The device keeps retrying in the manner as shown in Figure 38.

The duty cycle of this automatic retry cycle is set to the ratio of  $2\ \mu\text{A}/60\ \mu\text{A}$ , which approximates 3.8% on. The value of the timer capacitor determines the on time of this cycle. This time is calculated as follows:

$$t_{\text{ON}} = 1.3 \times C_{\text{TIMER}}/60\ \mu\text{A}$$

$$t_{\text{OFF}} = 1.1 \times C_{\text{TIMER}}/2\ \mu\text{A}$$

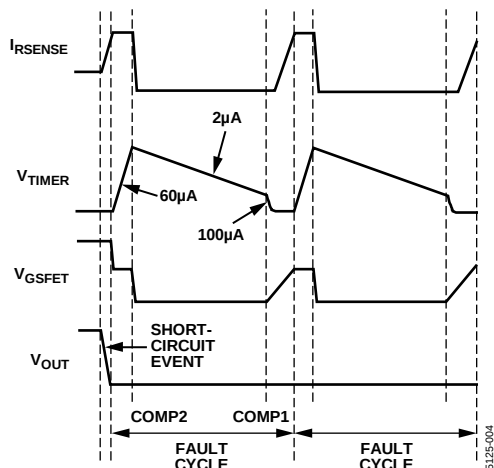


Figure 38. ADM1171-1 Automatic Retry During Overcurrent Fault

## AUTOMATIC RETRY OR LATCHED OFF

The ADM1171 is available in two models. The ADM1171-1 has an automatic retry system whereby when a current fault is detected, the FET is shut down after a time determined by the timer capacitor, and it is switched on again in a controlled continuous cycle to determine if the fault remains (see Figure 38 for details). The period of this cycle is determined by the timer capacitor at a duty cycle of 3.8% on and 96.2% off.

The ADM1171-2 model has a latch off system whereby when a current fault is detected, the  $\text{GATE}$  is switched off after a time determined by the timer capacitor (see Figure 39 for details). Toggling the  $\overline{\text{ON-CLR}}$  pin, or pulling the  $\text{TIMER}$  pin to  $\text{GND}$  for a brief period, resets this condition.

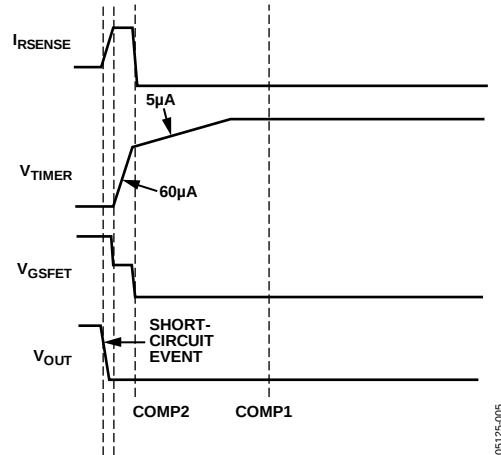


Figure 39. ADM1171-2 Latch Off After Overcurrent Fault

## SOFT START

The inrush current profile is controlled using an external capacitor on the soft start ( $\text{SS}$ ) pin. During power-on reset, the  $\text{SS}$  pin is held at  $\text{GND}$ . When the pass FET begins to conduct current, a pull-up current source is initiated on the  $\text{SS}$  pin and charges the voltage on the soft start capacitor in a linear fashion. The current limit of the device is proportional to the voltage on the  $\text{SS}$  pin until it reaches  $1\ \text{V}$ . When the voltage on the  $\text{SS}$  pin reaches  $1\ \text{V}$ , the current limit reaches the normal operating condition of  $V_{\text{SENSE}} = 50\ \text{mV}$ . The voltage on the  $\text{SS}$  pin continues to rise past the  $1\ \text{V}$  level with no effect on the current limit. The reference voltage for the  $\text{GATE}$  linear control amplifier is derived from the soft start voltage, such that the inrush linear current limit is defined as

$$I_{\text{LIMIT}} = V_{\text{SS}}/(20 \times R_{\text{SENSE}})$$

This provides a limit of  $50\ \text{mV}$  across  $R_{\text{SENSE}}$  when  $V_{\text{SS}}$  is at  $1\ \text{V}$ . Therefore, the value for the  $\text{SS}$  capacitor is chosen as follows:


$$C_{\text{SS}} = I_{\text{SS}} \times t$$

where  $I_{\text{SS}} = 10\ \mu\text{A}$  and  $t$  is the time required for the current limit to ramp up.

## CSOUT PIN

The ADM1171 has a current sense output pin ( $\text{CSOUT}$ ). The  $\text{CSOUT}$  pin provides an analog voltage representing the current flowing through the sense resistor. The voltage drop across the sense resistor, as equated by  $V_{\text{CC}} - \text{SENSE}$ , is gained up by a factor of 20 and presented on the  $\text{CSOUT}$  pin. The output impedance of the pin is typically  $14\ \text{k}\Omega$ .

## OUTLINE DIMENSIONS

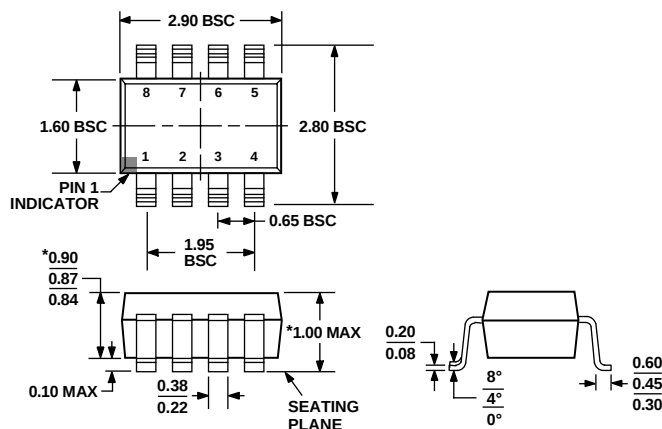

\*COMPLIANT TO JEDEC STANDARDS MO-193-BA WITH THE EXCEPTION OF PACKAGE HEIGHT AND THICKNESS.

Figure 40. 8-Lead Thin Small Outline Transistor Package [TSOT]  
(UJ-8)  
Dimensions shown in millimeters

## ORDERING GUIDE

| Model                          | Temperature Range | Package Description | Package Option | Branding |
|--------------------------------|-------------------|---------------------|----------------|----------|
| ADM1171-1AUJZ-RL7 <sup>1</sup> | −40°C to +85°C    | 8-Lead TSOT         | UJ-8           | M1K      |
| ADM1171-2AUJZ-RL7 <sup>1</sup> | −40°C to +85°C    | 8-Lead TSOT         | UJ-8           | M1L      |

<sup>1</sup> Z = Pb-free part.

**ADM1171**

## **NOTES**