

Features


- Operating Voltage: 4.75V~5.25V
- Compatible with Microsoft Windows 2000 and 5-button Wheel Mouse
- Compatible with Microsoft Intelli 3D PS/2 and IBM PS/2 mouse
- Supports rolling buttons in PS/2 mouse mode
- X/Y axis photo input with built-in Holtek's special dynamic photo-input resistor
- Supports three buttons and three axes (X, Y, Z) inputs
- Z axis can support two kinds of scroller input (optomechanical and mechanical)
- 2MHz RC oscillator for system frequency with external pull-high resistor
- 16-pin DIP package

General Description

The HT82M398A is a Plug and Play WIN2000 and 5-button 3D PS/2 mouse controller. It is also compatible with Microsoft Intelli 3D PS/2 and IBM PS/2 mouse. The

Z axis can support two kinds of scroller input, namely; mechanical and optomechanical.

Pin Assignment



Pin Description

| Pin No. | Pin Name | I/O | Description |
|---------|----------------|-----|---|
| 1, 2 | Z1, Z2 | I | Z, axis input supports two kinds of scroller input, namely; optomechanical and mechanical. |
| 3 | VDD | — | Positive power supply |
| 4 | B5 | I | Button 5, normal pull-low (50kΩ), Press connect to high. |
| 5 | VSS | — | Negative power supply |
| 6 | OSCI | I | 2MHz RC oscillator for system frequency with external pull-high resistor and built-in Capacitor. |
| 7 | CLK | I/O | CLK I/O, PS/2 mouse CLK line. NMOS open drain output with 5kΩ pull-high resistor. |
| 8 | DATA | I/O | DATA I/O, PS/2 mouse DATA line. NMOS open drain output with 5kΩ pull-high resistor. |
| 9~11 | RB, RO, LB | I | Right Button: Normal pull-low (50kΩ), Pressing the button connects to high. Rolling Button: Normal pull-low (50kΩ), Pressing the button connects to high. Left Button: Normal pull-low (50kΩ), Pressing the button connects to high. |
| 12 | B4 | I | Button 4, normal pull-low (50kΩ), Press connect to high. |
| 13~16 | X1, X2, Y1, Y2 | I | X/Y axis photo input with built-in Holtek's special dynamic photo input resistor |

Absolute Maximum Ratings

| | | | |
|----------------------|--------------------------------|-----------------------------|----------------|
| Supply Voltage | -0.3V to 6.5V | Storage Temperature | -50°C to 125°C |
| Input Voltage | $V_{SS}-0.3V$ to $V_{DD}+0.3V$ | Operating Temperature | -25°C to 70°C |

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.


Electrical Characteristics

$T_a=25^{\circ}C$

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------|---|-----------------|----------------------|--------------------------------------|------|------|-----------|
| | | V_{DD} | Conditions | | | | |
| V_{DD} | Operating Voltage | — | — | 4.75 | 5.0 | 5.25 | V |
| I_{OP} | Operating Current | 5V | $R_{OSC}=130k\Omega$ | — | — | 15 | mA |
| f_{OSC} | RC Oscillator | 5V | $R_{OSC}=130k\Omega$ | 1.6 | 2 | 2.4 | MHz |
| V_{IL1} | Input Low Voltage (Z1, Z2) | 5V | — | 0 | — | 1.5 | V |
| V_{IH1} | Input High Voltage (Z1, Z2) | 5V | — | 2.2 | — | 5 | V |
| V_{IL2} | Input Low Voltage (CLK, DATA) | 5V | — | 0 | — | 0.8 | V |
| V_{IH2} | Input High Voltage (CLK, DATA) | 5V | — | 2.0 | — | 5.0 | V |
| R_{PH2} | Pull-high Resistor (CLK, DATA) | 5V | $V_{IL}=0V$ | 2 | 5 | 10 | $k\Omega$ |
| I_{sink} | Sink Current (CLK, DATA) | 5V | $V_{OH}=0.4V$ | 4 | — | — | mA |
| V_{IL3} | Input Low Voltage (RB, Ro, LB) | 5V | — | 0 | — | 1.0 | V |
| V_{IH3} | Input High Voltage (RB, Ro, LB) | 5V | — | 1.8 | — | 5 | V |
| R_{PL3} | Pull-low Resistor (RB, Ro, LB) | 5V | $V_{IL}=0V$ | 3.0 | 60 | 125 | $k\Omega$ |
| V_{IL4} | Input Low Voltage (X1,X2,Y1,Y2) | 5V | — | 0 | — | 1.5 | V |
| V_{IH4} | Input High Voltage (X1, X2, Y1, Y2) | 5V | — | 2.2 | — | 5 | V |
| R_{PL5} | Dynamic Photo-resistor (X1, X2, Y1, Y2, Z1, Z2) | 5V | — | See Dynamic resistor characteristics | | | |

Dynamic resistor characteristics

- R-V curve

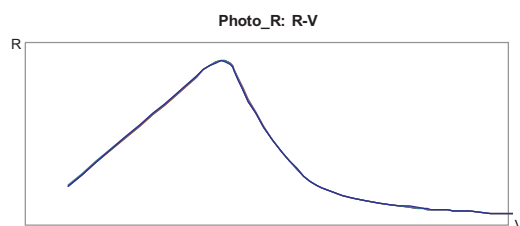

Functional Description

PS/2 mouse

- PS/2 status byte

Byte 1

bit

7: Reserved

6: 0=Stream Mode, 1=Remote Mode

5: 0=Disabled, 1=Enabled

4: 0=Scaling 1:1, 1=Scaling 2:1

3: 1=Wrap Mode, 0=Stream or Remote
(different from IBM specs.)

2: 1=Left Button Pressed

1: 1=Middle Button Pressed

0: 1=Right Button Pressed

Byte 2

Bit 0~7 current resolution setting

(Bit 0=LSB)

Byte 3

Bit 0~7 current sampling rate (Bit 0=LSB)

- Standard PS/2 data format

Variable rps, 0, 8, 1, bidirectional, synchronous

| Bit No. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|----|----|----|----|----|----|----|----|
| 1st word | YV | XV | YS | XS | 1 | M | R | L |
| 2nd word | X7 | X6 | X5 | X4 | X3 | X2 | X1 | X0 |
| 3rd word | Y7 | Y6 | Y5 | Y4 | Y3 | Y2 | Y1 | Y0 |

- Data format for 3D PS/2

Variable rps, 0, 8, 1, bidirectional, synchronous

| Bit No. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|----|----|----|----|----|----|----|----|
| 1st word | 0 | 0 | YS | XS | 1 | M | R | L |
| 2nd word | X7 | X6 | X5 | X4 | X3 | X2 | X1 | X0 |
| 3rd word | Y7 | Y6 | Y5 | Y4 | Y3 | Y2 | Y1 | Y0 |
| 4th word | Z7 | Z6 | Z5 | Z4 | Z3 | Z2 | Z1 | Z0 |

The x/y data report is 9-bit 2's complement

The z data report is 8-bit 2's complement

- Data format for 5-button Wheel Mouse

| Bit No. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|----|----|----|----|----|----|----|----|
| 1st word | 0 | 0 | YS | XS | 1 | M | R | L |
| 2nd word | X7 | X6 | X5 | X4 | X3 | X2 | X1 | X0 |
| 3rd word | Y7 | Y6 | Y5 | Y4 | Y3 | Y2 | Y1 | Y0 |
| 4th word | 0 | 0 | B5 | B4 | Z3 | Z2 | Z1 | Z0 |

X movement towards the right is positive, moving towards the left is negative

Y upward movement is positive, moving down is negative

Z rolling towards the user is positive, else negative

Button status: 1=pressed, 0=released


- 5-button Wheel Mouse Mode follows the 5-button Activation Method of Windows 2000 and the 5-button Wheel Mouse Specification.

- Any time the PC sends a reset "FFH" command to the mouse, it will reset the mouse to Standard PS/2 mode.

- After power-on reset is initiated, the mouse is set to Standard PS/2 mode.


Timing Diagrams

X, Y Axis Photo-coupler Cross Width

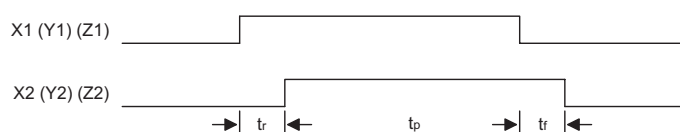


Note: For X, Y-axis t_r , t_p , $t_f > 30\mu s$
For Z-axis t_r , t_p , $t_f > 1ms$

X/Y/Z Axis Counting

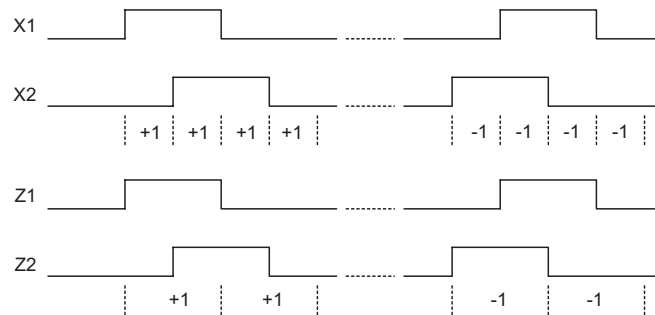


PS/2 Mouse

• Data output

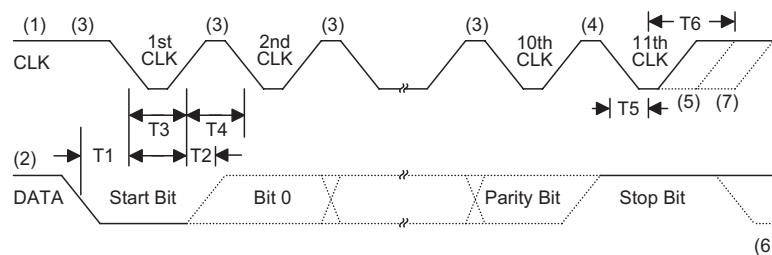

| Timing Parameter | Min./Max. |
|---|----------------|
| T1 DATA transition to the falling edge of CLK | 5/25 μ s |
| T2 Rising edge of CLK to DATA transition | 5/T4-5 μ s |
| T3 Inactive CLK Duration | 30/50 μ s |
| T4 Active CLK Duration | 30/50 μ s |
| T5 Minimum time to inhibit MOUSE after clock 11 | >0 μ s |
| T6 Maximum time to inhibit MOUSE after clock 11 to ensure MOUSE does not start another transmission | <50 μ s |


• Data input

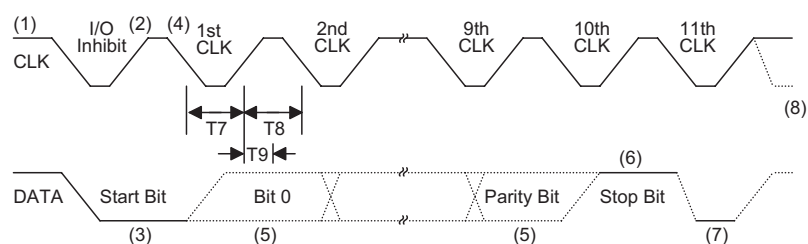


| Timing Parameter | Min./Max. |
|--|---------------|
| T7 CLK Duration, low | 30/50 μ s |
| T8 CLK Duration, high | 30/50 μ s |
| T9 Time from low to high CLK transition to time when MOUSE samples DATA line | 5/25 μ s |

Application Circuits


HT82M398A Z Axis Optomechanical (This Application Circuit is for Reference Only)

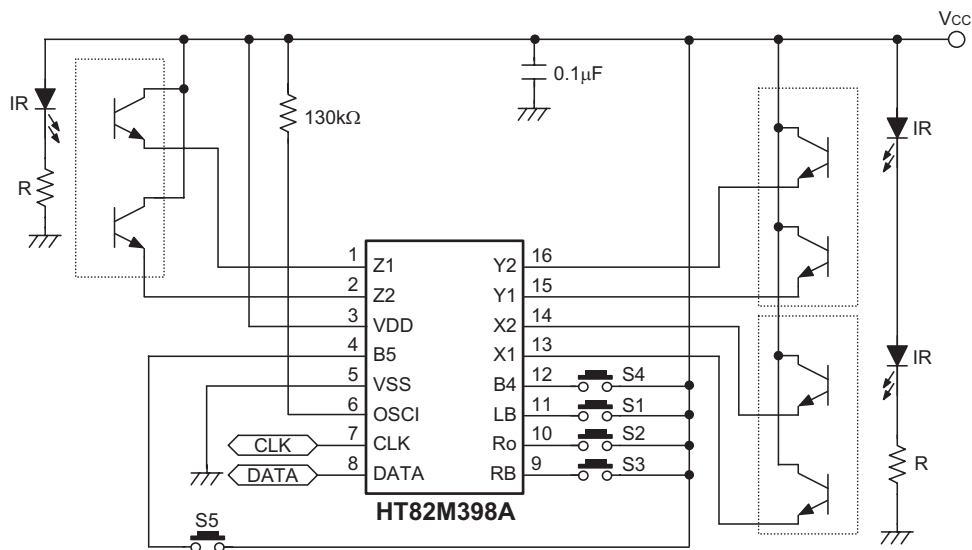

HT82M398A Z Axis Mechanical (This Application Circuit is for Reference Only)

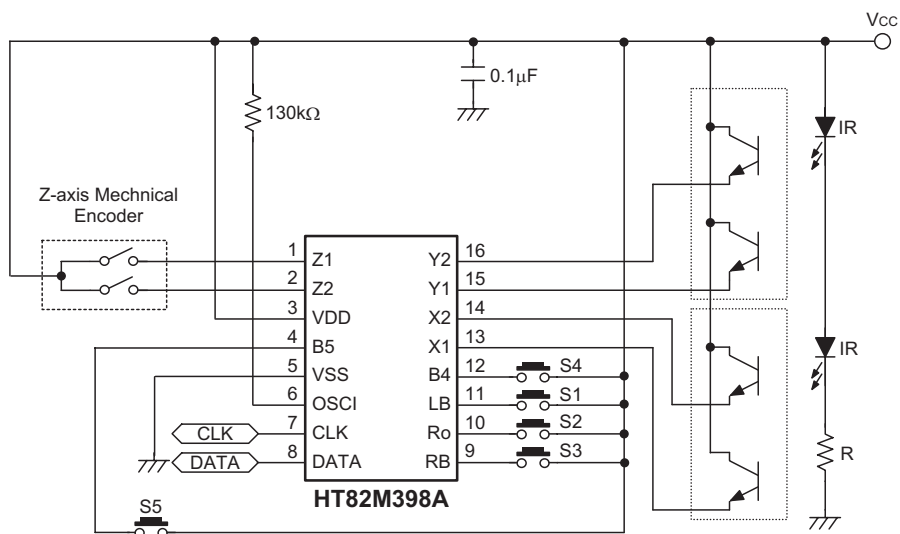

Note: R depends on IR characteristics, R=1kΩ for reference only

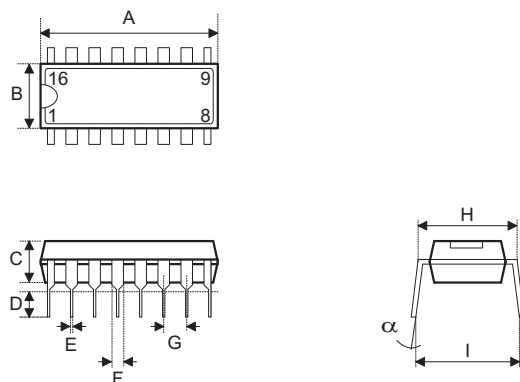Package Information
16-pin DIP (300mil) Outline Dimensions


| Symbol | Dimensions in mil | | |
|----------|-------------------|------|------|
| | Min. | Nom. | Max. |
| A | 745 | — | 775 |
| B | 240 | — | 260 |
| C | 125 | — | 135 |
| D | 125 | — | 145 |
| E | 16 | — | 20 |
| F | 50 | — | 70 |
| G | — | 100 | — |
| H | 295 | — | 315 |
| I | 335 | — | 375 |
| α | 0° | — | 15° |

Holtek Semiconductor Inc. (Headquarters)

No.3, Creation Rd. II, Science Park, Hsinchu, Taiwan
Tel: 886-3-563-1999
Fax: 886-3-563-1189
<http://www.holtek.com.tw>

Holtek Semiconductor Inc. (Taipei Sales Office)

4F-2, No. 3-2, YuanQu St., Nankang Software Park, Taipei 115, Taiwan
Tel: 886-2-2655-7070
Fax: 886-2-2655-7373
Fax: 886-2-2655-7383 (International sales hotline)

Holtek Semiconductor Inc. (Shanghai Sales Office)

7th Floor, Building 2, No.889, Yi Shan Rd., Shanghai, China 200233
Tel: 021-6485-5560
Fax: 021-6485-0313
<http://www.holtek.com.cn>

Holtek Semiconductor Inc. (Shenzhen Sales Office)

5/F, Unit A, Productivity Building, Cross of Science M 3rd Road and Gaoxin M 2nd Road, Science Park, Nanshan District, Shenzhen, China 518057
Tel: 0755-8616-9908, 8616-9308
Fax: 0755-8616-9533

Holtek Semiconductor Inc. (Beijing Sales Office)

Suite 1721, Jinyu Tower, A129 West Xuan Wu Men Street, Xicheng District, Beijing, China 100031
Tel: 010-6641-0030, 6641-7751, 6641-7752
Fax: 010-6641-0125

Holtek Semiconductor Inc. (Chengdu Sales Office)

709, Building 3, Champagne Plaza, No.97 Dongda Street, Chengdu, Sichuan, China 610016
Tel: 028-6653-6590
Fax: 028-6653-6591

Holmate Semiconductor, Inc. (North America Sales Office)

46729 Fremont Blvd., Fremont, CA 94538
Tel: 510-252-9880
Fax: 510-252-9885
<http://www.holmate.com>

Copyright © 2006 by HOLTEK SEMICONDUCTOR INC.

The information appearing in this Data Sheet is believed to be accurate at the time of publication. However, Holtek assumes no responsibility arising from the use of the specifications described. The applications mentioned herein are used solely for the purpose of illustration and Holtek makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Holtek's products are not authorized for use as critical components in life support devices or systems. Holtek reserves the right to alter its products without prior notification. For the most up-to-date information, please visit our web site at <http://www.holtek.com.tw>.