


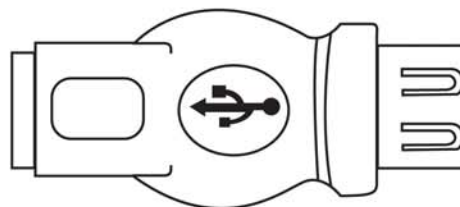


USB B Female

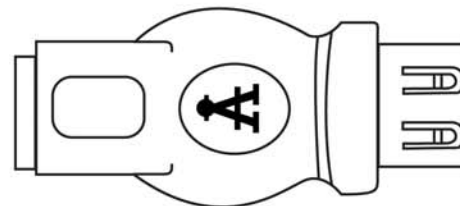

USB A Female

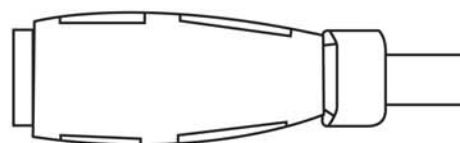

### PIN Out

(P1)		(P2)
1	—————	1
2	—————	2
3	—————	3
4	—————	4
Shell	—————	Shell

### Materials:

- Jump Wire: Non-UL 26AWG(7/0.16) Tinned Copper
- Connector:
  - P1: USB B Female Gold Flash Contact, Nickel Plated Shell
  - P2: USB A Female Gold Flash Contact, Nickel Plated Shell,
- Platic - White
- Hood: Molded Type PVC 45P
- Color: Beige

### Electrical:

- 100% Open Short & Mis Wire Test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.

Ⓜ = Assmann Logo

**RoHS**  
Compliant

ITEM NO

**A-USB-1-R**

TITLE

USB B Female <=> USB A Female Adapter

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components  
All International Rights Reserved