

PNP PRE-BIASED SMALL SIGNAL SOT-363 DUAL SURFACE MOUNT TRANSISTOR


Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Lead Free/RoHS Compliant (Note 3)


Mechanical Data

- Case: SOT-363
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Terminal Connections: See Diagram
- Marking: Date Code and Marking Code (See Diagrams & Page 3)
- Ordering Information (See Page 3)
- Weight: 0.006 grams (approx.)

P/N	R1	R2	MARKING
DDA124EU	22K Ω	22K Ω	P17
DDA144EU	47K Ω	47K Ω	P20
DDA114YU	10K Ω	47K Ω	P14
DDA123JU	2.2K Ω	47K Ω	P06
DDA114EU	10K Ω	10K Ω	P13
DDA113TU	1K Ω	—	P01
DDA143TU	4.7K Ω	—	P07
DDA114TU	10K Ω	—	P12

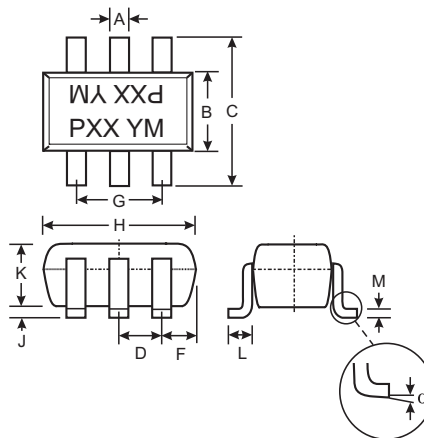

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J	—	0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
α	0°	8°
All Dimensions in mm		

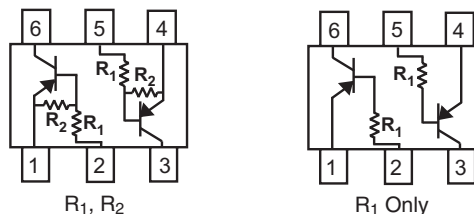

SCHEMATIC DIAGRAM

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Supply Voltage, (1) to (6) and (4) to (3)	V _{CC}	50	V
Input Voltage, (1) to (2) and (4) to (5)	V _{IN}	+10 to -40 +10 to -40 +6 to -40 +5 to -12 +10 to -40 +5 V _{max} +5 V _{max} +5 V _{max}	V
Output Current	I _O	-30 -30 -70 -100 -50 -100 -100 -100	mA
Output Current All	I _C (Max)	-100	mA
Power Dissipation (Total)	P _d	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1)	R _{θJA}	625	°C/W

- Note: 1. Mounted on FR4 PC Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. 150mW per element must not be exceeded.
 3. No purposefully added lead.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic (DDA113TU & DDA143TU & DDA114TU only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_{CBO}	-50	—	—	V	$I_C = -50\mu\text{A}$
Collector-Emitter Breakdown Voltage	BV_{CEO}	-50	—	—	V	$I_C = -1\text{mA}$
Emitter-Base Breakdown Voltage	BV_{EBO}	-5	—	—	V	$I_E = -50\mu\text{A}$
Collector Cutoff Current	I_{CBO}	—	—	-0.5	μA	$V_{CB} = -50\text{V}$
Emitter Cutoff Current	I_{EBO}	—	—	-0.5	μA	$V_{EB} = -4\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	-0.3	V	$I_C/I_B = -2.5\text{mA} / -0.25\text{mA}$ DDA143TU $I_C/I_B = -1\text{mA} / -0.1\text{mA}$ DDA114TU $I_C/I_B = -10\text{mA} / -1\text{mA}$ DDA113TU
DC Current Transfer Ratio	h_{FE}	100	250	600	—	$I_C = -1\text{mA}$, $V_{CE} = -5\text{V}$
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—
Gain-Bandwidth Product*	f_T	—	250	—	MHz	$V_{CE} = -10\text{V}$, $I_E = 5\text{mA}$, $f = 100\text{MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU $V_{I(off)}$	-0.5 -0.5 -0.3 -0.5 -0.5	-1.1 -1.1 — — -1.1	—	V	$V_{CC} = -5\text{V}$, $I_O = -100\mu\text{A}$
	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU $V_{I(on)}$	—	-1.9 -1.9 — — -1.9	-3.0 -3.0 -1.4 -1.1 -3.0		$V_O = -0.3$, $I_O = -5\text{mA}$ $V_O = -0.3$, $I_O = -2\text{mA}$ $V_O = -0.3$, $I_O = -1\text{mA}$ $V_O = -0.3$, $I_O = -5\text{mA}$ $V_O = -0.3$, $I_O = -10\text{mA}$
Output Voltage	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU $V_{O(on)}$	—	-0.1	-0.3	V	$I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$ $I_O/I_I = -5\text{mA} / -0.25\text{mA}$ $I_O/I_I = -10\text{mA} / -0.5\text{mA}$
Input Current	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU I_I	—	—	-0.36 -0.18 -0.88 -3.6 -0.88	mA	$V_I = -5\text{V}$
Output Current	$I_{O(off)}$	—	—	-0.5	μA	$V_{CC} = -50\text{V}$, $V_I = -0\text{V}$
DC Current Gain	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU G_I	56 68 68 80 30	—	—	—	$V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$ $V_O = -5\text{V}$, $I_O = -10\text{mA}$ $V_O = -5\text{V}$, $I_O = -10\text{mA}$ $V_O = -5\text{V}$, $I_O = -5\text{mA}$
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—
Resistance Ratio Tolerance	R_2/R_1	-20	—	+20	%	—
Gain-Bandwidth Product*	f_T	—	250	—	MHz	$V_{CE} = -10\text{V}$, $I_E = -5\text{mA}$, $f = 100\text{MHz}$


* Transistor - For Reference Only

Ordering Information (Note 4)

Device	Packaging	Shipping
DDA124EU-7-F	SOT-363	3000/Tape & Reel
DDA144EU-7-F	SOT-363	3000/Tape & Reel
DDA114YU-7-F	SOT-363	3000/Tape & Reel
DDA123JU-7-F	SOT-363	3000/Tape & Reel
DDA114EU-7-F	SOT-363	3000/Tape & Reel
DDA113TU-7-F	SOT-363	3000/Tape & Reel
DDA143TU-7-F	SOT-363	3000/Tape & Reel
DDA114TU-7-F	SOT-363	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



PXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

Year	2004	2005	2006	2007	2008	2009	2010	2011
Code	R	S	T	U	V	W	X	Y

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDA123JU ONE SECTION

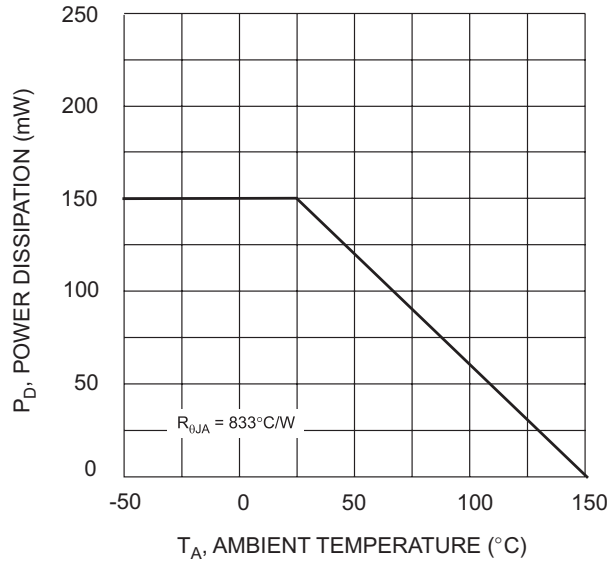


Fig. 1 Derating Curve

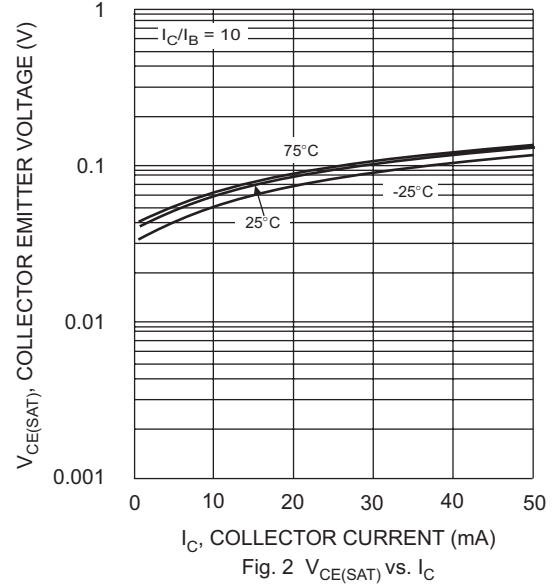
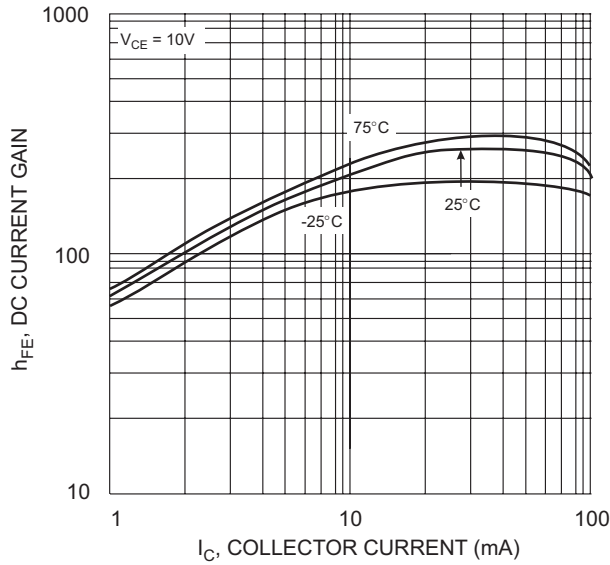

 Fig. 2 $V_{CE(SAT)}$ vs. I_C


Fig. 3 DC Current Gain

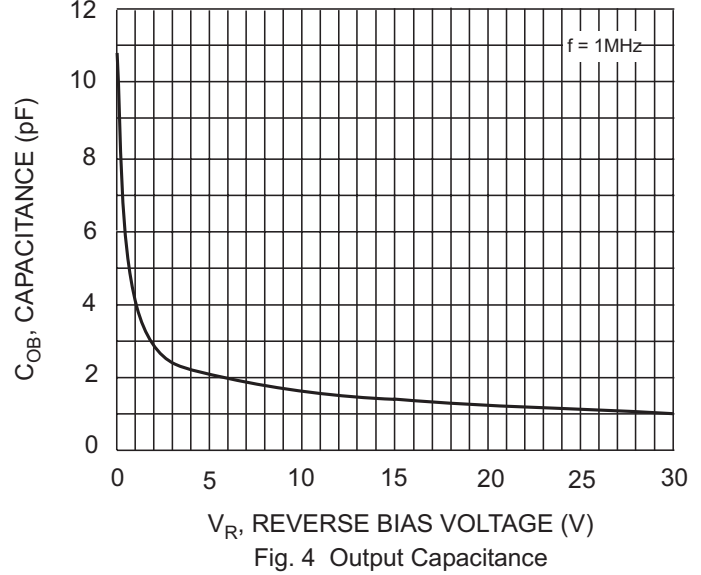


Fig. 4 Output Capacitance

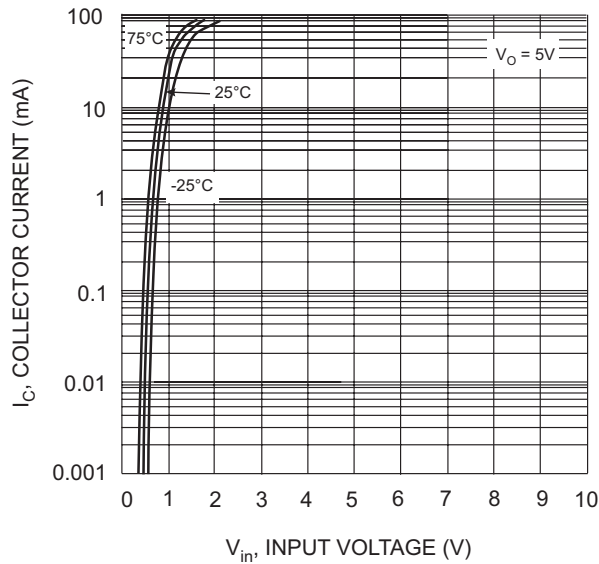


Fig. 5 Collector Current Vs. Input Voltage

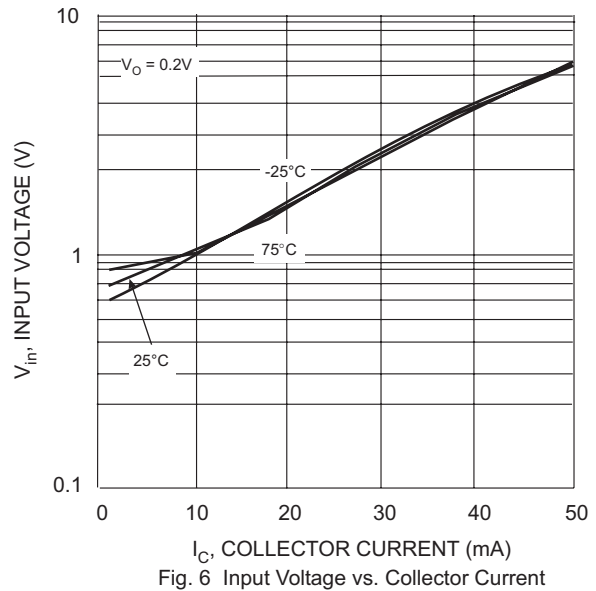


Fig. 6 Input Voltage vs. Collector Current

TYPICAL CURVES - DDA114TU ONE SECTION

NEW PRODUCT

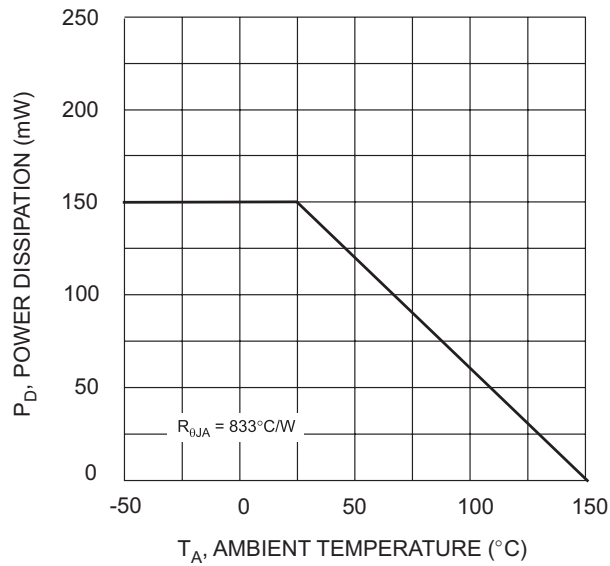


Fig. 1 Derating Curve

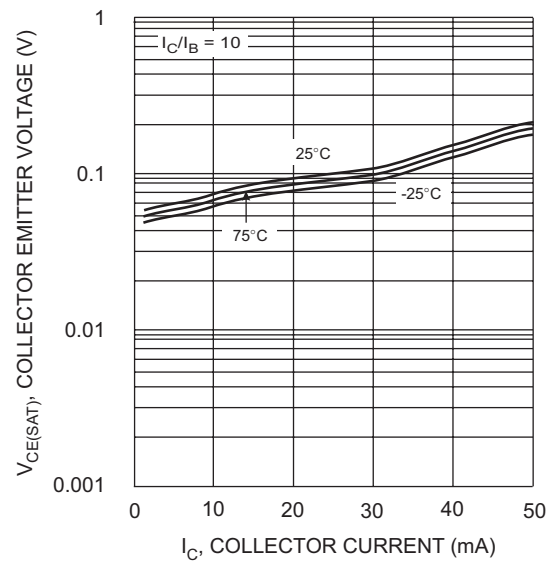


Fig. 2 $V_{CE(SAT)}$ vs. I_C

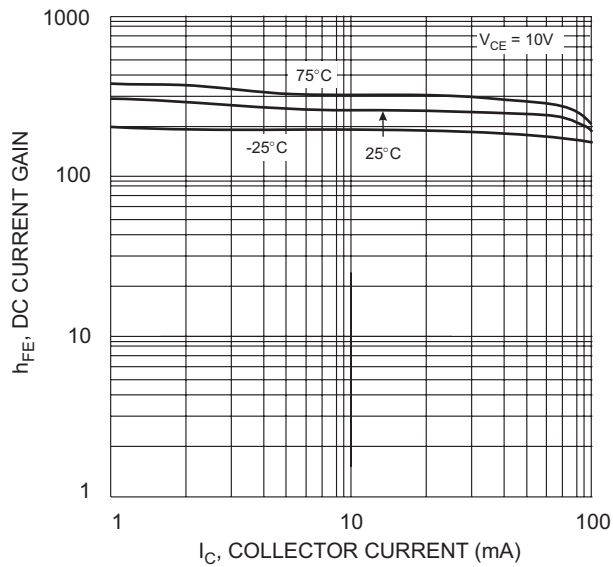


Fig. 3 DC Current Gain

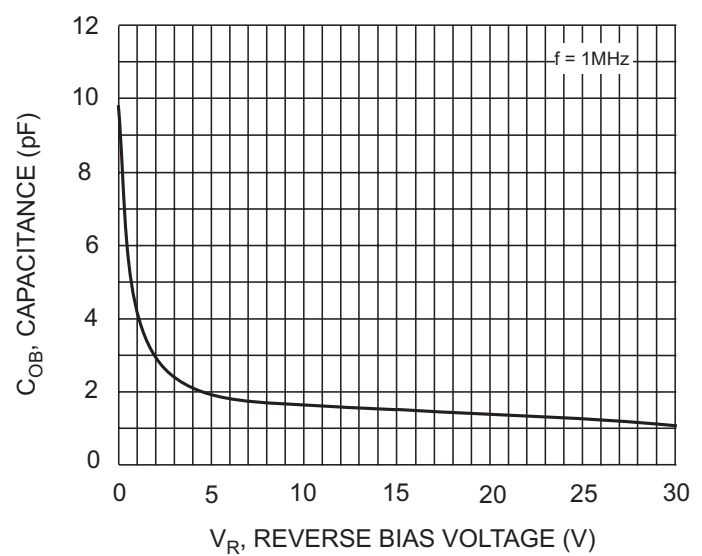


Fig. 4 Output Capacitance

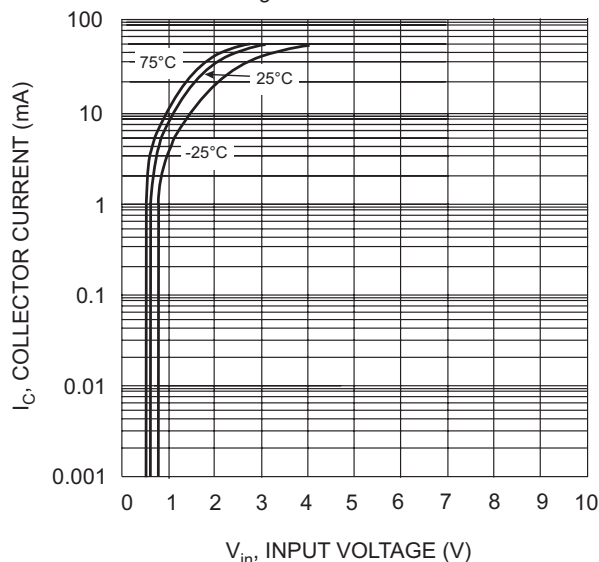


Fig. 5 Collector Current Vs. Input Voltage

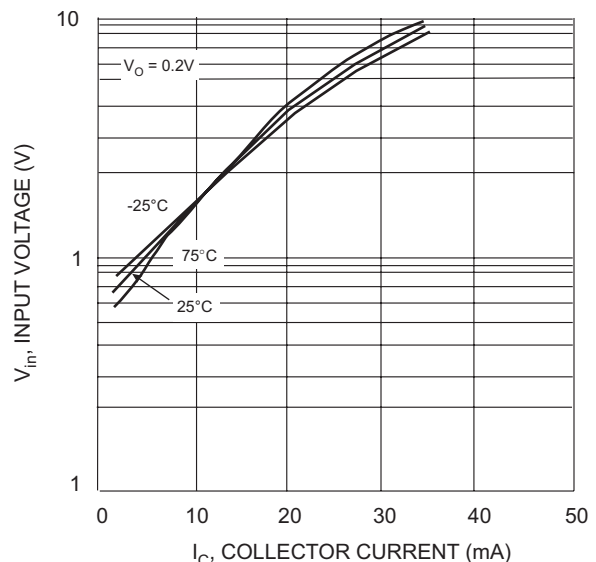


Fig. 6 Input Voltage vs. Collector Current

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.