

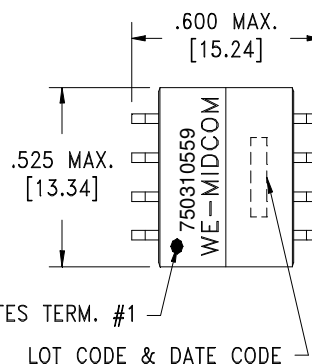


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE

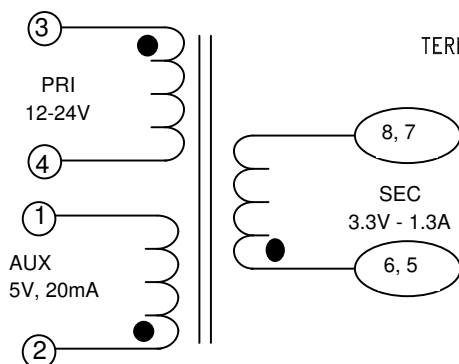

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

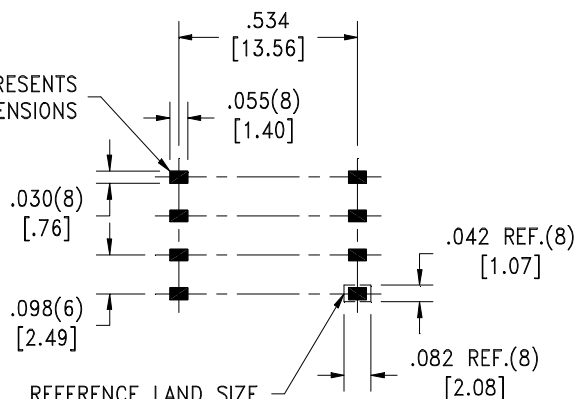

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C):	1-2 , 0.064 Ohms $\pm 10\%$.
	3-4 , 0.051 Ohms $\pm 10\%$.
	5-7 , 0.023 Ohms $\pm 10\%$.
	6-8 , 0.032 Ohms $\pm 10\%$.
DIELECTRIC RATING:	1500VAC, 1 minute tested by applying 1875VAC for 1 second between pins 1-8(2+3,5+6).
INDUCTANCE:	24.0 μ H $\pm 10\%$, 10kHz, 100mVAC, 0mADC, 3-4, Ls.
LEAKAGE INDUCTANCE:	500nH max., 100kHz, 100mVAC, 3-4(1+2,5+6+7+8), Ls.
TURNS RATIO:	(3-4):(5-7) , (4):(1.00) , $\pm 2\%$.
	(3-4):(6-8) , (4):(1.00) , $\pm 2\%$.
	(3-4):(2-1) , (4):(1.00) , $\pm 2\%$.

Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified, tolerances are as follows: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ (.127mm)	WE-Midcom, Inc.	
	Drawing Title Transformer	Drawing Number 750310559	Rev. 01
This drawing is dual dimensioned. Dimensions in brackets are in millimeters	Revisions: See Sheet 1	Scale ----	Sheet 2 of 5
Engineer:PLP		07/11/2008	