

## CT2-RX/TX IC

### Description

The IC for digital cordless telephone application is fabricated using TEMIC's most advanced UHF process. It covers the CT2 band (864 MHz to 868 MHz) as well as the CT2 Plus band (up to 952 MHz). The RX/TX circuit provides the down conversion to the data stream and the up conversion from the first IF. In conjunction with TEMIC's RF front end, Twin PLL, I/Q modulator and

AMDs CT2 PhoX™ controller AM 79C4xx a complete CT2 IC kit is available.

Electrostatic sensitive device.  
Observe precautions for handling.



### Features

- Low supply voltage 2.9 V typical (min. 2.7 V)
- Provides down conversion to the data stream, up conversion from the first IF
- Integrated UHF and VHF VCOs
- Low noise figure of RX path ( $NF \leq 10$  dB)
- RX and TX power down
- First IF filter used for transmit as well receive mode
- Temperature compensated logarithmic Receiver Signal Strength Indicator (RSSI) with a 75 dB dynamic range
- Low power consumption in RX and TX mode (<20 mA typ.)
- SSO28 plastic package

### Benefits

- Low power consumption results in extended talk time
- Few external components and very small package save space

### Block Diagram (Simplified Schematic)

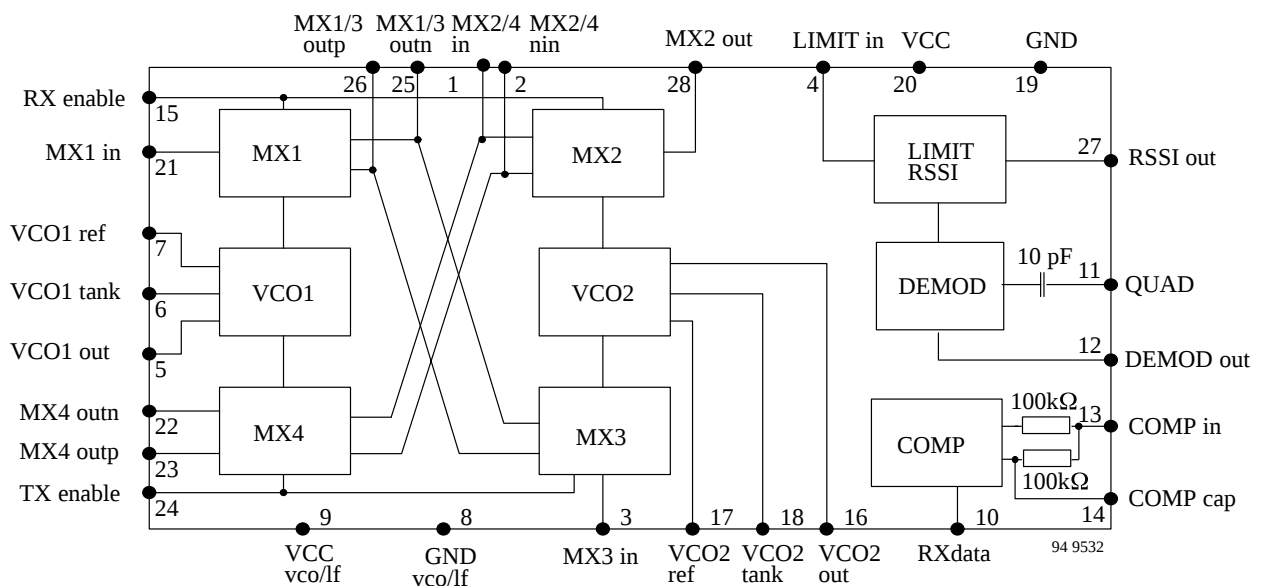


Figure 1.

## Ordering Information

| Extended Type Number | Package | Remarks                    |
|----------------------|---------|----------------------------|
| U2760B-AFS           | SSO28   | Rail, MOQ 600pcs.          |
| U2760B-AFS G3        | SSO28   | Tape + reel, MOQ 4000 pcs. |

## Functional Description

### MX1

Mixer 1 converts the RF signal to the first IF. It has a high impedance, unsymmetrical input and a symmetrical open collector output.

### MX2

The second mixer provides the down conversion to the second IF. An external SAW filter is placed at its input to provide rejection of the image frequency and spurious signals that went through the RF filtering.

### LIMITER / RSSI

This block contains a high gain (100 dB) amplifier, providing a limited signal at the second IF frequency for the demodulation, as well as a signal strength indicator providing an output voltage proportional to the input power.

### Demod

The quadrature demodulator in the receiving path contains an internal 10 pF quadrature capacitor to couple the IF signal to the external Tank providing the 90 degree phase shift. An external bit slicer reshapes the bits, a sample and hold circuit maintains the average DC value at the demodulator when switching the signal between transmission and reception.

### COMP

The comparator circuit with 100 k $\Omega$  input resistor and external input biasing has a 10 mV hysteresis. It is designed to square up the demodulated data signal.

### MX3

The third mixer converts the 800 kHz signal coming from the modulator circuit to the IF frequency. It has a high impedance, unsymmetrical input and a symmetrical open collector output.

### MX4

This mixer is designed for the up conversion of the RF frequency. It has a high impedance, unsymmetrical input and a symmetrical open collector output. The image rejection is obtained by external RF filtering.

The same first IF filter is used for the transmit path and the receive path. In the transmit path, this filter is supposed to eliminate the mixing products from MX3, in particular, the harmonics of the IF frequency.

### VCO1

The UHF VCO covers the frequency band up to 700 MHz. For external VCO application this circuit can be used as a buffer stage.

### VCO2

This VCO covers a frequency band up to 400 MHz.

## Pin Description

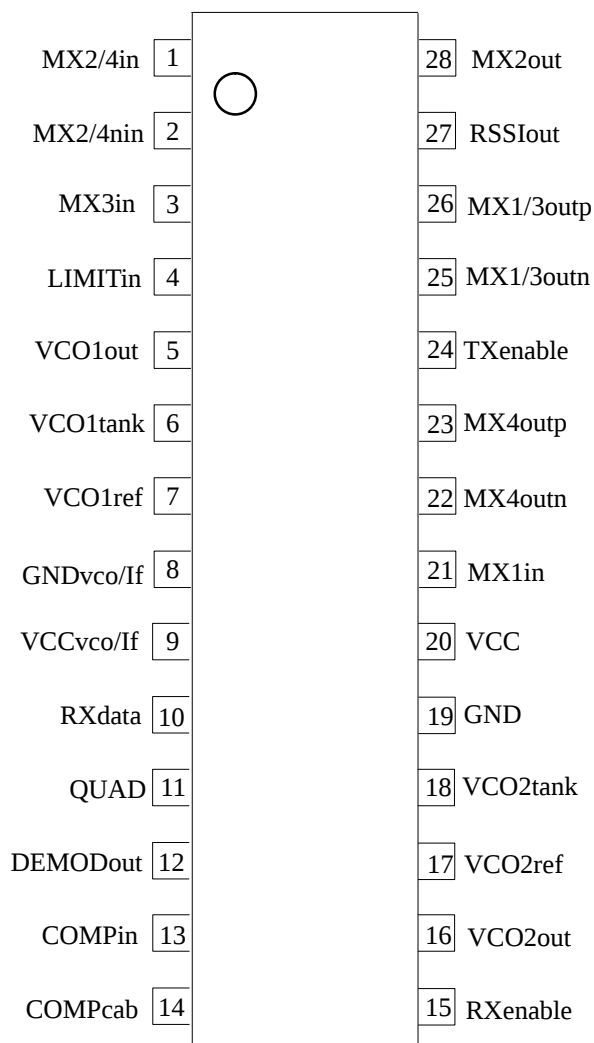


Figure 2. Pinning

| Pin | Symbol    | Function                        |
|-----|-----------|---------------------------------|
| 1   | MX2/4in   | Mixer2/ Mixer4 input            |
| 2   | MX2/4nin  | Mixer2/ Mixer4 ref. input       |
| 3   | MX3in     | Mixer3 input                    |
| 4   | LIMITin   | Limiter/RSSI input              |
| 5   | VCO1out   | VCO1 output (to PLL)            |
| 6   | VCO1tank  | VCO1 resonator                  |
| 7   | VCO1ref   | VCO1 resonator, to be blocked   |
| 8   | GNDvco/lf | Ground VCO, low frequency parts |
| 9   | VCCvco/lf | Power supply VCO/LF parts       |
| 10  | RXdata    | RX data output                  |
| 11  | QUAD      | Quadrature filter               |
| 12  | DEMODOut  | Demodulator output              |
| 13  | COMPIn    | Comparator input                |
| 14  | COMPcap   | Comparator blocking capacitor   |
| 15  | RXenable  | RX enable                       |
| 16  | VCO2out   | VCO2 output (to PLL)            |
| 17  | VCO2ref   | VCO2 resonator, to be blocked   |
| 18  | VCO2tank  | VCO2 resonator                  |
| 19  | GND       | Ground                          |
| 20  | VCC       | Power supply voltage            |
| 21  | MX1in     | Mixer1 input                    |
| 22  | MX4outn   | Mixer 4 output n                |
| 23  | MX4outp   | Mixer 4 output p                |
| 24  | TXenable  | TX enable                       |
| 25  | MX1/3outn | Mixer1/ Mixer3 output n         |
| 26  | MX1/3outp | Mixer1/ Mixer3 output p         |
| 27  | RSSIout   | Signal strength output          |
| 28  | MX2out    | Mixer2 output                   |

## Pin Functions

| Pin | Symbol    | Pin Voltage          | Function                                                                                                                                                                      | Equivalent Circuit |
|-----|-----------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| 1   | MX2/4in   | 1.5                  | Mixer2/ Mixer4 input                                                                                                                                                          |                    |
| 2   | MX2/4nin  | 1.5                  | Mixer2/ Mixer4 complementary input<br>Pin 1 is the input of the mixers, Pin 2 can be used for differential input signal, or should be connected to GND via a bypass capacitor |                    |
| 3   | MX3in     | 1.7 (RX)<br>2.4 (TX) | Mixer3 input<br>complementary input is internally connected to GND via a bypass capacitor                                                                                     |                    |
| 4   | LIMITin   | 2.1                  | Limiter/RSSI input                                                                                                                                                            |                    |
| 11  | QUAD      | 1.5                  | Quadrature filter                                                                                                                                                             |                    |
| 12  | DEMODOut  | 1.2                  | Demodulator output                                                                                                                                                            |                    |
| 5   | VCO1out   | 1.1                  | VCO1 output (to PLL)                                                                                                                                                          |                    |
| 6   | VCO1tank  | 1.5                  | VCO1 resonator                                                                                                                                                                |                    |
| 7   | VCO1ref   | 1.5                  | VCO1 reference, to be blocked. This Pin is also internally connected to GND via a bypass capacitor                                                                            |                    |
| 8   | GNDvco/lf | —                    | Ground VCO, low frequency parts                                                                                                                                               |                    |
| 9   | VCCvco/lf | —                    | Power supply VCO/LF parts                                                                                                                                                     |                    |

| Pin | Symbol   | Pin Voltage | Function                                                                                        | Equivalent Circuit |
|-----|----------|-------------|-------------------------------------------------------------------------------------------------|--------------------|
| 10  | RXdata   | 0 to 2.9    | RX data output                                                                                  |                    |
| 13  | COMPIn   | 1.2         | Comparator input                                                                                |                    |
| 14  | COMPcap  | 1.2         | Comparator blocking capacitor                                                                   |                    |
| 15  | RXenable | —           | RX enable                                                                                       |                    |
| 16  | VCO2out  | 1.1         | VCO2 output (to PLL)                                                                            |                    |
| 17  | VCO2ref  | 1.6         | VCO2 resonator, to be blocked                                                                   |                    |
| 18  | VCO2tank | 1.6         | VCO2 resonator                                                                                  |                    |
| 19  | GND      | —           | Ground (mixer parts)                                                                            |                    |
| 20  | VCC      | —           | Power supply (mixer parts)                                                                      |                    |
| 21  | MX1in    | 1.5         | Mixer1 input<br>complimentary input is internally<br>connected to GND via a bypass<br>capacitor |                    |
| 22  | MX4outn  | —           | Mixer 4 output n                                                                                |                    |
| 23  | MX4outp  | —           | Mixer 4 output p                                                                                |                    |

| Pin | Symbol    | Pin Voltage          | Function                | Equivalent Circuit |
|-----|-----------|----------------------|-------------------------|--------------------|
| 24  | TXenable  | –                    | TX enable               |                    |
| 25  | MX1/3outn | –                    | Mixer1/ Mixer3 output n |                    |
| 26  | MX1/3outp | –                    | Mixer1/ Mixer3 output p |                    |
| 27  | RSSIout   | 0.2 to 2.7           | Signal strength output  |                    |
| 28  | MX2out    | 1.0 (RX)<br>2.4 (TX) | Mixer2 output           |                    |

## Absolute Maximum Ratings

| Parameters                                               | Symbol    | Value         | Unit |
|----------------------------------------------------------|-----------|---------------|------|
| Supply voltage                                           | $V_{CC}$  | 0 to +5       | V    |
| Input voltages<br>Pins 1, 2, 3, 4, 13, 14, 15, 21 and 24 | $V_{in}$  | 0 to $V_{CC}$ | V    |
| Input voltages<br>Pins 6, 7, 17 and 18                   | $V_{in}$  | 1.5           | V    |
| Junction temperature                                     | $T_j$     | 125           | °C   |
| Storage temperature range                                | $T_{stg}$ | −40 to +125   | °C   |

## Thermal Resistance

| Parameters             | Symbol     | Value | Unit |
|------------------------|------------|-------|------|
| Junction ambient SSO28 | $R_{thJA}$ | 130   | K/W  |

## Operating Conditions

| Parameters            | Symbol    | Value      | Unit |
|-----------------------|-----------|------------|------|
| Supply voltage        | $V_{CC}$  | 2.7 to 3.6 | V    |
| Operating temperature | $T_{amb}$ | −5 to +45  | °C   |

## Electrical Characteristics: Receiver Input Mixer (MX1)

Test conditions (unless otherwise specified):  $V_{CC} = 2.9$  V,  $T_{amb} = 25$ °C, referred to application circuit,  $f_{RF} = 866.05$  MHz,  $f_{IF1} = 240.05$  MHz.

| Parameters                        | Test Conditions / Pins       | Symbol             | Min. | Typ. | Max. | Unit       |
|-----------------------------------|------------------------------|--------------------|------|------|------|------------|
| Supply voltage range              | Pin 20                       | $V_{CC}$           | 2.7  | 2.9  | 3.6  | V          |
| Supply current                    | @ $V_{CC} = 2.9$ V, Pin 20   | $I_s$              |      | 3    |      | mA         |
| Input impedance                   | Pin 21                       | $Z_{in}$           |      | 3    |      | k $\Omega$ |
| Input frequency                   | Pin 21                       | $f_{in}$           |      |      | 1000 | MHz        |
| Output frequency                  | Pins 25 and 26               | $f_{out}$          |      | 240  | 300  | MHz        |
| Power gain                        | Pins 21, 25 and 26           | $G_p$              |      | 8    |      | dB         |
| Noise figure                      | Pins 21, 25 and 26           | NF                 |      | 8    | 10   | dB         |
| Compression                       | Pins 21, 25 and 26           | $P_{1dB}$          | −18  |      |      | dBm        |
| Third order input intercept point | Pins 21, 25 and 26           | IIP3               | −8   |      |      | dBm        |
| LO to RF isolation                | Pin 21                       | Isol <sub>LO</sub> | 20   |      |      | dB         |
| LO $\pm$ (IF/2) response          | @ $P_{in} = -84$ dBm, Pin 21 |                    |      |      | −10  | dB         |

## Electrical Characteristics: Receiver IF Mixer (MX2)

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  $f_{IF1} = 240.05\text{ MHz}$ ,  $f_{IF2} = 800\text{ kHz}$ .

| Parameters                        | Test Conditions / Pins             | Symbol    | Min. | Typ. | Max. | Unit     |
|-----------------------------------|------------------------------------|-----------|------|------|------|----------|
| Supply voltage range              | Pin 20                             | $V_{CC}$  | 2.7  | 2.9  | 3.6  | V        |
| Supply current                    | @ $V_{CC} = 2.9\text{ V}$ , Pin 20 | $I_s$     |      | 3    |      | mA       |
| Input impedance                   | Pin 1                              | $Z_{in}$  | 130  | 200  | 300  | $\Omega$ |
| Input frequency                   | Pin 1                              | $f_{in}$  |      |      | 300  | MHz      |
| Output frequency                  | Pin 28                             | $f_{out}$ |      | 0.8  | 15   | MHz      |
| Power gain                        | Pins 1 and 28                      | $G_p$     | 10   | 11   |      | dB       |
| Noise figure                      | Pins 1 and 28                      | NF        |      |      | 20   | dB       |
| Compression                       | Pins 1 and 28                      | $P_{1dB}$ | -20  |      |      | dBm      |
| Third order input intercept point | Pins 1 and 28                      | IIP3      | -10  |      |      | dBm      |
| LO to RF isolation                | Pin 1                              | IsolLO    | 20   |      |      | dB       |
| LO $\pm$ (IF/2) response          | @ Pin = -40 dBm, Pin 1             |           |      |      | -35  | dB       |

## Electrical Characteristics: RSSI/Limiter Amplifier

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  $f_{LIMIT} = 800\text{ kHz}$ .

| Parameters           | Test Conditions / Pins            | Symbol      | Min. | Typ. | Max. | Unit          |
|----------------------|-----------------------------------|-------------|------|------|------|---------------|
| Supply voltage range | Pin 9                             | $V_{CC}$    | 2.7  | 2.9  | 3.6  | V             |
| Supply current       | @ $V_{CC} = 2.9\text{ V}$ , Pin 9 | $I_s$       |      | 1.5  |      | mA            |
| Input impedance      | Pin 4                             | $Z_{in}$    |      | 1500 |      | $\Omega$      |
| Voltage gain         | Pin 4                             | $G_v$       |      | 100  |      | dB            |
| Frequency range      | Pin 4                             | $f_{LIMIT}$ | 0.5  | 0.8  | 5    | MHz           |
| RSSI range           | Pins 4 and 27                     |             | -90  |      | -15  | dBm           |
| RSSI voltage at Pmin | Pins 4 and 27                     |             | 0.2  |      | 0.4  | V             |
| RSSI voltage at Pmax | Pins 4 and 27                     |             | 2.4  |      | 2.6  | V             |
| RSSI accuracy        | Pins 4 and 27                     |             | -2   |      | 2    | dB            |
| Output impedance     | Pins 27                           | $R_{RSSI}$  | 19   | 24   | 29   | $k\Omega$     |
| Rise time            | $C_{RSSI} = 1\text{ nF}$ , Pin 27 |             |      |      | 50   | $\mu\text{s}$ |
| Fall time            | $C_{RSSI} = 1\text{ nF}$ , Pin 27 |             |      |      | 50   | $\mu\text{s}$ |

## Electrical Characteristics: Demodulator

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  $f_{LIMIT} = 800\text{ kHz}$ .

| Parameters           | Test Conditions / Pins                       | Symbol    | Min. | Typ. | Max. | Unit              |
|----------------------|----------------------------------------------|-----------|------|------|------|-------------------|
| Supply voltage range | Pin 9                                        | $V_{CC}$  | 2.7  | 2.9  | 3.6  | V                 |
| Supply current       | @ $V_{CC} = 2.9\text{ V}$ , Pin 9            | $I_s$     |      | 0.2  |      | mA                |
| Output voltage       | $\pm 18\text{ kHz}$ deviation, Pins 4 and 12 | $V_{out}$ |      | 120  |      | mV <sub>rms</sub> |

## Electrical Characteristics: Comparator

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit

| Parameters           | Test Conditions / Pins                                    | Symbol   | Min. | Typ. | Max. | Unit |
|----------------------|-----------------------------------------------------------|----------|------|------|------|------|
| Supply voltage range | Pin 9                                                     | $V_{CC}$ | 2.7  | 2.9  | 3.6  | V    |
| Supply current       | @ $V_{CC} = 2.9\text{ V}$ , Pin 9                         | $I_s$    |      | 0.15 |      | mA   |
| Input hysteresis     | Pins 13 and 14                                            |          |      | 10   |      | mV   |
| Output HIGH voltage  | $R_{Load}$ to GND $\geq 500\text{ k}\Omega$ ,<br>Pin 10   |          | 2.3  |      |      | V    |
| Output LOW voltage   | $R_{Load}$ to $V_{CC} \geq 50\text{ k}\Omega$ ,<br>Pin 10 |          |      |      | 0.6  | V    |

## Electrical Characteristics Transmitter IF Mixer (MX3)

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  
 $f_{in} = 800\text{ kHz}$ ,  $f_{IF} = 240.05\text{ MHz}$ .

| Parameters           | Test Conditions / Pins                       | Symbol    | Min. | Typ. | Max. | Unit             |
|----------------------|----------------------------------------------|-----------|------|------|------|------------------|
| Supply voltage range | Pin 20                                       | $V_{CC}$  | 2.7  | 2.9  | 3.6  | V                |
| Supply current       | @ $V_{CC} = 2.9\text{ V}$ , Pin 20           | $I_s$     |      | 1.3  |      | mA               |
| Input impedance      | Pin 2                                        | $Z_{in}$  |      | 5    |      | $\text{k}\Omega$ |
| Input frequency      | Pin 3                                        | $f_{in}$  |      | 0.8  | 15   | MHz              |
| Output frequency     | Pins 25 and 26                               | $f_{out}$ |      | 250  | 300  | MHz              |
| Output power         | $V_{inpp} = 320\text{ mV}$<br>Pins 25 and 26 | $P_{out}$ |      | -16  |      | dBm              |
| Noise figure         | Pins 2, 25 and 26                            | NF        |      |      | 25   | dB               |

## Electrical Characteristics Transmitter Output Mixer (MX4)

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  
 $f_{IF} = 240.05\text{ MHz}$ ,  $f_{RF} = 866.05\text{ MHz}$ .

| Parameters              | Test Conditions / Pins                        | Symbol     | Min. | Typ. | Max. | Unit     |
|-------------------------|-----------------------------------------------|------------|------|------|------|----------|
| Supply voltage range    | Pin 20                                        | $V_{CC}$   | 2.7  | 2.9  | 3.6  | V        |
| Supply current          | @ $V_{CC} = 2.9\text{ V}$ , Pin 20            | $I_s$      |      | 3.5  | 4    | mA       |
| Input impedance         | Pin 1                                         | $Z_{in}$   | 130  | 200  | 300  | $\Omega$ |
| Input frequency         | Pin 1                                         |            |      |      | 300  | MHz      |
| Output frequency        | Pins 22 and 23                                |            |      |      | 900  | MHz      |
| Output power            | $P_{In} = -22\text{ dBm}$ ,<br>Pins 22 and 23 | $P_{out}$  | -16  | -14  |      | dBm      |
| Noise figure            | Pins 1, 22 and 23                             | NF         |      |      | 12   | dB       |
| LO leakage              | Pins 22 and 23                                | $L_{kLO}$  |      |      | -34  | dBm      |
| IF leakage              | Pins 22 and 23                                | $L_{kIF}$  |      |      | -45  | dBm      |
| (2*IF) leakage          | Pins 22 and 23                                | $L_{k2IF}$ |      |      | -55  | dBm      |
| (3*IF) leakage          | Pins 22 and 23                                | $L_{k3IF}$ |      |      | -65  | dBm      |
| (n*IF) leakage, $n > 3$ | Pins 22 and 23                                | $L_{knIF}$ |      |      | -60  | dBm      |

## Electrical Characteristics: UHF Voltage Controlled Oscillator (VCO1)

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  $f = 626\text{ MHz}$

| Parameters                       | Test Conditions / Pins            | Symbol    | Min  | Typ | Max   | Unit   |
|----------------------------------|-----------------------------------|-----------|------|-----|-------|--------|
| Supply voltage range             | Pin 9                             | $V_{CC}$  | 2.7  | 2.9 | 3.6   | V      |
| Supply current                   | @ $V_{CC} = 2.9\text{ V}$ , Pin 9 | $I_S$     |      | 3   |       | mA     |
| Frequency bandwidth              | Pins 5, 6 and 7                   | $f_{BW}$  |      |     | 700   | MHz    |
| Phase noise $\pm 100\text{ kHz}$ | Pins 5, 6 and 7                   | $P_N$     |      |     | - 86  | dBc/Hz |
| Phase noise $\pm 200\text{ kHz}$ | Pins 5, 6 and 7                   | $P_N$     |      |     | - 104 | dBc/Hz |
| Phase noise $\pm 300\text{ kHz}$ | Pins 5, 6 and 7                   | $P_N$     |      |     | - 109 | dBc/Hz |
| Phase noise $\pm 400\text{ kHz}$ | Pins 5, 6 and 7                   | $P_N$     |      |     | - 125 | dBc/Hz |
| Phase noise @ 50 MHz             | Pins 5, 6 and 7                   | $P_N$     |      |     | - 150 | dBc/Hz |
| Output power                     | 50 $\Omega$ termination, Pin 5    | $P_{out}$ | - 15 |     |       | dBm    |

## Electrical Characteristics: VHF Voltage Controlled Oscillator (VCO2)

Test conditions (unless otherwise specified):  $V_{CC} = 2.9\text{ V}$ ,  $T_{amb} = 25^{\circ}\text{C}$ , referred to application circuit,  $f = 239.25\text{ MHz}$

| Parameters           | Test Conditions / Pins            | Symbol    | Min  | Typ | Max   | Unit   |
|----------------------|-----------------------------------|-----------|------|-----|-------|--------|
| Supply voltage range | Pin 9                             | $V_{CC}$  | 2.7  | 2.9 | 3.6   | V      |
| Supply current       | @ $V_{CC} = 2.9\text{ V}$ , Pin 9 | $I_S$     |      | 2.5 |       | mA     |
| Frequency bandwidth  | Pins 16, 17 and 18                | $f_{BW}$  |      |     | 400   | MHz    |
| Phase noise 100 kHz  | Pins 16, 17 and 18                | $P_N$     |      |     | - 86  | dBc/Hz |
| Phase noise 200 kHz  | Pins 16, 17 and 18                | $P_N$     |      |     | - 114 | dBc/Hz |
| Phase noise 300 kHz  | Pins 16, 17 and 18                | $P_N$     |      |     | - 119 | dBc/Hz |
| Phase noise 400 kHz  | Pins 16, 17 and 18                | $P_N$     |      |     | - 135 | dBc/Hz |
| Phase noise @ 50 MHz | Pins 16, 17 and 18                | $P_N$     |      |     | - 150 | dBc/Hz |
| Output power         | 50 $\Omega$ termination, Pin 16   | $P_{out}$ | - 15 |     |       | dBm    |

## Applications Information

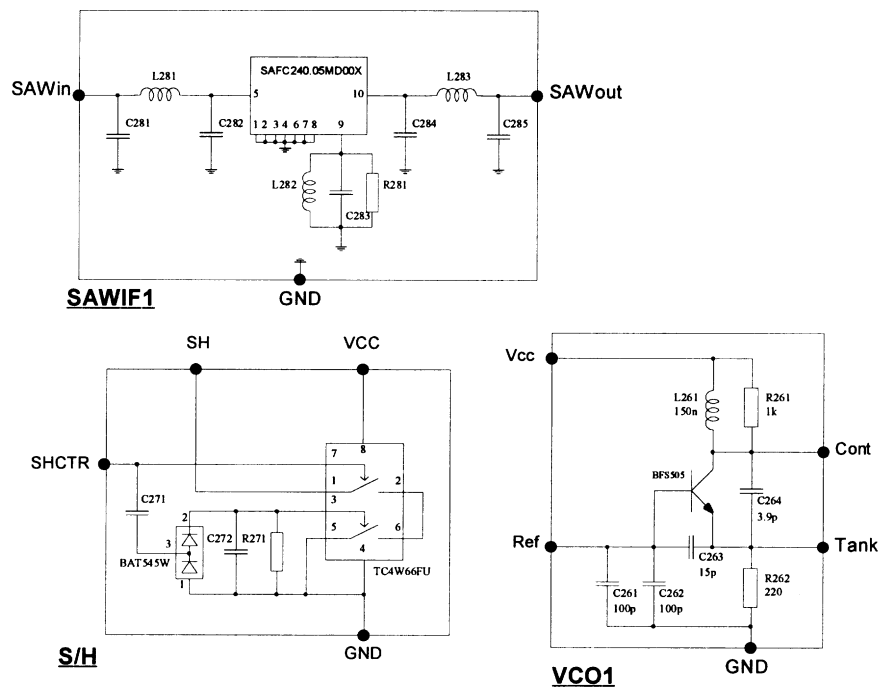


Figure 3.

The schematic diagram illustrates the RF front end of the BQ76940, showing the signal path from RX\_IN to SHCTR. The circuit includes several key components and their interconnections:

- Input Stage:** RX\_IN is connected to a matching network (C206, L202, C207) and a VCO1 control network (R201, C201, R202, C205, BBY51 diode). RX enable is connected to a matching network (C246, L208, C247).
- Mixers and VCOs:** The circuit features four mixers (MX1, MX2, MX3, MX4) and two voltage-controlled oscillators (VCO1, VCO2). VCO1 is controlled by VCO1\_cont and VCO1\_out. VCO2 is controlled by VCO2\_cpnt and VCO2\_out.
- Limiting and Demodulation:** The signal path includes a LIMIT block, a DEMOD block, and a COMP block. The LIMIT block is connected to RSSI and RSSI.
- Passive Components:** The circuit includes numerous capacitors (C201-C249) and inductors (L201-L208) for impedance matching and filtering. Resistors (R201-R216) are used for biasing and matching.
- Output Stage:** The signal path concludes with a SHCTR block, which is connected to SH and SHCTR pins.


The diagram shows the detailed internal structure of the BQ76940, including the internal components of the mixers, VCOs, and limiters. The circuit is designed to handle RF signals from 1.8V to 3.6V and provide a high-quality signal path for the BQ76940.

12 (14)

## Package Information

Package SSO28

Dimensions in mm

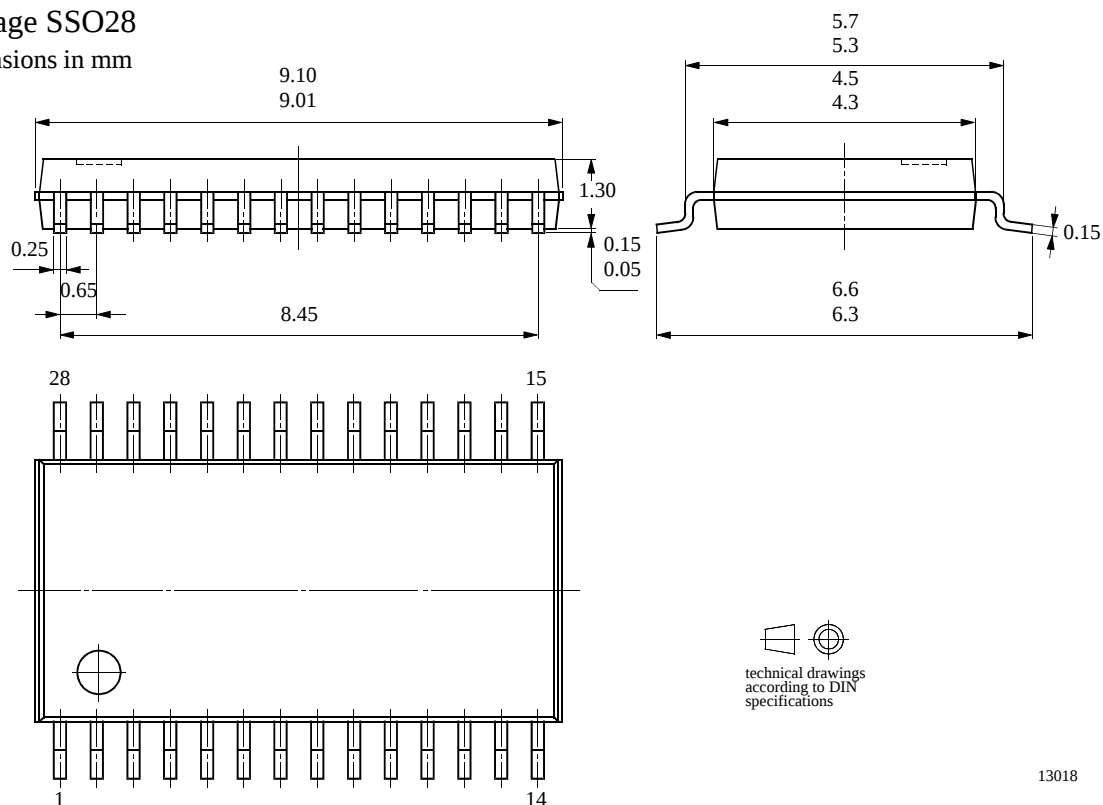

## Ozone Depleting Substances Policy Statement

It is the policy of **TEMIC Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**TEMIC Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**TEMIC Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use TEMIC products for any unintended or unauthorized application, the buyer shall indemnify TEMIC against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

TEMIC Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0)7131 67 2594, Fax number: 49 (0)7131 67 2423