



SAW Components

Data Sheet B3691

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid pattern, overlaid with a large, stylized, and slightly blurred "EPCOS" logo. The logo is tilted and appears to be part of a larger, layered design.



SAW Components

B3691

Low-Loss Filter

420,0 MHz

Data Sheet


Ceramic SMD package QCC8C

Features

- Low-loss filter for TETRA
- Usable bandwidth 20 MHz
- No matching required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)

Terminals


- Gold plated

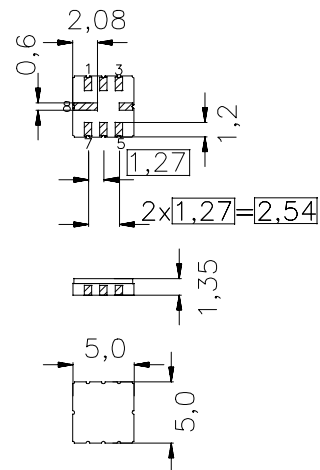

Dimensions in mm, approx. weight 0,10 g

Pin configuration

2	Input
3	Input ground
6	Output
7	Output ground
1, 5	Ground
4, 8	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B3691	B39421-B3691-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40/ +85	$^{\circ}\text{C}$	
Storage temperature range	T_{stg}	-40/ +85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Source power	P_s	10	dBm	



SAW Components	B3691
Low-Loss Filter	420,0 MHz

Data Sheet

Characteristics

Operating temperature:	$T = +25\text{ }^{\circ}\text{C}$
Terminating source impedance:	$50\text{ }\Omega$
Terminating load impedance:	$50\text{ }\Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	420,0	—	MHz
Maximum insertion attenuation 410,0 MHz ... 430,0 MHz	$\alpha_{\max}$	—	2,0	2,3	dB
Amplitude ripple (p-p) 410,0 MHz ... 430,0 MHz	$\Delta\alpha$	—	0,65	0,9	dB
Absolute attenuation	α_{abs}				
0,1 MHz ... 300,0 MHz		30	35	—	dB
300,0 MHz ... 365,0 MHz		24	30	—	dB
365,0 MHz ... 380,0 MHz		22	24,5	—	dB
464,825 MHz		10	23	—	dB
519,65 MHz ... 539,65 MHz		28	32	—	dB
629,3 MHz ... 649,3 MHz		24	28	—	dB
649,3 MHz ... 1000,0 MHz		26	30	—	dB
Return loss (Input)					
410,0 MHz ... 415,0 MHz		8,0	9,0	—	dB
415,0 MHz ... 430,0 MHz		10,0	11,0	—	dB
Return loss (Output)					
410,0 MHz ... 430,0 MHz		10,0	11,0	—	dB
Temperature coefficient of frequency	TC_f	—	– 70	—	ppm/K



SAW Components

B3691

Low-Loss Filter

420,0 MHz

Data Sheet

Characteristics

Operating temperature: $T = +5 \dots +45 \text{ }^{\circ}\text{C}$
Terminating source impedance: $50 \text{ } \Omega$
Terminating load impedance: $50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	420,0	—	MHz
Maximum insertion attenuation 410,0 MHz ... 430,0 MHz	$\alpha_{\max}$	—	2,1	2,5	dB
Amplitude ripple (p-p) 410,0 MHz ... 430,0 MHz	$\Delta\alpha$	—	0,65	1,0	dB
Absolute attenuation	α_{abs}				
0,1 MHz ... 300,0 MHz		30	35	—	dB
300,0 MHz ... 365,0 MHz		24	30	—	dB
365,0 MHz ... 380,0 MHz		22	24,5	—	dB
464,825 MHz		10	23	—	dB
519,65 MHz ... 539,65 MHz		28	32	—	dB
629,3 MHz ... 649,3 MHz		24	28	—	dB
649,3 MHz ... 1000,0 MHz		26	30	—	dB
Return loss (Input)					
410,0 MHz ... 415,0 MHz		8,0	9,0	—	dB
415,0 MHz ... 430,0 MHz		10,0	11,0	—	dB
Return loss (Output)					
410,0 MHz ... 430,0 MHz		10,0	11,0	—	dB
Temperature coefficient of frequency	TC_f	—	– 70	—	ppm/K



SAW Components	B3691
Low-Loss Filter	420,0 MHz

Data Sheet

Characteristics

Operating temperature:	$T = -30 \dots +80 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$50 \text{ } \Omega$
Terminating load impedance:	$50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	420,0	—	MHz
Maximum insertion attenuation 410,0 MHz ... 430,0 MHz	$\alpha_{\max}$	—	2,2	2,7	dB
Amplitude ripple (p-p) 410,0 MHz ... 430,0 MHz	$\Delta\alpha$	—	0,7	1,0	dB
Absolute attenuation	α_{abs}				
0,1 MHz ... 300,0 MHz		30	35	—	dB
300,0 MHz ... 365,0 MHz		24	30	—	dB
365,0 MHz ... 380,0 MHz		22	24,5	—	dB
464,825 MHz		10	23	—	dB
519,65 MHz ... 539,65 MHz		28	32	—	dB
629,3 MHz ... 649,3 MHz		24	28	—	dB
649,3 MHz ... 1000,0 MHz		26	30	—	dB
Return loss (Input)					
410,0 MHz ... 415,0 MHz		8,0	9,0	—	dB
415,0 MHz ... 430,0 MHz		10,0	11,0	—	dB
Return loss (Output)					
410,0 MHz ... 430,0 MHz		10,0	11,0	—	dB
Temperature coefficient of frequency	TC_f	—	- 70	—	ppm/K



SAW Components


B3691

Low-Loss Filter


420,0 MHz

Data Sheet

Transfer function

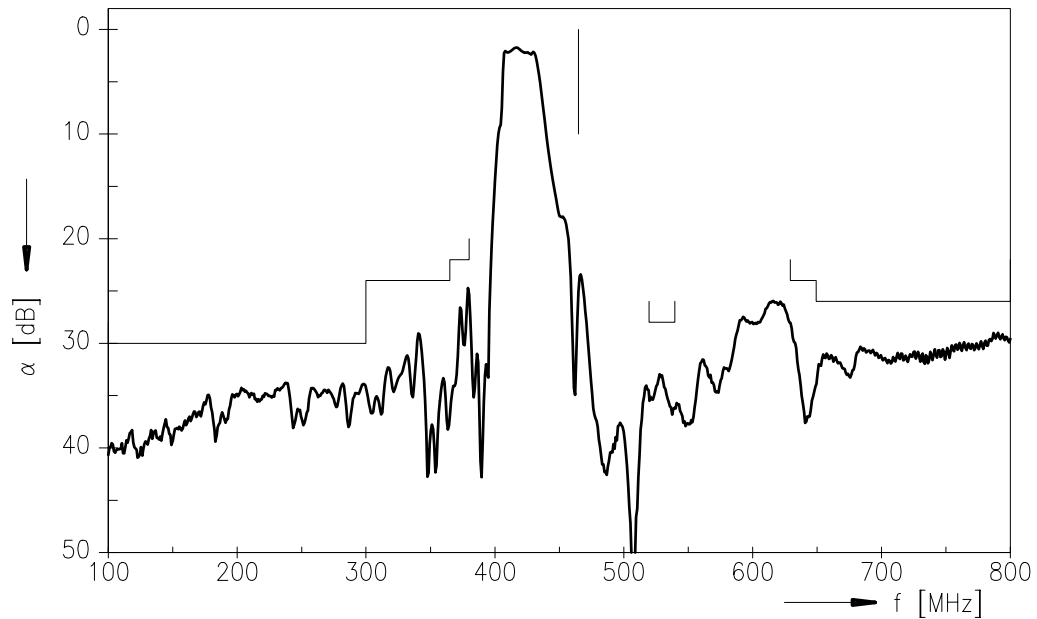

Normalized Transfer function (pass band)

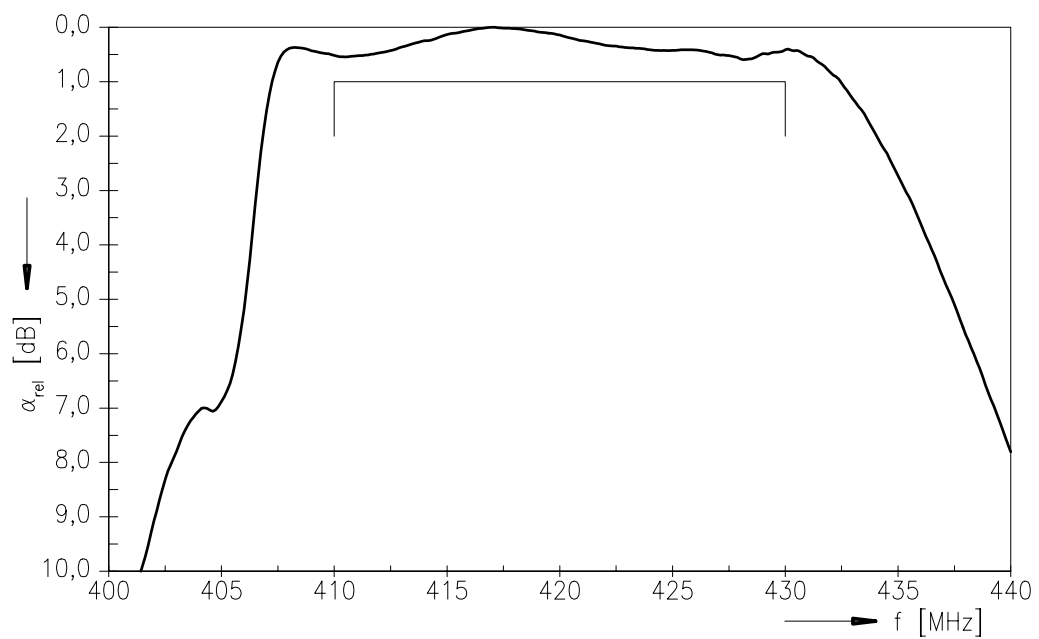



SAW Components	B3691
Low-Loss Filter	420,0 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E NK
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.