


ISOLATED DC/DC CONVERTERS

48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs



07QB-C5T Series PRELIMINARY

- Isolated
- High Efficiency
- High Power Density
- Low Cost
- Input Under Voltage Lockout
- Fixed Frequency (330KHz)
- Active Low/High (Option)
- Output Over Voltage Shutdown
- OCP/SCP
- Over Temperature Protection
- Remote On/Off
- Output Voltage Trim
- Positive/Negative Remote Sense



Description

The 07QB-C5T Series are isolated DC/DC converters that operate from a nominal 48V source. These units will provide up to 150W of output power from a nominal 48V input. These units are designed to be highly efficient and low cost. Typical efficiency of 12V output at 48V input at full load is 93%. Features include remote on/off, over current protection and under-voltage lockout. These converters are provided in an industry standard quarter brick package.

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Model Number Active High	Model Number Active Low
12V	48V	12A	144W	93%	07QB-C5T120	07QB-C5T12L
5.0V	48V	30A	150W	91%	07QB-C5T050	07QB-C5T05L
3.3V	48V	45A	150W	91%	07QB-C5T033	07QB-C5T03L
2.5V	48V	50A	125W	89%	07QB-C5T025	07QB-C5T02L
1.8V	48V	50A	120W	87%	07QB-C5TV80	07QB-C5TV8L
1.5V	48V	50A	75W	85%	07QB-C5TV50	07QB-C5TV5L
1.2V	48V	50A	60W	83%	07QB-C5TV20	07QB-C5TV2L

Note: Add "G" suffix at the end of the model number to indicate Tray Packaging.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	-0.3V	-	80V	
Remote On/Off	-0.3V	-	18V	
I/O Isolation Voltage	-	-	2000V	
Ambient Temperature	-40°C	-	85°C	
Storage Temperature	-55°C	-	125°C	

Note: All specifications are typical at nominal input, full load at 25°C unless noted.

ISOLATED DC/DC CONVERTERS

48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs



Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	36V	48V	75V	
Input Current (full load)				
Vo=12V	-	-	4.5A	
Vo=5.0V	-	-	4.9A	
Vo=3.3V	-	-	4.9A	
Vo=2.5V	-	-	4.1A	
Vo=1.8V	-	-	3.0A	
Vo=1.5V	-	-	2.6A	
Vo=1.2V	-	-	2.1A	
Input Current (no load)	-	120mA	180mA	
Remote Off Input Current		10mA	15mA	
Input Reflected Ripple Current (pk-pk)	-	10mA	20mA	Tested with simulated source impedance of 10uH, 5Hz to 20MHz; use a 100uF/100V electrolytic capacitor with ESR = 1 ohm max. at 200KHz at 25°C.
Input Reflected Ripple Current (RMS)	-	3mA	8mA	
I ² t Inrush Current Transient	-	0.05A ² s	0.1A ² s	
Turn-on Voltage Threshold	32V	34V	35V	
Turn-off Voltage Threshold	30V	32V	34V	

Output Specifications

Parameter	Min	Typ	Max	Notes
Output Voltage Set Point				
Vo=12V	11.820V	12V	12.180V	Vin=48V, Io=50% full load
Vo=5.0V	4.925V	5V	5.075V	
Vo=3.3V	3.250V	3.3V	3.350V	
Vo=2.5V	2.463V	2.5V	2.538V	
Vo=1.8V	1.773V	1.8V	1.827V	
Vo=1.5V	1.477V	1.5V	1.523V	
Vo=1.2V	1.182V	1.2V	1.218V	
Line Regulation				
Vo=12V	-	±12mV	±24mV	
Vo=5.0V	-	±5mV	±10mV	
Vo=3.3V	-	±3mV	±7mV	
Vo=1.2V-2.5V	-	±3mV	±6mV	
Load Regulation				
Vo=12V	-	±30mV	±60mV	
Vo=5.0V	-	±10mV	±20mV	
Vo=3.3V	-	±7mV	±15mV	
Vo=2.5V	-	±6mV	±13mV	
Vo=1.8V	-	±5mV	±9mV	
Vo=1.5V	-	±4mV	±8mV	
Vo=1.2V	-	±3mV	±6mV	
Regulation Over Temperature (-40°C to +85°C)				
Vo=12V	-	±60mV	±100mV	
Vo=5.0V	-	±45mV	±75mV	
Vo=3.3V	-	±30mV	±50mV	
Vo=2.5V	-	±25mV	±45mV	
Vo=1.8V	-	±20mV	±40mV	
Vo=1.5V	-	±20mV	±35mV	
Vo=1.2V	-	±15mV	±30mV	

ISOLATED DC/DC CONVERTERS

48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs



Output Specifications (continued)

Parameter		Min	Typ	Max	Notes	
Output Current		Vo=12V	0A	-	12A	
		Vo=5.0V	0A	-	30A	
		Vo=3.3V	0A	-	45A	
		Vo=1.2V-2.5V	0A	-	50A	
Current Limit Threshold		Vo=12V	14A	15.5A	18A	
		Vo=5.0V	36A	43A	50A	
		Vo=3.3V	55A	62A	70A	
		Vo=1.2V-2.5V	58A	63A	70A	
Short Circuit Surge Transient		-	3A ² s	5A ² s		
Ripple and Noise (RMS)		Vo=12V	-	30mV	50mV	Test conditions: 0-20MHz BW, with a 1uF ceramic capacitor and a 10uF Tantalum capacitor at the output.
		Vo=5.0V	-	25mV	50mV	
		Vo=3.3V	-	20mV	40mV	
		Vo=1.2V-2.5V	-	15mV	30mV	
Ripple and Noise (pk-pk)		Vo=12V	-	100mV	150mV	
		Vo=5.0V	-	100mV	150mV	
		Vo=3.3V	-	55mV	100mV	
		Vo=1.2V-2.5V	-	40mV	80mV	
Turn on Time		20mS	-	100mS		
Overshoot at Turn on		-	0%	5%		
Output Capacitance		Vo=12.0V	0uF	-	2200uF	
		Vo=5.0V	0uF	-	10000uF	
		Vo=1.2V-3.3V	0uF	-	20000uF	
Transient Response						
50% ~ 75% Max Load	Overshoot	Vo=12.0V	-	600mV	800mV	Test conditions: di/dt = 0.1A/uS, Vin=48V, with a 1uF ceramic capacitor and a 10uF Tantalum capacitor at the output.
	Settling Time		-	200uS	300uS	
75% ~ 50% Max Load	Overshoot		-	600mV	800mV	
	Settling Time		-	200uS	300uS	
50% ~ 75% Max Load	Overshoot	Vo=5.0V	-	150mV	300mV	
	Settling Time		-	200uS	300uS	
75% ~ 50% Max Load	Overshoot		-	150mV	300mV	
	Settling Time		-	200uS	300uS	
50% ~ 75% Max Load	Overshoot	Vo=1.2V-3.3V	-	100mV	200mV	
	Settling Time		-	200uS	300uS	
75% ~ 50% Max Load	Overshoot		-	100mV	200mV	
	Settling Time		-	200uS	300uS	

Note: All specifications are typical at nominal input, full load at 25°C unless noted.

ISOLATED DC/DC CONVERTERS

48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs



General Specifications

Parameter	Min	Typ	Max	Notes
Efficiency				Vin=48V, full load , Ta=25°C
Vo=12V	90%	93%	-	
Vo=5.0V	88%	91%	-	
Vo=3.3V	88%	91%	-	
Vo=2.5V	86%	89%	-	
Vo=1.8V	84%	87%	-	
Vo=1.5V	82%	85%	-	
Vo=1.2V	80%	83%	-	
Switching Frequency	280KHz	330KHz	380KHz	
Isolation capacitance	-	1500pF	-	
Output Voltage Trim Range	80%Vo	-	110%Vo	
Over Temperature Protection	-	125°C	-	
Over Voltage Protection	115%Vo	122%Vo	127%Vo	
MTBF	TBD			Calculated Per Bell Core TR-332 (Io = Nominal; Ta = 25°C)
Dimensions				
Inches	2.30 x 1.45 x 0.395			
millimeters	58.42 x 36.83 x 10.03			
Weight	-	41g	-	

Control Specifications

Parameter		Min	Typ	Max	Notes
Remote On/Off					
Signal Low (Unit On)	Active Low	-0.3V	-	0.8V	07QB-C5TxxL. The remote on/off pin open, Unit off.
Signal High (Unit Off)		2.4V	-	18V	
Signal Low (Unit Off)	Active High	-0.3V	-	0.8V	07QB-C5Txx0. The remote on/off pin open, Unit on.
Signal High (Unit On)		2.4V	-	18V	
Current Sink		0mA	-	0.75mA	

ISOLATED DC/DC CONVERTERS

48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs



Output Trim Equations

Equations for calculating the trim resistor are shown below (Unit: kΩ). The Trim Down resistor should be connected between the Trim pin and Ground pin. The Trim Up resistor should be connected between the Trim pin and the Vout. Only one of the resistors should be used for any given application.


1) For $V_o=1.5V - 12V$:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 626}{1.225 \cdot \delta} - 10.22$$

Notes:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100[\%]$$

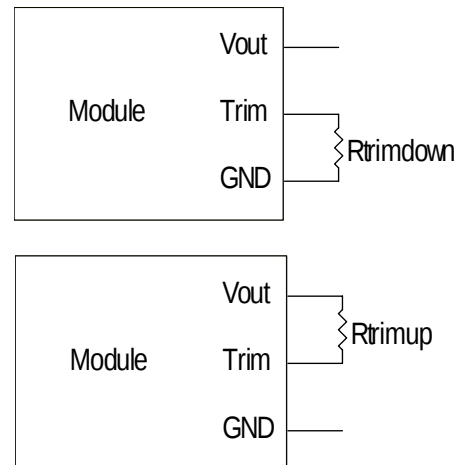

V_{o_req} =Desired (trimmed) output voltage [V]; V_o =output voltage

V_o =12.006V for 12V output; V_o =5V for 5.0V output;; V_o =3.308V for 3.3V output; V_o =2.505V for 2.5V output;

V_o =1.804V for 1.8V output; V_o =1.503V for 1.5V output

2) For $V_o=1.2V$:

$$R_{trimdown} = \frac{511}{|\delta|} - 10.22$$

$$R_{trimup} = \frac{(100 + \delta) \cdot V_o \cdot 5.11 - 313}{0.6125 \cdot \delta} - 10.22$$

Notes:

$$\delta = \frac{(V_{o_req} - V_o)}{V_o} \times 100[\%]$$

V_{o_req} =Desired (trimmed) output voltage [V]; V_o =output voltage


V_o =1.202V for 1.2V output

ISOLATED DC/DC CONVERTERS


48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs



Efficiency Data

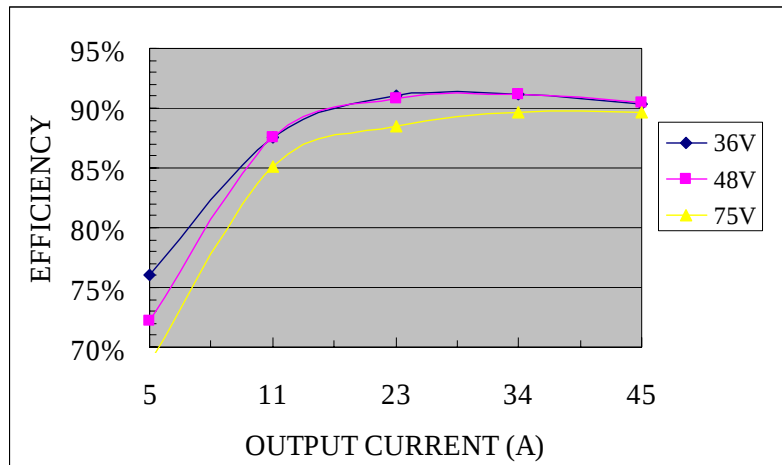

07QB-C5T03x

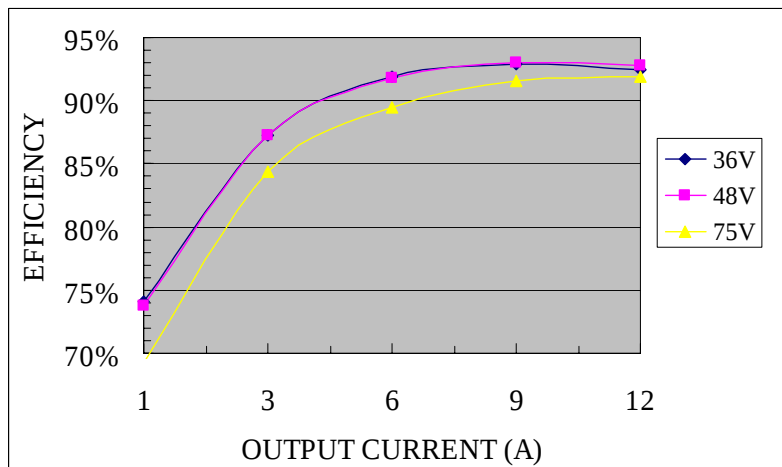



07QB-C5T12x

ISOLATED DC/DC CONVERTERS



48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs

bel
POWER PRODUCTS

Thermal Derating Curves

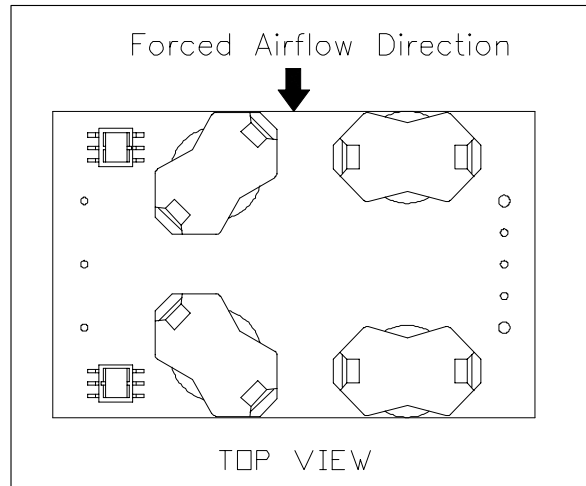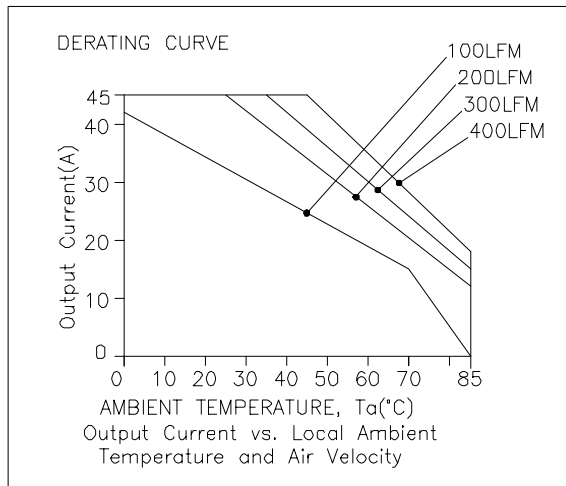



07QB-C5T03x

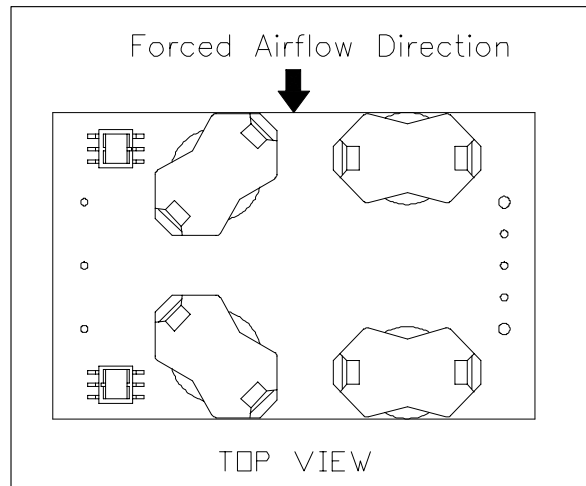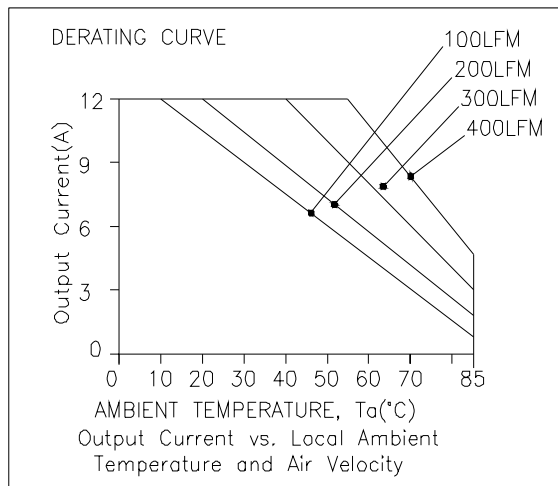


07QB-C5T12x

ISOLATED DC/DC CONVERTERS


48V Input 12V/12A, 3.3V/45A, 5V/30A, 1.2V-2.5V/50A Outputs

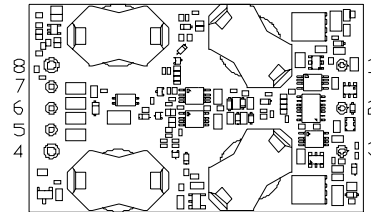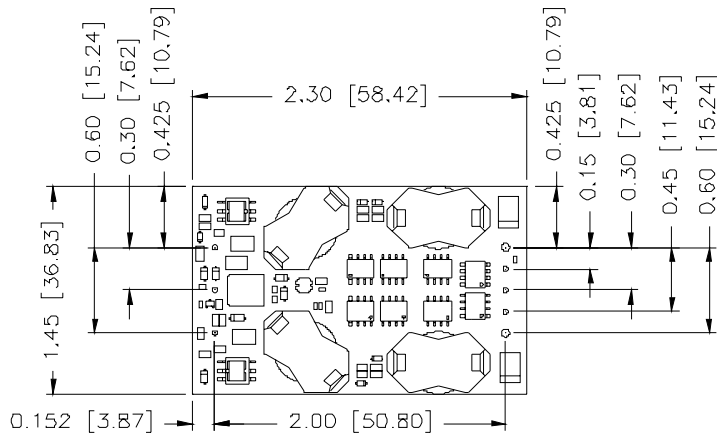


BOTTOM VIEW

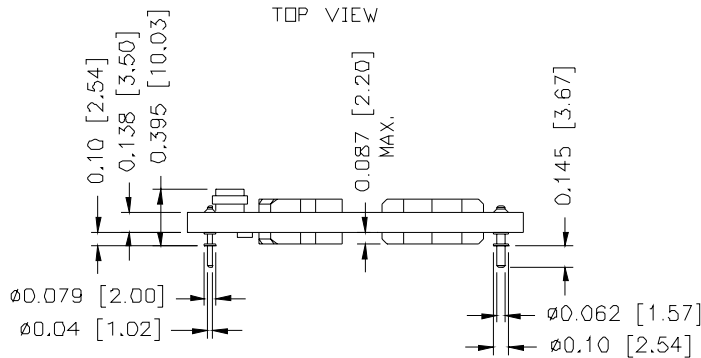

SIDE VIEW

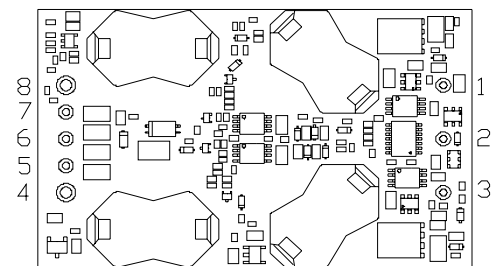

BOTTOM VIEW

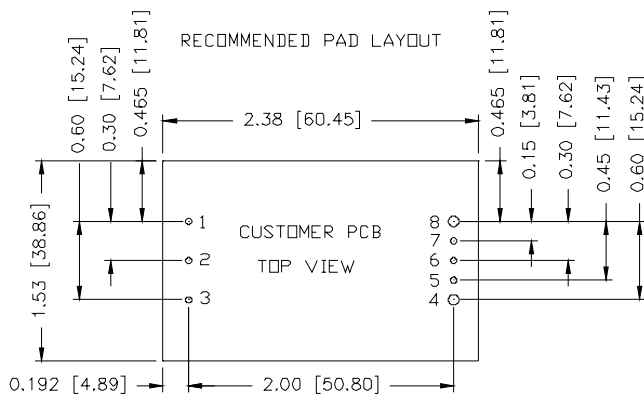

1,2,3,5,6,7 Ø0.047 HOLE SIZE, Ø0.08 min PAD SIZE
4,8 Ø0.07 HOLE SIZE, Ø0.10 min PAD SIZE

Pin Connections

Pin	Function	Pin Size
1	Vin (+)	0.04"
2	Remote On/Off	0.04"
3	Vin (-)	0.04"
4	Vout (-)	0.062"
5	Remote Sense (-)	0.04"
6	Trim	0.04"
7	Remote Sense (+)	0.04"
8	Vout (+)	0.062"

©2005 Bel Fuse Inc. Specifications subject to change without notice. 030405

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com