

4-BIT SYNCHRONOUS DECADE COUNTER WITH SYNCHRONOUS RESET



The HEF40162B is a fully synchronous edge-triggered 4-bit decade counter with a clock input (CP), four synchronous parallel data inputs (P_0 to P_3), four synchronous mode control inputs (parallel enable ($\overline{PE}$), count enable parallel (CEP), count enable trickle (CET) and synchronous reset ($\overline{SR}$)), buffered outputs from all four bit positions (O_0 to O_3) and a terminal count output (TC).

Operation is synchronous and occurs on the LOW to HIGH transition of CP. When $\overline{PE}$ is LOW, the next LOW to HIGH transition of CP loads data into the counter from P_0 to P_3 . When $\overline{PE}$ is HIGH, the next LOW to HIGH transition of CP advances the counter to its next state only if both CEP and CET are HIGH; otherwise no change occurs in the state of the counter. TC is HIGH when the state of the counter is 9 ($O_0 = O_3 = \text{HIGH}$, $O_1 = O_2 = \text{LOW}$) and when CET is HIGH. A LOW on $\overline{SR}$ sets all outputs (O_0 to O_3 and TC) LOW on the next LOW to HIGH transition of CP, independent of the state of all other synchronous mode control inputs (CEP, CET and $\overline{PE}$). Multistage synchronous counting is possible without additional components by using a carry look-ahead counting technique; in this case, TC is used to enable successive cascaded stages. CEP, CET, $\overline{PE}$ and $\overline{SR}$ must be stable only during the set-up time before the LOW to HIGH transition of CP.

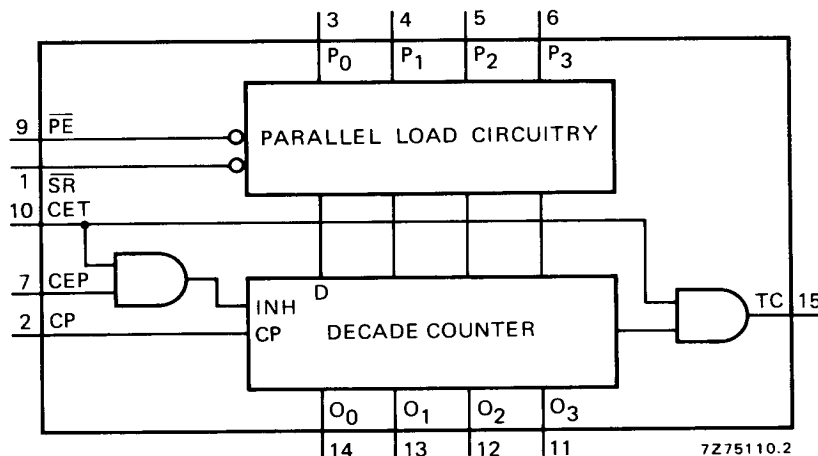


Fig. 1 Functional diagram.

FAMILY DATA

I_{DD} LIMITS category MSI

see Family Specifications



Products approved to CECC 90 104-095.

October 1980

785

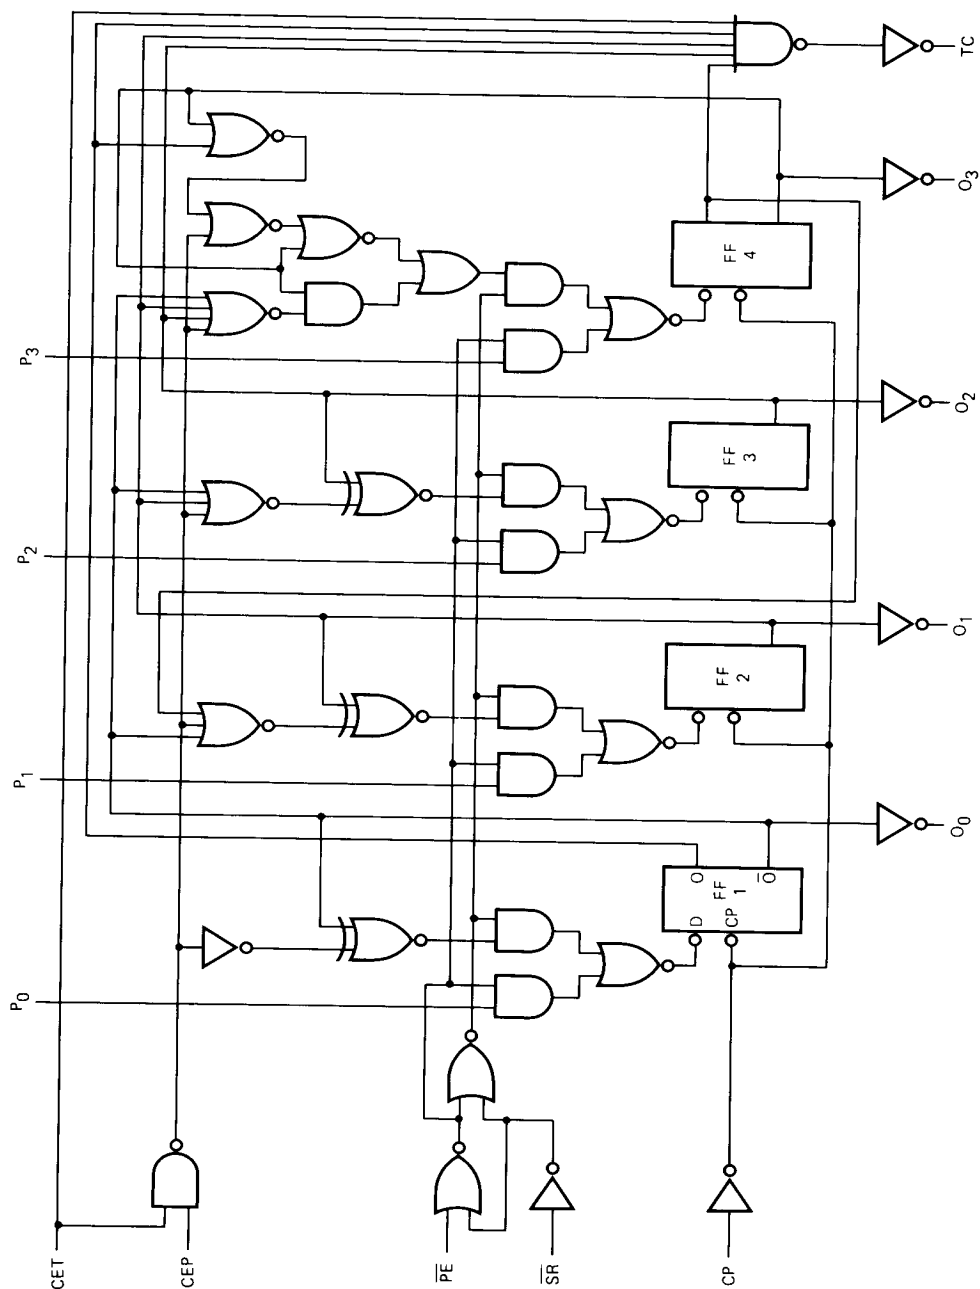


Fig. 2 Logic diagram.

7274573

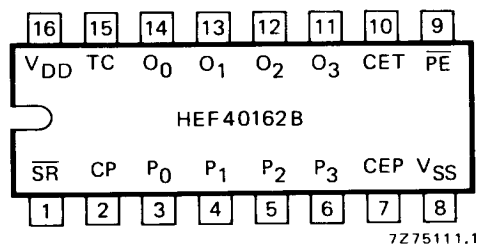


Fig. 3 Pinning diagram.

PINNING

$\overline{PE}$	parallel enable input
P_0 to P_3	parallel data inputs
CEP	count enable parallel input
CET	count enable trickle input
CP	clock input (LOW to HIGH, edge-triggered)
$\overline{SR}$	synchronous reset input (active LOW)
O_0 to O_3	parallel outputs
TC	terminal count output

HEF40162BP : 16-lead DIL; plastic (SOT-38Z).

HEF40162BD : 16-lead DIL; ceramic (cerdip) (SOT-74).

HEF40162BT : 16-lead mini-pack; plastic (SO-16; SOT-109A).

SYNCHRONOUS MODE SELECTION

$\overline{SR}$	$\overline{PE}$	CEP	CET	mode
H	L	X	X	preset
H	H	L	X	no change
H	H	X	L	no change
H	H	H	H	count
L	X	X	X	reset

H = HIGH state (the more positive voltage)

L = LOW state (the less positive voltage)

X = state is immaterial

TERMINAL COUNT GENERATION

CET	$(O_0 \cdot \overline{O}_1 \cdot \overline{O}_2 \cdot O_3)$	TC
L	L	L
L	H	L
H	L	L
H	H	H

$$TC = CET \cdot O_0 \cdot \overline{O}_1 \cdot \overline{O}_2 \cdot O_3$$

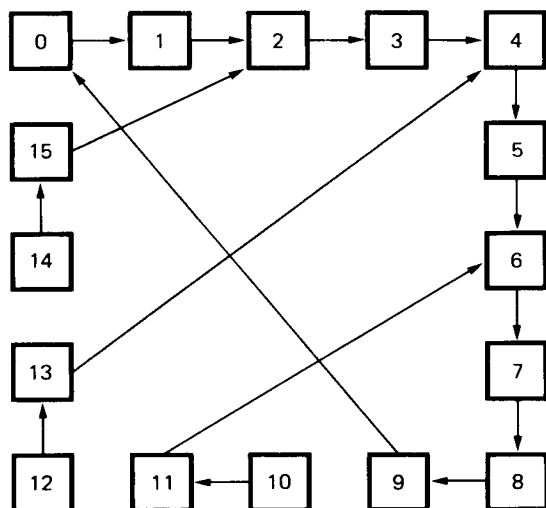


Fig. 4 State diagram.

7275086

A.C. CHARACTERISTICS

 $V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$; input transition times $\leq 20\text{ ns}$

	V_{DD} V	typical formula for P (μW)	where f_i = input freq. (MHz) f_o = output freq. (MHz) C_L = load capacitance (pF) $\Sigma(f_o C_L)$ = sum of outputs V_{DD} = supply voltage (V)
Dynamic power dissipation per package (P)	5	$1\,200 f_i + \Sigma(f_o C_L) \times V_{DD}^2$	
	10	$5\,600 f_i + \Sigma(f_o C_L) \times V_{DD}^2$	
	15	$16\,000 f_i + \Sigma(f_o C_L) \times V_{DD}^2$	

A.C. CHARACTERISTICS

 $V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$; $C_L = 50\text{ pF}$; input transition times $\leq 20\text{ ns}$

	V _{DD} V	symbol	min.	typ.	max.	typical extrapolation formula	
Propagation delays							
CP → O _n	5	t _{PHL}		110	220	ns	83 ns + (0,55 ns/pF) C _L
HIGH to LOW	10			45	90	ns	34 ns + (0,23 ns/pF) C _L
	15			30	60	ns	22 ns + (0,16 ns/pF) C _L
LOW to HIGH	5	t _{PLH}		115	230	ns	88 ns + (0,55 ns/pF) C _L
	10			45	95	ns	34 ns + (0,23 ns/pF) C _L
	15			35	65	ns	27 ns + (0,16 ns/pF) C _L
CP → TC	5	t _{PHL}		130	260	ns	103 ns + (0,55 ns/pF) C _L
HIGH to LOW	10			55	105	ns	44 ns + (0,23 ns/pF) C _L
	15			35	75	ns	27 ns + (0,16 ns/pF) C _L
LOW to HIGH	5	t _{PLH}		140	280	ns	113 ns + (0,55 ns/pF) C _L
	10			55	115	ns	44 ns + (0,23 ns/pF) C _L
	15			40	80	ns	32 ns + (0,16 ns/pF) C _L
CET → TC	5	t _{PHL}		105	210	ns	78 ns + (0,55 ns/pF) C _L
HIGH to LOW	10			50	100	ns	39 ns + (0,23 ns/pF) C _L
	15			35	75	ns	27 ns + (0,16 ns/pF) C _L
LOW to HIGH	5	t _{PLH}		90	185	ns	63 ns + (0,55 ns/pF) C _L
	10			35	70	ns	24 ns + (0,23 ns/pF) C _L
	15			25	50	ns	17 ns + (0,16 ns/pF) C _L
Output transition times							
HIGH to LOW	5	t _{THL}		60	120	ns	10 ns + (1,0 ns/pF) C _L
	10			30	60	ns	9 ns + (0,42 ns/pF) C _L
	15			20	40	ns	6 ns + (0,28 ns/pF) C _L
LOW to HIGH	5	t _{TLH}		60	120	ns	10 ns + (1,0 ns/pF) C _L
	10			30	60	ns	9 ns + (0,42 ns/pF) C _L
	15			20	40	ns	6 ns + (0,28 ns/pF) C _L

A.C. CHARACTERISTICS

$V_{SS} = 0\text{ V}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$; $C_L = 50\text{ pF}$; input transition times $\leq 20\text{ ns}$

	V_{DD} V	symbol	min.	typ.	max.	
Minimum clock pulse width; LOW	5	t_{WCPL}	100	50	ns	see also waveforms Figs 5, 6, 7 and 8
	10		40	20	ns	
	15		30	15	ns	
Set-up times $P_n \rightarrow CP$	5	t_{su}	110	55	ns	
	10		40	20	ns	
	15		30	15	ns	
$\overline{PE} \rightarrow CP$	5	t_{su}	120	60	ns	
	10		40	20	ns	
	15		25	10	ns	
CEP, CET $\rightarrow CP$	5	t_{su}	260	130	ns	
	10		100	50	ns	
	15		70	35	ns	
$\overline{SR} \rightarrow CP$	5	t_{su}	50	25	ns	
	10		20	10	ns	
	15		15	10	ns	
Hold times $P_n \rightarrow CP$	5	t_{hold}	20	-35	ns	
	10		10	-10	ns	
	15		5	-10	ns	
$\overline{PE} \rightarrow CP$	5	t_{hold}	15	-45	ns	
	10		5	-15	ns	
	15		5	-10	ns	
CEP, CET $\rightarrow CP$	5	t_{hold}	25	-105	ns	
	10		15	-35	ns	
	15		10	-25	ns	
$\overline{SR} \rightarrow CP$	5	t_{hold}	15	-10	ns	
	10		5	-5	ns	
	15		5	0	ns	
Maximum clock pulse frequency	5	f_{max}	2,5	5	MHz	
	10		7	14	MHz	
	15		9	18	MHz	

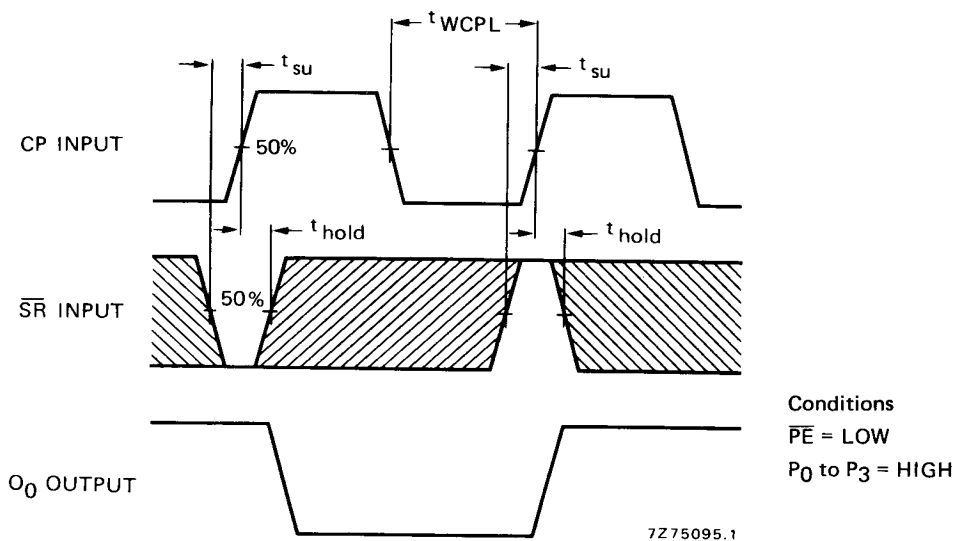


Fig. 5 Waveforms showing set-up times and hold times for $\overline{SR}$ input and minimum CP pulse width.

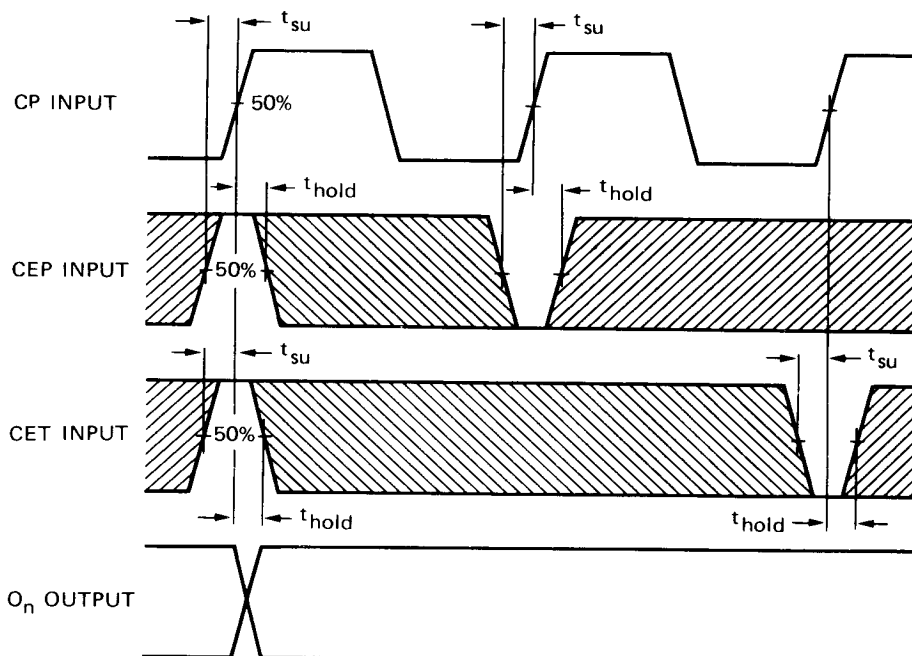
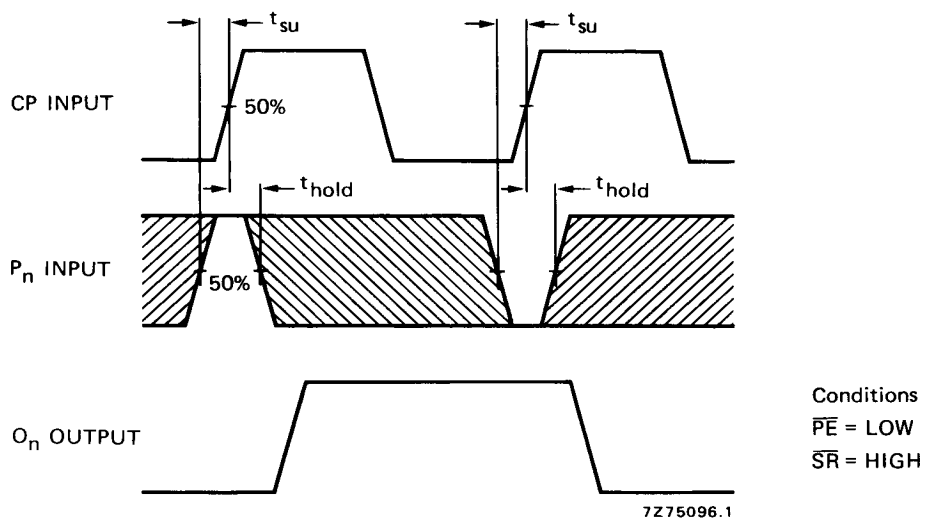
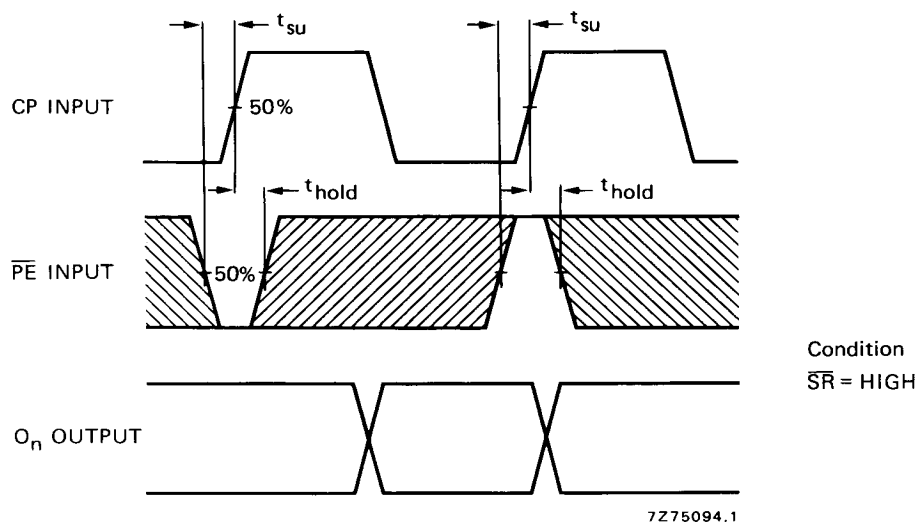


Fig. 6 Waveforms showing set-up times and hold times for CEP and CET inputs.

Condition: $\overline{PE} = \overline{SR} = \text{HIGH}$.

Fig. 7 Waveforms showing set-up times and hold times for P_n inputs.Fig. 8 Waveforms showing set-up times and hold times for $\overline{PE}$ input.**Note**

Set-up and hold times are shown as positive values but may be specified as negative values.

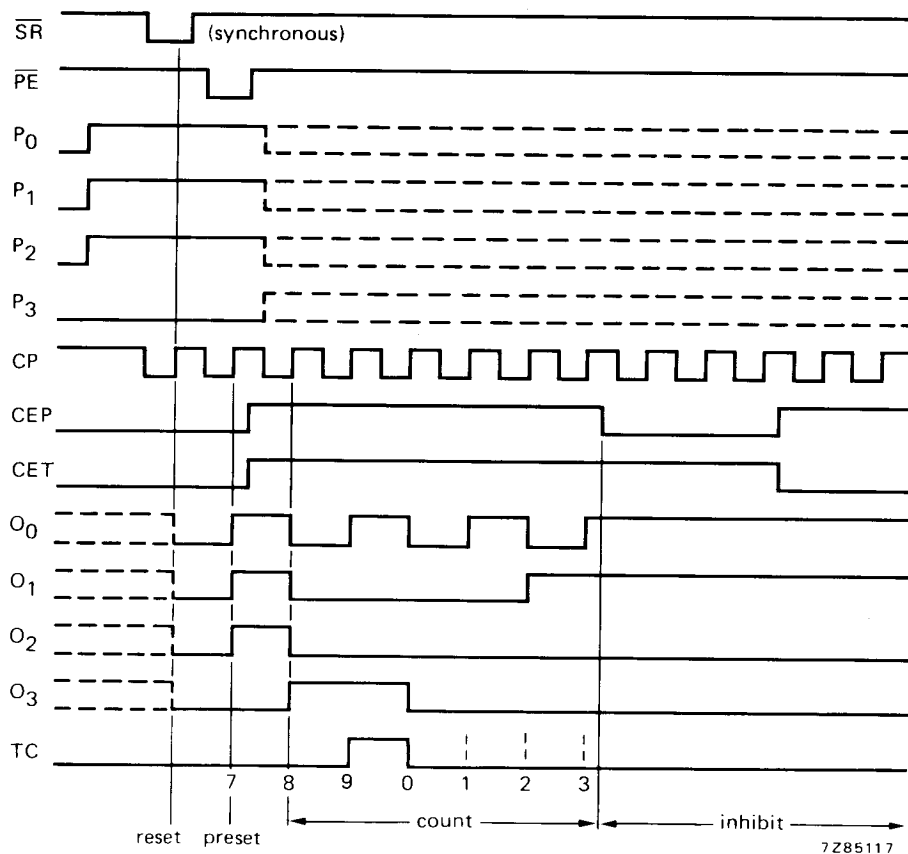



Fig. 9 Timing diagram.

APPLICATION INFORMATION

An example of an application for the HEF40162B is:

- Programmable decade counter.

clock

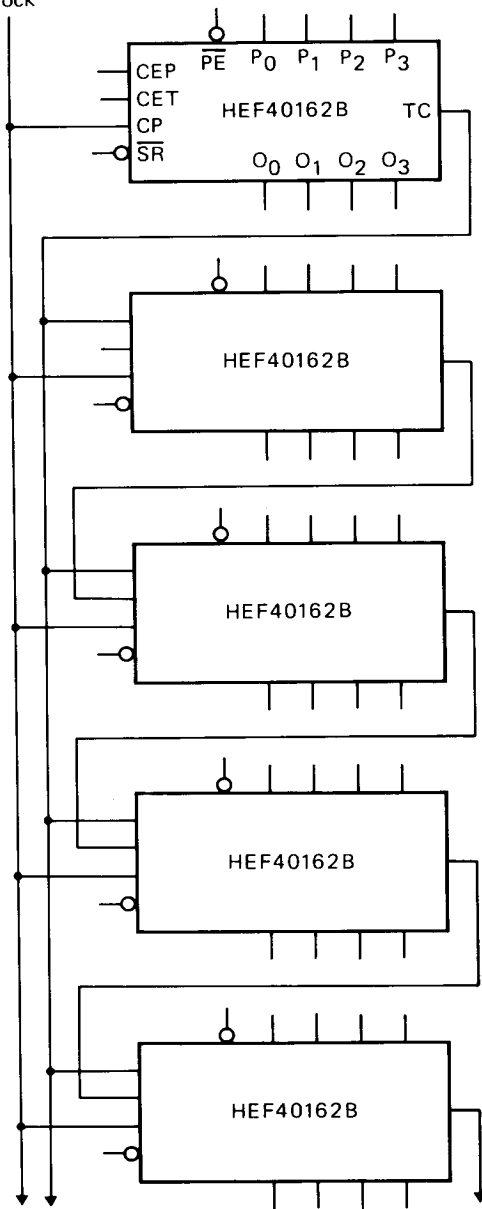

7285120

NOTE

On the TC outputs, glitches can occur during counting. In totally synchronous mode they will not have any adverse affect. However the TC output in asynchronous mode can cause problems.

Fig. 10 Synchronous multi-stage counting scheme.