


NJM2900/3900

The NJM2900/3900 consist of four independent, dual input, internally compensated amplifiers which were designed specifically to operate off of a single power supply voltage and to provide a large output voltage swing. These amplifiers make use of a current mirror to achieve the non-inverting input function. Application areas include: ac amplifiers, RC active filters, low frequency triangle, squarewave and pulse waveform generation circuits, tachometers and low speed, high voltage digital logic gates.


■ Package Outline

■ Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Supply Voltage	V^+ (2900)	+36V ($\pm 18\text{V}$)
	V^+ (3900)	+32V ($\pm 16\text{V}$)
Power Dissipation	P_D (N-Type)	500mW
	(M.E-Type)	300mW
Input Current	I_{IN}	20mA
Operating Temperature Range	T_{opr} (2900)	$-40\sim+85^\circ\text{C}$
	T_{opr} (3900)	$-20\sim+75^\circ\text{C}$
Storage Temperature Range	T_{stg}	$-40\sim+125^\circ\text{C}$



NJM2900N
NJM3900N



NJM2900M
NJM3900M



NJM2900E
NJM3900E

■ Electrical Characteristics ($T_a=25^\circ\text{C}$, $V^+=+15\text{V}$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Voltage Gain	A_V	Open Loop, $f=100\text{Hz}$	61.5	69	—	dB
Input Resistance	R_{IN}	Open Loop, Inverting Input	—	1	—	M Ω
Output Resistance	R_O	Open Loop	—	8	—	k Ω
Unity Gain Bandwidth	GB	$A_V=1$, Inverting Input (note 1)	—	2.5	—	MHz
Input Bias Current	I_B	Inverting Input	—	30	200	nA
Slew Rate	SR	Positive Output Swing	—	0.5	—	V/ μs
		Negative Output Swing	—	20	—	V/ μs
Supply Current	I_{CC}	$R_L=\infty$	—	6.2	10	mA
Output High Voltage Swing	V_{OH}	$I_{IN}^-=0$, $I_{IN}^+=0$, $R_L=5.1\text{k}\Omega$	13.5	14.2	—	V
Output Low Voltage Swing	V_{OL}	$I_{IN}^-=10\mu\text{A}$, $I_{IN}^+=0$, $R_L=5.1\text{k}\Omega$	—	0.09	0.2	V
Output Source Current	I_{SOURCE}		6	18	—	mA
Output Sink Current	I_{SINK}	(note 2)	0.5	1.3	—	mA
Power Supply Rejection	SVR	$f=100\text{Hz}$	—	70	—	dB
Mirror Gain	M	$I_{IN}^+=200\mu\text{A}$ (note 3)	0.90	1	1.1	$\mu\text{A}/\mu\text{A}$
Mirror Current	I_M	(note 4)	—	10	500	μA
Negative Input Current	I_{IN}^-	(note 5)	—	1.0	—	mA


note 1. The output sink current capacity can be increased by over-driving the inverting input.

2. This standard shows the current amplification degree of a current mirror when NJM2900/3900 serves as a non-inverting amplifier.


3. The V_{BE} matching of input stage transistors is designed to meet a mirror current of about $10\mu\text{A}$.

4. The input clamp transistor is designed in such a way as the input voltage is not lower than about 0.3V. If the negative input current exceeds 4mA, the output may drop to a low voltage.

■ Equivalent Circuit

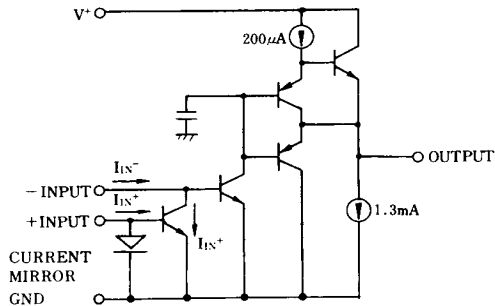

■ Connection Diagram

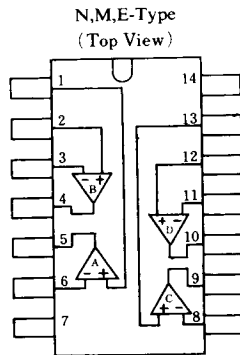


PIN FUNCTION


- | | |
|-------------|--------------|
| 1. A+INPUT | 14. V+ |
| 2. B+INPUT | 13. C+INPUT |
| 3. B-INPUT | 12. D+INPUT |
| 4. B OUTPUT | 11. D-INPUT |
| 5. A OUTPUT | 10. D OUTPUT |
| 6. A-INPUT | 9. C OUTPUT |
| 7. GND | 8. C-INPUT |

■ Typical Application (V⁺=15V)


Voltage Control Current Source (Transconductance Amp.)




Triangle/Square Wave Generator




Inverting Amplifier




V_{BE} Bias




Stepped wave generator/Pulse Counter

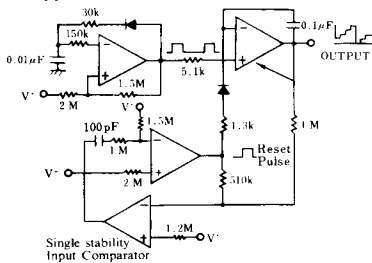


Auxiliary Amp. for In Supplier




Band Buss Active Filter

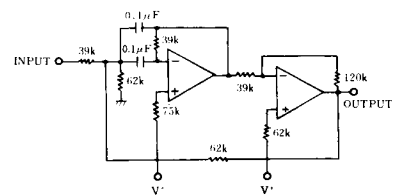

Differential input signal detecting circuit




Non-Inverting Amplifier




Double Voltage (V⁺/V⁻= ±15V)

Non inverting AC Amp.




AC Amp.



■ Typical Characteristics


Mirror Gain vs. Temperature

($V^+ = 15V$, $I_{IN} = 10\mu A$)

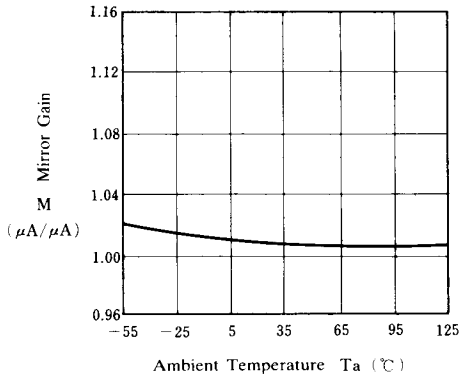


Maximum Mirror Current vs. Temperature

($V^+ = 15V$, $A_I \geq 0.90$)

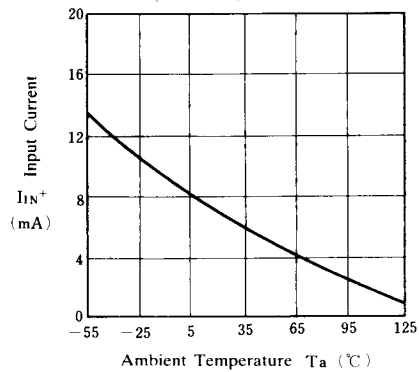


Voltage Gain vs. Frequency

($V^+ = 15V$, $T_a = 25^\circ C$)

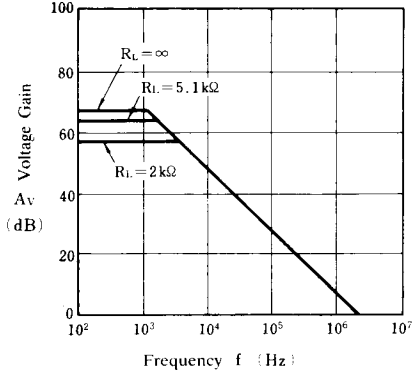


Voltage Gain vs. Supply Voltage

($T_a = 25^\circ C$)

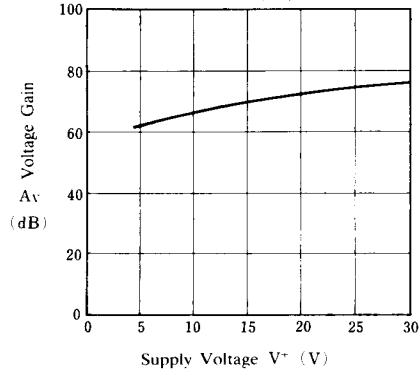


Voltage Gain vs. Temperature

($V^+ = 15V$, $R_L = \infty$)

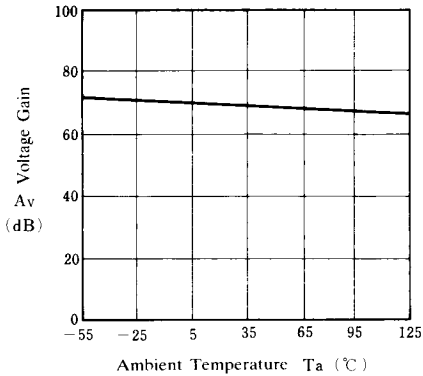

Input Current vs. Temperature


($V^+ = 15V$)

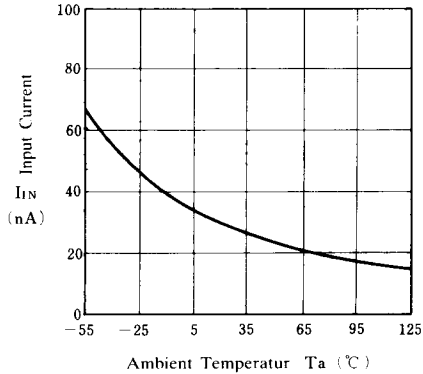

■ Typical Characteristics


Supply Current vs. Supply Voltage

($R_L = \infty$)

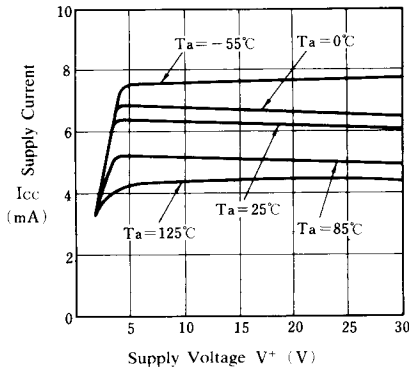


Maximum Output Voltage Swing vs. Frequency

($V^+ = 15V$, $10k\Omega \leq R_L \leq \infty$, $T_a = 25^\circ C$)

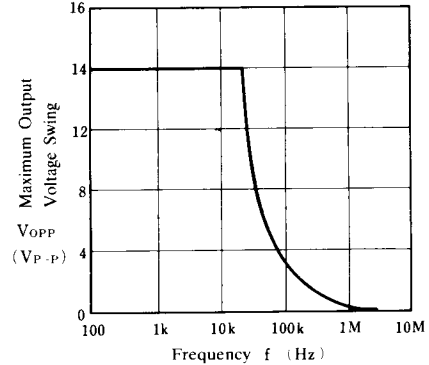


Output Sink Current vs. Supply Voltage


($T_a = 25^\circ C$)

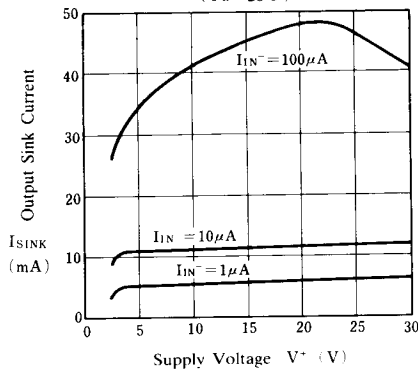

A Class Output Bias Current vs. Supply Voltage

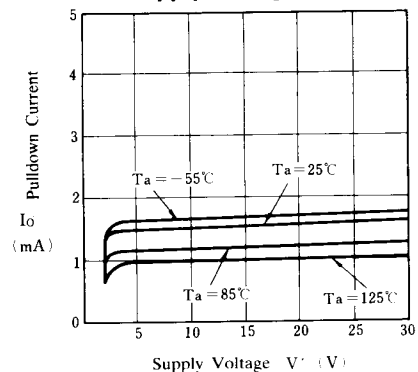

Output Source Current vs. Supply Voltage

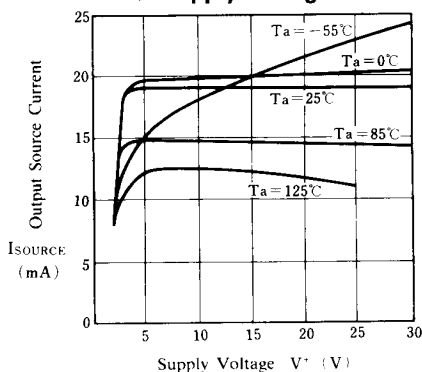

Supply Voltage Rejection vs. Frequency

($T_a = 25^\circ C$)

