

NJM022

The NJM022 is a dual low-power operational amplifier which was designed to replace higher-power devices in many applications without sacrificing system performance. High input impedance, low supply currents, and low equivalent input noise voltage over a wide range of operating supply voltages result in an extremely versatile operational amplifier for use in a variety of analog applications including battery-operated circuit. Internal frequency compensation, absence of latch-up, high slew rate, and output short-circuit protection assure ease of use.

Absolute Maximum Ratings (Ta=25°C)


Supply Voltage	V^+/V^-	$\pm 18V$
Input Voltage (note)	V_{IC}	$\pm 15V$
Differential Input Voltage	V_{ID}	$\pm 30V$
Power Dissipation	P_D (D-Type)	500mW
	(M,E-Type)	300mW
	(L-Type)	800mW
Operating Temperature Range	T_{opr}	$-20 \sim +75^\circ C$
Storage Temperature Range	T_{stg}	$-40 \sim +125^\circ C$

(note) For supply voltage less than $\pm 15V$, the absolute maximum input voltage is equal to the supply voltage.

Recommended Operating Condition

Supply Voltage $V^+/V^- \pm 2 \sim \pm 18V$

Package Outline




NJM022D



NJM022M



NJM022E





NJM022L


Electrical Characteristics (Ta=25°C, $V^+/V^- = \pm 15V$)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	V_{IO}	$R_S \leq 10k\Omega$	—	1	5	mV
Input Offset Current	I_{IO}		—	15	80	nA
Input Bias Current	I_{IB}		—	100	250	nA
Large Signal Voltage Gain	A_V	$R_L \geq 10k\Omega$, $V_O = \pm 10V$	60	80	—	dB
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	60	72	—	dB
Response Time (Rise Time)	t_R	$V_{IN} = 20mV$, $R_L = 10k\Omega$, $C_L = 100pF$	—	0.3	—	μs
Slew Rate	SR	$V_{IN} = 10V$, $R_L = 10k\Omega$, $C_L = 100pF$	—	0.5	—	V/ μs
Input Common Mode Voltage Range	V_{ICM}		± 12	± 13	—	V
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	74	94	—	dB
Equivalent Input Noise Voltage	V_{NI}	$A_V = 20dB$, $f = 1kHz$	—	50	—	nV/ $\sqrt{Hz}$
Short-circuit Output Current	I_{OS}		—	± 6	—	mA
Quiescent Current	I_{CC}		—	130	250	μA

Connection Diagram

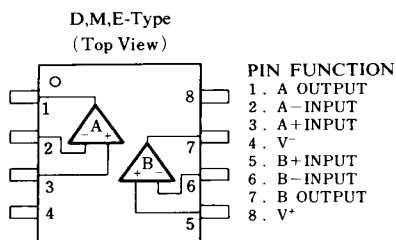


■ Equivalent Circuit (1/2 Shown)

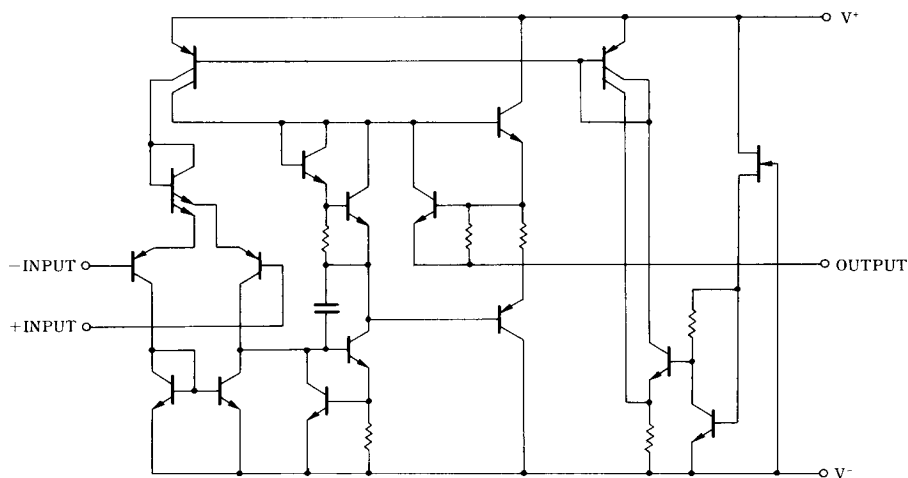

■ Typical Characteristics


Voltage Gain, Phase vs. Frequency

($V^+/V^- = \pm 15V$, $R_L = 10k\Omega$,
 $C_L = 100pF$, $A_v = 40dB$, $T_a = 25^\circ C$)

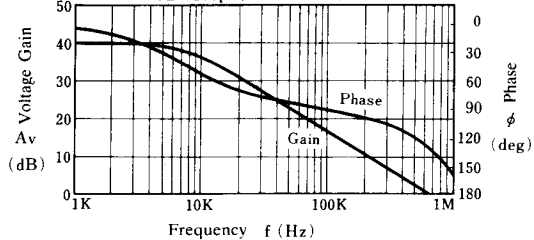


Voltage Gain vs. Temperature

($V^+/V^- = \pm 15V$, $R_L = 10k\Omega$)

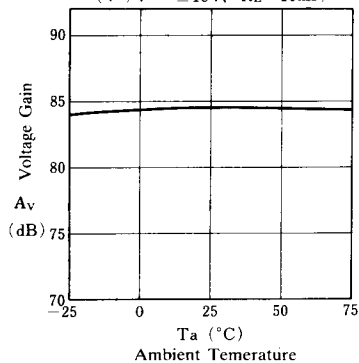


■ Typical Characteristics


Power Dissipation vs. Supply Voltage

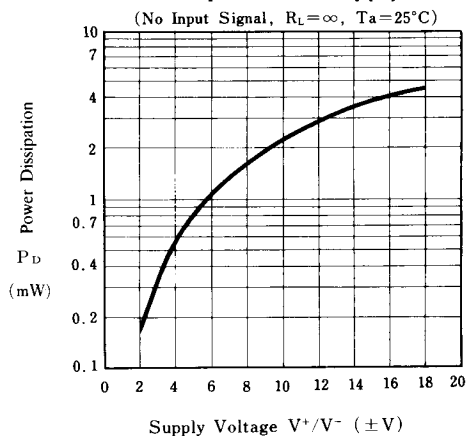


Maximum Output Voltage Swing vs. Frequency

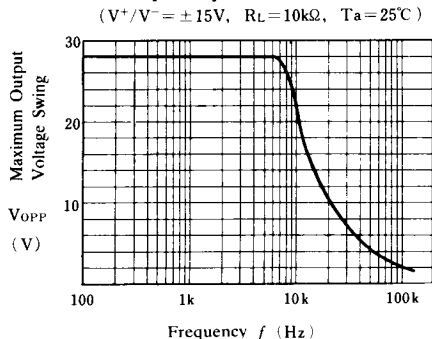

Maximum Output Voltage Swing vs. Supply Voltage

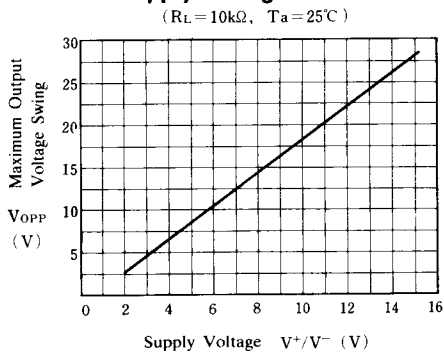

Maximum Output Voltage Swing vs. Load Resistance

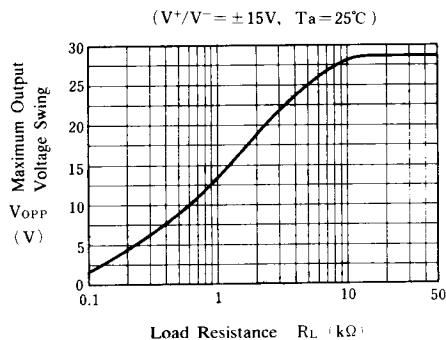

Supply Current vs. Supply Voltage

