

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0705450006](#)
Status: **Active**
Overview: [cgrid_sl_products](#)
Description: 2.54mm (.100") Pitch SL™ Header, Single Row .120" Pocket Vertical, Shrouded, with Press-fir Plastic Peg, 7 Circuits, Tin (Sn) Plating

Documents:

3D Model	Product Specification PS-70400 (PDF)
Packaging Specification (PDF)	Product Specification PS-70541 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	70545
Application	Wire-to-Board
Overview	cgrid_sl_products
Product Name	SL™

Physical

Breakaway	No
Circuits (Loaded)	7
Circuits (maximum)	7
Color - Resin	Black
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Metal	Brass, Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	1
Orientation	Vertical
PC Tail Length (in)	0.130 In
PC Tail Length (mm)	3.30 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	150
Plating min: Mating (µm)	3.75
Plating min: Termination (µin)	150
Plating min: Termination (µm)	3.75
Polarized to Mating Part	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole



*Series
image - Reference only*

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[70545Series](#)

Mates With
[70066n](#) , [70066g](#) , [70430g](#) , [70400g](#) Housing

Electrical

Current - Maximum per Contact	3A
Voltage - Maximum	250V

Solder Process Data

Lead-free Process Capability	Wave Capable (TH only)
------------------------------	------------------------

Material Info

Old Part Number	A-70545-0006
-----------------	--------------

Reference - Drawing Numbers




Packaging Specification	PK-70873-0014
Product Specification	PS-70400, PS-70541
Sales Drawing	SDA-70545-****

This document was generated on 05/24/2010



PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

13 12 11 10 9 8 7 6 5 4 3 2 1


J
I
H
G
F
E
D
C
B
A

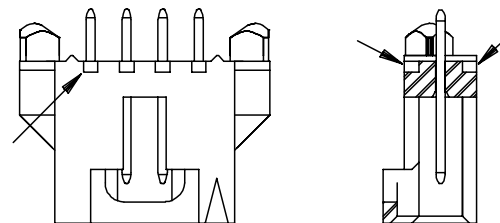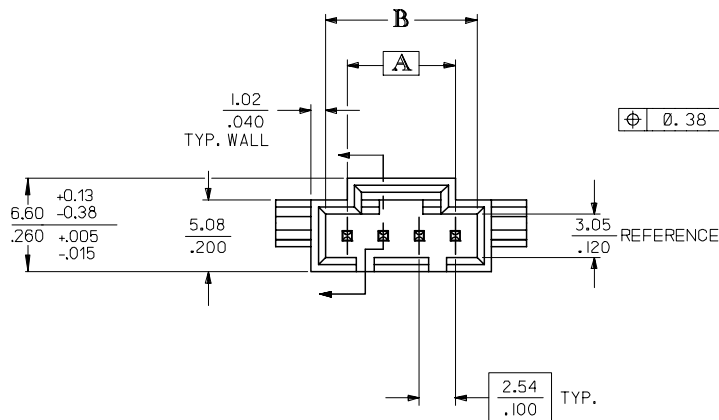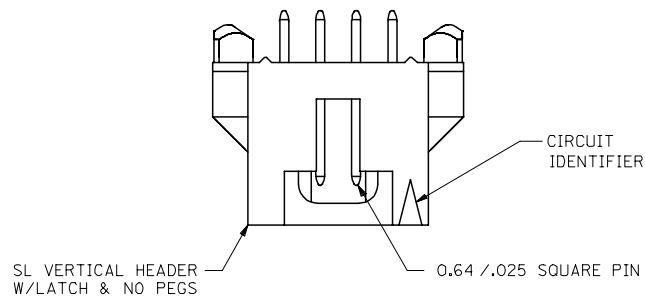

CKT. SIZE	DIM. "A"		DIM. "B"	
	MM	IN.	MM	IN.
2	2.54	.100	5.33 $\pm$ 0.08	.210 $\pm$.003
3	5.08	.200	8.13 $\pm$ 0.10	.320 $\pm$.004
4	7.62	.300	10.67 $\pm$ 0.10	.420 $\pm$.004
5	10.16	.400	13.21 $\pm$ 0.10	.520 $\pm$.004
6	12.70	.500	15.75 $\pm$ 0.10	.620 $\pm$.004
7	15.24	.600	18.29 $\pm$ 0.10	.720 $\pm$.004
8	17.78	.700	20.83 $\pm$ 0.10	.820 $\pm$.004
9	20.32	.800	23.37 $\pm$ 0.10	.920 $\pm$.004
10	22.86	.900	25.91 $\pm$ 0.13	1.020 $\pm$.005
11	25.40	1.000	28.45 $\pm$ 0.13	1.120 $\pm$.005
12	27.94	1.100	30.99 $\pm$ 0.13	1.220 $\pm$.005
13	30.48	1.200	33.53 $\pm$ 0.13	1.320 $\pm$.005
14	33.02	1.300	36.07 $\pm$ 0.13	1.420 $\pm$.005
15	35.56	1.400	38.61 $\pm$ 0.15	1.520 $\pm$.006
16	38.10	1.500	41.15 $\pm$ 0.15	1.620 $\pm$.006
17	40.64	1.600	43.69 $\pm$ 0.15	1.720 $\pm$.006
18	43.18	1.700	46.23 $\pm$ 0.15	1.820 $\pm$.006
19	45.72	1.800	48.77 $\pm$ 0.18	1.920 $\pm$.007
20	48.26	1.900	51.31 $\pm$ 0.18	2.020 $\pm$.007
21	50.80	2.000	53.85 $\pm$ 0.18	2.120 $\pm$.007
22	53.34	2.100	56.39 $\pm$ 0.18	2.220 $\pm$.007
23	55.88	2.200	58.93 $\pm$ 0.18	2.320 $\pm$.007
24	58.42	2.300	61.47 $\pm$ 0.18	2.420 $\pm$.007
25	60.96	2.400	64.01 $\pm$ 0.20	2.520 $\pm$.008

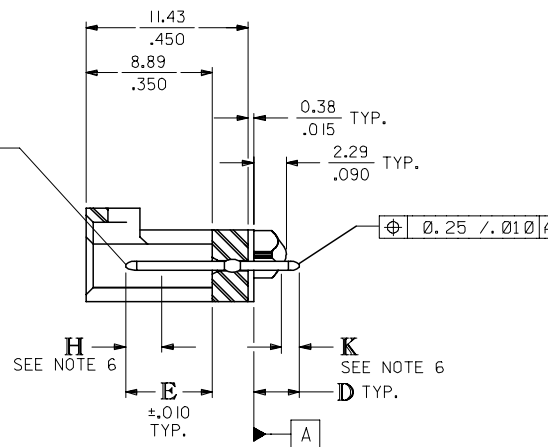


2 CIRCUIT



3 CIRCUIT

- NOTES:
- HEADER MATERIAL: GLASS FILLED POLYESTER, UL94V-0; COLOR: BLACK
PIN MATERIAL: PHOSPHOR BRONZE
 - FINISH:
TIN - 0.00381/0.00150 MIN TIN PLATE
OVER 0.00127/0.00050 MIN NICKEL PLATE
15 GOLD - 0.00038/0.00015 MIN GOLD PLATE IN SELECT AREA,
0.00191/0.00075 MIN TIN PLATE IN SELECT AREA,
OVER 0.00127/0.00050 MIN NICKEL PLATE OVERALL.
30 GOLD - 0.00076/0.00030 MIN GOLD PLATE IN SELECT AREA,
0.00191/0.00075 MIN TIN PLATE IN SELECT AREA,
OVER 0.00127/0.00050 MIN NICKEL PLATE OVERALL.
* THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS
DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC."
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.
 - PRODUCT SPECIFICATION: PS-70541
 - PACKAGING SPECIFICATION: PK-70873-0014
 - HEADER TO BE USED WITH OPTION "G" 70400 AND
70430 SERIES SL CONNECTORS.
 - MEASURE POINT FOR PLATING THICKNESS.

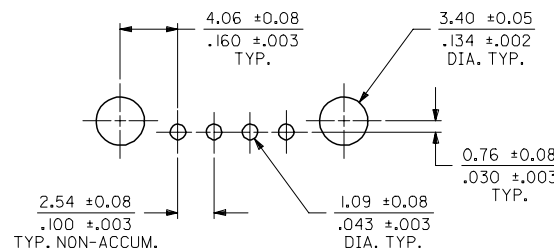

RECOMMENDED PC BOARD LAYOUT

(FOR USE WITH .157 $\pm$.062 THICK BOARD)




CLARIFY DIM. EC NO: UCP2007-1216 2006/11/28 DRAWN: S. BARRA CHKD: J. MORGAN APPR: S. MILLER 2006/12/04 2006/12/05	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm		INCH		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	TITLE SALES ASSY, SL VERTICAL HEADER W/LATCH&TRI-PEGS (2.54)/.100 CENTERS MOLEX MOLEX INCORPORATED
				4 PLACES ± --- ± ---		AAB		DATE 05/12/93		DATE 05/12/93			
				3 PLACES ± --- ± .005		CHECKED BY MJM		DATE 05/12/93					
				2 PLACES ± 0.13 ± 0.01		APPROVED BY WAZ		DATE 05/12/93					
				1 PLACE ± 0.25 ± ---									
		ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.		SHEET NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SDA-70545-****		1 OF 4					
				SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

12 11 10 9 8 7 6 5 4 3 2 1

OPTIONAL HOUSING

WEBBED KEYING FEATURES

20 CKT HEADER
SHOWN FOR REFERENCE

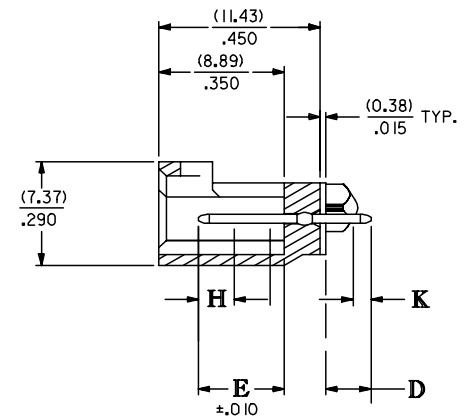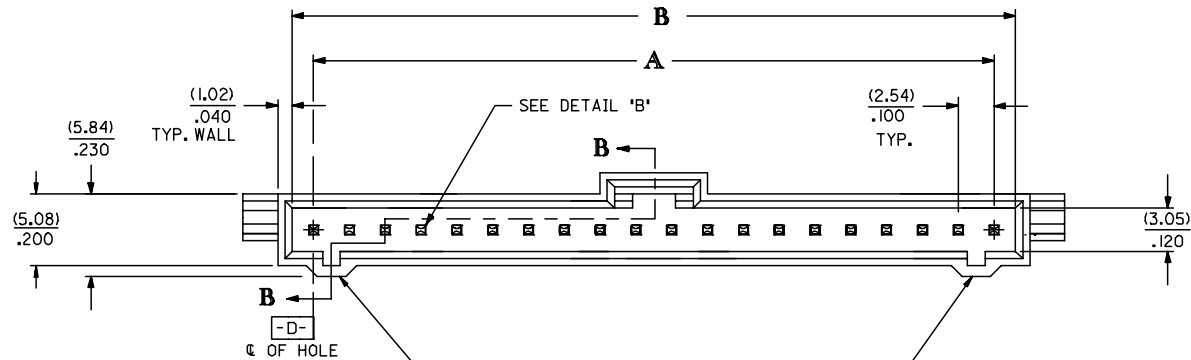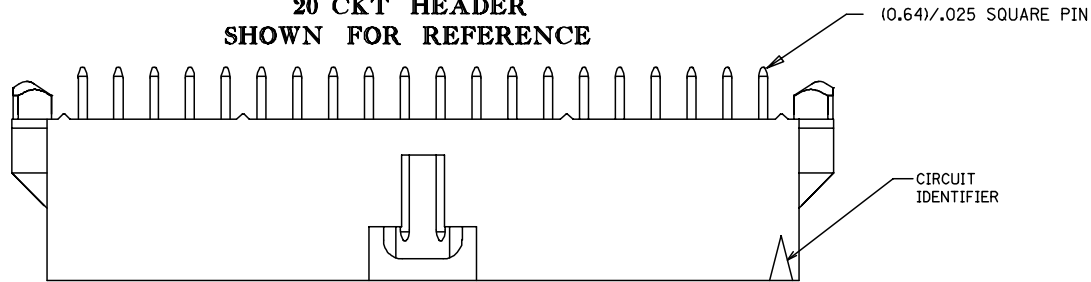

SECTION B-B

UPDATE TITLE BLOCK EC NO: UCP2006-0202 DRWN: JLOWE CHKD: ADERR APPR: FSMTH REV T1	DESCRIPTION 2005/08/05 2005/08/05 2005/08/09	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE ---	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY WGM	DATE 07/10/96	TITLE SALES ASSY, SL VERTICAL HEADER W/LATCH&TRI-PEGS (2.54)/.100 CENTERS  MOLEX INCORPORATED	
			4 PLACES	± ---	± ---	CHECKED BY WGM	DATE 07/10/96		
			3 PLACES	± ---	± .005				
			2 PLACES	± 0.13	± .01				
			1 PLACE	± 0.25	± ---	APPROVED BY WAZ	DATE 07/10/96		
		ANGULAR ±1/2°		MATERIAL NO. SEE CHART		DOCUMENT NO. SDA-70545-****		SHEET NO. 2 OF 4	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

