

**Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier**
PRELIMINARY SPECIFICATION
DESCRIPTION

The MSC-LX1792 offers a patent pending, low voltage, low power, and high efficiency amplifier for driving a high impedance speaker such as a hearing aid receiver.

The core of the amplifier is built upon Microsemi's patented LX1790 class D amplifier.

The LX1790 consists of a preamplifier followed by a fixed gain class D amplifier.

The input resistor and feedback resistor is external in the LX1792 making it possible to set the gain arbitrarily, up to approximately 40dB. The feedback resistor can also be potentiometer to facilitate volume control.

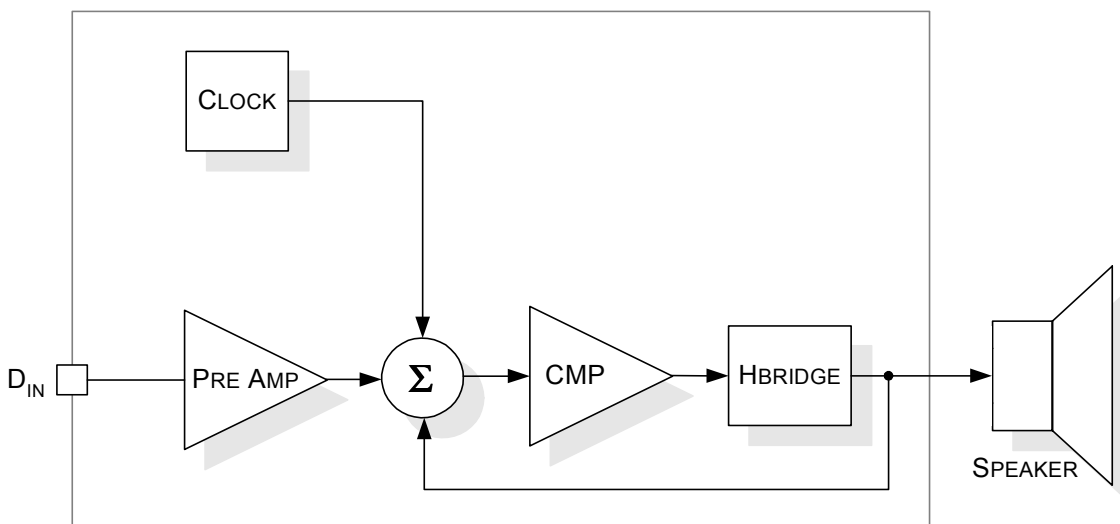
KEY FEATURES

- Low Operating Current: 120µA Typical
- Low Operating Voltage: 0.9V minimum
- Gain set by external resistors
- 3 Output Switch Resistance Settings: 48, 24 & 16 Ω
- 5uVrms input referred noise.

APPLICATIONS

- Hearing Aid applications
- High impedance speaker /Transducer applications

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

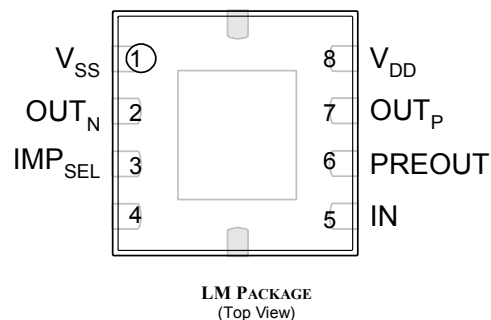
PRODUCT HIGHLIGHT

PACKAGE ORDER INFO

T _J (°C)	N	Plastic Dip 14-Pin	LM	Plastic MLPM 8-Pin	Bare Die
10 to 55		LX1792CN		LX1792CLM	LX1792 bare die

**Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier**
PRELIMINARY SPECIFICATION
ABSOLUTE MAXIMUM RATINGS

Input Logic Supply Voltage (V_{DD}).....-0.3V to +3.0V
 Operating Temperature Range.....10°C to 55°C

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

PACKAGE PIN OUT

FUNCTIONAL PIN DESCRIPTION

PIN NAME	PIN No 14 PIN DIP (EVALUATION SAMPLES)	PIN No 8 PIN MLPM	DESCRIPTION
V_{DD}	13	8	Supply Voltage
V_{SS}	2	1	Ground
IN	8	5	Analog Audio Input
OUT _P	14	7	Positive Output Voltage
OUT _N	1	2	Negative Output Voltage
PREOUT	9	6	Pre amplifier output
IMP _{SEL}	6	3	Output Resistance Select. See Settings table below for selections.

SETTINGS

PIN	IMP _{SEL} =VSS	IMP _{SEL} =VDD	IMP _{SEL} =Floating
IMP _{SEL}	16Ω	24Ω	48Ω

**Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier**
PRELIMINARY SPECIFICATION
RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Test Conditions	LX1792			Units
			Min	Typ	Max	
▶ OPERATING CONDITIONS						
Supply Voltage	V _{DD}		0.9		1.5	V
Ground	V _{SS}			0		V

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, the following specifications apply over the operating ambient temperature T_A=25°C except where otherwise noted. Test conditions: V_{DD}=1.3V, V_{SS}=0V, Circuit connected as application schematic on page 5, No load

Parameter	Symbol	Test Conditions	LX1792			Units
			Min	Typ	Max	
Switch Output Resistance @ Low Drive	R _{OUT-L}			48		Ω
Switch Output Resistance @ Med Drive	R _{OUT-M}			24		
Switch Output Resistance @ High Drive	R _{OUT-HI}			16	19	
Quiescent Current @ Low Drive	IDDQ _L			110		μA
Quiescent Current @ Med Drive	IDDQ _M			120		
Quiescent Current @ High Drive	IDDQ _H			130		
3dB Bandwidth – min Frequency	F _{MIN}	R1=50k, R2=1000k		40	100	Hz
3dB Bandwidth – max Frequency	F _{MAX}			50		KHz
Output Switching Frequency		F _{CLK}		200		KHz
Gain1	A ₁	R1=50k, R2=1000k		32		dB
Power Supply Rejection Ratio	PSRR	Input Reference R1=50k, R2=1000k		45		dB
Total Harmonic Distortion	THD1	R1=50k, R2=1000k, Vin=5mVrms		0.3		%
Input Referred Noise	V _{N-20}	R1=50k, R2=1000k, 100Hz-10kHz, No weighting		5		μV
Output clock frequency	F _{CLK}		140	200	300	KHz
Max absolute DC Offset OutN-OutP	V _{OFF-NP}	No input signal	0	0.5	5	mV



Microsemi
INTEGRATED PRODUCTS

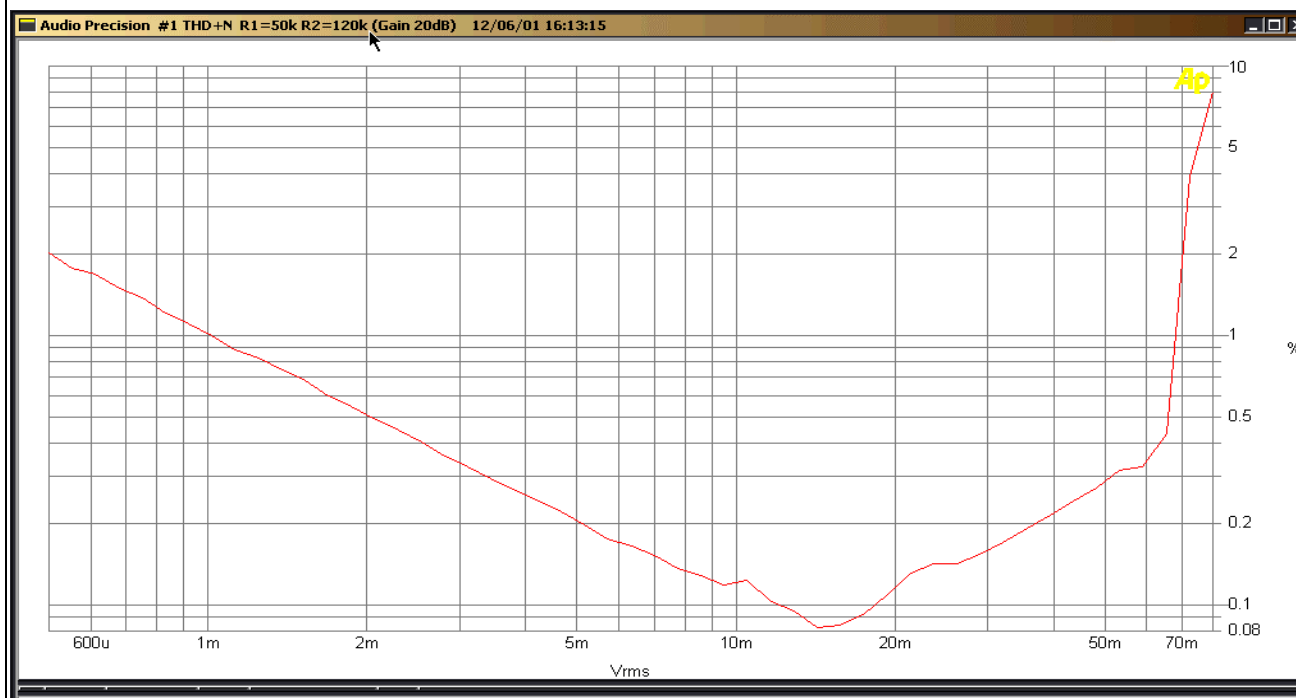
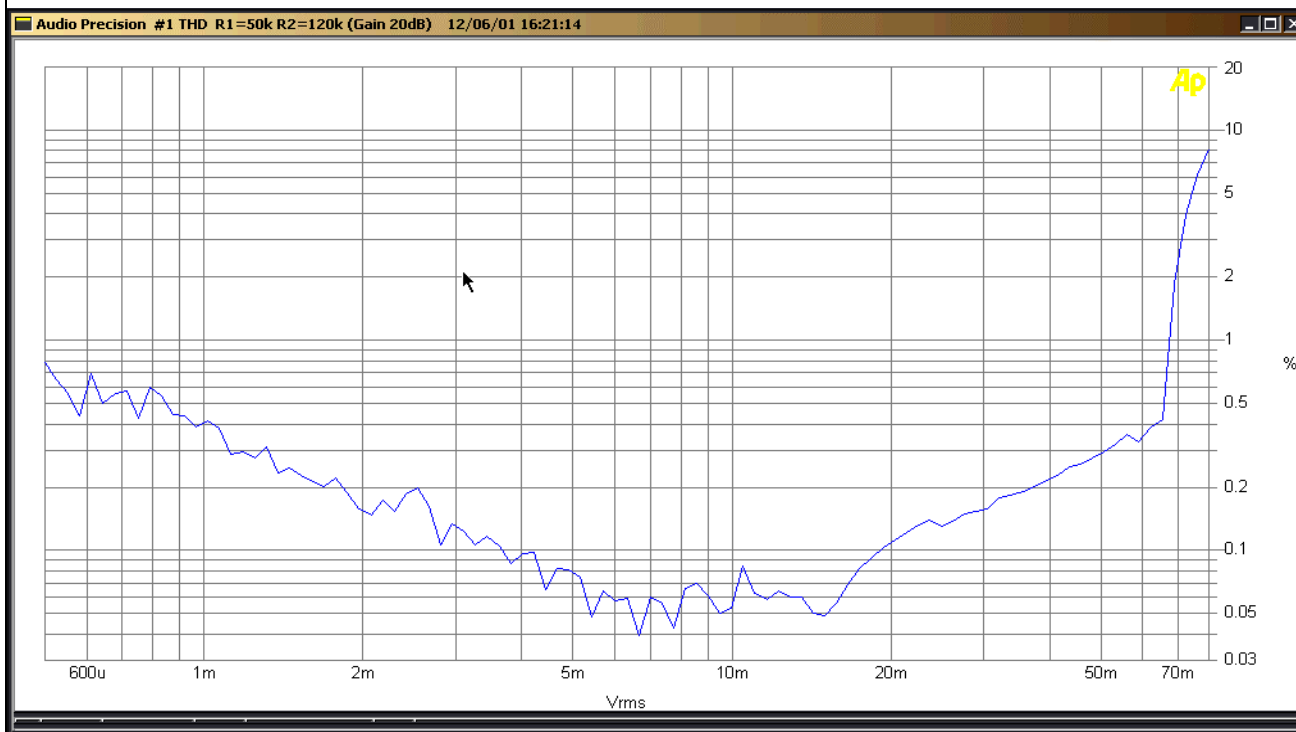
3/11/2002

LX1792

Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier

PRELIMINARY SPECIFICATION

CHARTS



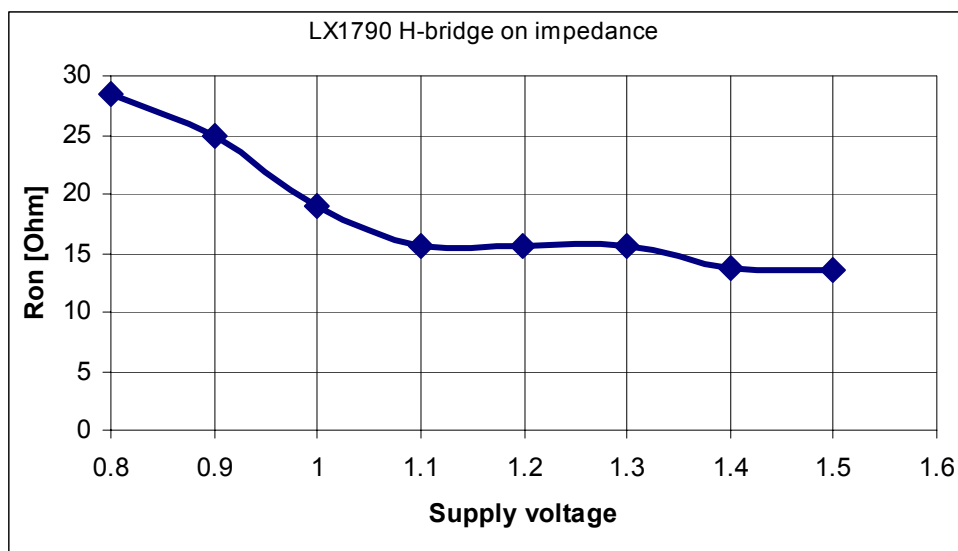
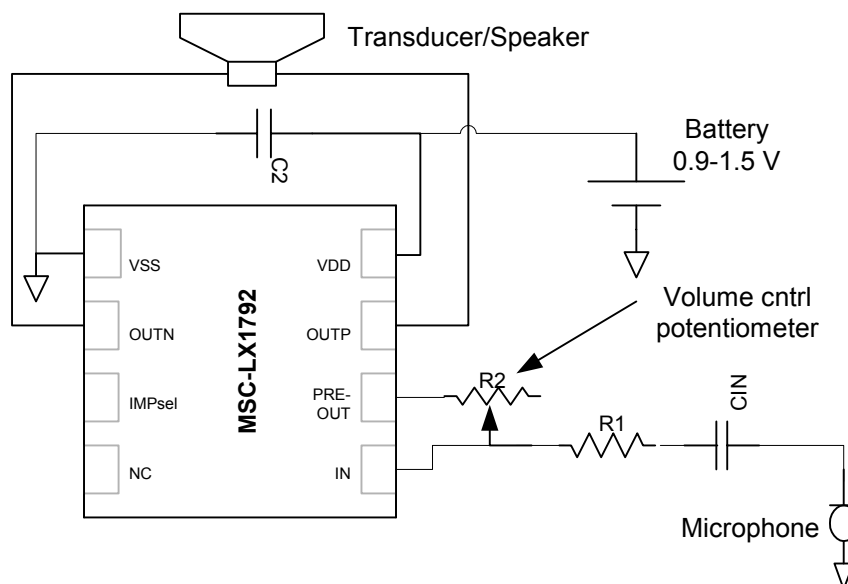
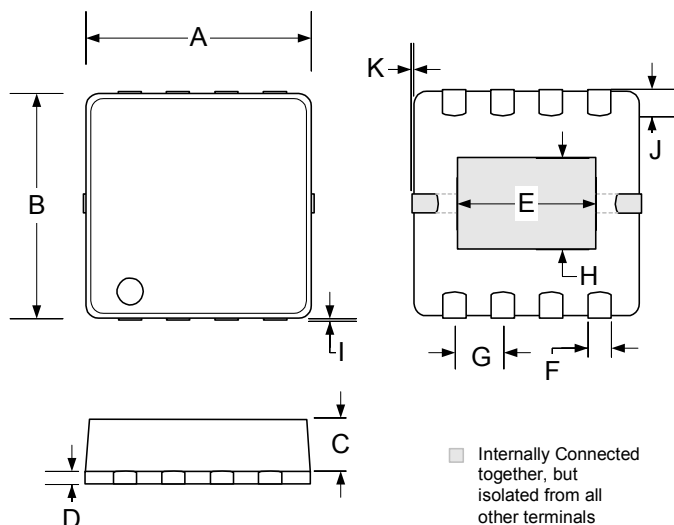
PRELIMINARY SPECIFICATION


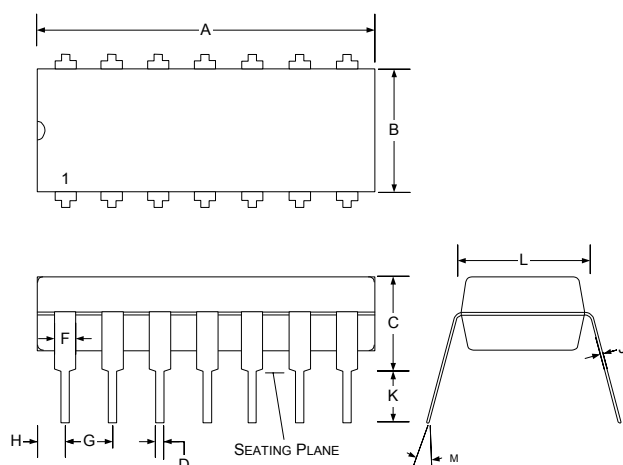
Figure 2 – H-Bridge Impedance vs. Supply Voltage (Lowest Impedance Setting)

PRELIMINARY SPECIFICATION
APPLICATION SCHEMATIC

SUGGESTED EXTERNAL APPLICATION COMPONENTS

COMPONENT	SUGGESTED VALUE	Description
CIN	100nF	Input AC coupling capacitor, must be present
C2		For best performance this should be as close as possible to the supply pins
R1	> 25k Ohm	Input resistor > 25k Ohms
R2		Preamplifier feedback resistor
RX/CX		If the audio source (for example a microphone) has a low power supply rejection an additional filter for the supply to this have to be added.

**Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier**
PRELIMINARY SPECIFICATION
MECHANICAL - 8 PIN MLPQ PACKAGE OUTLINE
LM 8-Pin Plastic MLP-Micro Exposed Pad


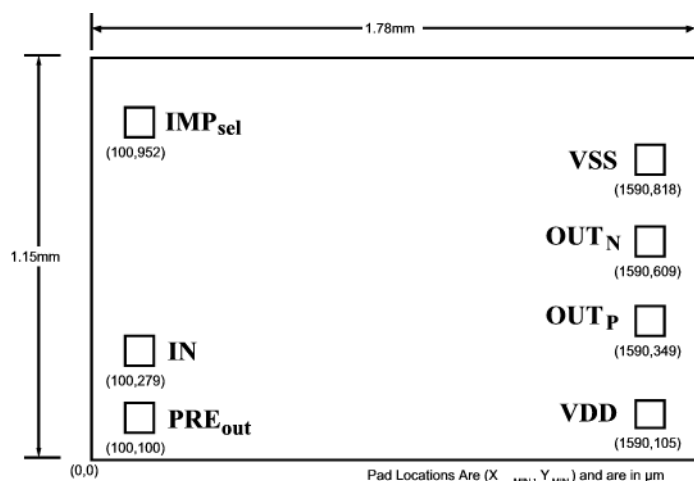
Dim	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.90	3.10	0.114	0.122
B	2.90	3.10	0.114	0.122
C	0.65	0.75	0.025	0.029
D	0.15	0.25	0.005	0.009
E	1.841 BSC		0.075 BSC	
F	0.27	0.43	0.010	0.016
G	0.65 BSC		0.025 BSC	
H	1.22 BSC		0.048 BSC	
I	0	0.10	0	0.003
J	0.21	0.37	0.008	0.014
K	0	0.10	0	0.003

N 14-Pin Plastic Dip


Dim	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	18.54	20.57	0.730	0.810
B	6.09	6.60	0.240	0.260
C	-	5.08	-	0.200
D	0.38	0.51	0.015	0.020
F	0.76	1.52	0.030	0.060
G	2.54 BSC		0.100 BSC	
H	1.27	2.28	0.050	0.090
J	0.20	0.38	0.008	0.015
K	3.18	-	0.125	-
L	7.62 BSC		0.300 BSC	
M	15°		15°	

Note:

- Dimensions do not include mold flash or protrusions; these shall not exceed 0.155mm(.006") on any side. Lead dimension shall not include solder coverage.

**Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier**
PRELIMINARY SPECIFICATION
MECHANICALS 7-PIN BARE DIE


Dim	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
X		1.15		0.045
Y		1.78		0.070

Note:

- Dimensions do not include mold flash or protrusions; these shall not exceed 0.155mm(.006") on any side. Lead dimension shall not include solder coverage.



Microsemi
INTEGRATED PRODUCTS

3 / 1 1 / 2 0 0 2

LX1792

Low Voltage, Low Power, AudioMite™
Class-D Audio Amplifier

PRELIMINARY SPECIFICATION

NOTES

www.Microsemi.com

NOTES