

LV2200M**SANYO****Cordless Telephone System IC****Overview**


The LV2200M is a cordless telephone system IC that integrates a narrow-band FM IF system that includes an adjustment-free FM detection circuit, a dual-PLL frequency synthesizer, and audio signal-processing functions (componder) on a single chip. This IC is appropriate for compact design end products.

Functions

- IF system block
 - First mixer, first local oscillator, second mixer, second local oscillator
 - IF amplifier, limiter, RSSI
 - FM detector
 - Noise detection circuit (noise detection, Schmitt input, and noise filter operational amplifier)
- PLL system block (Supports all reception areas worldwide, except Japan.)
 - Two built-in PLL systems, one for reception and one for transmission
 - Programmable divider for the local oscillator
 - Programmable divider for the reference frequency
 - Built-in lock detection circuit (reception PLL)
 - Transmitter and receiver PLL charge pump output current control circuits (PLL loop gain and time constant switching)
- Audio signal-processing block
 - Compressor and expander
 - Transmission audio signal limiter circuit (IDC)
 - Splatter filter (SCF)
 - Microphone amplifier
 - Transmission and reception audio signal mute
 - Reception system audio signal output level switching (low/high)
- Other functions
 - Data input using serial data transmission (Controls all functions, including PLL circuits and muting.)
 - Reception data input system filter (SCF)
 - Reception data waveform shaper circuit (with hysteresis characteristics)
 - Reception VCO regulator
 - PLL regulator
 - Battery check function
 - Two standby modes

Package Dimensions

unit: mm

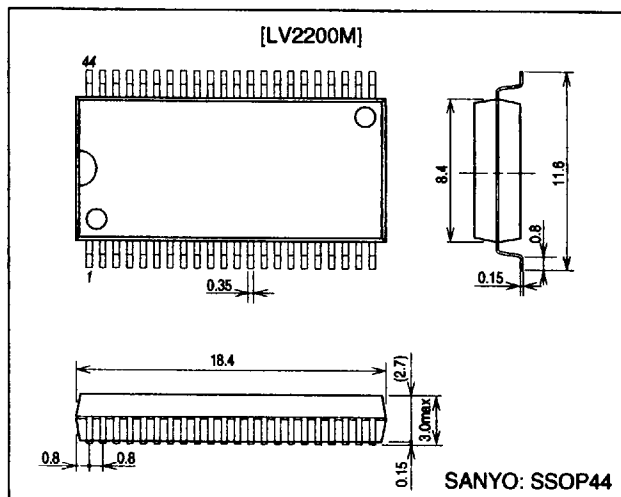SSOP44

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

■ 7997076 0023265 347 ■

71699RM (OT) No. 6074-1/23

Specifications

Maximum Ratings at $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC\text{ max}}$		7	V
Allowable power dissipation	$P_{d\text{ max}}$	$T_a \leq 75^{\circ}\text{C}$	300	mW
Operating temperature	T_{opr}		-20 to +75	$^{\circ}\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^{\circ}\text{C}$

Operating Conditions at $T_a = 25^{\circ}\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		3	V
Operating supply voltage	V_{CCop}		2.4 to 5.5	V

Allowable Operating Ranges at $T_a = -20$ to 75°C , $V_{CC} = 2.4$ to 5.5 V

PLL block

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
High-level input voltage	V_{IH}	CL, DI, CE	$V_{CC} \times 0.7$		5.5	V
Low-level input voltage	V_{IL}	CL DI, CE	0		0.6	V
Output voltage	V_O	LD	0		5.5	V
Input frequency	f_{IN}	PI (TX)	1.0		60	MHz
Input amplitude	V_{IN}	PI (TX), $f_{IN} = 10\text{ M}$ to 60 MHz	-12		10	dBm

Note : 50 Ω terminate (0 dBm = 0.224 mVrms)

Electrical Characteristics at $T_a = 25^{\circ}\text{C}$, $V_{CC} = 3\text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[Current Drain]						
Quiescent current	I _{CCOP}	No signal input, all circuits active		17.3	24	mA
Standby current	I _{sb-1}	No signal input, only latches active		0.01	10	μA
	I _{sb-2}	No signal input, reception PLL and oscillators active		6.5	9.5	mA
	I _{sb-3}	No signal input, RF system, reception PLL, and DTSH active		12.3	17.3	mA
[IF Block] f _c = 49.830 MHz, f _m = 1 kHz, f _{dev} = ±3.0 kHz, AM _{mod} = 30%						
First mixer conversion gain	V _{CG1}			20		dB
Second mixer conversion gain	V _{CG2}			22		dB
Mixer third intercept point	I _{p3}	First mixer		94		dBμ
Demodulator output	V _O	V _{IN} = 80 dBμEMF	138	175	222	mVrms
Total harmonic distortion	THD	V _{IN} = 80 dBμEMF		1.5	3	%
Signal-to-noise ratio	S/N	V _{IN} = 80 dBμEMF	43	48		dB
AM suppression ratio	AMR	V _{IN} = 80 dBμEMF	35	43		dB
RSSI output	V _{REF1}	V _{IN} = 0 dBμEMF	0.1	0.3	0.55	V
	V _{REF2}	V _{IN} = 20 dBμEMF	0.6	0.9	1.3	V
	V _{REF3}	V _{IN} = 80 dBμEMF	1.6	2.0	2.4	V
Noise detector output	V _{ND1}	f _{IN} = 40 kHz, V _{IN} = -20 dBV	0.85	1.1	1.35	V
	V _{ND2}	f _{IN} = 40 kHz, V _{IN} = -10 dBV	1.4	1.7	2.0	V
Noise detection	V _{NTH1}	Schmitt circuit on		0.85		V
	V _{NTH2}	Schmitt circuit off		0.75		V
Schmitt output	V _{SH1}	V ₄₁ = 1.4 V			0.2	
	V _{SH2}	V ₄₁ = 0.2 V	2.8			V
[PLL Block]						
High-level output voltage	V _{OL}	LD, I _O = 2 mA			0.5	V
Output off leakage current	I _{OFF1}	LD, V _O = 3 V			3	μA
	I _{OFF2}	PDR PDT, V _O = 1.5 V			0.1	μA
High-level input current	I _{H1}	CL, DI, CE, V _I = 3 V			5	μA
Low-level input current	I _{L1}	CL, DI, CE, V _I = 0 V			5	μA

Continued on next page.

LV2200M





Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[Audio Signal-Processing Block]						
<Transmission System Audio Signal Processing> $V_{IN\ REFC} = -40\text{ dBV} = 0\text{ dB}$, $f_{IN} = 1\text{ kHz}$, Pre-Amp Gain = 20 dB, $R_L = 15\text{ k}\Omega$						
Output level	V_{Otx}	$V_{IN} = V_{IN\ REFC} = 0\text{ dB}$	-15.1	-13.1	-11.1	dBV
Gain error	Gec	$V_{IN} = -40\text{ dB}$	-2	-0.6	+1.0	dB
Total harmonic distortion	THDtx	$V_{IN} = 0\text{ dB}$		0.45	1.0	%
Output noise voltage	V_{Ntx}	$R_g = 620\Omega$, $f = 20\text{ Hz to }20\text{ kHz}$		2.7	5.4	mVrms
Limiting voltage	V_{LT}	$V_{IN} = +20\text{ dB}$, 1 kHz-BPF	1.16	1.4	1.64	Vp-p
Maximum preamplifier voltage gain	V_{Gmax}		30			dB
Splatter filter attenuation	Gfil	$f_{IN} = 5\text{ kHz}$	-13.5	-11.5	-9.5	dB
Muting attenuation	ATTtx	$V_{IN} = 0\text{ dB}$, 1 kHz-BPF		-76	-60	dBV
Crosstalk	CTtx	Exp- $V_{IN} = -20\text{ dBV}$, 1 kHz-BPF		-60	-50	dBV
[Reception System Audio Signal Processing] $V_{IN\ REFE} = -20\text{ dBV} = 0\text{ dB}$, $f_{IN} = 1\text{ kHz}$, $R_L = 15\text{ k}\Omega$						
Output level	V_{Orx}	$V_{IN} = V_{IN\ REFE} = 0\text{ dB}$	-22.2	-19.7	-17.2	dBV
Audio switching level difference	VLch	$V_{IN} = 0\text{ dB}$	6.5	7.4	8.4	dB
Gain error	Gee	$V_{IN} = -30\text{ dB}$	-1.5	+0.3	+2.0	dB
Total harmonic distortion	THDrx	$V_{IN} = 0\text{ dB}$		0.3	1	%
Output noise voltage	V_{Nrx}	$R_g = 620\Omega$, $f = 20\text{ Hz to }20\text{ kHz}$		27	55	μVrms
Muting attenuation	ATTrx	$V_{IN} = 0\text{ dB}$, 1 kHz-BPF		-92	-70	dBV
Crosstalk	CTrx	Cmp- $V_{IN} = -20\text{ dBV}$, 1 kHz-BPF		-92	-70	dBV
[Data Shaper] $V_{IN} = -20\text{ dBV}$, $f_{IN} = 1\text{ kHz}$, $R_L = 100\text{ k}\Omega$ (pin 14)						
Duty ratio	Duty		43	50	57	%
Hysteresis	Hys			50		mVp-p
High-level output voltage	V_{DTH}		$V_{CC} - 0.2$	V_{CC}		V
Low-level output voltage	V_{DTL}			0.03	0.3	V
[Battery Check Function] $R_L = 100\text{ k}\Omega$ (pin 15)						
Supply voltage detection level	L_{BT1}	BT1 = 0, BT0 = 1	3.08	3.3	3.52	V
	L_{BT2}	BT1 = 1, BT0 = 0	2.83	3.05	3.27	V
	L_{BT3}	BT1= 1, BT0 = 1	2.63	2.85	3.03	V
High-level output voltage	V_{BCH}	$V_{CC} \leq L_{BT}$	$V_{CC} - 0.2$	V_{CC}		V
Low-level output voltage	V_{BCL}	$V_{CC} \leq L_{BT}$		0.03	0.3	V



A11867





Pin Functions

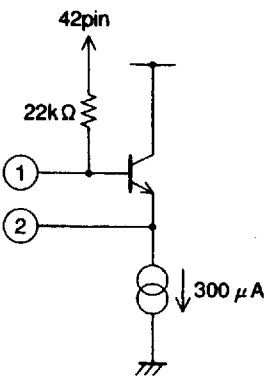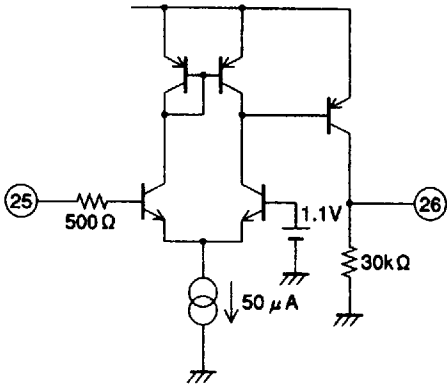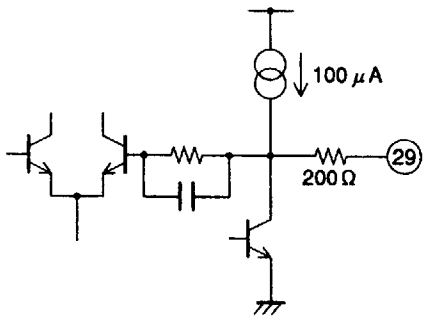Pin No.	Pin	Function	Equivalent circuit
1 2	VCO1 VCO2	VCO input VCO output	 A11868
3	GND1	MOS system ground	
10 11	OSC1 OSC2	Local oscillator input Local oscillator output	 A11869
25 26	NFIN NFOUT	Noise filter input Noise filter output	 A11870
29	AFOUT	FM detector output	 A11871

Continued on next page.

LV2200M





Continued from preceding page.

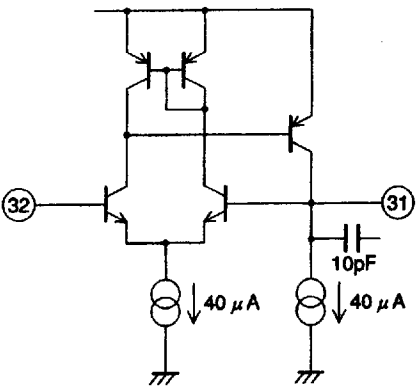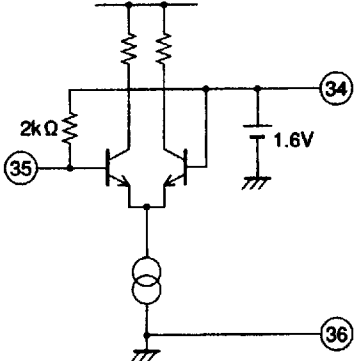Pin No.	Pin	Function	Equivalent circuit
30	GND3	Low-frequency system ground	
31 32	P.S. 1 P.S. 2	Phase shifter operational amplifier output Phase shifter operational amplifier input	 A11872
33	IFOUT	IF output	 A11873
34 35 36	VREGIF IF IN GND2	IF reference voltage IF input IF system ground	 A11874
37	2nd MIX OUT	Second mixer output	 A11875

Continued on next page.

LV2200M




Continued from preceding page.

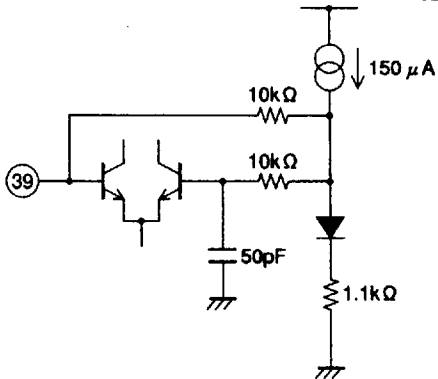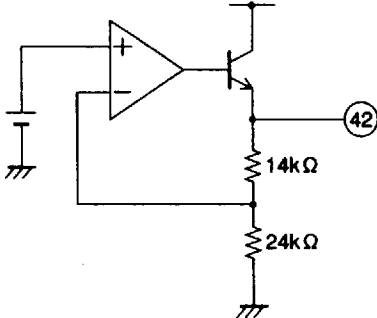Pin No.	Pin	Function	Equivalent circuit
39	2nd MIX IN	Second mixer input	 A11876
40	N RCT	Noise detector	 A11877
41	1st MIX OUT	First mixer output	 A11878
42	VCO REG	VCO reference voltage	 A11879

Continued on next page.

LV2200M

Continued from preceding page.

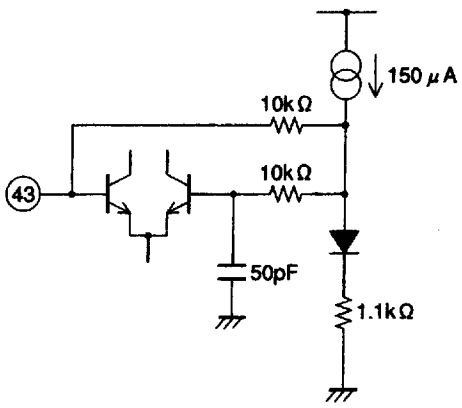Pin No.	Pin	Function	Equivalent circuit
43	1st MIX IN	First mixer input	 A11880
44	GND4	VCO GND	
13	RSSI	RSSI output	 A11881
16	NS OUT		 A11882
4 6	RCP TCP	Receiver charge pump output Transmitter charge pump output	 A11883
5	Vcc1	MOS block latch power supply	

Continued on next page.

LV2200M

Continued from preceding page.


Pin No.	Pin	Function	Equivalent circuit
7 9	P-REG V _{CC2}	External transistor base input External transistor collector input (PLL power supply)	A11884
8	PI	Transmitter comparison signal input	A11885
12	VCC3	Power supply	
14 15	FSK OUT LD OUT	FSK signal output Receiver unlock detection output	A11886
17 18 19	CL DI CE	Data input CMOS input. Not built in pull-down resistor.	
20	TX DT IN	Transmitter data input	A11887
21	TX OUT	Transmitter output Operational amplifier output (class A)	A11888

Continued on next page.

Continued from preceding page.

Pin No.	Pin	Function	Equivalent circuit
22	MIC IN	Microphone input	A11889
23	CMP NF	Compressor noise filter connection	A11890
24	RX OUT	Receiver output Operational amplifier output (class A)	A11891
27 38	C RCT E RCT	Full-wave rectifier output	A11892
28	RX IN	EXP input VCA/full-wave rectifier input block	A11893

Serial Data Format

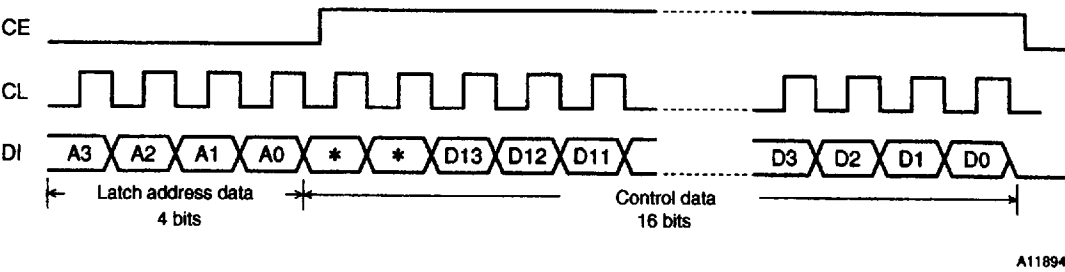

Latch address				Control data content
A3	A2	A1	A0	D13 to D0
1	0	0	0	12 bits: Reference divider counter value
0	1	0	0	14 bits: Receiver programmable divider counter value
1	1	0	0	14 bits: Transmitter programmable divider counter value
0	0	1	0	Control settings 1
1	0	1	0	Control settings 2

Latch address				Control data content													
A3	A2	A1	A0	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
1	0	0	0	0	0	R11	R10	R9	R8	R7	R6	R5	R4	R3	R2	R1	R0
0	1	0	0	PR13	PR12	PR11	PR10	PR9	PR8	PR7	PR6	PR5	PR4	PR3	PR2	PR1	PR0
1	1	0	0	PT13	PT12	PT11	PT10	PT9	PT8	PT7	PT6	PT5	PT4	PT3	PT2	PT1	PT0
0	0	1	0	SB1	SB0	RMT	TMT	LVL	*	CR1	CR0	CT1	CT0	AR1	AR0	AT1	AT0
1	0	1	0	*	SCF2	SCF1	SCF0	SCFB	ULD	0	0	DZ	PE	ULT	CP	BT1	BT0

Control Data Function

- Reference divider counter value (R11 to R0)
Binary value in which R0 is the lsb. The divisor can be set to a value in the range 32 to 4095. However, since there is a divide-by-2 circuit in the preceding stage, the actual divisor will be twice the set value.

Example: With a 10.24 MHz crystal, to create a reference frequency f_{ref} of 5 kHz:
 $10.24\text{ MHz}/5\text{ kHz}/2$ gives a divisor of: 1024
Set R11 to R0 to the value 1024 (0400 hexadecimal).

UK1	UK0	R11	R10	R9	R8	R7	R6	R5	R4	R3	R2	R1	R0
0	0	0	1	0	0	0	0	0	0	0	0	0	0

- Receiver programmable divider counter value (PR13 to PR0)
Binary value in which PR0 is the lsb. The divisor can be set to a value in the range 256 to 16383.

Example: To create the receiver VCO frequency of 38.975 MHz when f_{ref} is 5 kHz:
 $38.975/5\text{ kHz}$ gives a divisor of: 7795
Set PR11 to PR0 to the value 7795 (1E73 hexadecimal).

PR13	PR12	PR11	PR10	PR9	PR8	PR7	PR6	PR5	PR4	PR3	PR2	PR1	PR0
0	1	1	1	1	0	0	1	1	1	0	0	1	1

- Transmitter programmable divider counter value (PT13 to PT0)
Binary value in which PT0 is the lsb. The divisor can be set to a value in the range 256 to 16383.

Example: To create the transmitter VCO frequency of 46.610 MHz when f_{ref} is 5 kHz:
 $46.610/5\text{ kHz}$ gives a divisor of: 9322
Set PT11 to PT0 to the value 9322 (246A hexadecimal).

PT13	PT12	PT11	PT10	PT9	PT8	PT7	PT6	PT5	PT4	PT3	PT2	PT1	PT0
1	0	0	1	0	0	0	1	1	0	1	0	1	0

- Power saving mode settings

SB1	SB0	Setting
0	0	1 st L0 VCO, 2 nd L0 OSC, RX-PLL blocks operate.
0	1	1 st L0 VCO, 2 nd L0 OSC, RX-PLL, 1 st mixer, 2 nd mixer, IF detect, Noise detect, Data shaper, SCF (data system) operate.
1	0	All blocks operate
1	1	All blocks operate

- Baseband muting control

Receiver audio signal

RMT	State
0	Receiver system audio signal muted
1	Receiver system audio signal mute released

Transmitter audio signal

TMT	State
0	Transmitter system audio signal muted
1	Transmitter system audio signal mute released

- Audio level control (receiver system output)

LVL	State
0	Standard level
1	Boosted level (boosted by about +7.4 dB)

- Charge pump output current control (manual switching)
The charge pump circuit output current is controlled manually.

(Receiver charge pump output current)

These control states are valid only when both AR0 and AR1 are set to 0.

CR1	CR0	State
0	0	CRA
0	1	CRB
1	0	CRC
1	1	CRD

Current level: CRA > CRB > CRC > CRD

(Transmitter charge pump output current)

These control states are valid only when both AT0 and AT1 are set to 0.

CT1	CT0	State
0	0	CTA
0	1	CTB
1	0	CTC
1	1	CTD

Current level: CTA > CTB > CTC > CTD

- Charge pump output current control (automatic switching)
The charge pump circuit output current is controlled automatically.
(Receiver charge pump output current)

AR1	AR0	State
0	0	Manual switching is enabled
0	1	The circuit operates in CRA mode until the receiver PLL locks, and then switches to CRC mode when the circuit locks
1	0	The circuit operates in CRB mode until the receiver PLL locks, and then switches to CRD mode when the circuit locks
1	1	Manual switching is enabled

Current level: CRA > CRB > CRC > CRD

(Transmitter charge pump output current)

AT1	AT0	State
0	0	Manual switching is enabled
0	1	The circuit operates in CTA mode until the transmitter PLL locks, and then switches to CTC mode when the circuit locks
1	0	The circuit operates in CTB mode until the transmitter PLL locks, and then switches to CTD mode when the circuit locks
1	1	Manual switching is enabled

Current level: CTA > CTB > CTC > CTD

- SCF clock frequency switching
Low-pass filter 1 (splatter filter)

SCF2	SCF1	SCF0	SCF clock divisor	Cutoff frequency
0	0	0	60	3.313 kHz
0	1	0	62	3.206 kHz
1	0	0	58	3.427 kHz
0	0	1	66	3.106 kHz
0	1	1	68	3.011 kHz
1	0	1	64	2.923 kHz

Low-pass filter 2 (Receiver data input filter)

SCFB	SCF clock divisor	Cutoff frequency
0	60	3.313 kHz
1	120	1.656 kHz

• Unlock detection width control

This bit sets the phase error detection width for PLL locked/unlocked discrimination. The unlocked state is detected when the phase error listed in the table below occurs.

ULD	Phase error detection width	When the second crystal frequency is 10.24 MHz
0	$\pm 4/2\text{nd Xtal}$	390 ns
1	$\pm 8/2\text{nd Xtal}$	780 ns

Note: If this bit is changed while the PLL circuit is locked, lock will be lost temporarily.

• Phase error output control

Controls whether the unlock output pin (pin 15) output is set to the post-unlock detection output, or directly outputs phase detector phase error without modification.

PE	State
0	The unlock detector result is output
1	The phase detector phase error is output without modification

• Dead zone control

Controls the phase comparator dead zone.

DZ	State
0	DZA
1	DZB

DZA < DZB

• Transmitter unlock detector function

Pin 20 normally functions as the data addition amplifier input. However, it operates as the transmitter system unlock detector output if ULT is set to 1.

ULT	State
0	Data addition amplifier input function enabled
1	Transmitter unlock detector output function enabled

• Charge pump circuit on/off function

CP	State
0	Charge pump circuit turned on
1	Charge pump circuit turned off

• Battery check function


Pin 15 normally outputs the receiver unlock detector output. However, it can be set to function as the battery tester with the following mode settings.

BT1	BT0	Mode
0	0	Receiver unlock detector output enabled
0	1	Supply voltage detection level 1 ($V_{CC} \approx 3.3\text{ V}$)
1	0	Supply voltage detection level 2 ($V_{CC} \approx 3.05\text{ V}$)
1	1	Supply voltage detection level 3 ($V_{CC} \approx 2.85\text{ V}$)

• Phase error extension time

The time the detected phase error signal is extended.


Extension time = $32 \times (1/\text{fref}) = 32/5\text{ kHz} = 6.4\text{ ms}$
(fref = reference frequency)




A11895

Sample Application Circuit









A11896








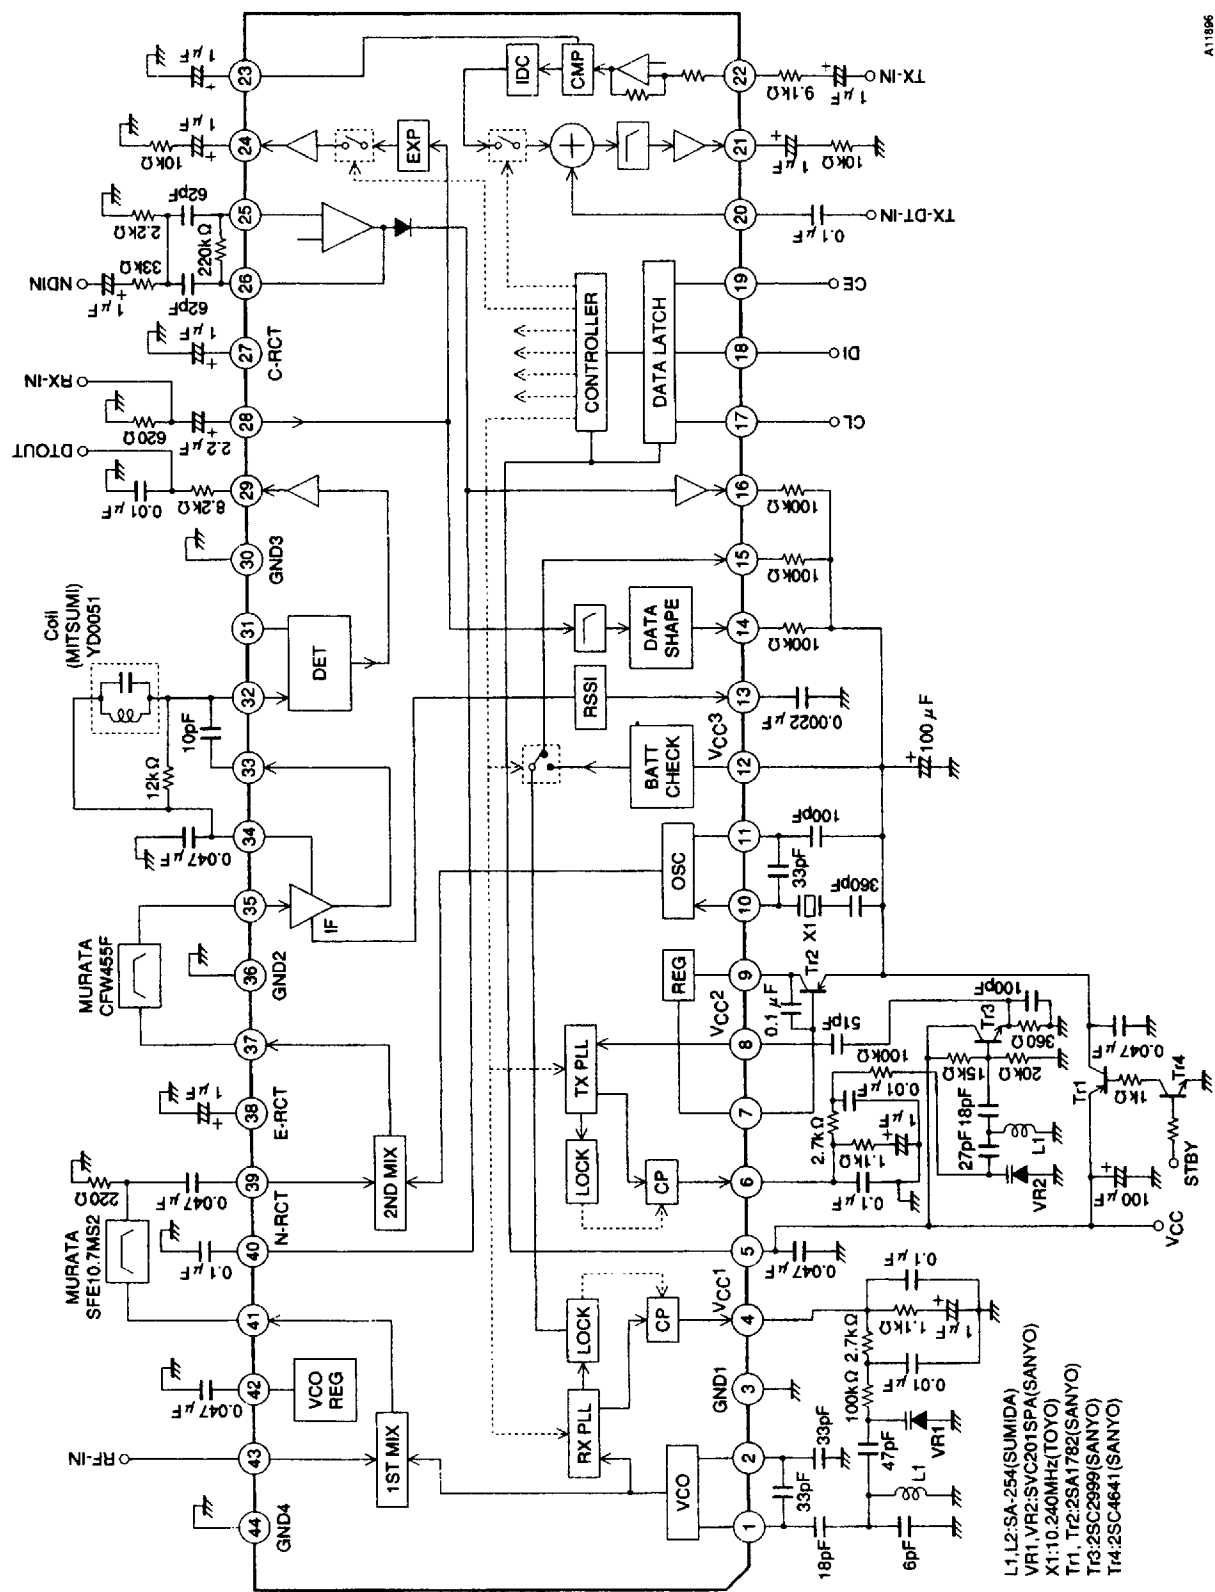


Test Circuit

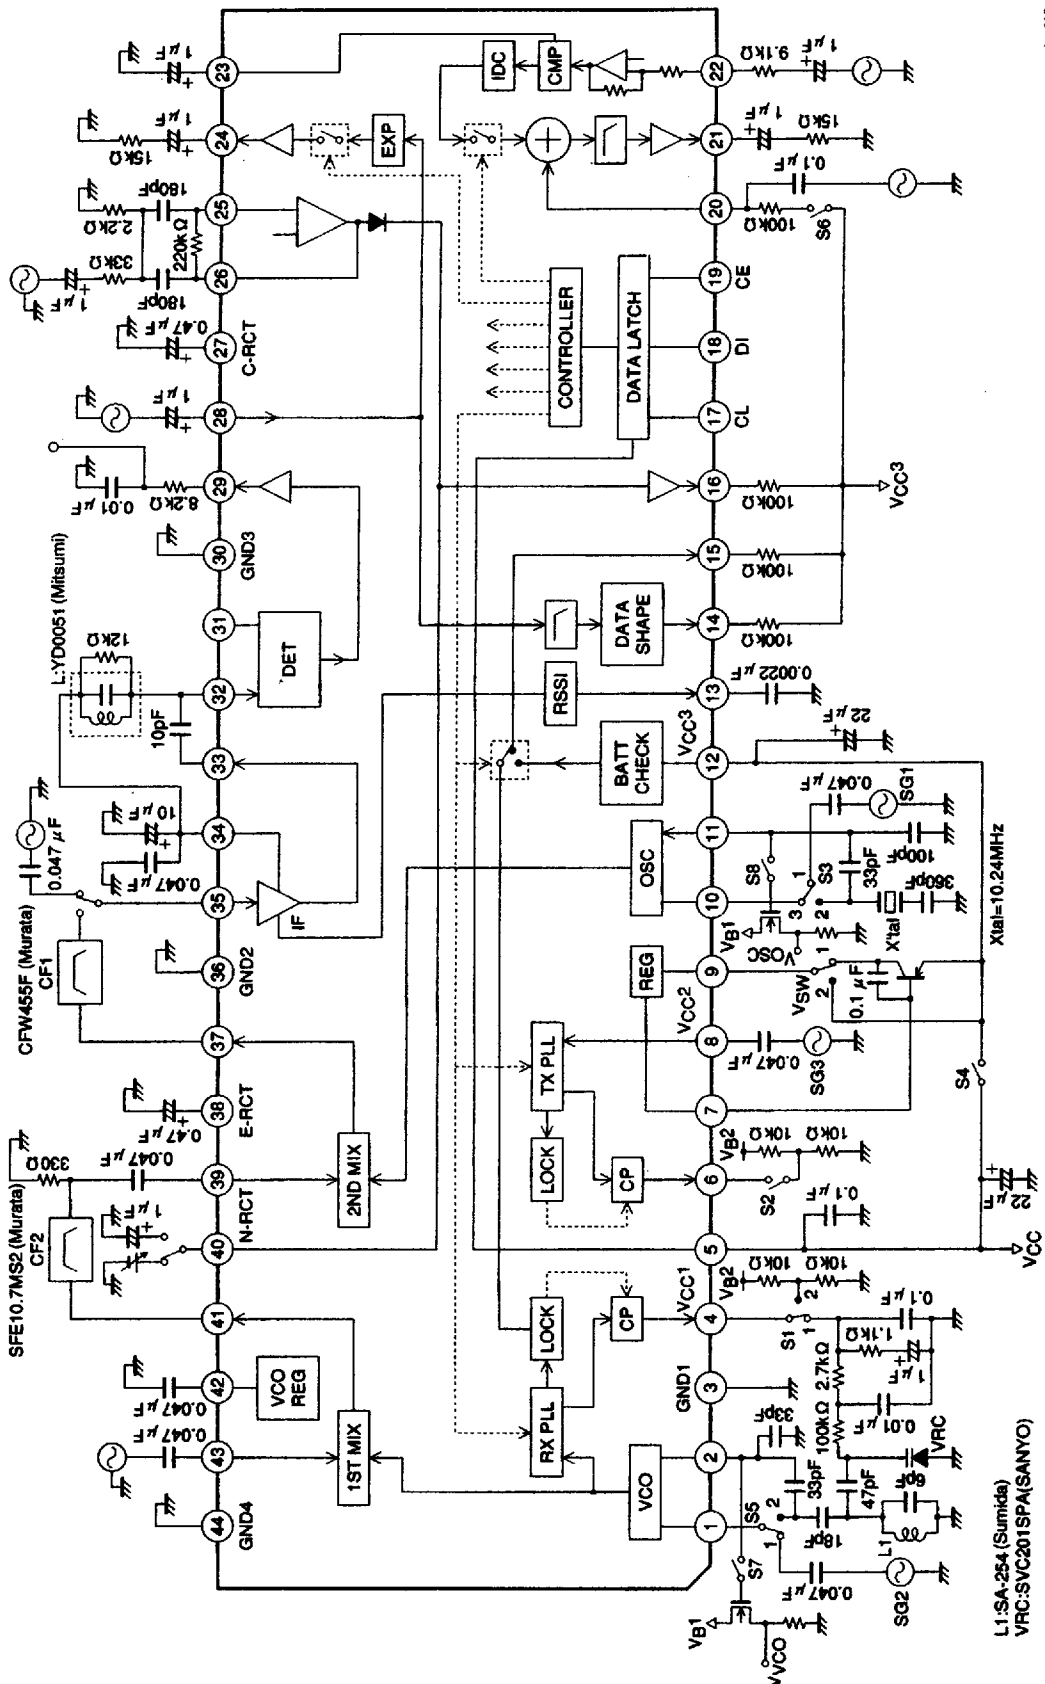


A11807

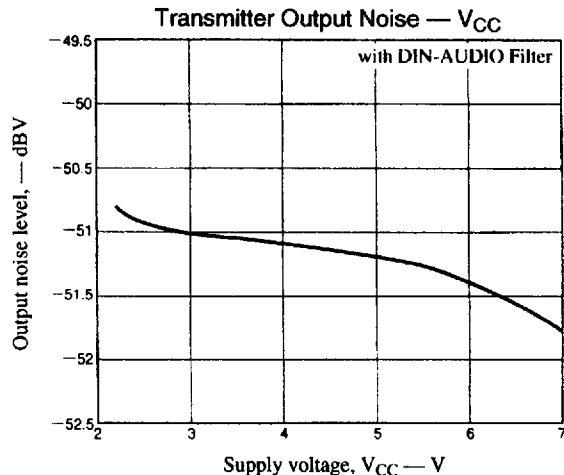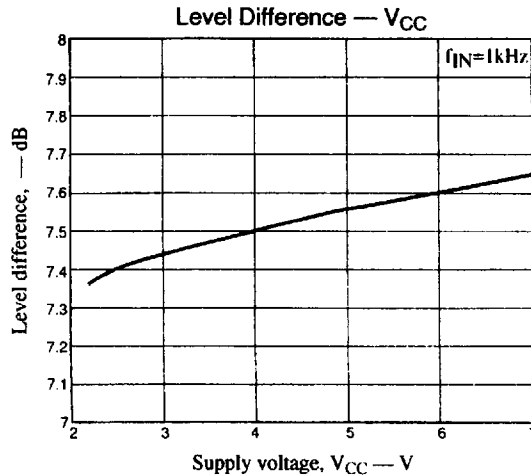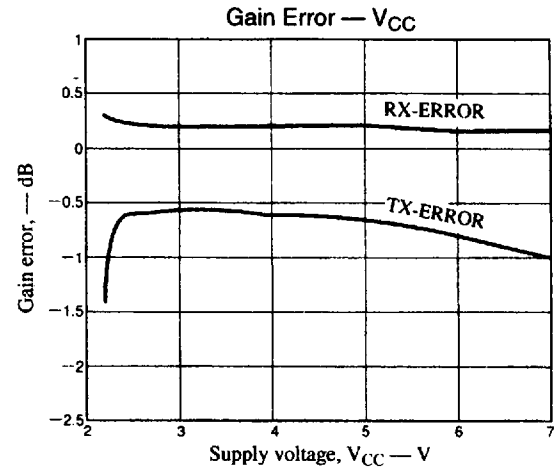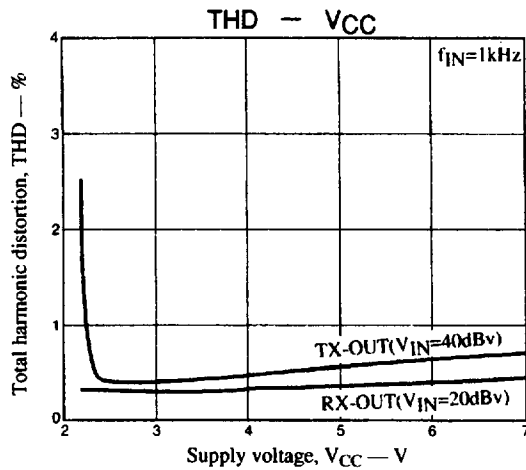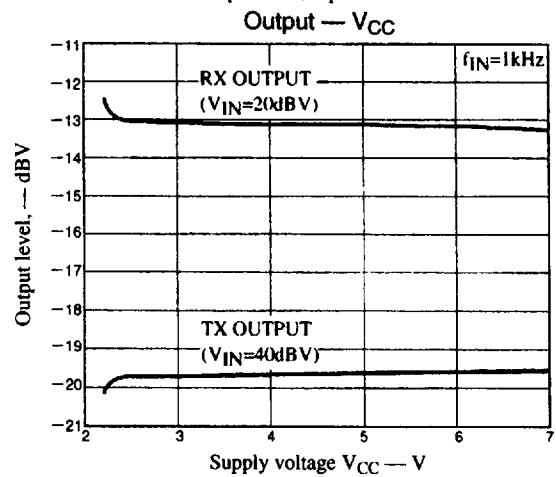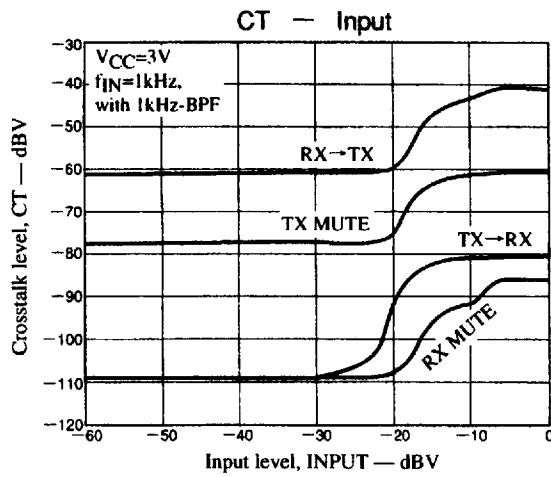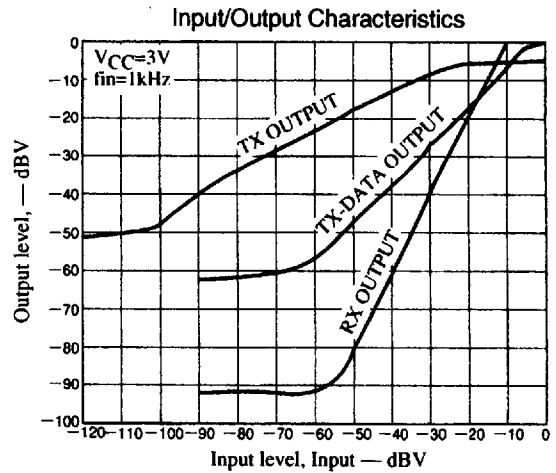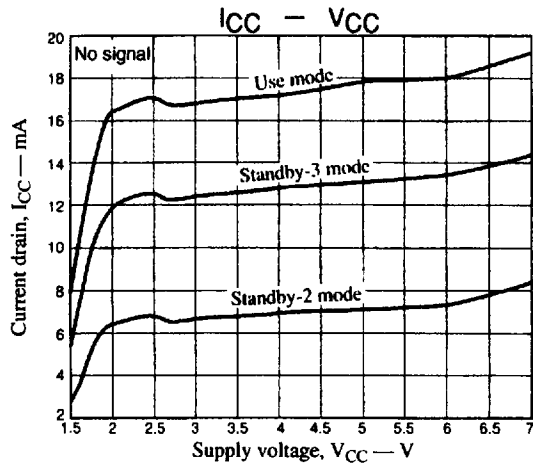


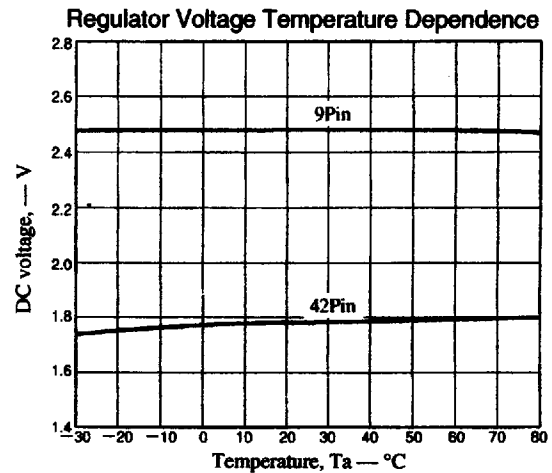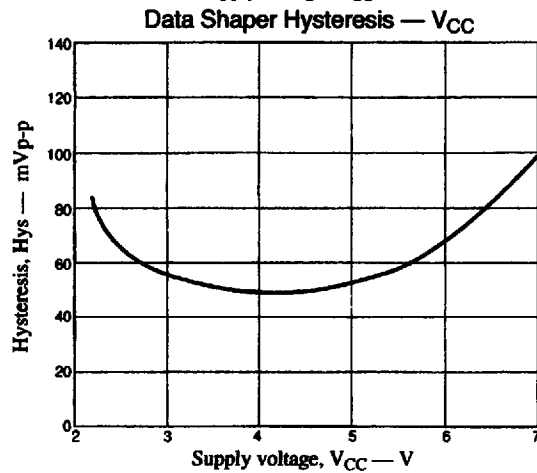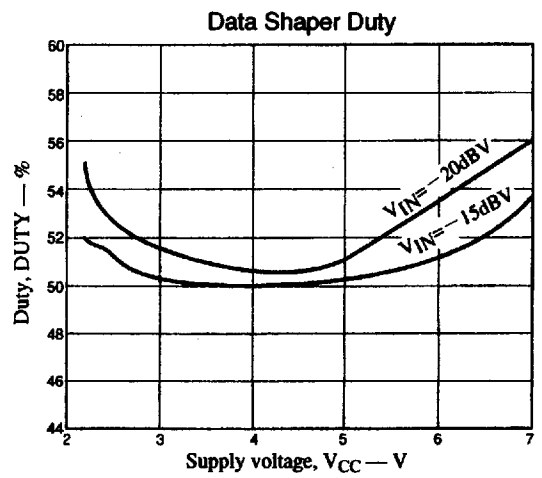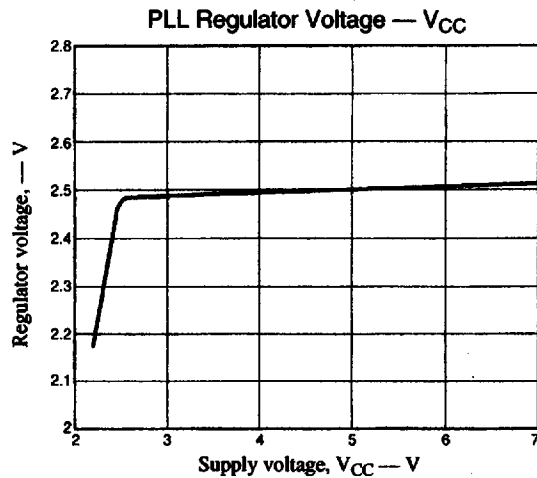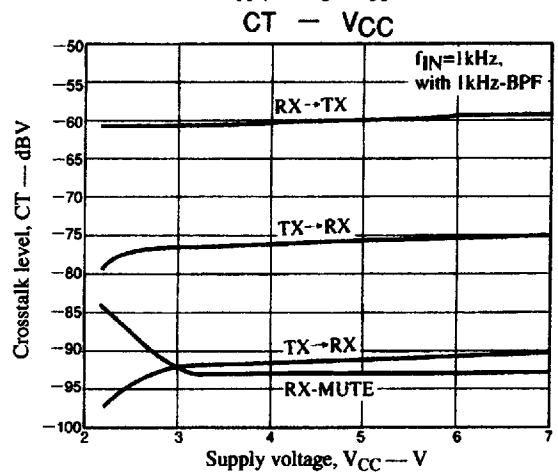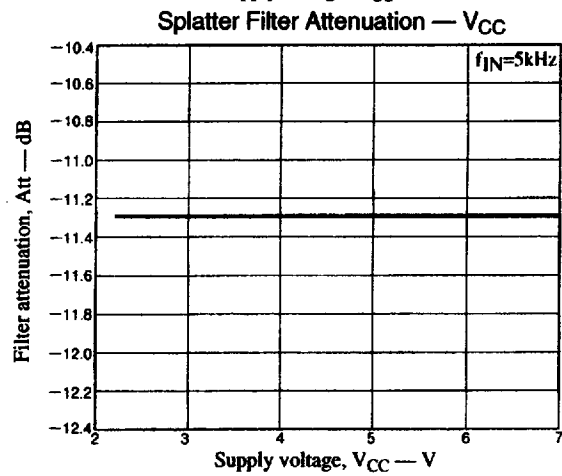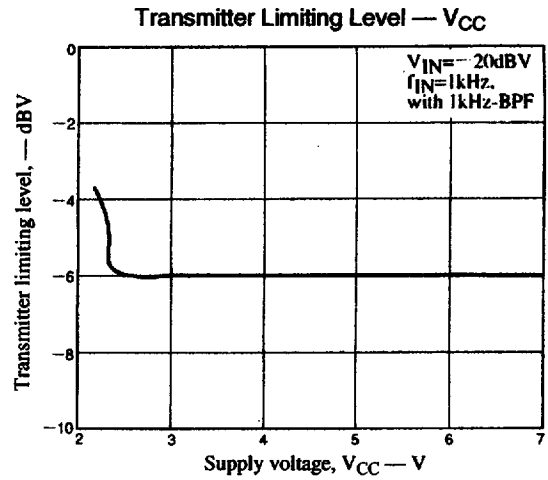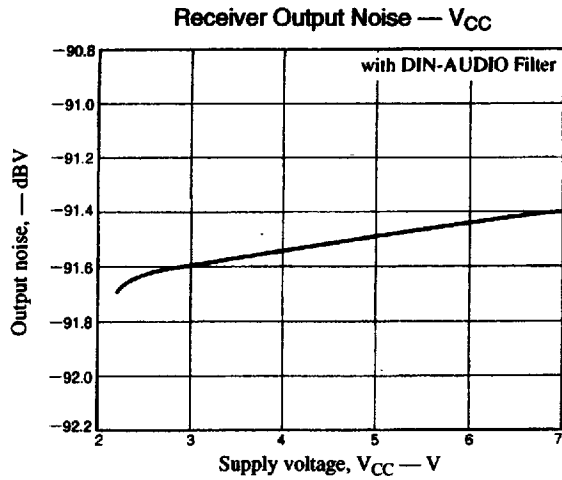


Quiescent Current Temperature Characteristics

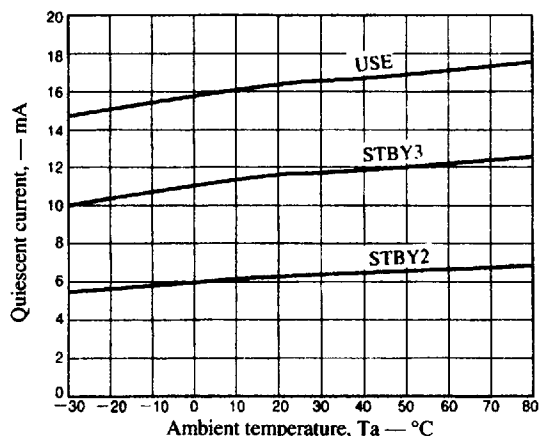


Output Level Temperature Characteristics

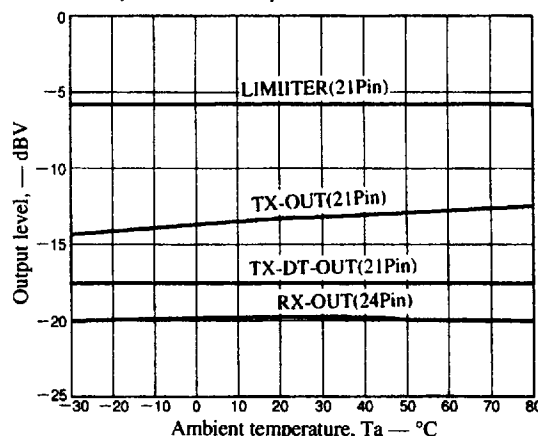


Compander Gain Error Temperature Characteristics

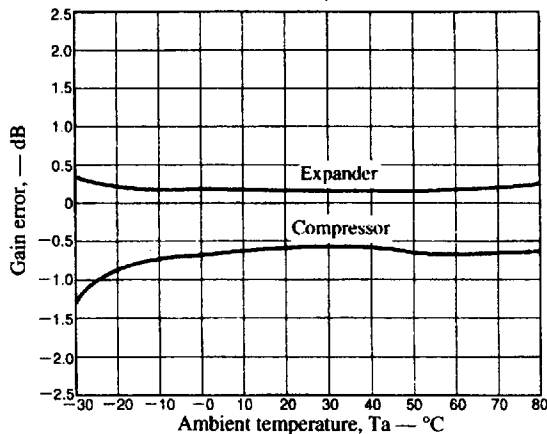


Output Distortion Temperature Characteristics

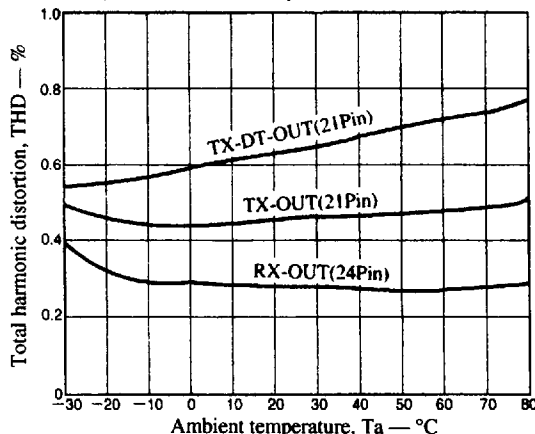


Maximum Input Level Temperature Characteristics

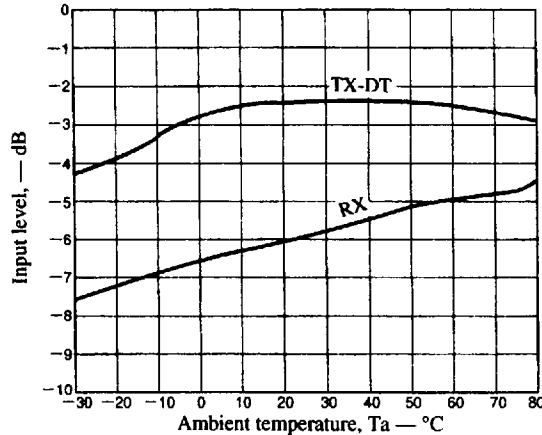


RX Noise Level — T_a







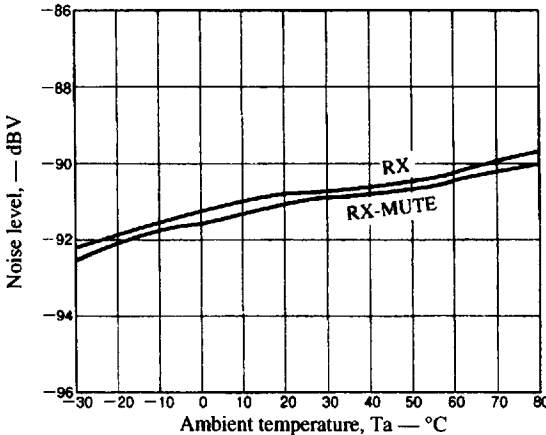


TX Noise Level — T_a

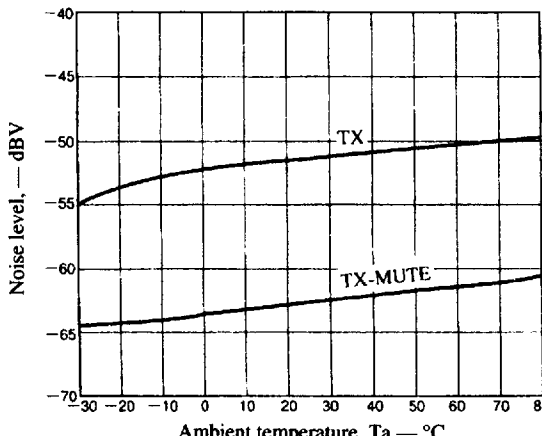


Receiver System Output Switching Level Difference Temperature Characteristics

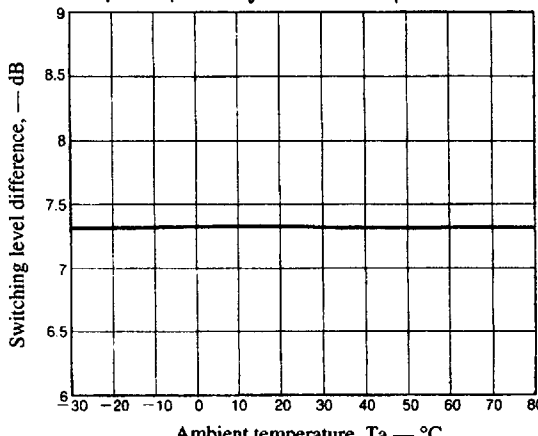

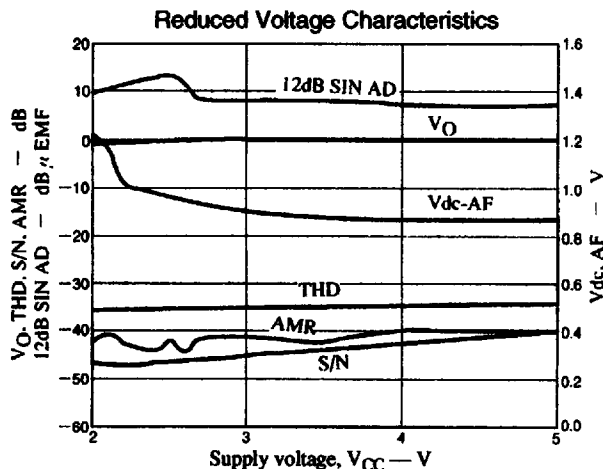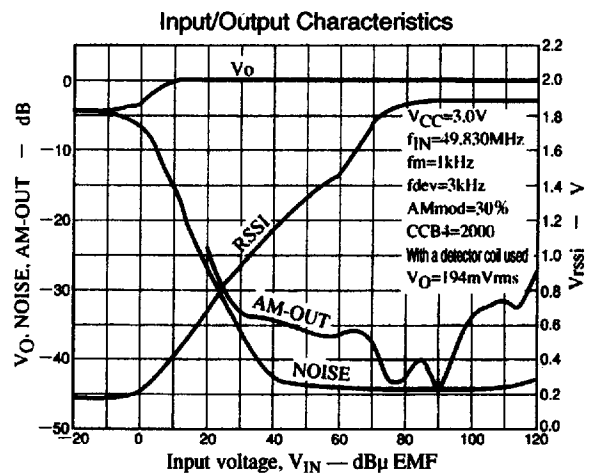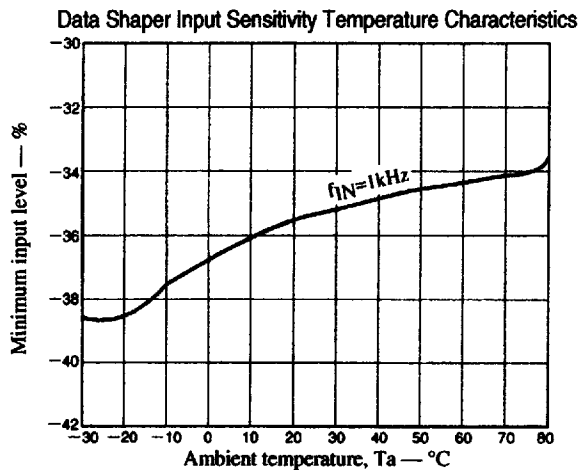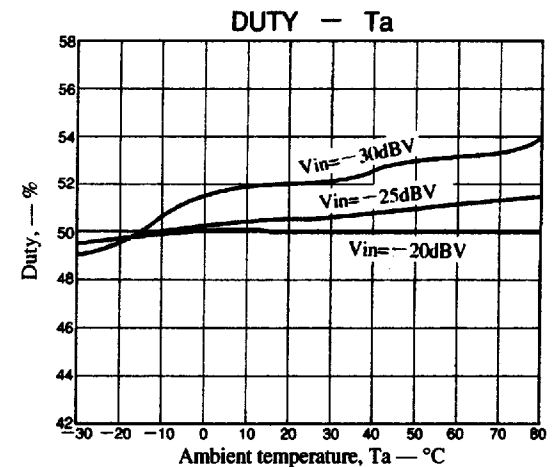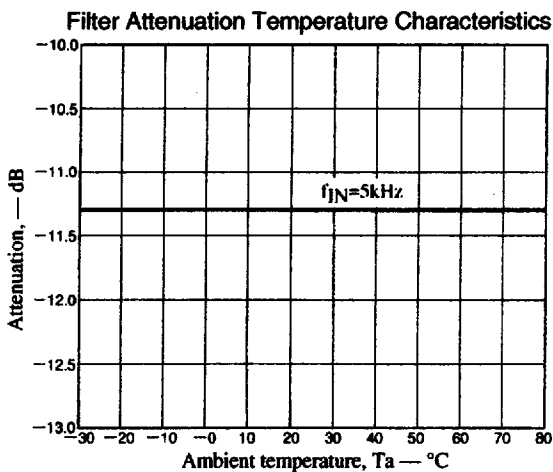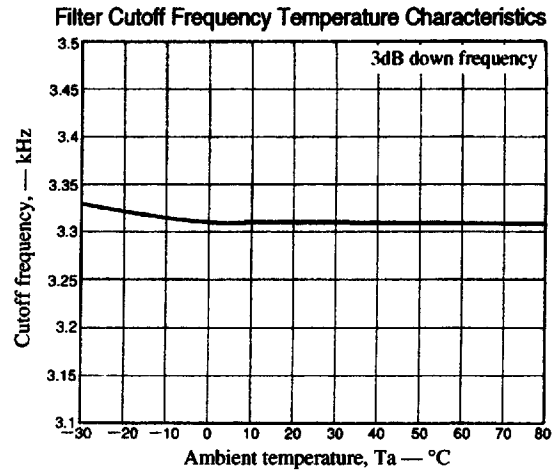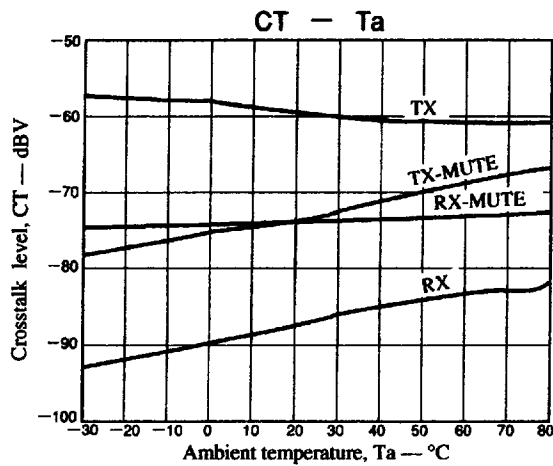


V_{CC}=3.0V
f_{IN}=49.830MHz
f_m=1kHz
f_{dev}=3kHz
AMmod=30%
CCB4=2000
With a detector coil used
V_O=194mVrms

RSSI Temperature Dependence

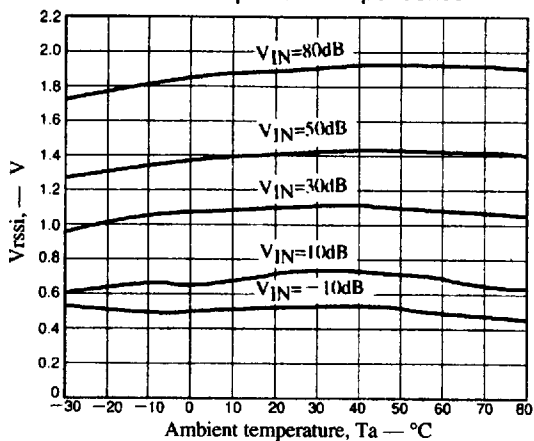


$V_{CC1, 2, 3}=3.0\text{V}$
 $f_{IN}=49.830\text{MHz}$
 $CCB4=1000$
 $V_{CC1, 2}=\text{GND}$
 $V_{CC3}=3.0\text{V}$
 $f_{IN}=49.830\text{MHz}$
 $f_m=1.0\text{kHz}$
 $\Delta f=+3\text{kHz}$
 $V_{IN}=80\text{dB}$ μEMF
 $f_{vco}=39.135\text{MHz}$
 $V_{vco}=100\text{dB}$ μEMF
 $f_{osc}=10.240\text{MHz}$
 $V_{osc}=100\text{mVrms}$
Logic-Block off
LPF typ adj.free det.

RSSI Temperature Characteristics

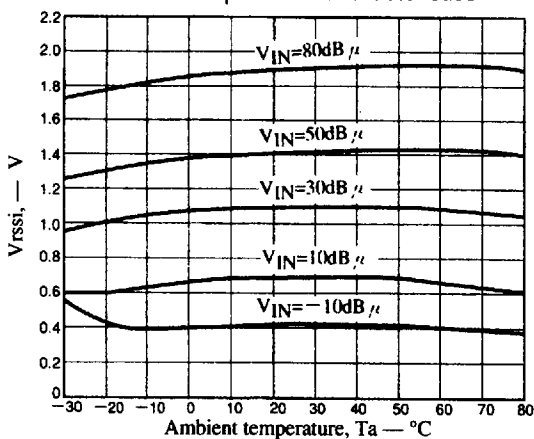


$V_{CC1, 2}=\text{GND}$
 $V_{CC3}=3.0\text{V}$
 $f_{IN}=49.830\text{MHz}$
 $f_m=1.0\text{kHz}$
 $\Delta f=+3\text{kHz}$
 $V_{IN}=80\text{dB}$ μEMF
 $f_{vco}=39.135\text{MHz}$
 $V_{vco}=100\text{dB}$ μEMF
 $f_{osc}=10.240\text{MHz}$
 $V_{osc}=100\text{mVrms}$
Logic-Block off
LPF typ adj.free det.


RSSI Temperature Characteristics

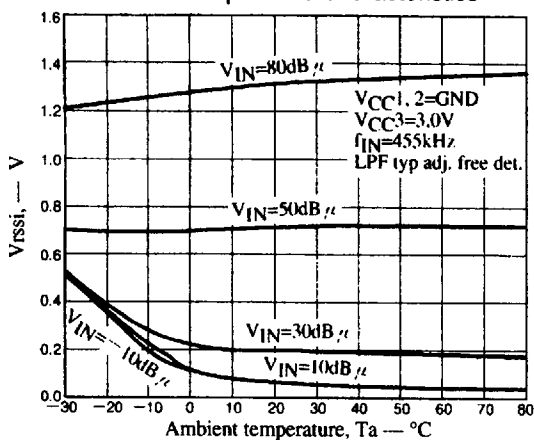


First Mixer Conversion Gain

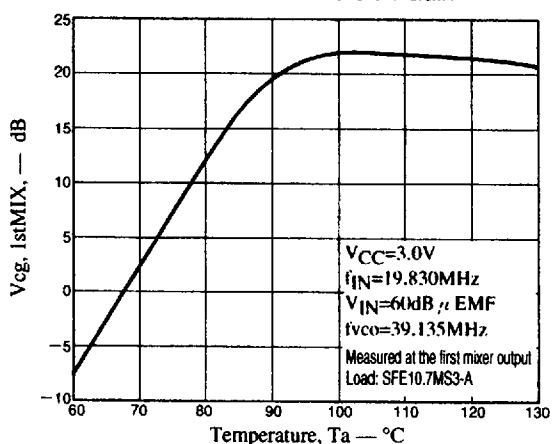


First Mixer Input/Output Characteristics


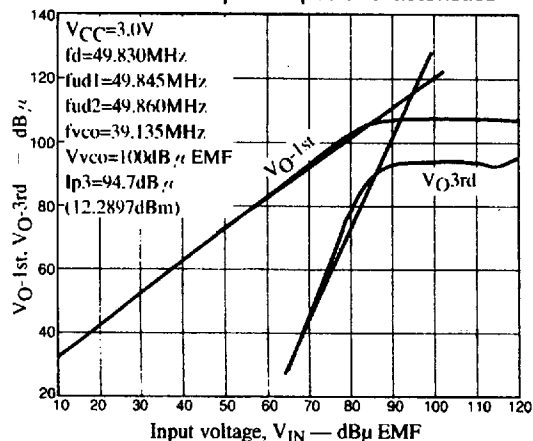


First Mixer Input Frequency — Conversion Gain Characteristics

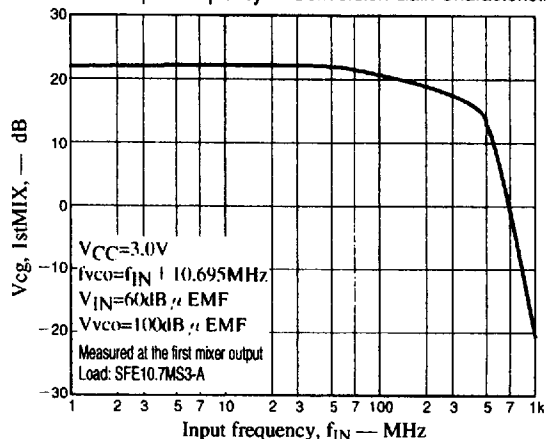


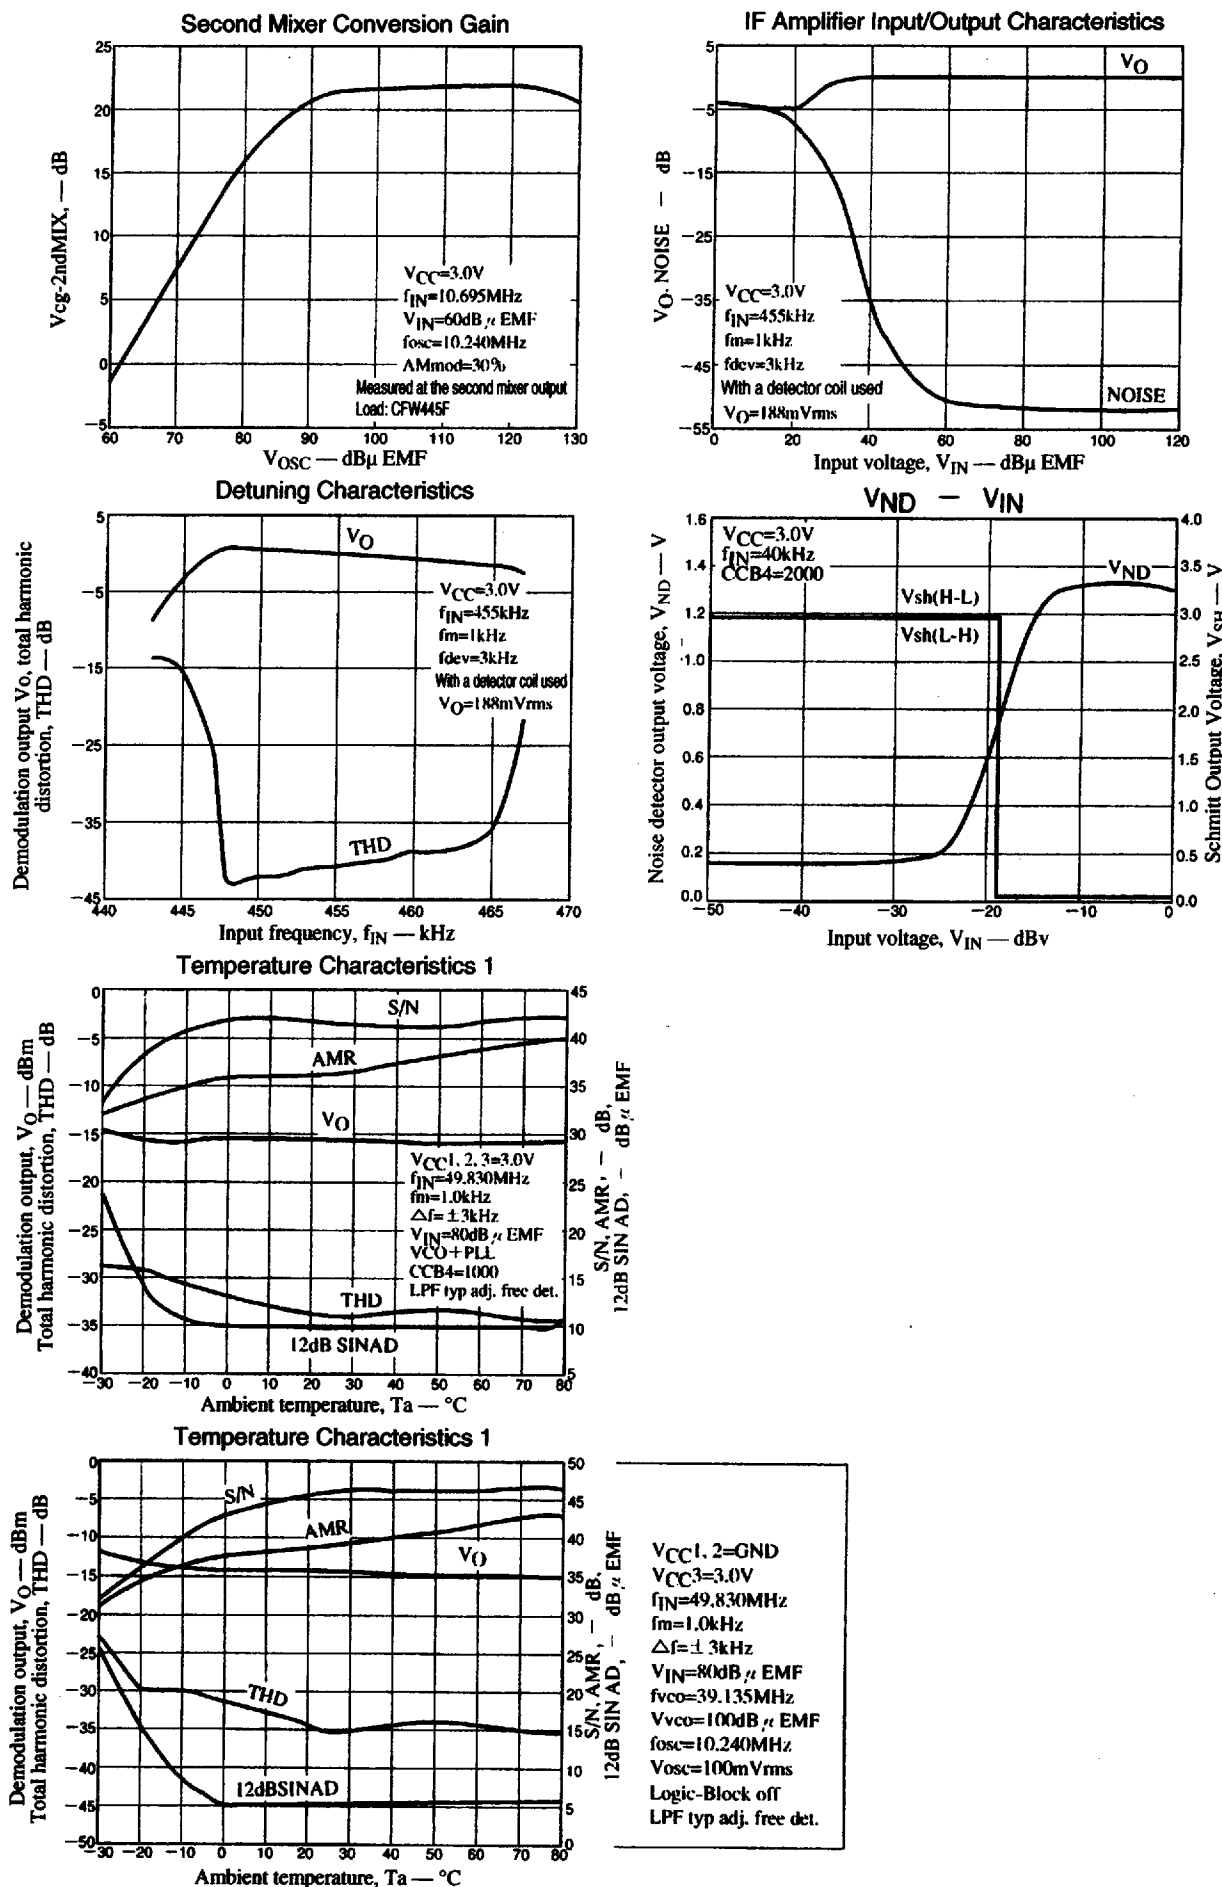


Detuning Characteristics

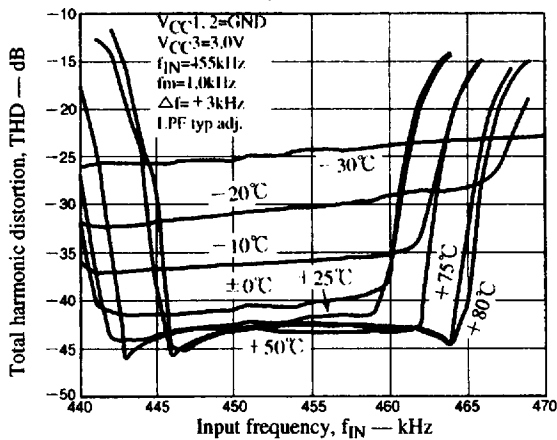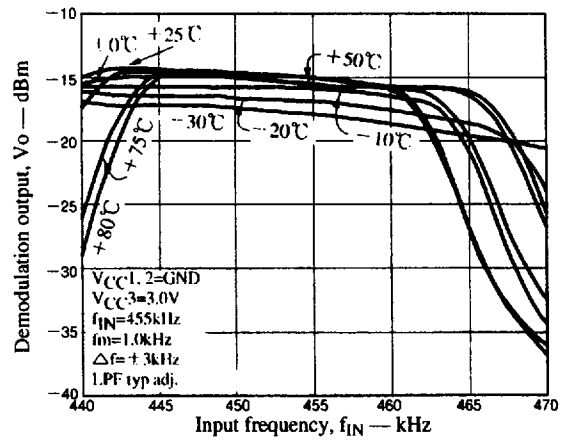 V_O Detuning Characteristics

Noise Schmitt Temperature Characteristics

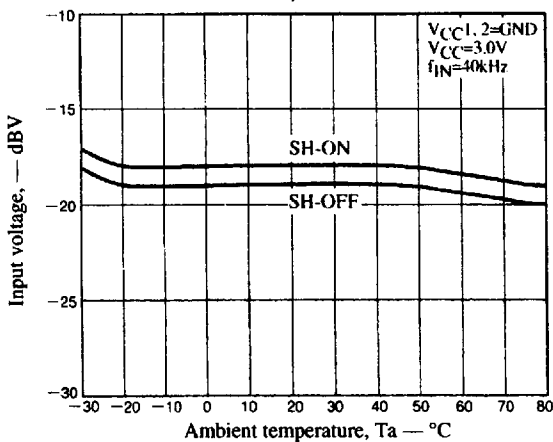

Noise Detector Output Voltage

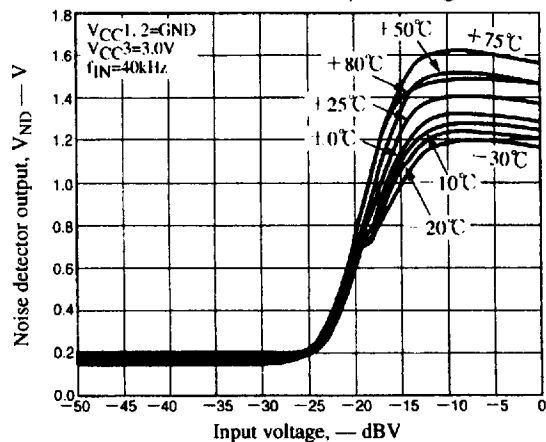

■ Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of July, 1999. Specifications and information herein are subject to change without notice.