

# Advanced Low Power 5V RS232 Drivers/Receivers with Small Capacitors

## FEATURES


- ESD Protection over  $\pm 10\text{kV}$  ( $\pm 15\text{kV}$  for LT1137A)
- Uses Small Capacitors:  $0.1\mu\text{F}$ ,  $0.2\mu\text{F}$
- $1\mu\text{A}$  Supply Current in SHUTDOWN
- 120kBaud Operation for  $R_L = 3\text{k}$ ,  $C_L = 2500\text{pF}$
- 250kBaud Operation for  $R_L = 3\text{k}$ ,  $C_L = 1000\text{pF}$
- CMOS Comparable Low Power
- Easy PC Layout: Flowthrough Architecture
- Rugged Bipolar Design: Absolutely No Latch-Up
- Outputs Assume a High Impedance State When Off or Powered Down
- Improved Protection: RS232 I/O Lines Can be Forced to  $\pm 30\text{V}$  Without Damage
- Output Overvoltage Does Not Force Current Back Into Supplies
- Available in SO and SSOP Packages

## DESCRIPTION


The LT1130A/LT1140A series of RS232 drivers/receivers features special bipolar construction techniques which protect the drivers and receivers beyond the fault conditions stipulated for RS232. Driver outputs and receiver inputs can be shorted to  $\pm 30\text{V}$  without damaging the device or the power supply generator. In addition, the RS232 I/O pins are resilient to multiple  $\pm 10\text{kV}$  ESD strikes. An advanced driver output stage operates up to 250kbaud while driving heavy capacitive loads. Supply current is typically 12mA, competitive with CMOS devices.

Several members of the series include flexible operating mode controls. The Driver Disable pin disables the drivers and the charge pump, the ON/OFF pin shuts down all circuitry. While shut down, the drivers and receivers assume high impedance output states.

## TYPICAL APPLICATION

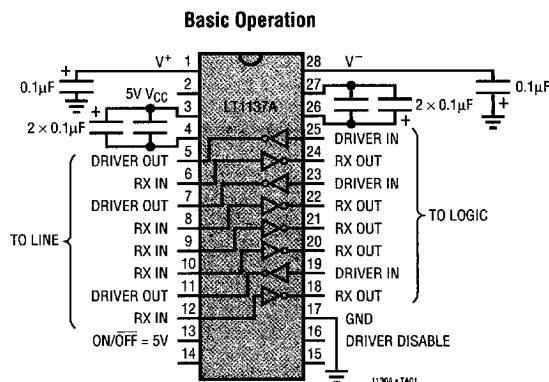

LT1130A 5-Driver/5-Receiver RS232 Transceiver  
 LT1131A 5-Driver/4-Receiver RS232 Transceiver w/Shutdown  
 LT1132A 5-Driver/3-Receiver RS232 Transceiver  
 LT1133A 3-Driver/5-Receiver RS232 Transceiver  
 LT1134A 4-Driver/4-Receiver RS232 Transceiver  
 LT1135A 5-Driver/3-Receiver RS232 Transceiver w/o Charge Pump

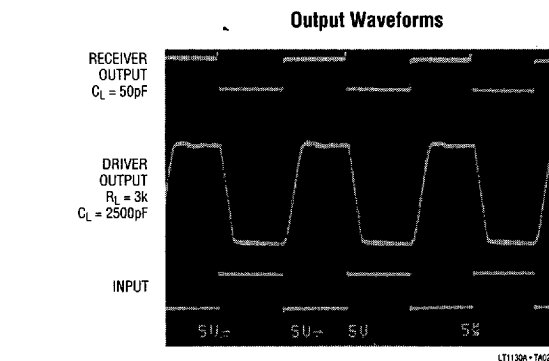

LT1136A 4-Driver/5-Receiver RS232 Transceiver w/Shutdown  
 LT1137A 3-Driver/5-Receiver RS232 Transceiver w/Shutdown  
 LT1138A 5-Driver/3-Receiver RS232 Transceiver w/Shutdown  
 LT1139A 4-Driver/4-Receiver RS232 Transceiver w/Shutdown  
 LT1140A 5-Driver/3-Receiver RS232 Transceiver w/o Charge Pump  
 LT1141A 3-Driver/5-Receiver RS232 Transceiver w/o Charge Pump

# LT1130A/LT1140A Series

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                             |                          |                                      |                |
|-----------------------------|--------------------------|--------------------------------------|----------------|
| Supply Voltage ( $V_{CC}$ ) | 6V                       | Short-Circuit Duration               |                |
| $V^+$                       | 13.2V                    | $V^+$                                | 30 sec         |
| $V^-$ (Note 7)              | -13.2V                   | $V^-$                                | 30 sec         |
| Input Voltage               |                          | Driver Output                        | Indefinite     |
| Driver                      | $V^-$ to $V^+$           | Receiver Output                      | Indefinite     |
| Receiver                    | -30V to 30V              | Operating Temperature Range          |                |
| On/Off Pin                  | -0.3V to 12V             | LT113XAC/LT114XAC                    | 0°C to 70°C    |
| Driver Disable Pin          | -0.3V to $V_{CC} + 0.3V$ | LT113XAI/LT114XAI                    | -40° to +85°C  |
| Output Voltage              |                          | Storage Temperature Range            | -65°C to 150°C |
| Driver                      | -30V to 30V              | Lead Temperature (Soldering, 10 sec) | 300°C          |
| Receiver                    | -0.3V to $V_{CC} + 0.3V$ |                                      |                |

## PRODUCT SELECTION TABLE

| Part Number | Power Supply Voltages* | Shutdown | Driver Disable | Drivers | Receivers | External Components |
|-------------|------------------------|----------|----------------|---------|-----------|---------------------|
| LT1130A     | 5                      | No       | No             | 5       | 5         | 4 Capacitors        |
| LT1131A     | 5                      | Yes      | Yes            | 5       | 4         | 4 Capacitors        |
| LT1132A     | 5                      | No       | No             | 5       | 3         | 4 Capacitors        |
| LT1133A     | 5                      | No       | No             | 3       | 5         | 4 Capacitors        |
| LT1134A     | 5                      | No       | No             | 4       | 4         | 4 Capacitors        |
| LT1135A     | 5, 12, -12             | No       | No             | 5       | 3         | None                |
| LT1136A     | 5                      | Yes      | Yes            | 4       | 5         | 4 Capacitors        |
| LT1137A     | 5                      | Yes      | Yes            | 3       | 5         | 4 Capacitors        |
| LT1138A     | 5                      | Yes      | Yes            | 5       | 3         | 4 Capacitors        |
| LT1139A     | 5, 12                  | Yes      | No             | 4       | 4         | 2 Capacitors        |
| LT1140A     | 5, 12, -12             | Yes      | Yes            | 5       | 3         | None                |
| LT1141A     | 5, 12, -12             | Yes      | Yes            | 3       | 5         | None                |

\*The LT1130A, LT1131A, LT1132A, LT1134A, LT1136A, LT1137A and LT1138A can operate with 5V and 12V supplies and two external capacitors.

## PACKAGE/ORDER INFORMATION

| 5-DRIVER/5-RECEIVER<br>TOP VIEW                                                                                                                                                                                                                                                                                                   | ORDER PART<br>NUMBER           | 5-DRIVER/4-RECEIVER WITH SHUTDOWN<br>TOP VIEW                                                                                                                                                                                                                                                                                     | ORDER PART<br>NUMBER           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| <p>N PACKAGE<br/>28-LEAD PLASTIC DIP<br/>(.600" WIDE)</p> <p>S PACKAGE<br/>28-LEAD PLASTIC SOL<br/>(.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (S)</p> | <p>LT1130ACN<br/>LT1130ACS</p> | <p>N PACKAGE<br/>28-LEAD PLASTIC DIP<br/>(.600" WIDE)</p> <p>S PACKAGE<br/>28-LEAD PLASTIC SOL<br/>(.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (S)</p> | <p>LT1131ACN<br/>LT1131ACS</p> |

# PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                                                                                           |                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| <p><b>5-DRIVER/3-RECEIVER</b></p> <p>N PACKAGE<br/>24-LEAD PLASTIC DIP (.300" WIDE)</p> <p>S PACKAGE<br/>24-LEAD PLASTIC SOL (.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (S)</p>               | <p><b>ORDER PART NUMBER</b></p> <p>LT1132ACN<br/>LT1132ACS</p>                             | <p><b>3-DRIVER/5-RECEIVER</b></p> <p>N PACKAGE<br/>24-LEAD PLASTIC DIP (.300" WIDE)</p> <p>S PACKAGE<br/>24-LEAD PLASTIC SOL (.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (S)</p>                                                                                                                                                                            | <p><b>ORDER PART NUMBER</b></p> <p>LT1133ACN<br/>LT1133ACS</p>                                           |
| <p><b>4-DRIVER/4-RECEIVER</b></p> <p>N PACKAGE<br/>24-LEAD PLASTIC DIP (.300" WIDE)</p> <p>S PACKAGE<br/>24-LEAD PLASTIC SOL (.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 58^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 80^{\circ}\text{C/W}</math> (S)</p>               | <p><b>ORDER PART NUMBER</b></p> <p>LT1134ACN<br/>LT1134ACS<br/>LT1134AIN<br/>LT1134AIS</p> | <p><b>5-DRIVER/3-RECEIVER WITHOUT CHARGE PUMP</b></p> <p>N PACKAGE<br/>20-LEAD PLASTIC DIP (.300" WIDE)</p> <p>S PACKAGE<br/>20-LEAD PLASTIC SOL (.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 79^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 85^{\circ}\text{C/W}</math> (S)</p>                                                                                                                                                        | <p><b>ORDER PART NUMBER</b></p> <p>LT1135ACN<br/>LT1135ACS</p>                                           |
| <p><b>4-DRIVER/5-RECEIVER WITH SHUTDOWN</b></p> <p>N PACKAGE<br/>28-LEAD PLASTIC DIP (.600" WIDE)</p> <p>S PACKAGE<br/>28-LEAD PLASTIC SOL (.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (S)</p> | <p><b>ORDER PART NUMBER</b></p> <p>LT1136ACN<br/>LT1136ACS</p>                             | <p><b>3-DRIVER/5-RECEIVER WITH SHUTDOWN</b></p> <p>G PACKAGE<br/>28-LEAD PLASTIC SSOP (.300" WIDE)</p> <p>N PACKAGE<br/>28-LEAD PLASTIC DIP (.600" WIDE)</p> <p>S PACKAGE<br/>28-LEAD PLASTIC SOL (.300" WIDE)</p> <p><math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 96^{\circ}\text{C/W}</math> (G)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 56^{\circ}\text{C/W}</math> (N)<br/> <math>T_{JMAX} = 150^{\circ}\text{C}</math>, <math>\theta_{JA} = 68^{\circ}\text{C/W}</math> (S)</p> | <p><b>ORDER PART NUMBER</b></p> <p>LT1137ACG<br/>LT1137ACN<br/>LT1137ACS<br/>LT1137AIN<br/>LT1137AIS</p> |

## PACKAGE/ORDER INFORMATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                     |                                                                                                                                                                                                                                                                                                                             |                                                        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| <b>5-DRIVER/3-RECEIVER WITH SHUTDOWN</b><br><br>6 PACKAGE: 28-LEAD PLASTIC SSOP (.300" WIDE)<br>N PACKAGE: 28-LEAD PLASTIC DIP (.600" WIDE)<br>S PACKAGE: 28-LEAD PLASTIC SOL (.300" WIDE)<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 96^{\circ}\text{C/W (G)}$<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 56^{\circ}\text{C/W (N)}$<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 68^{\circ}\text{C/W (S)}$ | <b>ORDER PART NUMBER</b><br><br>LT1138ACG<br>LT1138ACN<br>LT1138ACS | <b>4-DRIVER/4-RECEIVER WITH SHUTDOWN WITH 12V AND 5V SUPPLIES</b><br><br>N PACKAGE: 24-LEAD PLASTIC DIP (.300" WIDE)<br>S PACKAGE: 24-LEAD PLASTIC SOL (.300" WIDE)<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 58^{\circ}\text{C/W (N)}$<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 80^{\circ}\text{C/W (S)}$ | <b>ORDER PART NUMBER</b><br><br>LT1139ACN<br>LT1139ACS |
| <b>5-DRIVER/3-RECEIVER WITH SHUTDOWN WITHOUT CHARGE PUMP</b><br><br>N PACKAGE: 24-LEAD PLASTIC DIP (.300" WIDE)<br>S PACKAGE: 24-LEAD PLASTIC SOL (.300" WIDE)<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 58^{\circ}\text{C/W (N)}$<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 80^{\circ}\text{C/W (S)}$                                                                                                         | <b>ORDER PART NUMBER</b><br><br>LT1140ACN<br>LT1140ACS              | <b>3-DRIVER/5-RECEIVER WITH SHUTDOWN WITHOUT CHARGE PUMP</b><br><br>N PACKAGE: 24-LEAD PLASTIC DIP (.300" WIDE)<br>S PACKAGE: 24-LEAD PLASTIC SOL (.300" WIDE)<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 58^{\circ}\text{C/W (N)}$<br>$T_{JMAX} = 150^{\circ}\text{C}, \theta_{JA} = 80^{\circ}\text{C/W (S)}$      | <b>ORDER PART NUMBER</b><br><br>LT1141ACN<br>LT1141ACS |

Consult factory for Industrial and Military grade parts.

## ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                                                                                        | CONDITIONS                                            | MIN | TYP  | MAX | UNITS |
|--------------------------------------------------------------------------------------------------|-------------------------------------------------------|-----|------|-----|-------|
| <b>Power Supply Generator</b>                                                                    |                                                       |     |      |     |       |
| V <sup>+</sup> Output                                                                            |                                                       |     | 8.6  |     | V     |
| V <sup>-</sup> Output                                                                            |                                                       |     | -7.8 |     | V     |
| 5V V <sub>CC</sub> Supply Current: LT1130A, LT1131A, LT1132A, LT1133A, LT1134A, LT1136A, LT1138A | (Note 3)                                              | ●   | 15   | 25  | mA    |
| 5V V <sub>CC</sub> Supply Current: LT1135A, LT1140A, LT1141A                                     | (Note 3), V <sup>+</sup> = 12V, V <sup>-</sup> = -12V | ●   | 8    | 15  | mA    |
| 5V V <sub>CC</sub> Supply Current: LT1137A                                                       | (Note 3)                                              | ●   | 12   | 17  | mA    |
| 5V V <sub>CC</sub> Supply Current: LT1139A                                                       | (Note 3), V <sup>+</sup> = 12V                        | ●   | 8    | 15  | mA    |
| 12V V <sup>+</sup> Supply Current: LT1135A, LT1140A, LT1141A                                     | (Note 3), V <sup>-</sup> = -12V                       | ●   | 1    | 4   | mA    |
| 12V V <sup>+</sup> Supply Current: LT1139A                                                       | (Note 3)                                              | ●   | 6    | 10  | mA    |
| -12V V <sup>-</sup> Supply Current: LT1135A, LT1140A, LT1141A                                    | (Note 3) V <sup>+</sup> = 12V                         | ●   | 2    | 6   | mA    |

# ELECTRICAL CHARACTERISTICS (Note 2)

| PARAMETER                               | CONDITIONS                                                                                         |        | MIN        | TYP         | MAX        | UNITS                    |
|-----------------------------------------|----------------------------------------------------------------------------------------------------|--------|------------|-------------|------------|--------------------------|
| Supply Current when OFF ( $V_{CC}$ )    | SHUTDOWN (Note 4)<br>DRIVER DISABLE                                                                | ●      |            | 1<br>4      | 10         | $\mu$ A<br>mA            |
| Supply Rise Time<br>SHUTDOWN to Turn-On | $C_1, C_2, C^+, C^- = 1.0\mu F$<br>$C^+, C^- = 0.1\mu F, C_1, C_2 = 0.2\mu F$                      |        |            | 2.0<br>0.2  |            | ms<br>ms                 |
| ON/OFF Pin Thresholds                   | Input Low Level (Device SHUTDOWN)<br>Input High Level (Device Enabled)                             | ●<br>● | 2.4        | 1.4<br>1.4  | 0.8        | V<br>V                   |
| ON/OFF Pin Current                      | $0V \leq V_{ON/OFF} \leq 5V$                                                                       | ●      | -15        |             | 80         | $\mu$ A                  |
| DRIVER DISABLE Pin Thresholds           | Input Low Level (Drivers Enabled)<br>Input High Level (Drivers Disabled)                           | ●<br>● | 2.4        | 1.4<br>1.4  | 0.8        | V<br>V                   |
| DRIVER DISABLE Pin Current              | $0V \leq V_{DRIVER\ DISABLE} \leq 5V$                                                              | ●      | -10        |             | 500        | $\mu$ A                  |
| Oscillator Frequency                    |                                                                                                    |        |            | 130         |            | kHz                      |
| <b>Any Driver</b>                       |                                                                                                    |        |            |             |            |                          |
| Output Voltage Swing                    | Load = 3k to GND Positive<br>Negative                                                              | ●<br>● | 5          | 7.3<br>-6.5 |            | V<br>V                   |
| Logic Input Voltage Level               | Input Low Level ( $V_{OUT} = \text{High}$ )<br>Input High Level ( $V_{OUT} = \text{Low}$ )         | ●<br>● | 2          | 1.4<br>1.4  | 0.8        | V<br>V                   |
| Logic Input Current                     | $0.8V \leq V_{IN} \leq 2V$                                                                         | ●      |            | 5           | 20         | $\mu$ A                  |
| Output Short-Circuit Current            | $V_{OUT} = 0V$                                                                                     |        | $\pm 9$    | $\pm 17$    |            | mA                       |
| Output Leakage Current                  | SHUTDOWN $V_{OUT} = \pm 30V$ (Note 4)                                                              | ●      |            | 10          | 100        | $\mu$ A                  |
| Data Rate                               | $R_L = 3k, C_L = 2500pF$<br>$R_L = 3k, C_L = 1000pF$                                               |        | 120<br>250 |             | 250        | kBaud<br>kBaud           |
| Slew Rate                               | $R_L = 3k, C_L = 51pF$<br>$R_L = 3k, C_L = 2500pF$                                                 |        |            | 15<br>6     | 30         | V/ $\mu$ s<br>V/ $\mu$ s |
| Propagation Delay                       | Output Transition $t_{HL}$ High-to-Low (Note 5)<br>Output Transition $t_{LH}$ Low-to-High          |        |            | 0.6<br>0.5  | 1.3<br>1.3 | $\mu$ s<br>$\mu$ s       |
| <b>Any Receiver</b>                     |                                                                                                    |        |            |             |            |                          |
| Input Voltage Thresholds                | Input Low Threshold ( $V_{OUT} = \text{High}$ )<br>Input High Threshold ( $V_{OUT} = \text{Low}$ ) | ●<br>● | 0.8        | 1.3<br>1.7  | 2.4        | V<br>V                   |
| Hysteresis                              |                                                                                                    | ●      | 0.1        | 0.4         | 1          | V                        |
| Input Resistance                        | $-10V < V_{IN} < 10V$                                                                              |        | 3          | 5           | 7          | k $\Omega$               |
| Output Voltage                          | Output Low, $I_{OUT} = -1.6mA$<br>Output High, $I_{OUT} = 160\mu A$ ( $V_{CC} = 5V$ )              | ●<br>● |            | 0.2<br>4.2  | 0.4        | V<br>V                   |
| Output Leakage Current                  | SHUTDOWN (Note 4) $0 \leq V_{OUT} \leq V_{CC}$                                                     | ●      |            | 1           | 10         | $\mu$ A                  |
| Output Short-Circuit Current            | Sinking Current, $V_{OUT} = V_{CC}$<br>Sourcing Current, $V_{OUT} = 0V$                            |        | 10         | -20<br>20   | -10        | mA<br>mA                 |
| Propagation Delay                       | Output Transition $t_{HL}$ High-to-Low (Note 6)<br>Output Transition $t_{LH}$ Low-to-High          |        |            | 250<br>350  | 600<br>600 | ns<br>ns                 |

The ● denotes specifications which apply over the operating temperature range ( $0^\circ C \leq T_A \leq 70^\circ C$  for commercial grade and  $-40^\circ C \leq T_A \leq 85^\circ C$  for industrial grade).

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

**Note 2:** Testing done at  $V_{CC} = 5V$  and  $V_{ON/OFF} = 3V$ .

**Note 3:** Supply current is measured with driver and receiver outputs unloaded and the driver inputs tied high.

**Note 4:** Supply current and driver leakage current measurements in SHUTDOWN are performed with  $V_{ON/OFF} = 0.1V$ . Supply current measurements using DRIVER DISABLE are performed with  $V_{DRIVER\ DISABLE} = 3V$ .










For LT1135, LT1139, LT1140 and LT1141 with 12V supplies,  $V_{OUT}$  leakage is  $200\mu A$  for  $V_{OUT}$  forced to  $\pm 25V$ .

**Note 5:** For driver delay measurements,  $R_L = 3k$  and  $C_L = 51pF$ . Trigger points are set between the driver's input logic threshold and the output transition to the zero crossing ( $t_{HL} = 1.4V$  to  $0V$  and  $t_{LH} = 1.4V$  to  $0V$ ).





**Note 6:** For receiver delay measurements,  $C_L = 51pF$ . Trigger points are set between the receiver's input logic threshold and the output transition to standard TTL/CMOS logic threshold ( $t_{HL} = 1.3V$  to  $2.4V$  and  $t_{LH} = 1.7V$  to  $0.8V$ ).

**Note 7:** For LT1133A/LT1137A, absolute maximum externally applied  $V^- = -6.5V$ . Internal charge pump will drive this pin to a higher negative voltage.

## TYPICAL PERFORMANCE CHARACTERISTICS

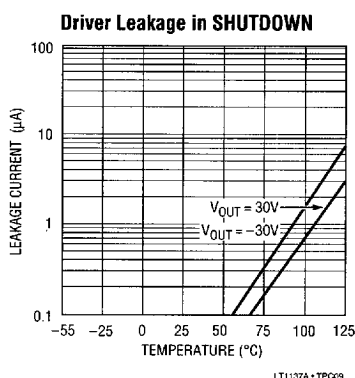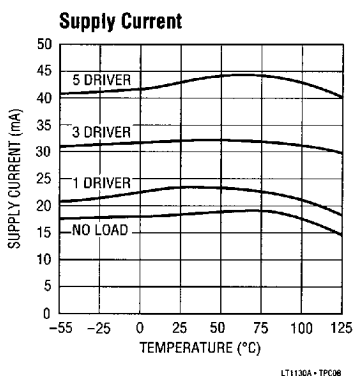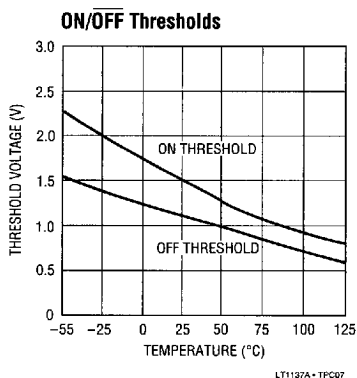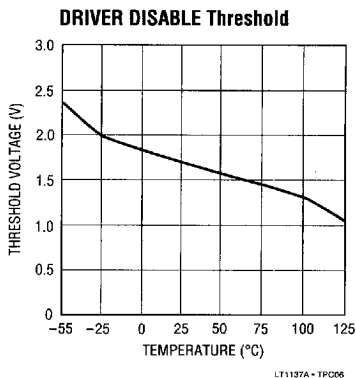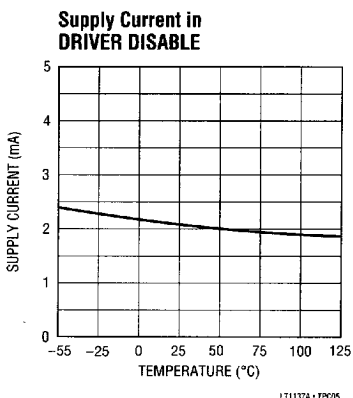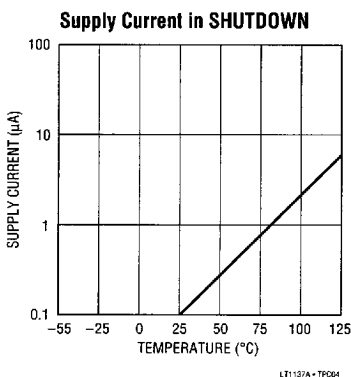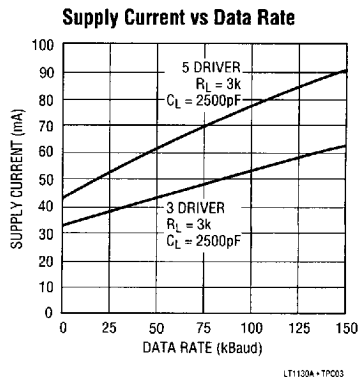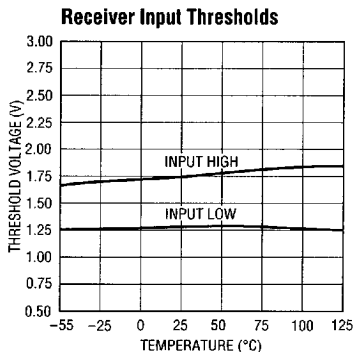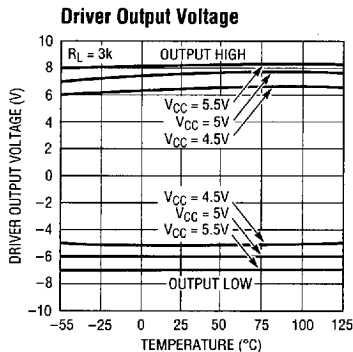

## TYPICAL PERFORMANCE CHARACTERISTICS

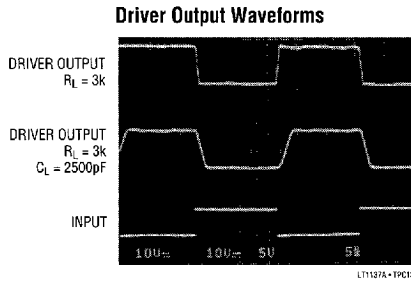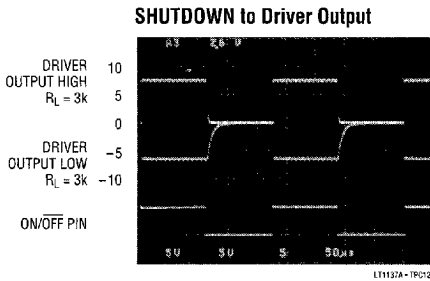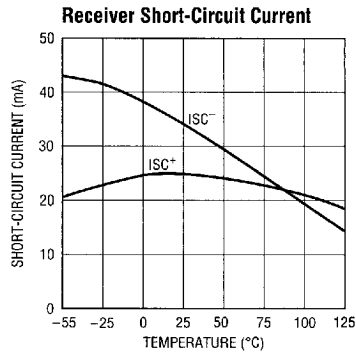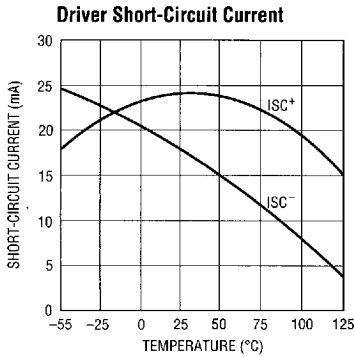

## PIN FUNCTIONS

**V<sub>CC</sub>:** 5V Input Supply Pin. Supply current drops to zero in the SHUTDOWN mode. This pin should be decoupled with a 0.1 $\mu$ F ceramic capacitor close to the package pin. Insufficient supply bypassing can result in low output drive levels and erratic charge pump operation.

**GND:** Ground Pin.

**ON/OFF:** Control the operation mode of the device and is TTL/CMOS compatible. A logic low puts the device in the SHUTDOWN mode which reduces input supply current to zero and places all of the drivers and receivers in high impedance state. A logic high fully enables the transceiver.

**DRIVER DISABLE:** This pin provides an alternate control for the charge pump and RS232 drivers. A logic high on this pin shuts down the charge pump and places all drivers

in a high impedance state. Receivers remain active under these conditions. Floating the driver disable pin or driving it to a logic low level fully enables the transceiver. A logic low on the ON/OFF pin supersedes the state of the Driver Disable pin. Supply current drops to 4mA when in DRIVER DISABLE mode.

**V<sup>+</sup>:** Positive Supply Output (RS232 Drivers).  $V^+ \approx 2V_{CC} - 1.5V$ . This pin requires an external charge storage capacitor  $C \geq 1.0\mu F$ , tied to ground or  $V_{CC}$ . Larger value capacitors may be used to reduce supply ripple. With multiple transceivers, the  $V^+$  and  $V^-$  pins may be paralleled into common capacitors. For large numbers of transceivers, increasing the size of the shared common storage capacitors is recommended to reduce ripple.

## PIN FUNCTIONS

**V<sup>-</sup>:** Negative Supply Output (RS232 Drivers).  $V^- \approx -(2V_{CC} - 2.5V)$ . This pin requires an external charge storage capacitor  $C \geq 0.1\mu F$ .  $V^-$  is short-circuit proof for 30 seconds.

**C1<sup>+</sup>, C1<sup>-</sup>, C2<sup>+</sup>, C2<sup>-</sup>:** Commutating Capacitor Inputs. These pins require two external capacitors  $C \geq 0.2\mu F$ : one from C1<sup>+</sup> to C1<sup>-</sup>, and another from C2<sup>+</sup> to C2<sup>-</sup>. To maintain charge pump efficiency, the capacitor's effective series resistance should be less than  $2\Omega$ . For  $C \geq 1\mu F$ , low ESR tantalum capacitors work well in this application, although small value ceramic capacitors may be used with a minimal reduction in charge pump compliance. In applications where larger positive voltages are available, such as 12V, C1 may be omitted and the positive voltage may be connected directly to the C1<sup>+</sup> pin. In this mode of operation, the V<sup>+</sup> pin should be decoupled with a 0.1 $\mu F$  ceramic capacitor.

**DRIVER IN:** RS232 Driver Input Pins. These inputs are TTL/CMOS compatible. Inputs should not be allowed to float. Tie unused inputs to  $V_{CC}$ .

**DRIVER OUT:** Driver Outputs at RS232 Voltage Levels. Driver output swing meets RS232 levels for loads up to 3k.


Slew rates are controlled for lightly loaded lines. Output current capability is sufficient for load conditions up to 2500pF. Outputs are in a high impedance state when in SHUTDOWN mode,  $V_{CC} = 0V$ , or when the driver disable pin is active. Outputs are fully short-circuit protected from  $V^- + 30V$  to  $V^+ - 30V$ . Applying higher voltages will not damage the device if the overdrive is moderately current limited. Short circuits on one output can load the power supply generator and may disrupt the signal levels of the other outputs. The driver outputs are protected against ESD to  $\pm 10kV$  for human body model discharges.

**RX IN:** Receiver Inputs. These pins accept RS232 level signals ( $\pm 30V$ ) into a protected 5k terminating resistor. The receiver inputs are protected against ESD to  $\pm 10kV$  for human body model discharges. Each receiver provides 0.4V of hysteresis for noise immunity. Open receiver inputs assume a logic low state.

**RX OUT:** Receiver Outputs with TTL/CMOS Voltage Levels. Outputs are in a high impedance state when in SHUTDOWN mode to allow data line sharing. Outputs are fully short-circuit protected to ground or  $V_{CC}$  with the power on, off, or in SHUTDOWN mode.

## ESD PROTECTION


The RS232 line inputs of the LT1130A/LT1140A series of RS232 Driver/Receivers have on-chip protection from ESD transients up to  $\pm 10kV$ . The protection structures act to divert the static discharge safely to system ground. In order for the ESD protection to function effectively, the power supply and ground pins of the LT1130A/LT1140A must be connected to ground through low impedances. The power supply decoupling capacitors and charge pump storage capacitors provide this low impedance in normal application of the circuit. The only constraint is that low ESR capacitors must be used for bypassing and charge storage. ESD testing must be done with pins  $V_{CC}$ , V<sup>+</sup>, V<sup>-</sup> and GND shorted to ground or connected with low ESR capacitors.

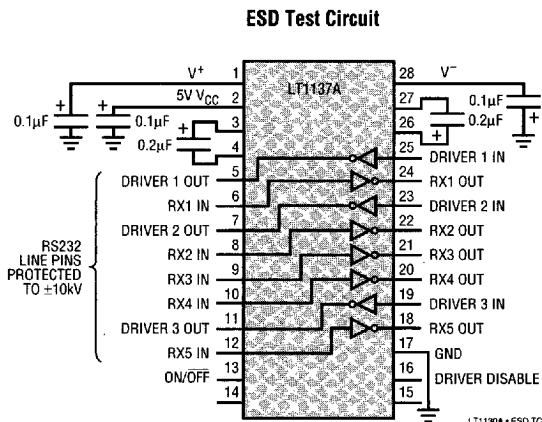




## TYPICAL APPLICATIONS

### Operation Using 5V and 12V Power Supplies

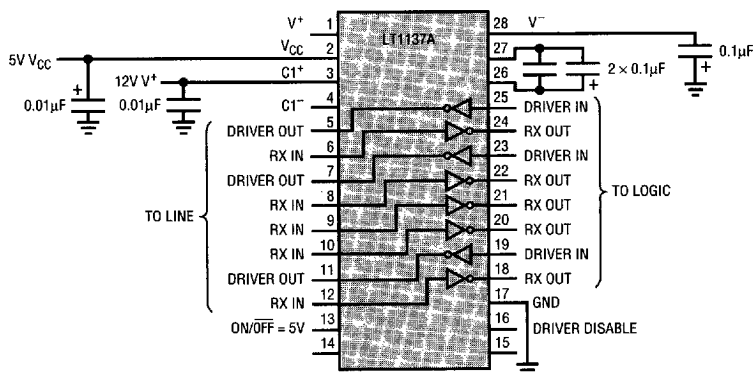

LT1130A • TA03

### Typical Mouse Driving Application

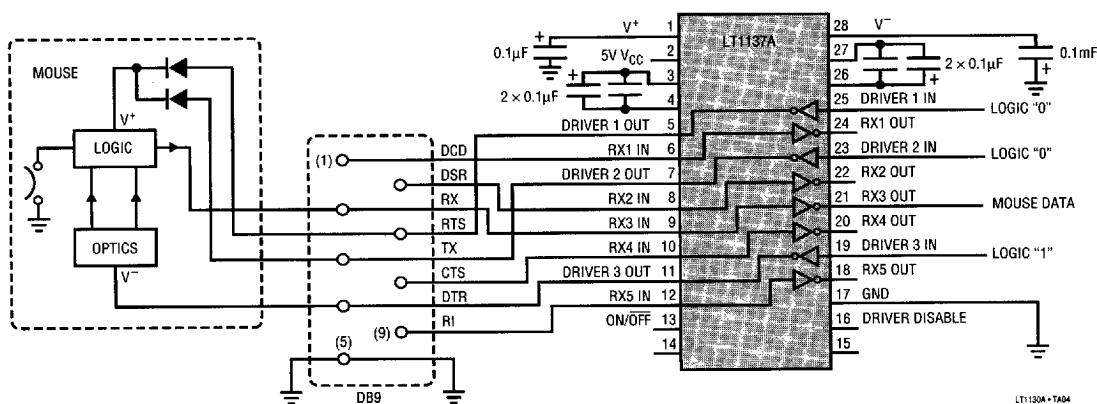

LT1130A • TA04

## TYPICAL APPLICATIONS

### Sharing Power Supply Generator with a Second Transceiver

