

100 WATT SINGLE OUTPUT HIGH DENSITY DC/DC CONVERTER

VKA100xS Series

FEATURES

- 18 - 36V & 33 - 75V INPUT RANGE
- SMALL SIZE: 2.28" X 2.4" X 0.50"
- HIGH EFFICIENCY: 87% TYPICAL AT 5V
- 100 μ S TRANSIENT RESPONSE 50-100% LOAD STEP
- 420kHz FIXED-FREQUENCY OPERATION
- OPERATION TO +100°C BASEPLATE TEMP.
- PRIMARY REMOTE ON/OFF, CHOICE OF POS/NEG LOGIC
- ADJUSTABLE OUTPUT VOLTAGE
- REMOTE SENSE
- CONTINUOUS SHORT-CIRCUIT PROTECTION
- THERMAL SHUTDOWN
- SAFETY PER UL1950, EN 60950 AND CSA 22.2 #234
- CASE GROUND PIN

DESCRIPTION

The VKA100xS Series DC/DC converters present an economical and practical solution for distributed power system architectures which require high power density and efficiency while maintaining system modularity and upgradeability. With the ability to operate over a wide input voltage range of 18 to 36 and 33 to 75 volts, these modules are ideal for use in battery backup applications common in today's telecommunication and electronic data processing applications. The output is fully isolated from the input, allowing for a variety of polarity and grounding configurations.

The VKA100xS's proprietary control circuitry responds to 50-100% load steps in 100 μ Seconds to within 1% nominal Vout.

The patented fixed frequency architecture combined with surface mount technology results in a compact, efficient and reliable solution to DC/DC conversion requirements.

Model	Input Voltage	V _{OUT} (VDC)	I _{OUT} (A)	Efficiency(%) Note (1)	
				Min	Typ
VKA100LS02	24Vdc	2.0V	20.0	75	76
VKA100LS02F		2.0V	30.0	73	74
VKA100LS2V5F		2.5V	30.0	75	76
VKA100LS03		3.3V	20.0	80	81
VKA100LS03F		3.3V	30.0	80	81
VKA100LS05		5.0V	20.0	85	86
VKA100LS12		12.0V	8.3	87	88
VKA100LS15		15.0V	6.7	88	89
VKA100LS24		24.0V	4.2	89	90

Model	Input Voltage	V _{OUT} (VDC)	I _{OUT} (A)	Efficiency(%) Note (1)	
				Min	Typ
VKA100MS02	48Vdc	2.0V	20.0	76	77
VKA100MS02F		2.0V	30.0	74	75
VKA100MS2V5F		2.5V	30.0	77	78
VKA100MS03		3.3V	20.0	81	82
VKA100MS03F		3.3V	30.0	81	82
VKA100MS05		5.0V	20.0	86	87
VKA100MS12		12.0V	8.3	88	89
VKA100MS15		15.0V	6.7	89	90
VKA100MS24		24.0V	4.2	89	90

AGENCY APPROVALS



COMMON SPECIFICATIONS

Specifications typical at T_{CASE} = +40°C, nominal input voltage, rated output current unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT					
Voltage Range		18	24	36	VDC
VKA100LS		33	48	75	VDC
VKA100MS					
Maximum Input Current				7.4	A
VKA100LS	V _{IN} = 16VDC			4.4	A
VKA100MS	V _{IN} = 27VDC				
Reflected Ripple Current	Peak - Peak	50	20		mA
Input Ripple Rejection	DC to 1KHz		60		dB
No Load Input Current LS/MS			50/100		mA
Power Dissipation LS/MS					
No Load			3.6/4.8		W
Standby, Primary On/Off Disabled LS/MS			0.18/0.4		W
Inrush Charge	V _{IN} = V _{IN} max.			0.520	mC
VKA100LS				0.360	mC
VKA100MS					
Quiescent Operating Current			8	12	mA
Primary On/Off Disabled					
OUTPUT					
Rated Power		0		100	W
Set point Accuracy				1	%
Line Regulation	High Line to Low Line		0.02	0.05	%
Load Regulation	No Load to Rated Load		0.02	0.05	%
Output Temperature Drift			±.02		%/°C
Output Ripple, p-p	DC to 20MHz BW		1%		V _{OUT} , Nom
Output Current Limit Inception				130%	I _{OUT} , Nom
Output Short-Circuit Current (2)	test			110%	I _{OUT} , Nom
Output Overvoltage Limit			125%	135%	V
Transient Response	50 to 100% Load Step				V _{OUT} , Nom
Peak Deviation	di/dt = 0.1A/μSec		2%		μSec
Settling Time	V _{OUT} , 1% of Nominal Output		100		
ISOLATION					
Input to Output	Peak Test for 2 Seconds	1500			VDC
Input to Baseplate		1500			VDC
Output to Baseplate		500			VDC
Resistance		10			MΩ
Capacitance			2000		pF
Leakage Current	V _{ISO} = 240VAC, 60Hz		180		μA, rms
GENERAL					
Efficiency, Line, Load, Temp. (3)		400	420	440	KHz
Switching Frequency				0.5	V
Remote Sense Compensation			-50% / +25%		V _{OUT} , Nom
Output Voltage Adjust Range -12 V & higher(4)					
Remote On/Off Control Inputs					
Primary	Open Collector/Drain			1.0	mA
Sink Current-Logic Low				0.4	V
Vlow					
Vhigh0					
Turn-on Time	Within 1% of Rated Output		10.0	12.5	mSec
Weight				85 (3.0)	g (oz.)
TEMPERATURE					
Operation/Specification	Case Temperature	-40	+25	+100	°C
Storage	Case Temperature	-55	+25	+125	°C
Shutdown Temperature	Case Temperature	+100		+115	°C
Thermal Impedance, case-ambient			7.1		°C/W
Lead Solder Temperature	10 Seconds max			+300	°C

() See NOTES on page 3.

NOTES:


- (1) See Typical Performance Curves, page 3
- (2) Continuous Mode
- (3) See graphs for Efficiency vs. Output Load, V_{IN} , T_{CASE}
- (4) 3.3V Models Limited in Trim Down Range
- (5) Consult Factory for Details

ORDERING INFORMATION


Device Family	VKA100 xSzz-
Indicates 100 Watt Regulated Unit	
Model Number	Selected from Table of Electrical Characteristics
Where:	
x = Input Voltage (L = 24VDC; M = 48VDC)	
zz = Output Voltage (03=3.3V, 05=5V, etc.)	
Lead Length	
0.200" - No Number	
0.145" - (6)	
0.110" - (8)	
Remote On-Off Logic:	
Positive - No Number	
Negative - (1)	

TYPICAL PERFORMANCE CURVES

$T_A = +40^\circ\text{C}$, nominal input voltage, rated load, recommended external components applied, unless otherwise specified.

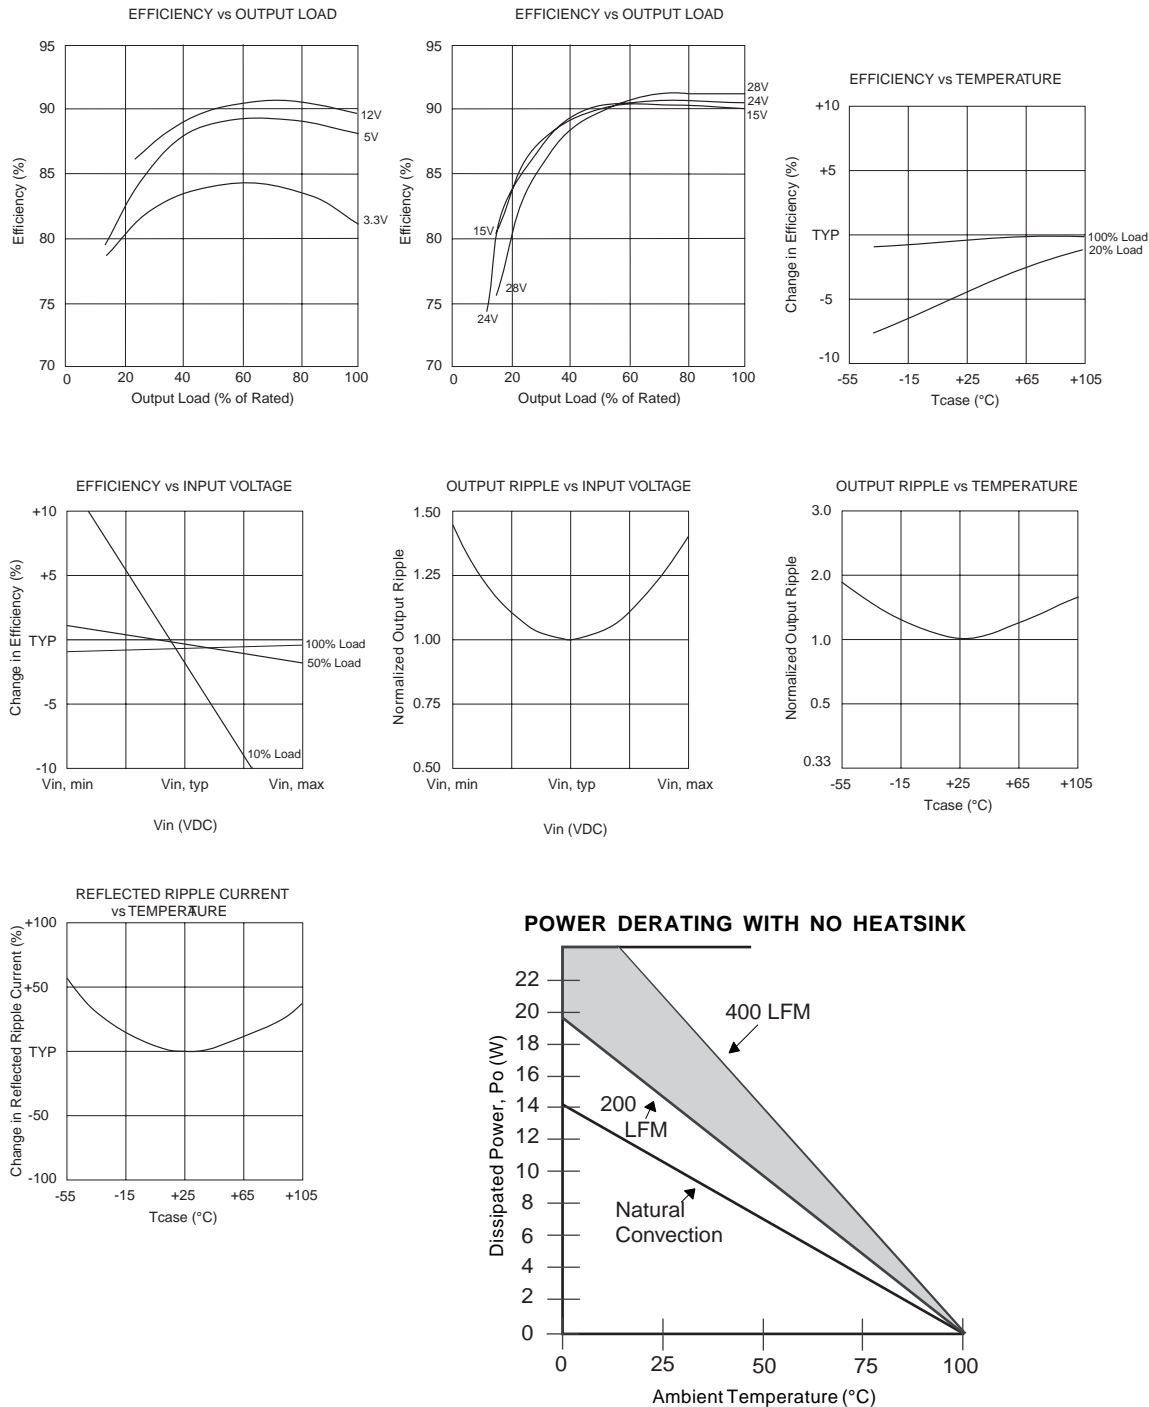

MECHANICAL

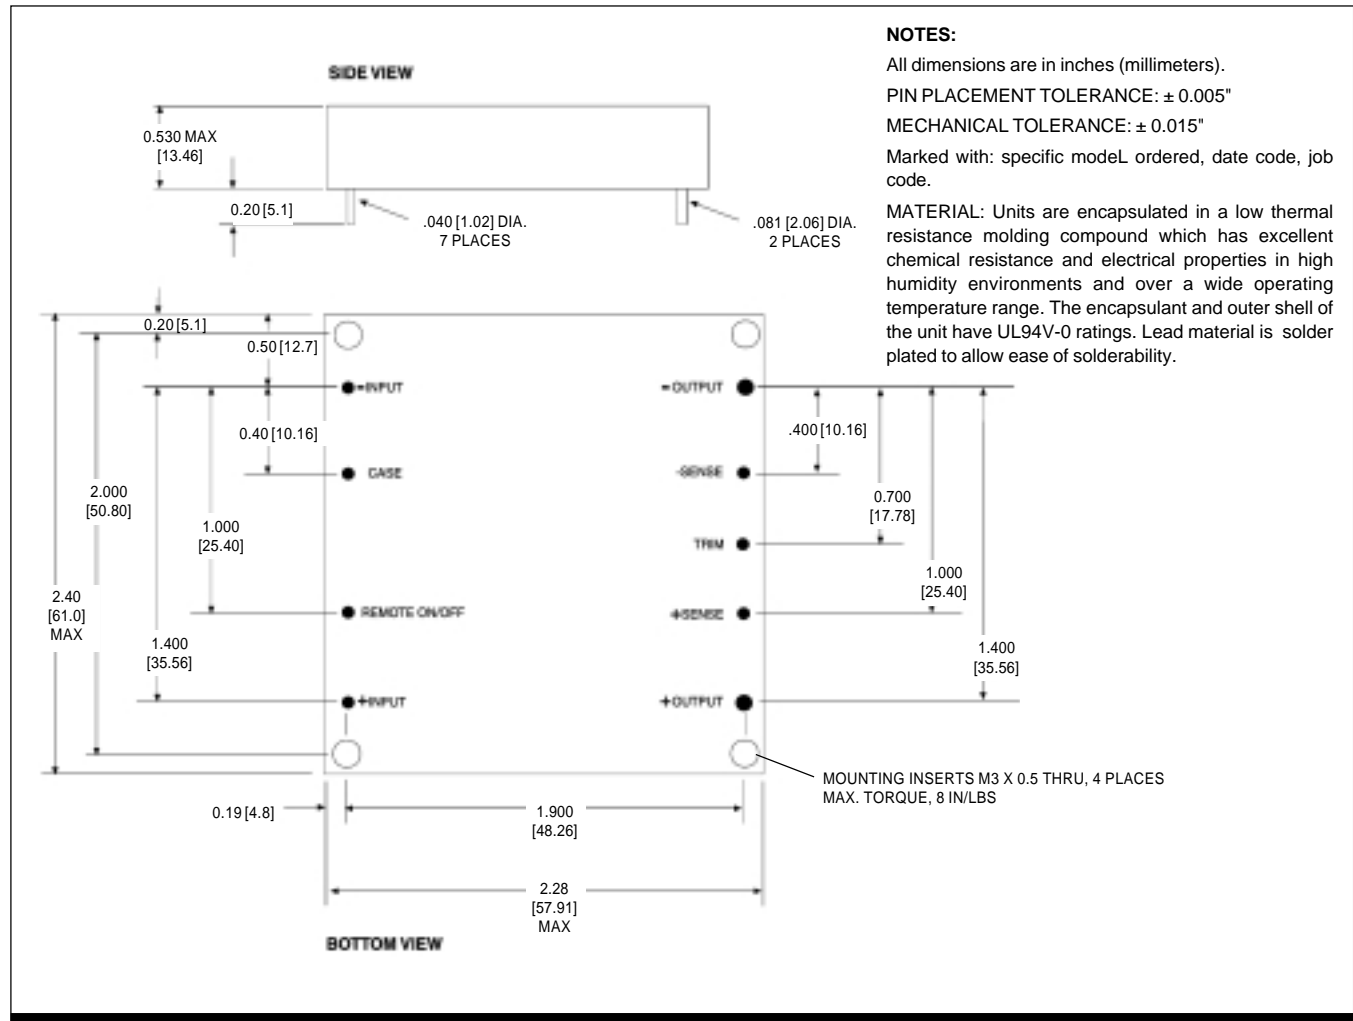

OUTPUT VOLTAGE ADJUST

This feature allows the user to accurately adjust the module's output voltage set point to a specified level. This is achieved by connecting a resistor or potentiometer from the TRIM terminal to either the +Vout terminal (for increased Vout) or the -Vout terminal (for decreased Vout). The formulae below describe the trim resistor value to obtain a Vout change of $\Delta\%$. Vo is output voltage prior to adjustment (3.3V, 5V, 12V, 15V, 24V or 28V).

$$\text{Radj - up} = \left(\frac{V_o(100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) \text{ k}\Omega$$

$$\text{Radj - down} = \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

OVP NOTE

Special attention should be given to the peak voltage deviation during a dynamic load step when trimming the output above the original set point to avoid tripping the overvoltage protection circuit. Should an OVP condition occur, the converter will go into a latch condition and must be externally reset before it will return to normal operation.

Power Electronics Division, United States
 3400 E Britannia Drive, Tucson, Arizona 85706
 Phone: 800.547.2537
 Fax: 520.770.9369

C&D Technologies, (NCL)
 Tanners Drive, Blakelands North
 Milton Keynes MK14 5BU UK
 Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Power Electronics Division, Europe
 C&D Technologies (Power Electronics) Ltd.
 132 Shannon Industrial Estate, Shannon, Co. Clare, Ireland
 Tel: +353.61.474.133 Fax: +353.61.474.141

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.