

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0671300802](#)
Status: **Active**
Description: 1.27mm (.050") PC Card Header: Single Slot, Flush Profile, Top Mount, Right Angle, SMT, without Mylar, Tape and Reel Packaging, Lead-free

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Memory Card Sockets
Series	67130
Button Type	N/A
Comments	Without Mylar, Tape and Reel Packaging
Component Type	Header/Socket (Host)
Product Name	CardBus, PC Card
Type	I, II, III

Physical

Card Detection Switch	N/A
Circuits (Loaded)	68
Durability (mating cycles max)	10,000
Ejector Button Side	No Ejector Button Present
Entry Angle	90° Angle (Side Entry)
Keying to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
PCB Locator	Yes
PCB Mounting Side	Normal
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.38
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.5
Ports	1
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Surface Mount


Electrical

Current - Maximum per Contact	0.5A
Voltage - Maximum	100V AC
Voltage Key	3.3V

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-67130-005
---------------	--------------

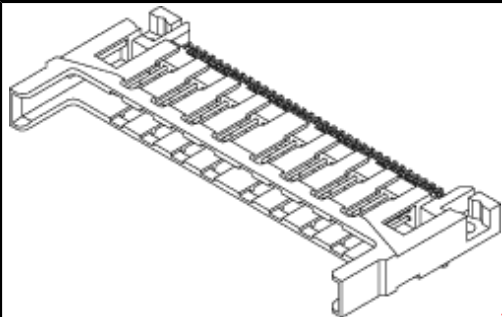

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)



Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[67130Series](#)

Use With

[67121](#) Ejector Mechanism

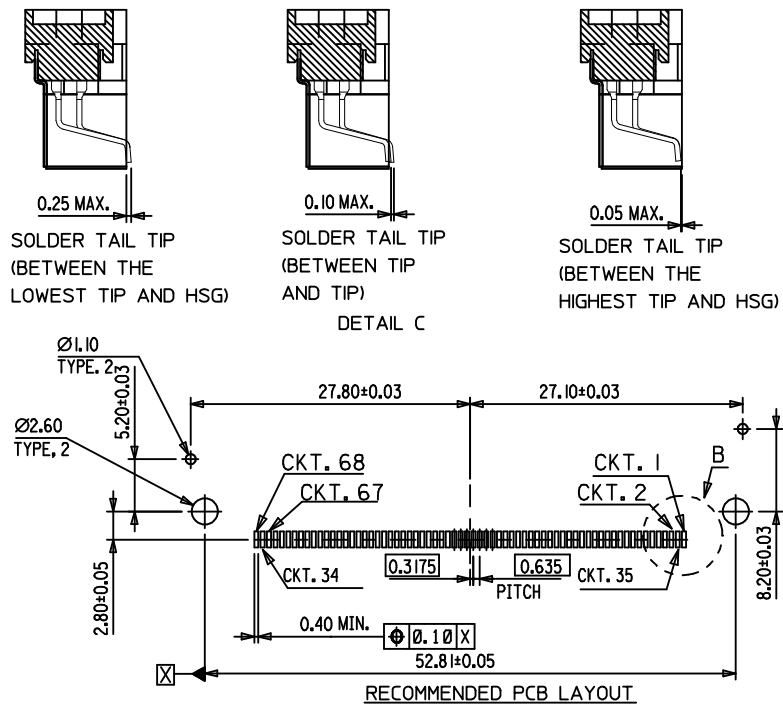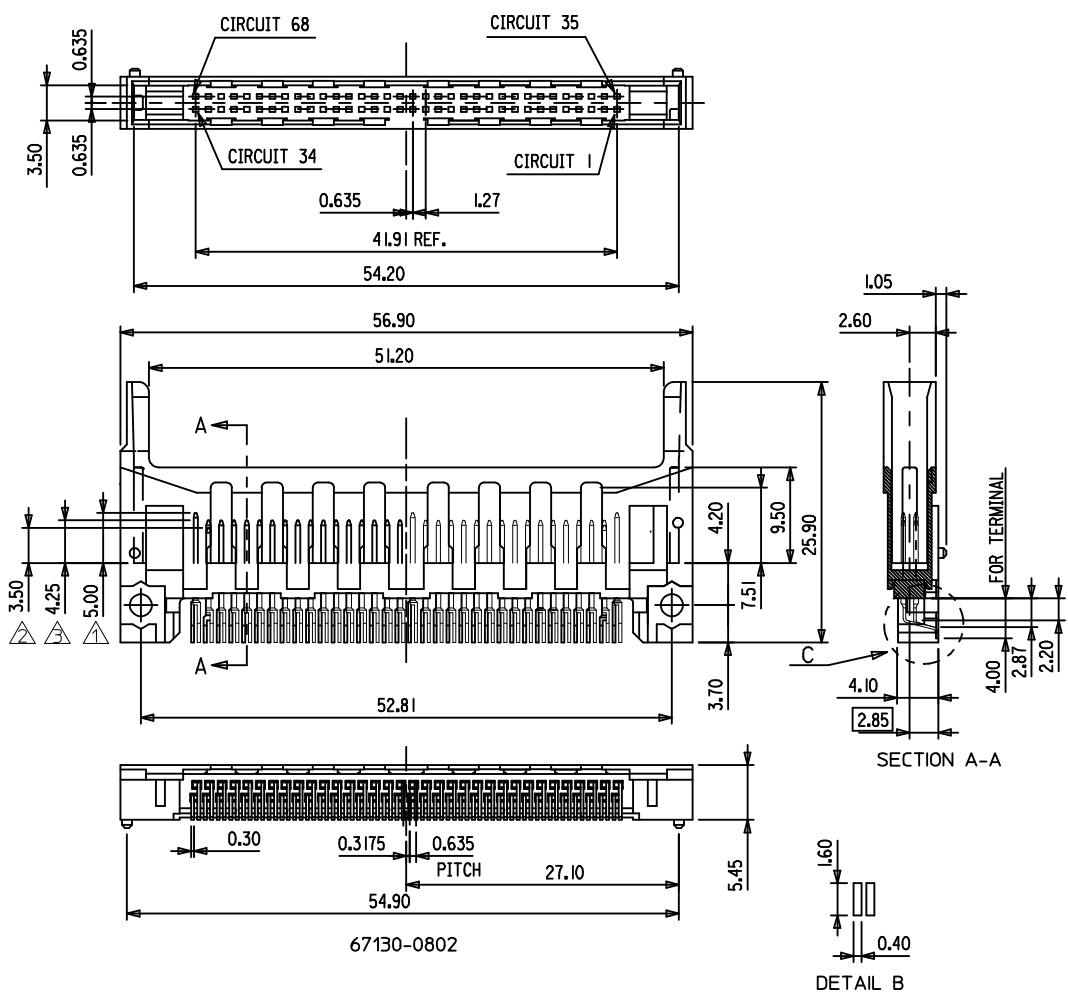


- NOTES:
- 1. APPLIES TO CIRCUIT NUMBER:1,17,34,35,51,68.
 - 2. APPLIES TO CIRCUIT NUMBER:36,67.
 - 3. APPLIES TO CIRCUIT NUMBER:THE OTHERS.
 - 4. COPLANARITY BETWEEN SOLDER TAILS IS 0.10mm MAX.
 - 5. TRUE POSITION BETWEEN SOLDER TAILS IS 0.15 mm MAX.
 - 6. PRODUCT SPEC : PS-67160-011.
 - 7. FINISH:
SELECTIVE GOLD (Au) IN CONTACT AREA, THICKNESS=0.38 MICROMETER MINIMUM,
SELECTIVE PURE TIN IN SOLDER TAIL AREA, THICKNESS=2.50 MICROMETER MINIMUM,
NICKEL (Ni) OVERALL.
 - 8. THE PACKAGE OF 67130-0802 PER PK-67130-002, 67130-0809 PER PK-67130-001.
 - 9. PRODUCT COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV 2000/53/EC.

67130-0809	W MYLAR	T&R
67130-0802	W/O MYLAR	TRAY
PART NUMBER	DESCRIPTION	PACKAGE


REVISED	EC NO: SH2009-0192	2008/09/25
DRWN:XQZHANG	2008/09/29	
CHKD:XJISONG	2008/10/27	
APPR:HWANG		
REV	DESCRIPTION	

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
▽=0	mm INCH
▽=0	4 PLACES ± --- ± ---
	3 PLACES ± --- ± ---
	2 PLACES ± 0.25 ± .010
	1 PLACE ± 0.25 ± .010
	ANGULAR ± 3 °
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
MM ONLY	1:1	METRIC	
DRAWN BY	DATE	TITLE	
JACK	2004/11/13	PC CARD HEADER ASS'Y	
CHECKED BY	DATE	LEAD-FREE FOR 3.3V SMT	
HWANG	2004/11/14	STANDARD TYPE	
APPROVED BY	DATE	MOLEX INCORPORATED	
YTYP	2004/11/14		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
SEE TABLE	SD-67130-005	1 OF 2	
SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
A3			



tb_frame_A3_P_AM_T
Rev. E 2006/04/15



GC.DGN REV A
96/06/12 LEVEL 3