




0664D SERIES

The 664D filter is a 3 phase (Delta) filter.
This series is designed to be used with military systems which are required to meet the conducted emission levels of MIL-STD-461, CE03.
Minor modifications can be done to adjust the Environmental and vibration specs.

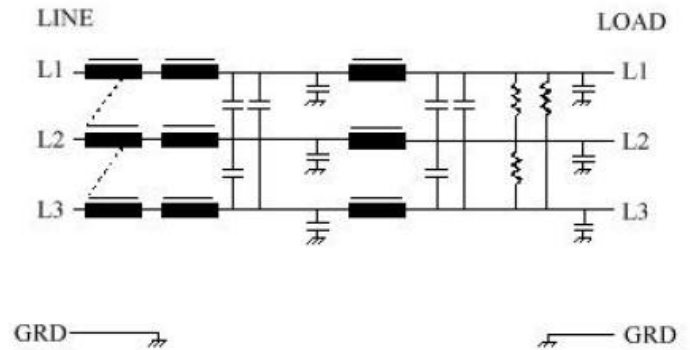

Operating Voltage = 250/480 V ac
Operating Current Max= 7 & 10 amps
Operating Frequency = 50 - 400Hz
Operating Temperature= -20 to +50°C
Diel Withstand (L to Case)= 1500V ~for 1 Min.
Diel Withstand (L to L)= 1500V dc for 1 Min.
Leakage current @ 250V ~60Hz=
1.0 mA at 250V ac, 400Hz
Max Residual Voltage after 5 secs = 34 V olts
Max

