

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

FEATURES

- High power gain
- Low noise figure
- Gold metallization ensures excellent reliability.

APPLICATIONS

They are intended for wideband applications in the UHF and microwave ranges.

DESCRIPTION



NPN silicon planar epitaxial transistors in plastic, 4-pin dual-emitter SOT343 and SOT343R packages.

MARKING

TYPE NUMBER	CODE
BFG93AW	R8
BFG93AW/X	R9
BFG93AW/XR	R0

PINNING

PIN	DESCRIPTION
BFG93AW (see Fig.1)	
1	collector
2	base
3	emitter
4	emitter
BFG93AW/X (see Fig.1)	
1	collector
2	emitter
3	base
4	emitter
BFG93AW/XR (see Fig.2)	
1	collector
2	emitter
3	base
4	emitter

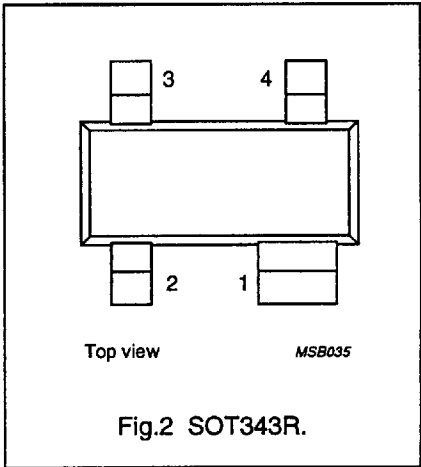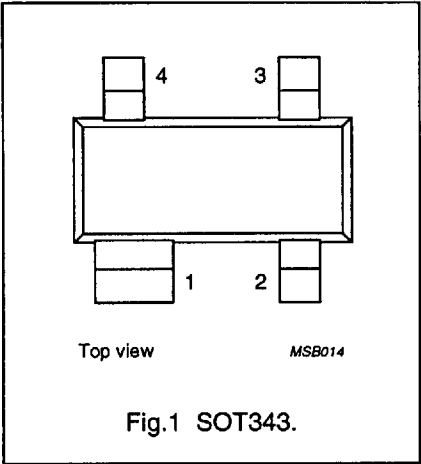

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	–	15	V
V_{CEO}	collector-emitter voltage	open base	–	–	12	V
I_C	collector current (DC)		–	–	35	mA
P_{tot}	total power dissipation	up to $T_s = 60\text{ }^{\circ}\text{C}$	–	–	500	mW
h_{FE}	DC current gain	$I_C = 30\text{ mA}$; $V_{CE} = 5\text{ V}$	40	90	–	
C_{re}	feedback capacitance	$I_C = 0$; $V_{CE} = 5\text{ V}$; $f = 1\text{ MHz}$	–	0.6	–	pF
f_T	transition frequency	$I_C = 30\text{ mA}$; $V_{CE} = 5\text{ V}$; $f = 500\text{ MHz}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$	–	7	–	GHz
G_{UM}	maximum unilateral power gain	$I_C = 30\text{ mA}$; $V_{CE} = 8\text{ V}$; $f = 1\text{ GHz}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$	–	14.5	–	dB
		$I_C = 30\text{ mA}$; $V_{CE} = 8\text{ V}$; $f = 2\text{ GHz}$; $T_{amb} = 25\text{ }^{\circ}\text{C}$	–	9	–	dB
F	noise figure	$\Gamma_s = \Gamma_{opt}$; $I_C = 5\text{ mA}$; $V_{CE} = 8\text{ V}$; $f = 1\text{ GHz}$	–	2	–	dB

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR


LIMITING VALUES
In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V _{CBO}	collector-base voltage	open emitter	–	15	V
V _{CEO}	collector-emitter voltage	open base	–	12	V
V _{EBO}	emitter-base voltage	open collector	–	2	V
I _C	collector current (DC)		–	35	mA
P _{tot}	total power dissipation	up to T _s = 60 °C; see Fig.3; note 1	–	500	mW
T _{stg}	storage temperature		–65	+150	°C
T _j	junction temperature		–	150	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R _{th j-s}	thermal resistance from junction to soldering point	up to T _s = 60 °C; note 1	180	K/W

Note to the “Limiting values” and “Thermal characteristics”
1. T_s is the temperature at the soldering point of the collector pin.

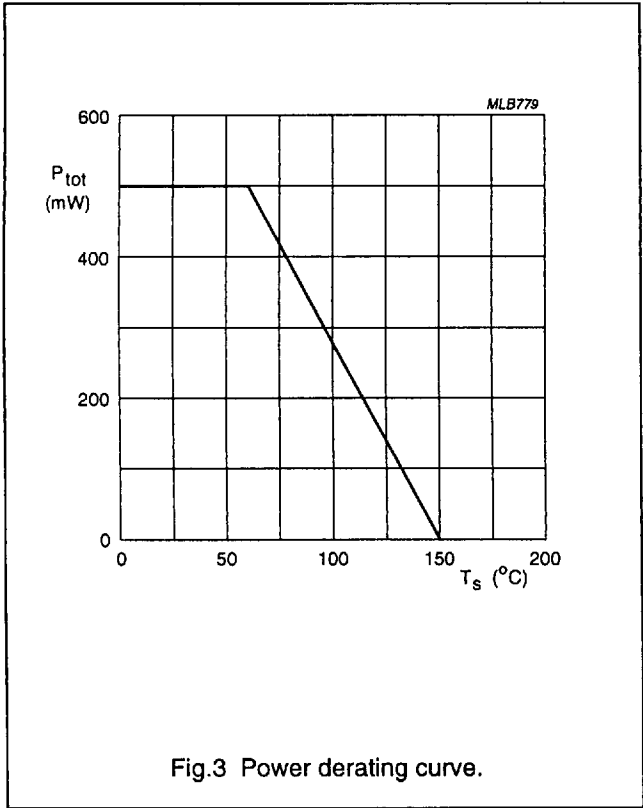

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

CHARACTERISTICS

T_j = 25 °C (unless otherwise specified).




SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V _{(BR)CBO}	collector-base breakdown voltage	open emitter; I _C = 10 µA; I _E = 0	–	–	15	V
V _{(BR)CEO}	collector-emitter breakdown voltage	open base; I _C = 10 mA; I _B = 0	–	–	12	V
V _{(BR)EBO}	emitter-base breakdown voltage	open collector; I _E = 10 µA; I _C = 0	–	–	2	V
I _{CBO}	collector cut-off current	open emitter; V _{CB} = 5 V; I _E = 0	–	–	50	nA
h _{FE}	DC current gain	I _C = 30 mA; V _{CE} = 5 V	40	90	–	
f _T	transition frequency	I _C = 30 mA; V _{CE} = 5 V; f = 500 MHz; T _{amb} = 25 °C	–	7	–	GHz
C _c	collector capacitance	I _E = I _e = 0; V _{CE} = 5 V; f = 1 MHz	–	0.9	–	pF
C _e	emitter capacitance	I _C = I _c = 0; V _{EB} = 0.5 V; f = 1 MHz	–	1.9	–	pF
C _{re}	feedback capacitance	I _C = 0; V _{CE} = 5 V; f = 1 MHz	–	0.6	–	pF
G _{UM}	maximum unilateral power gain; note 1	I _C = 30 mA; V _{CE} = 8 V; f = 1 GHz; T _{amb} = 25 °C	–	14.5	–	dB
		I _C = 30 mA; V _{CE} = 8 V; f = 2 GHz; T _{amb} = 25 °C	–	9	–	dB
F	noise figure	Γ _s = Γ _{opt} ; I _C = 5 mA; V _{CE} = 8 V; f = 1 GHz	–	2	–	dB
		Γ _s = Γ _{opt} ; I _C = 5 mA; V _{CE} = 8 V; f = 2 GHz	–	3	–	dB

Note

1. G_{UM} is the maximum unilateral power gain, assuming s₁₂ is zero. $G_{UM} = 10 \log \frac{|s_{21}|^2}{(1 - |s_{11}|^2)(1 - |s_{22}|^2)}$ dB.





NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

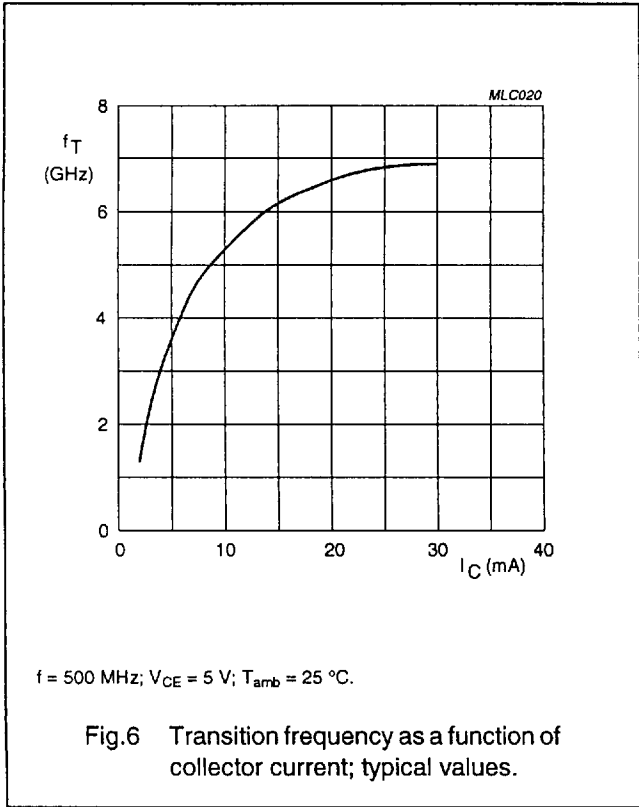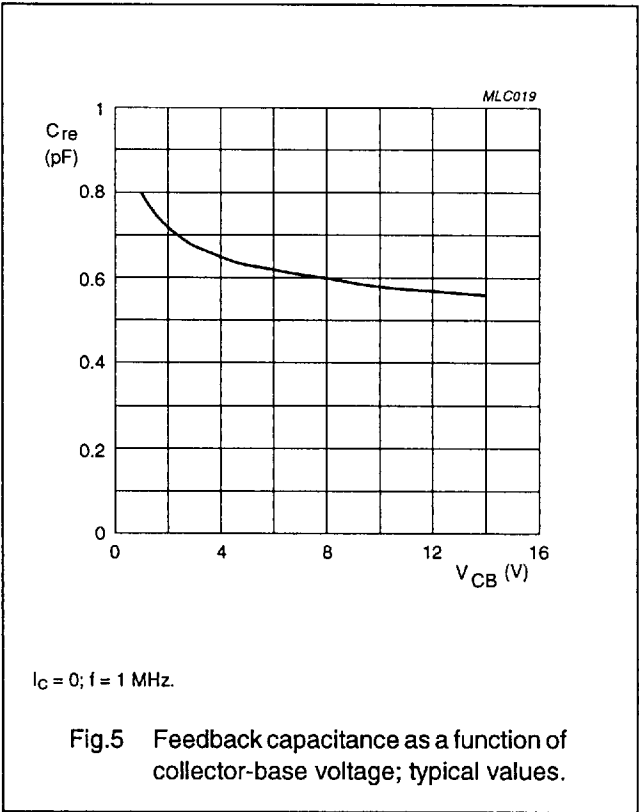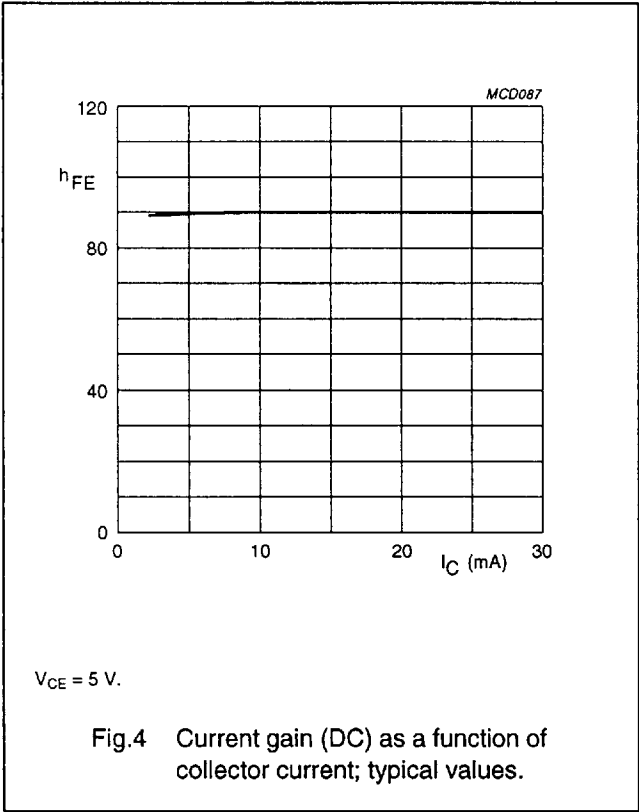


NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

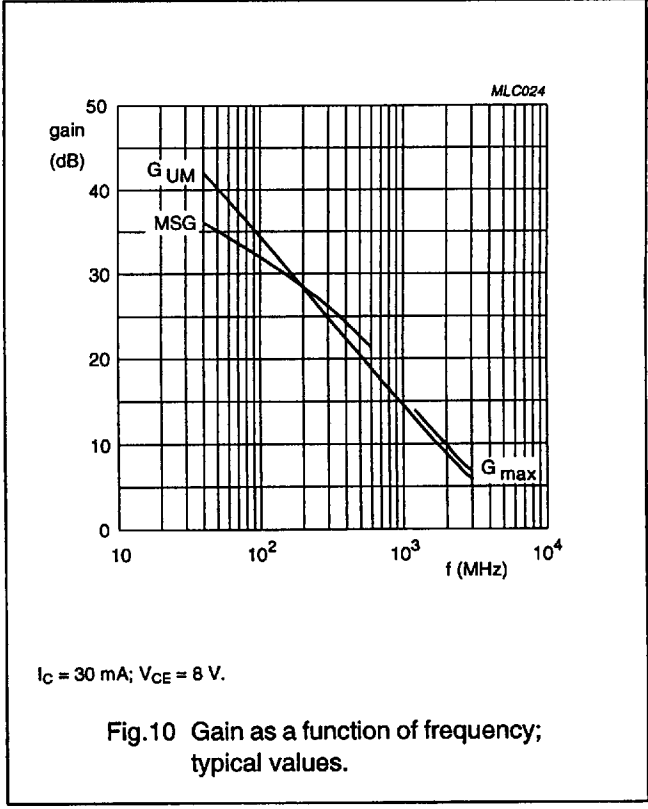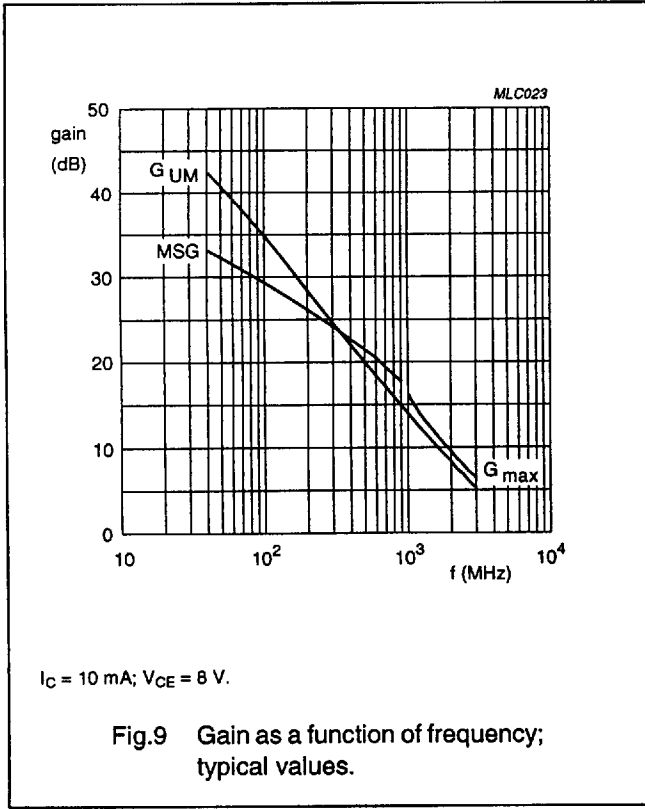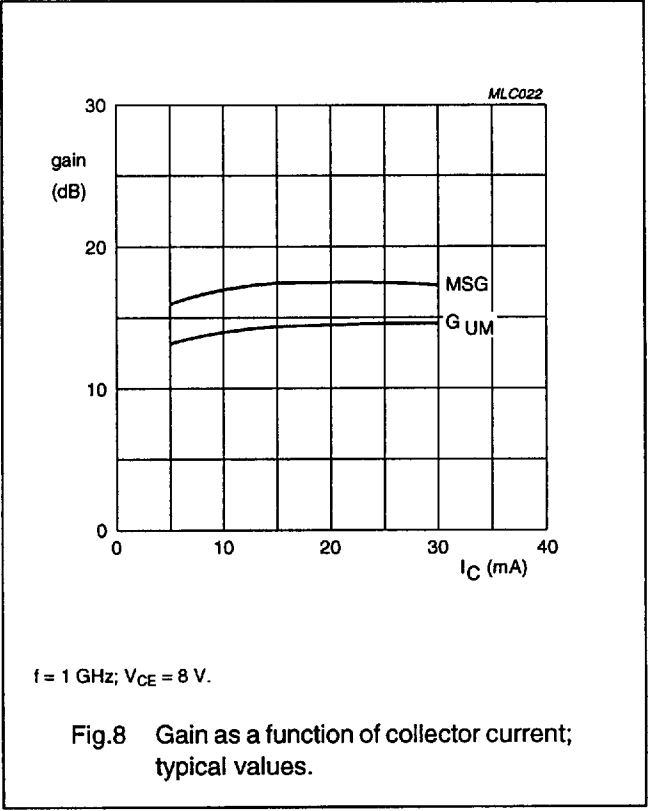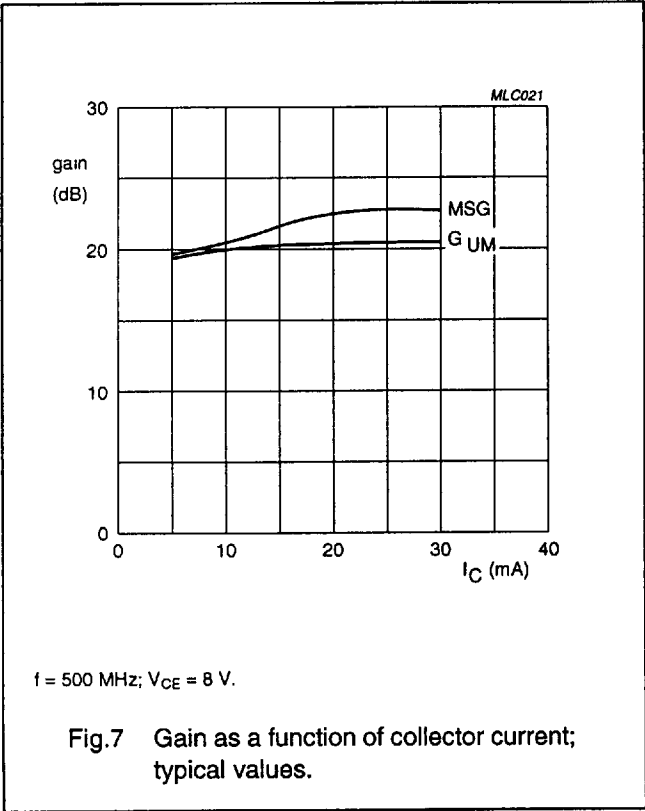


NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

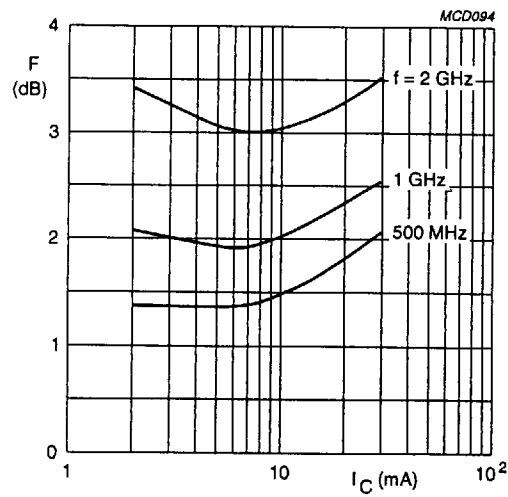

$V_{CE} = 8\text{ V}$.

Fig.11 Minimum noise figure as a function of collector current; typical values.


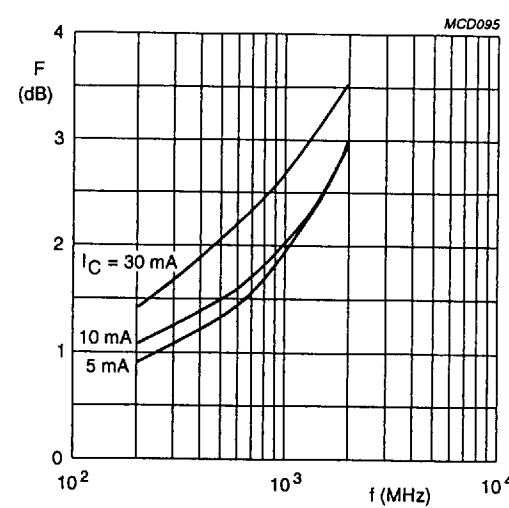


$V_{CE} = 8\text{ V}$.

Fig.12 Minimum noise figure as a function of frequency; typical values.


NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

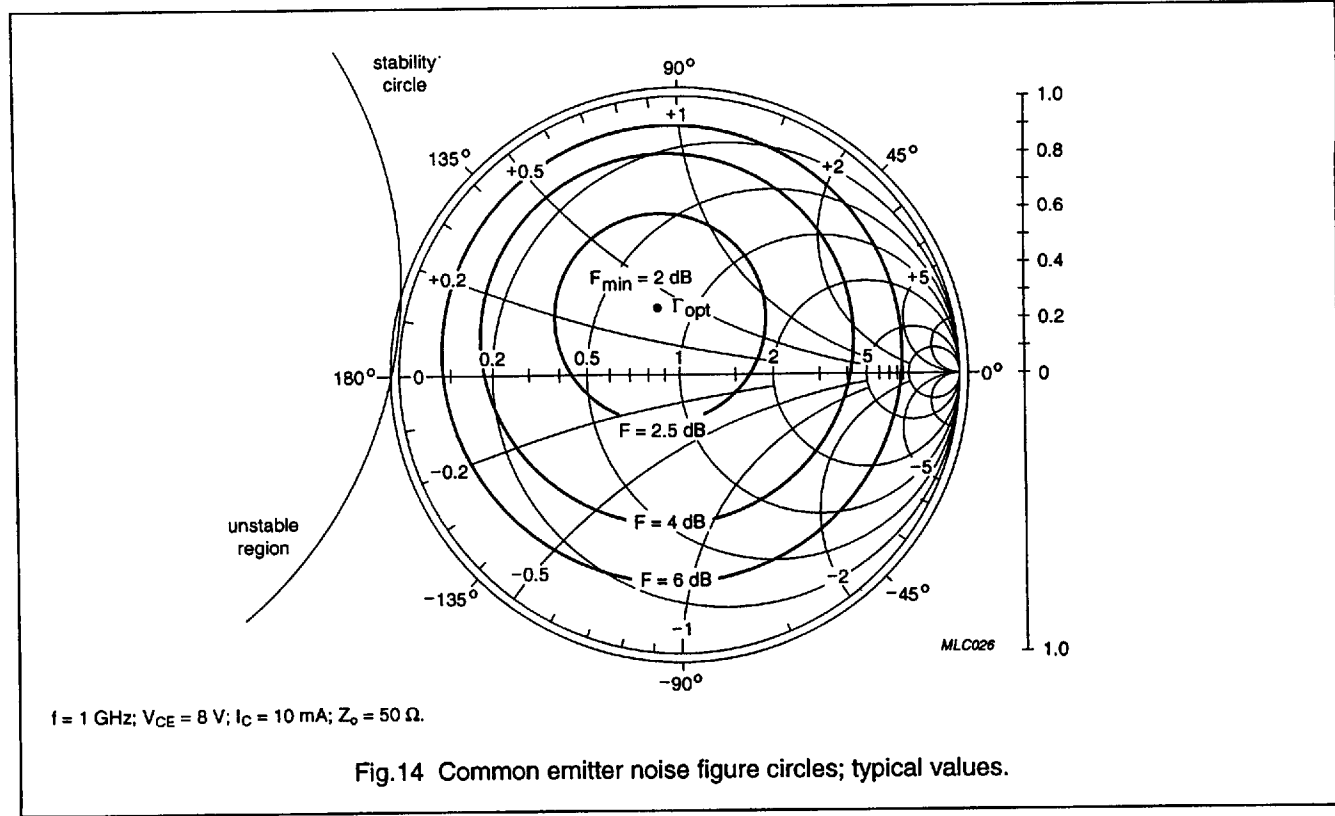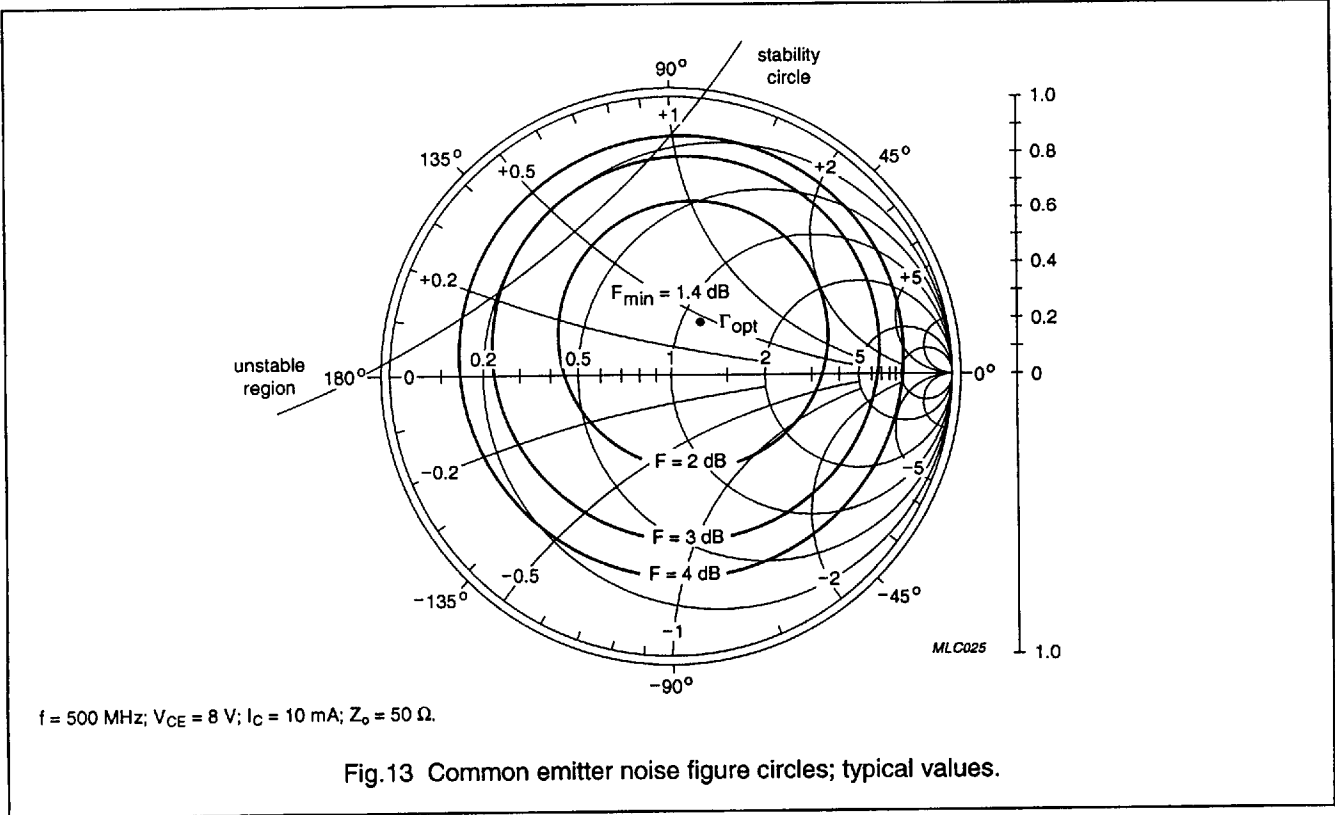

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

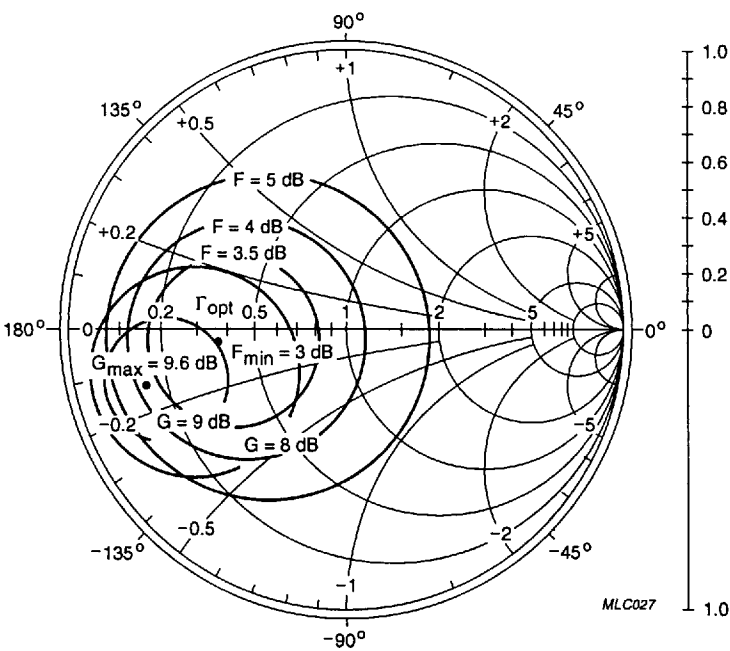


$f = 2\text{ GHz}$; $V_{CE} = 8\text{ V}$; $I_C = 10\text{ mA}$; $Z_0 = 50\ \Omega$.

Fig.15 Common emitter noise figure circles; typical values.


NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

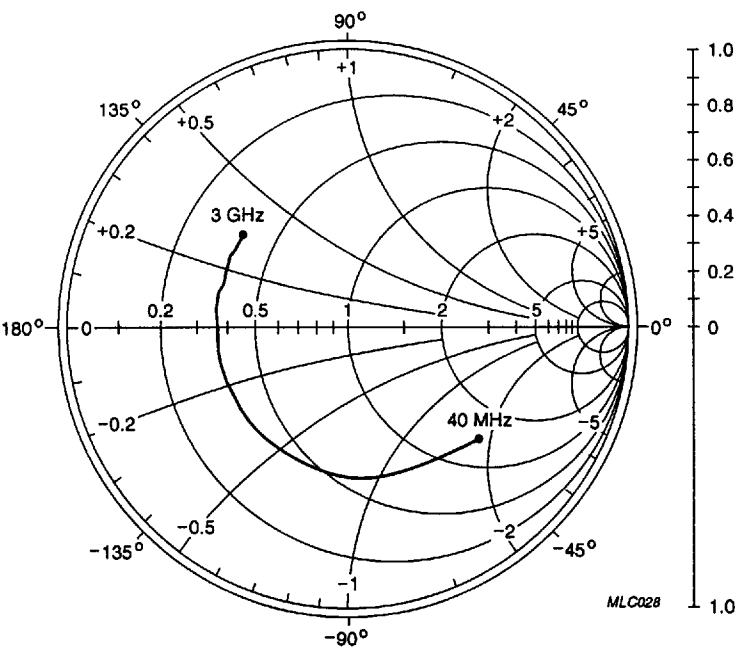

$V_{CE} = 8\text{ V}$; $I_C = 30\text{ mA}$; $Z_o = 50\ \Omega$.

Fig.16 Common emitter input reflection coefficient (s_{11}); typical values.


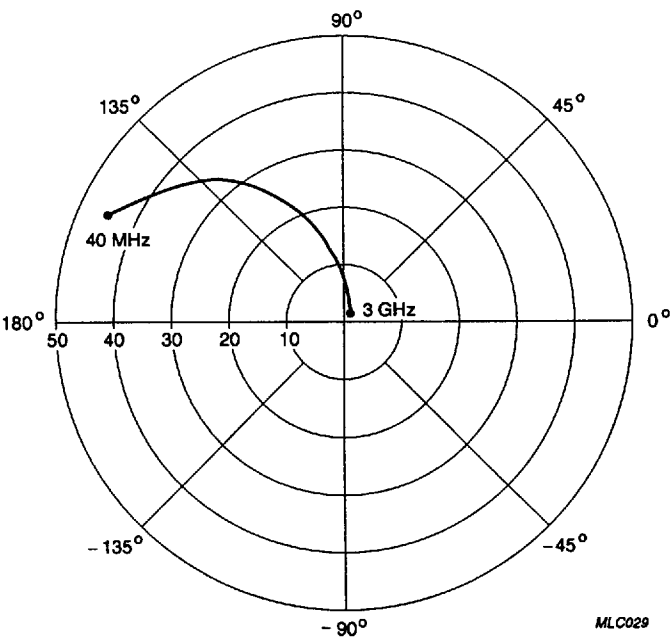


$V_{CE} = 8\text{ V}$; $I_C = 30\text{ mA}$.

Fig.17 Common emitter forward transmission coefficient (s_{21}); typical values.

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

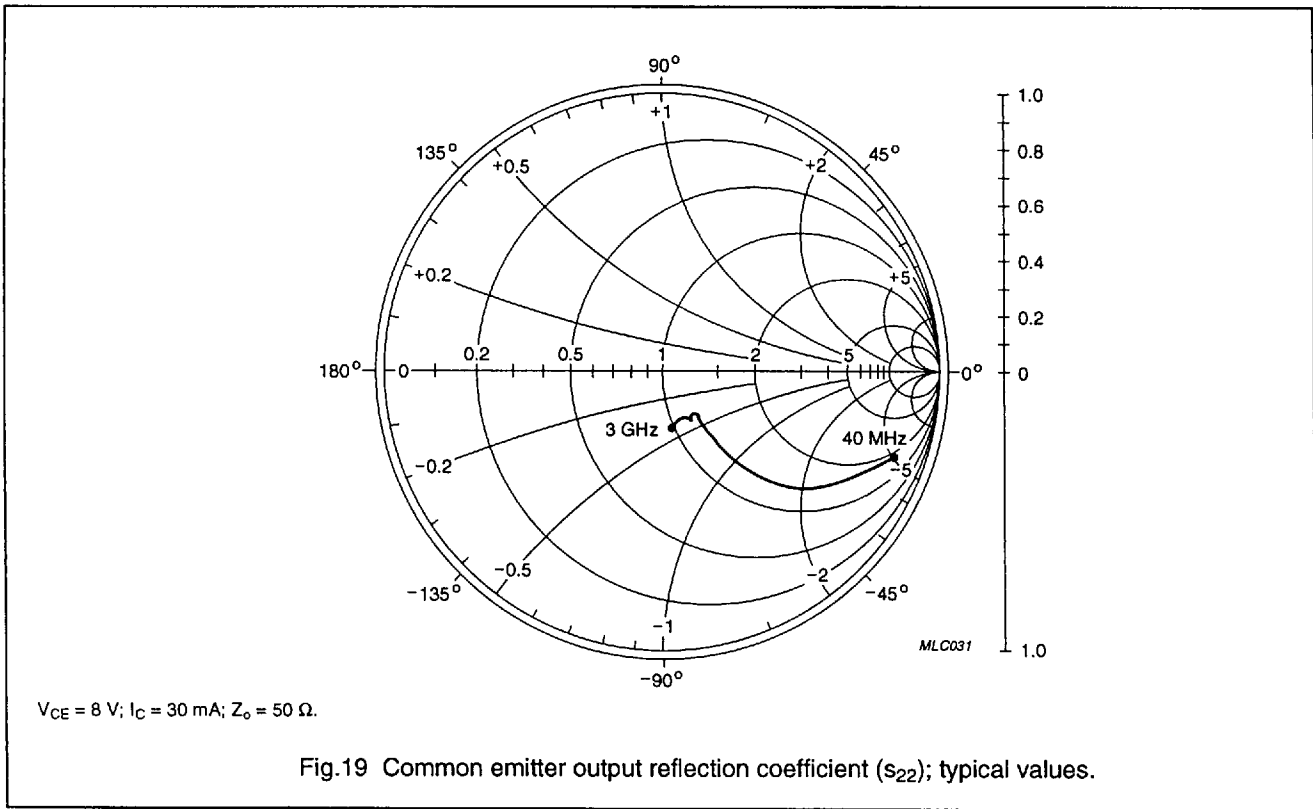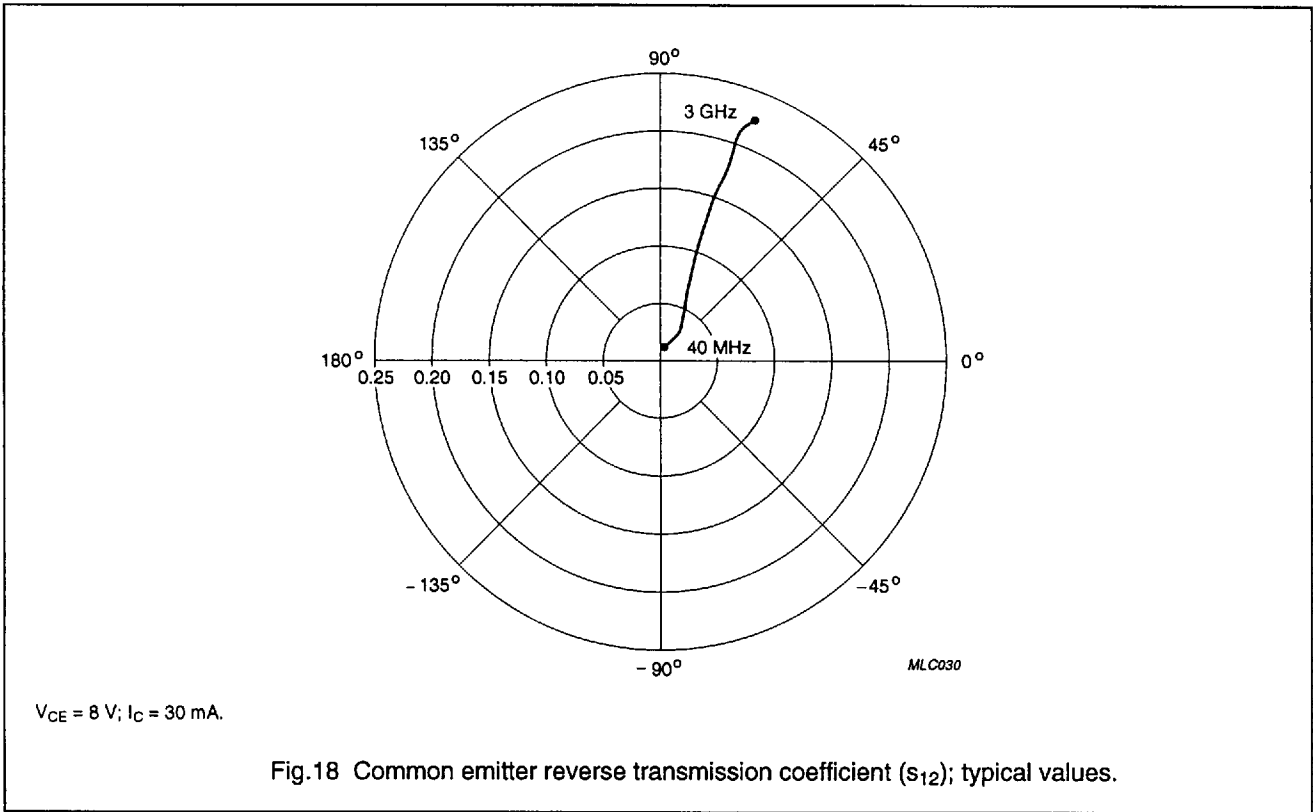

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR


SPICE parameters for the BFG93AW crystal

SEQUENCE No.	PARAMETER	VALUE	UNIT
1	IS	411.8	aA
2	BF	102.6	–
3	NF	0.997	–
4	VAF	62.67	V
5	IKF	3.200	A
6	ISE	4.010	fA
7	NE	1.577	–
8	BR	18.10	–
9	NR	0.996	–
10	VAR	3.369	V
11	IKR	1.281	A
12	ISC	279.9	aA
13	NC	1.075	–
14	RB	10.00	Ω
15	IRB	1.000	μA
16	RBM	10.00	Ω
17	RE	1.164	Ω
18	RC	2.320	Ω
19 ⁽¹⁾	XTB	0.000	–
20 ⁽¹⁾	EG	1.110	eV
21 ⁽¹⁾	XTI	3.000	–
22	CJE	890.5	fF
23	VJE	600.0	mV
24	MJE	0.258	–
25	TF	15.49	ps
26	XTF	39.14	–
27	VTF	2.152	V
28	ITF	213.7	mA
29	PTF	0.000	deg
30	CJC	546.5	fF
31	VJC	380.8	mV
32	MJC	0.202	–
33	XCJC	0.150	–
34	TR	5.618	ns
35 ⁽¹⁾	CJS	0.000	F

SEQUENCE No.	PARAMETER	VALUE	UNIT
36 ⁽¹⁾	VJS	750.0	mV
37 ⁽¹⁾	MJS	0.000	–
38	FC	0.850	–

Note

1. These parameters have not been extracted, the default values are shown.

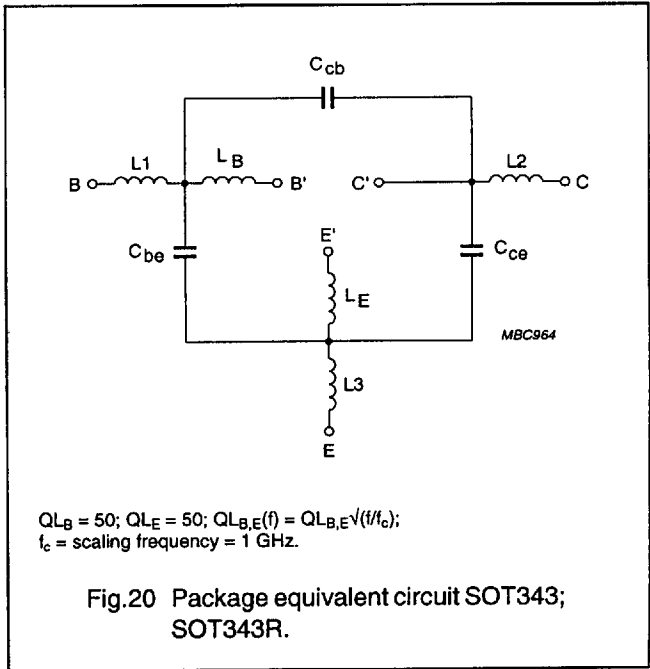



List of components (see Fig.20)

DESIGNATION	VALUE	UNIT
Cbe	70	fF
Ccb	50	fF
Cce	115	fF
L1	0.34	nH
L2	0.10	nH
L3	0.25	nH
LB	0.40	nH
LE	0.40	nH

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

PACKAGE OUTLINES

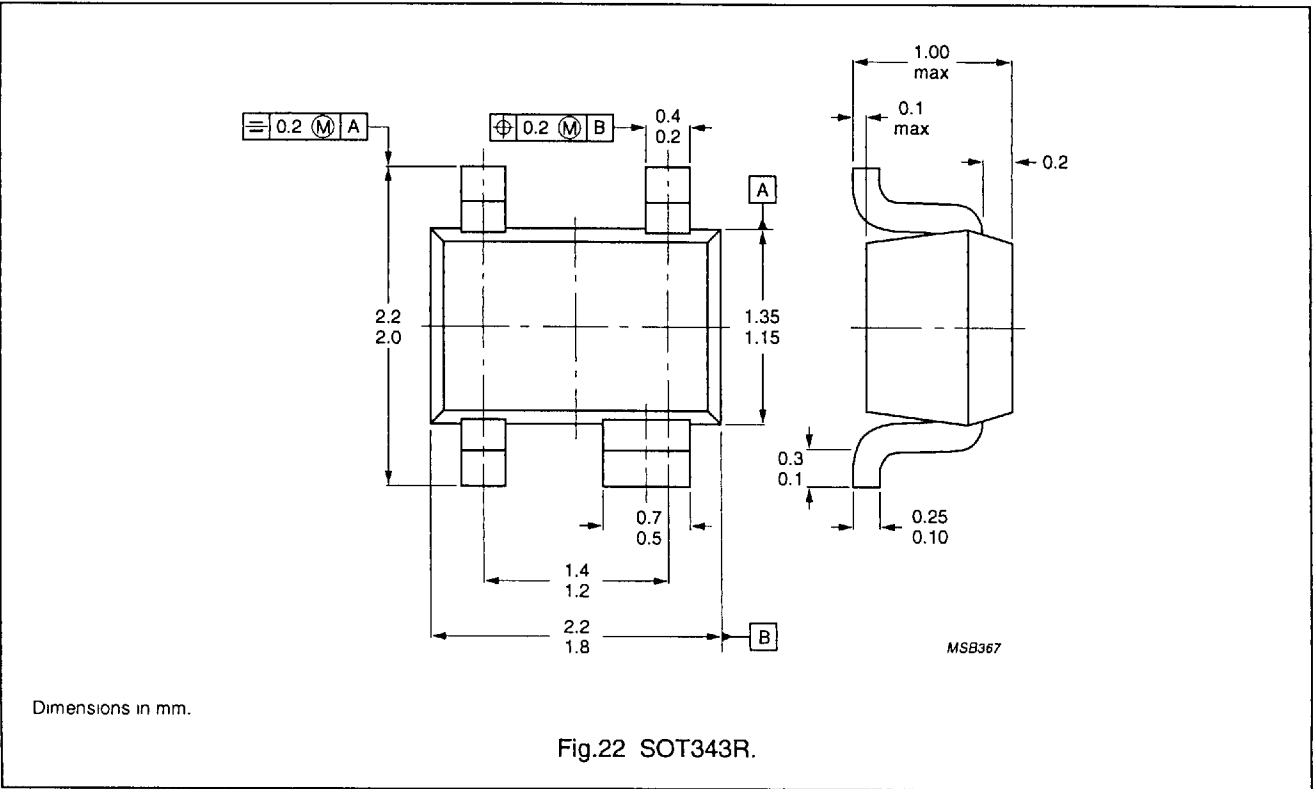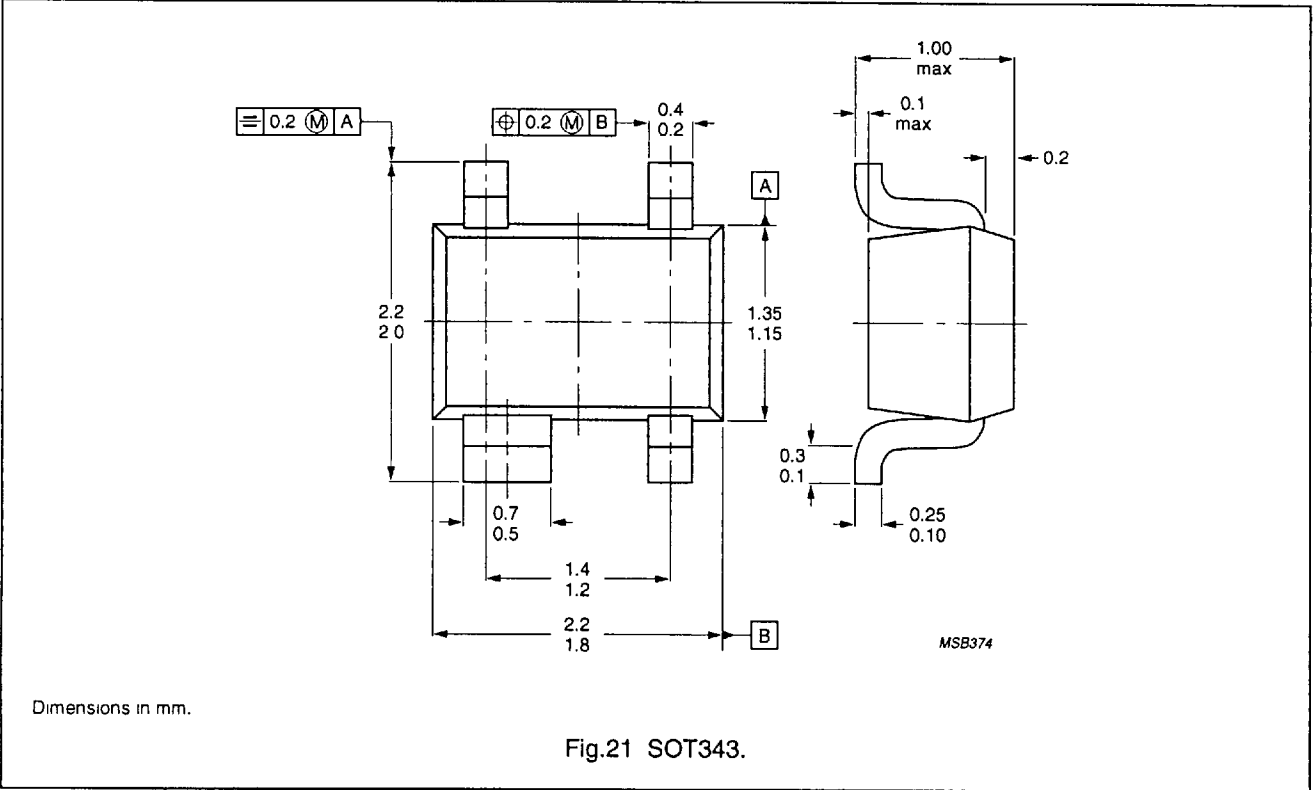

NPN 7 GHz wideband transistor

BFG93AW
BFG93AW/X; BFG93AW/XR

DEFINITIONS

Data Sheet Status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.