

PT7750 Series

15 Amp 24V Input "Big Hammer III"
Programmable ISR

Programming Information

				PT7751		PT7756	
				VID4=1	VID4=0	VID4=1	VID4=0
VID3	VID2	VID1	VID0	Vout	Vout	Vout	Vout
1	1	1	1	2.5V	4.1V	6.6V	9.8V
1	1	1	0	2.6V	4.2V	6.8V	10.0V
1	1	0	1	2.7V	4.3V	7.0V	10.2V
1	1	0	0	2.8V	4.4V	7.2V	10.4V
1	0	1	1	2.9V	4.5V	7.4V	10.6V
1	0	1	0	3.0V	4.6V	7.6V	10.8V
1	0	0	1	3.1V	4.7V	7.8V	11.0V
1	0	0	0	3.2V	4.8V	8.0V	11.2V
0	1	1	1	3.3V	4.9V	8.2V	11.4V
0	1	1	0	3.4V	5.0V	8.4V	11.6V
0	1	0	1	3.5V	5.1V	8.6V	11.8V
0	1	0	0	3.6V	5.2V	8.8V	12.0V
0	0	1	1	3.7V	5.3V	9.0V	12.2V
0	0	1	0	3.8V	5.4V	9.2V	12.4V
0	0	0	1	3.9V	5.5V	9.4V	12.6V
0	0	0	0	4.0V	5.6V	9.6V	12.8V

Logic 0 = Pin 12 potential (remote sense gnd)
Logic 1 = Open circuit (no pull-up resistors)
VID3 and VID4 may not be changed while the unit is operating.

Ordering Information

PT7751□ = 2.5 to 5.6 Volts
PT7756□ = 6.6 to 12.8 Volts

(For dimensions and PC board layout,
see Package Styles 1000 and 1010.)


PT Series Suffix (PT1234X)

Case/Pin Configuration


Vertical Through-Hole	N
Horizontal Through-Hole	A
Horizontal Surface Mount	C

TYPICAL CHARACTERISTICS


Efficiency vs Output Current (@Vin=+24V)

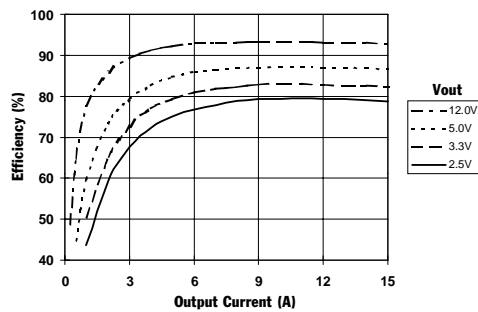


Output Ripple vs Output Current (@Vin=+24V)

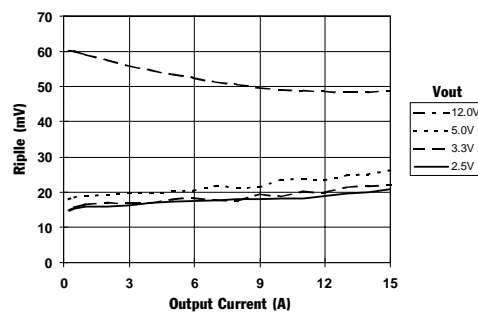


Power Dissipation vs Output Current (@Vin=+24V)

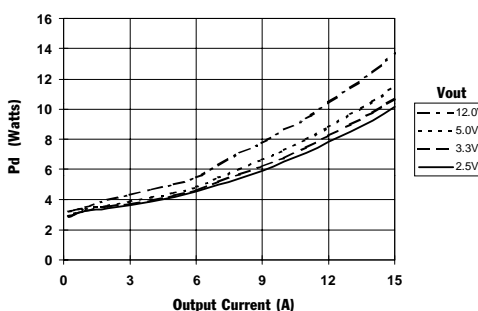

PT7751 Safe Operating Area (@Vin=+24V, Over V_O Range)

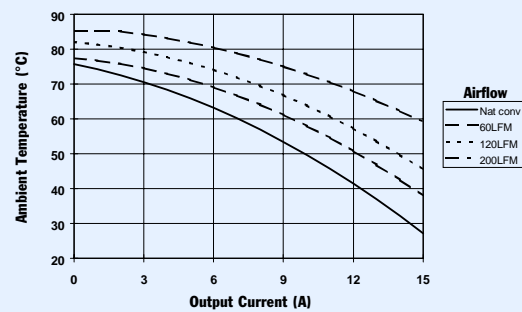

PT7756 Safe Operating Area (@Vin=+24V, Over V_O Range)

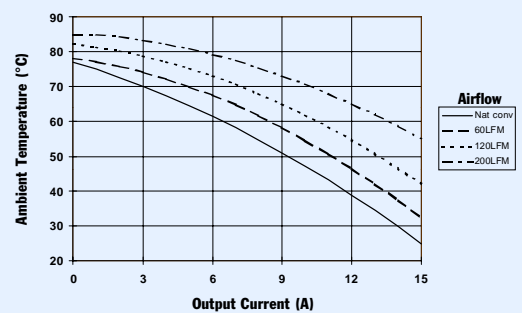

Note: SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

Using the Standby Function on the PT7750 “Big Hammer III” Programmable ISRs

For applications requiring output voltage On/Off control, the PT7750 “Big Hammer” ISRs incorporate a standby function¹. This feature may be used for power-up/shut-down sequencing, and to change the output voltage while input power is applied. *See related notes:* “Pin-coded Output Voltage Adjustment on the ‘Big Hammer III’ Series ISRs.”

The standby function is provided by the *STBY** control, pin 5. If pin 5 is left open-circuit the regulator operates normally, providing a regulated output whenever a valid supply voltage is applied to V_{in} (pins 7-11) with respect to GND (pins 13-19). Connecting pin 5 to ground² will set the regulator output to zero volts³. This places the regulator in standby mode, and reduces the input current to typically 30mA (50mA max). If a ground signal is applied to pin 5 prior to power-up, the regulator output will be held at zero volts during the period that input power is applied.

The standby input must be controlled with an open-collector (or open-drain) discrete transistor (See Figure 1). Table 1 gives the threshold requirements.


Table 1 Inhibit Control Threshold²

Parameter	Min	Max
Disable (VIL)	-0.1V	0.3V

Notes:


1. The Standby/Inhibit control logic is similar for all Power Trends' modules, but the flexibility and threshold tolerances will be different. For specific information on this function for other regulator models, consult the applicable application note.
2. The Standby input on the PT7750 regulator series must be controlled using an open-collector (or open-drain) discrete transistor. *Do Not* use a pull-up resistor. The control input has an open-circuit voltage of about 1.5Vdc. To set the regulator output to zero, the control pin must be “pulled” to less than 0.3Vdc with a low-level 0.1mA sink to ground.
3. When placed in the standby mode, the regulator output discharges the output capacitance with a low impedance to ground. If an external voltage is applied to the output, it will sink current and possibly over-stress the part.
4. The turn-off time of Q_1 , or rise time of the standby input is not critical on the PT7750 series. Turning Q_1 off slowly, over periods up to 100ms, will not affect regulator operation. However, a slow turn-off time will increase both the initial delay and rise-time of the output voltage.

Figure 1

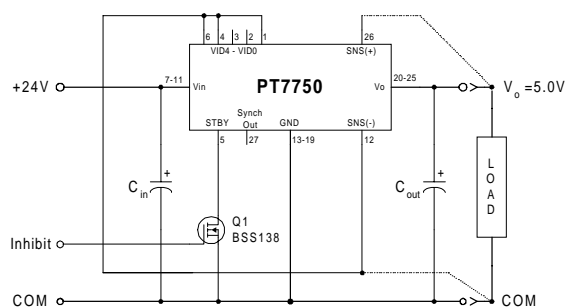

Turn-On Time: Turning Q_1 in Figure 1 off, removes the low-voltage signal at pin 5 and enables the output. Following a brief delay of 8-18ms, the output voltage of the PT7750 series regulators rise to full regulation within 20ms⁴. Figure 2 shows the typical output voltage waveform of a PT7751 following the prompt turn-off of Q_1 at time $t=0$ secs. The output voltage in Figure 1 is set to 5.0V by connecting VID0 (pin 1), VID3 (pin 4), and VID4 (pin 6) to the Remote Sense Gnd (pin 12)*. The waveform in Figure 2 was measured with a 24V input source voltage, and 10A resistive load.

Figure 2

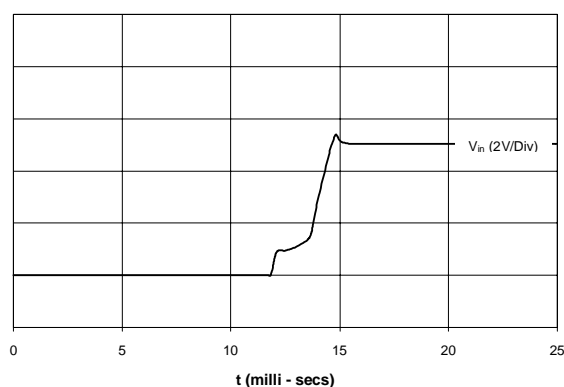

* Consult the data sheet for details on other VID codes.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.