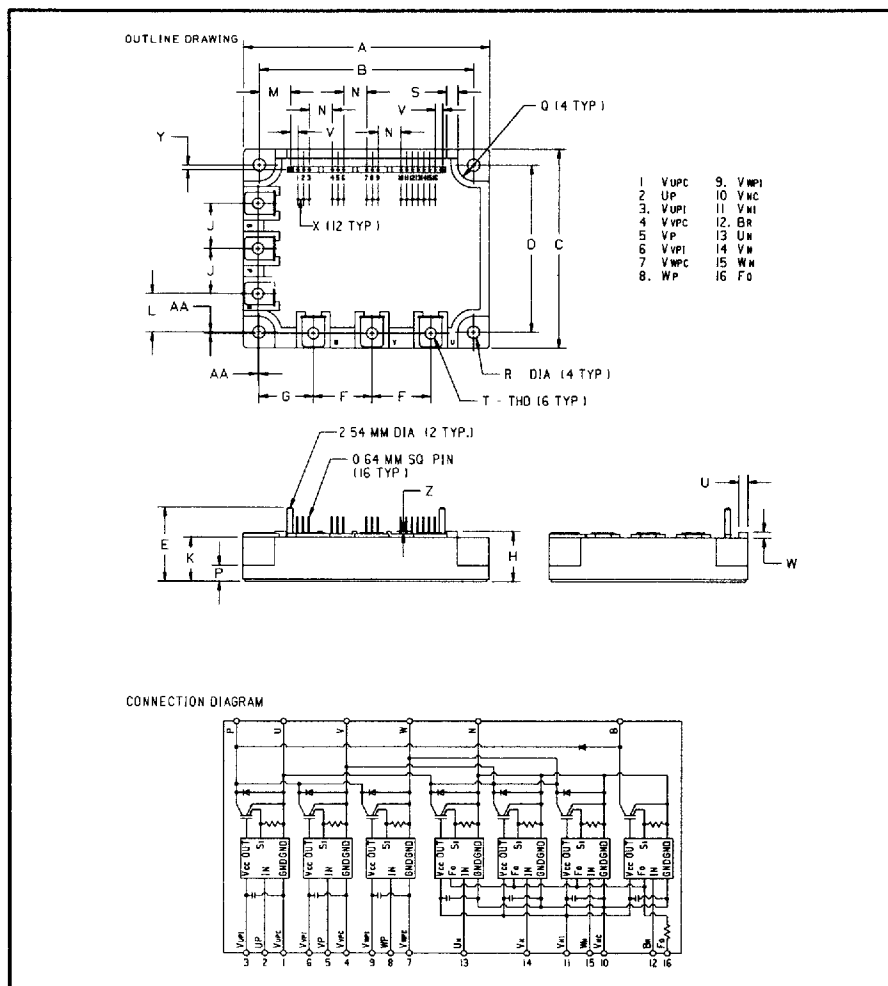


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272


Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**Intellimod™-3 Modules**  
**Three Phase + Brake**  
**IGBT Inverter Output**  
**75 Amperes/110-230 Volt Line**

**110-230 Volt Line, PM75RHA060 Outline Drawing**

| Dimensions | Inches    | Millimeters |
|------------|-----------|-------------|
| A          | 4.29±0.04 | 109.0±1.0   |
| B          | 3.74±0.02 | 95.0±0.5    |
| C          | 3.46±0.04 | 88.0±1.0    |
| D          | 2.91±0.02 | 74.0±0.5    |
| E          | 1.28      | 32.6        |
| F          | 1.02      | 26.0        |
| G          | 0.94      | 24.0        |
| H          | 0.87      | 22.0        |
| J          | 0.79      | 20.0        |
| K          | 0.76      | 19.4        |
| L          | 0.67      | 17.0        |
| M          | 0.54      | 13.8        |
| N          | 0.4       | 10.16       |

| Dimensions | Inches    | Millimeters |
|------------|-----------|-------------|
| P          | 0.28      | 7.0         |
| Q          | 0.38 R    | 7.0 R       |
| R          | 0.22 Dia. | 5.5 Dia.    |
| S          | 0.2       | 5.0         |
| T          | M5 Metric | M5          |
| U          | 0.16      | 4.0         |
| V          | 0.127     | 3.22        |
| W          | 0.1       | 2.6         |
| X          | 0.1       | 2.54        |
| Y          | 0.08      | 2.0         |
| Z          | 0.04      | 1.0         |
| AA         | 0.02      | 0.5         |

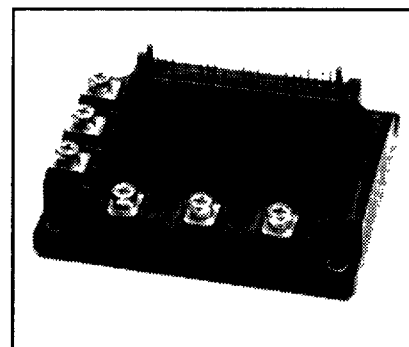**Description**

Powerex Intellimod-3 Modules are designed for applications requiring a high frequency (20kHz) output switching inverter. The modules are isolated from the baseplate, consisting of complete drive, control and protection circuitry for the IGBT inverter.

**Features:**

- ☐ Complete Output Power Circuit
- ☐ Gate Drive Circuit
- ☐ Protection Logic
  - Short Circuit
  - Over-Current
  - Over Temperature
  - Under Voltage

**Applications:**

- ☐ Inverters
- ☐ Small UPS
- ☐ Motion/Servo Control
- ☐ AC Motor Control

**Ordering Information**  
 PM75RHA060



POWEREX INC

51E D ■ 7294621 0005697 800 ■ PRX

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060

Intellimod-3 Modules

Three Phase + Brake IGBT Inverter Output

75 Amperes/110-230 Volt Line

T-57-29

### Absolute Maximum Ratings, $T_J = 25^\circ\text{C}$ unless otherwise specified

| Characteristics                                                                      | Symbol         | PM75RHA060  | Units            |
|--------------------------------------------------------------------------------------|----------------|-------------|------------------|
| Power Device Junction Temperature                                                    | $T_J$          | -20 to +150 | $^\circ\text{C}$ |
| Storage Temperature                                                                  | $T_{STG}$      | -40 to +125 | $^\circ\text{C}$ |
| Case Operating Temperature                                                           | $T_C$          | -20 to +100 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws                                                  | —              | 17          | Kg-cm            |
| Mounting Torque, M5 Main Terminal Screws                                             | —              | 17          | Kg-cm            |
| Module Weight (Typical)                                                              | —              | 550         | Grams            |
| Supply Voltage Protected by OC and SC ( $V_D = 13.5 - 16.5\text{V}$ , Inverter Part) | $V_{CC(prot)}$ | 400         | Volts            |
| Isolation Voltage AC 1 minute, 60Hz                                                  | $V_{RMS}$      | 2500        | Volts            |

### Control Sector

|                                                                                                                        |           |    |       |
|------------------------------------------------------------------------------------------------------------------------|-----------|----|-------|
| Supply Voltage Applied between ( $V_{UP1} - V_{UPC}$ , $V_{VP1} - V_{VPC}$ , $V_{WP1} - V_{WPC}$ , $V_{N1} - V_{NC}$ ) | $V_D$     | 20 | Volts |
| Input Voltage Applied between ( $U_P$ , $V_P$ , $U_N$ , $V_N$ , $W_N$ , $B_r$ )                                        | $V_{CIN}$ | 20 | Volts |
| Fault Output Supply Voltage                                                                                            | $V_{FO}$  | 20 | Volts |
| Fault Output Current                                                                                                   | $I_{FO}$  | 20 | mA    |

### IGBT Inverter Sector

|                                              |                 |     |         |
|----------------------------------------------|-----------------|-----|---------|
| Collector-Emitter Voltage Fig. 1             | $V_{CES}$       | 600 | Volts   |
| Collector Current $\pm$                      | $I_C$           | 75  | Amperes |
| Peak Collector Current $\pm$                 | $I_{CP}$        | 150 | Amperes |
| Supply Voltage (Applied between P - N)       | $V_{CC}$        | 400 | Volts   |
| Supply Voltage (Surge) Applied between P - N | $V_{CC(surge)}$ | 500 | Volts   |
| Collector Dissipation                        | $P_C$           | 312 | Watts   |

### Brake Sector

|                                              |                 |     |         |
|----------------------------------------------|-----------------|-----|---------|
| Collector-Emitter Voltage Fig. 1             | $V_{CES}$       | 600 | Volts   |
| Collector Current $\pm$                      | $I_C$           | 30  | Amperes |
| Peak Collector Current $\pm$                 | $I_{CP}$        | 60  | Amperes |
| Supply Voltage (Applied between P - N)       | $V_{CC}$        | 400 | Volts   |
| Supply Voltage (Surge) Applied between P - N | $V_{CC(surge)}$ | 500 | Volts   |
| Collector Dissipation                        | $P_C$           | 208 | Watts   |
| Diode Forward Current                        | $I_F$           | 30  | Amperes |
| Diode DC Reverse Voltage                     | $V_{R(DC)}$     | 600 | Volts   |

T-57-29

# Electrical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics                         | Symbol                | Test Conditions                                                                                                                                                         | Min. | Typ. | Max. | Units              |
|-----------------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|--------------------|
| Control Sector                          |                       |                                                                                                                                                                         |      |      |      |                    |
| Overcurrent Trip Level Inverter Part    | OC                    | $-20^{\circ}\text{C} \leq T \leq 125^{\circ}\text{C}, V_D = 15\text{V}$                                                                                                 | 115  | 161  | —    | Amperes            |
| Overcurrent Trip Level Brake Part       |                       |                                                                                                                                                                         | 39   | 53   | —    | Amperes            |
| Short Circuit Trip Level Inverter Part  | SC                    | $-20^{\circ}\text{C} \leq T \leq 125^{\circ}\text{C}, V_D = 15\text{V}$                                                                                                 | —    | 241  | —    | Amperes            |
| Short Circuit Trip Level Brake Part     |                       |                                                                                                                                                                         | —    | 79   | —    | Amperes            |
| Over Current Delay Time                 | $t_{\text{off(OC)}}$  | $V_D = 15\text{V}, \text{Fig. 7}$                                                                                                                                       | —    | 10   | —    | $\mu\text{S}$      |
| Over Temperature Protection             | OT                    | Trip Level                                                                                                                                                              | 111  | 118  | 125  | $^{\circ}\text{C}$ |
| Over Temperature Protection             | $\text{OT}_R$         | Reset Level                                                                                                                                                             | —    | 100  | —    | $^{\circ}\text{C}$ |
| Supply Circuit Under Voltage Protection | UV                    | Trip Level                                                                                                                                                              | 11.5 | 12.0 | 12.5 | Volts              |
| Supply Circuit Under Voltage Protection | $\text{UV}_R$         | Reset Level                                                                                                                                                             | —    | 12.5 | —    | Volts              |
| Supply Voltage                          | $V_D$                 | Applied between $V_{\text{UP1}} - V_{\text{UPC}}, V_{\text{VP1}} - V_{\text{VPC}}, V_{\text{WP1}} - V_{\text{WPC}}, V_{\text{N1}} - V_{\text{NC}}$                      | 13.5 | 15   | 16.5 | Volts              |
| Circuit Current                         | $I_D$                 | $V_D = 15\text{V}, V_{\text{CIN}} = 15\text{V}, V_{\text{N1}} - V_{\text{NC}}$                                                                                          | —    | 80   | 120  | mA                 |
|                                         | $I_D$                 | $V_D = 15\text{V}, V_{\text{CIN}} = 15\text{V}, V_{\text{XP1}} - V_{\text{XPC}}$                                                                                        | —    | 25   | 35   | mA                 |
| Input On Voltage                        | $V_{\text{CIN(on)}}$  | Applied between $V_{\text{UP1}} - V_{\text{UPC}}, V_{\text{VP1}} - V_{\text{VPC}}, V_{\text{WP1}} - V_{\text{WPC}}, V_{\text{N1}} - V_{\text{NC}}, B_r - V_{\text{NC}}$ | 1.2  | 1.5  | 1.8  | Volts              |
| Input Off Voltage                       | $V_{\text{CIN(off)}}$ | Applied between $V_{\text{UP1}} - V_{\text{UPC}}, V_{\text{VP1}} - V_{\text{VPC}}, V_{\text{WP1}} - V_{\text{WPC}}, V_{\text{N1}} - V_{\text{NC}}, B_r - V_{\text{NC}}$ | 1.7  | 2.0  | 2.3  | Volts              |
| PWM Input Frequency                     | $f_{\text{PWM}}$      | 3- $\emptyset$ Sinusoidal                                                                                                                                               | —    | 15   | 20   | kHz                |
| Dead Time                               | $t_{\text{DEAD}}$     | For each Input Pulse                                                                                                                                                    | 3.0  | —    | —    | $\mu\text{S}$      |
|                                         |                       | Using example Interface Circuit*                                                                                                                                        | 5.0  | —    | —    | $\mu\text{S}$      |
| Fault Output Current                    | $I_{\text{FO(H)}}$    | $V_D = 15\text{V}, V_{\text{FO}} = 15\text{V}$                                                                                                                          | —    | —    | 0.01 | mA                 |
|                                         | $I_{\text{FO(L)}}$    | $V_D = 15\text{V}, V_{\text{FO}} = 15\text{V}$                                                                                                                          | —    | 10   | 15   | mA                 |
| Minimum Fault Output Pulse Width        | $t_{\text{FO}}$       | $V_D = 15\text{V}$                                                                                                                                                      | 1.0  | 2.0  | —    | mS                 |
|                                         |                       | Using example Interface Circuit*<br>$V_D = 15\text{V}$                                                                                                                  | 1.0  | 2.0  | —    | mS                 |
| Brake Sector                            |                       |                                                                                                                                                                         |      |      |      |                    |
| Collector Emitter Saturation Voltage    | $V_{\text{CE(sat)}}$  | $V_D = 15\text{V}, V_{\text{CIN}} = 0\text{V}, I_C = 30\text{A}, T_J = 25^{\circ}\text{C}, \text{Fig. 2}$                                                               | —    | 2.7  | 3.5  | Volts              |
|                                         |                       | $V_D = 15\text{V}, V_{\text{CIN}} = 0\text{V}, I_C = 30\text{A}, T_J = 125^{\circ}\text{C}, \text{Fig. 2}$                                                              | —    | 3.1  | 4.0  | Volts              |
| Diode Forward Voltage                   | $V_{\text{FM}}$       | $I_C = 30\text{A}, V_D = 15\text{V}, V_{\text{CIN}} = 15\text{V}, \text{Fig. 3}$                                                                                        | —    | 1.7  | 2.7  | Volts              |
| Collector Cutoff Current                | $I_{\text{CEX}}$      | $V_{\text{CE}} = V_{\text{CES}}, T_J = 25^{\circ}\text{C}, \text{Fig. 6}$                                                                                               | —    | —    | 1    | mA                 |
|                                         |                       | $V_{\text{CE}} = V_{\text{CES}}, T_J = 125^{\circ}\text{C}, \text{Fig. 6}$                                                                                              | —    | —    | 10   | mA                 |

\*See Intellimod-3 Applications Data Section 4.3.



POWEREX INC

51E D ■ 7294621 0005699 683 ■ PRX

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060

Intellimod-3 Modules

Three Phase + Brake IGBT Inverter Output

75 Amperes/110-230 Volt Line

T-57-29

**Electrical Characteristics,  $T_J = 25^\circ\text{C}$  unless otherwise specified**

| Characteristics                      | Symbol        | Test Conditions                                                                                         | Min. | Typ. | Max. | Units         |
|--------------------------------------|---------------|---------------------------------------------------------------------------------------------------------|------|------|------|---------------|
| <b>IGBT Inverter Sector</b>          |               |                                                                                                         |      |      |      |               |
| Collector Cutoff Current             | $I_{CEX}$     | $V_{CE} = V_{CES}$ , $T_J = 25^\circ\text{C}$ , Fig. 6                                                  | –    | –    | 1    | mA            |
| Collector Cutoff Current             | $I_{CEX}$     | $V_{CE} = V_{CES}$ , $T_J = 125^\circ\text{C}$ , Fig. 6                                                 | –    | –    | 10   | mA            |
| Diode Forward Voltage                | $V_{FM}$      | $-I_C = 75\text{A}$ , $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ , Fig. 3                              | –    | 1.6  | 2.5  | Volts         |
| Collector Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15\text{V}$ , $V_{CIN} = 0\text{V}$ , $T_J = 25^\circ\text{C}$ ,<br>$I_C = 75\text{A}$ , Fig. 2  | –    | 2.7  | 3.5  | Volts         |
| Collector Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15\text{V}$ , $V_{CIN} = 0\text{V}$ , $T_J = 125^\circ\text{C}$ ,<br>$I_C = 75\text{A}$ , Fig. 2 | –    | 2.5  | 3.4  | Volts         |
| Inductive Load Switching Times       | $t_{on}$      | $V_D = 15\text{V}$ , $V_{CIN} = 0\text{V}$ ,                                                            | 0.3  | 0.5  | 1.5  | $\mu\text{S}$ |
|                                      | $t_{rr}$      | $V_{CC} = 300\text{V}$ , $I_C = 75\text{A}$ ,                                                           | –    | 0.25 | 0.4  | $\mu\text{S}$ |
|                                      | $t_{C(on)}$   | $T_J = 125^\circ\text{C}$                                                                               | –    | 0.4  | 1.2  | $\mu\text{S}$ |
|                                      | $t_{off}$     | Fig. 4, 5                                                                                               | –    | 2.0  | 3.3  | $\mu\text{S}$ |
|                                      | $t_{C(off)}$  |                                                                                                         | –    | 0.6  | 1.2  | $\mu\text{S}$ |

**Thermal Characteristics**

| Characteristics                      | Symbol         | Test Conditions                     | Min. | Typ. | Max. | Units              |
|--------------------------------------|----------------|-------------------------------------|------|------|------|--------------------|
| Thermal Resistances Junction to Case | $R_{th(l-c)Q}$ | Inverter IGBT                       | –    | –    | 0.4  | $^\circ\text{C/W}$ |
|                                      | $R_{th(l-c)F}$ | Inverter FWD                        | –    | –    | 1.0  | $^\circ\text{C/W}$ |
|                                      | $R_{th(l-c)Q}$ | Brake IGBT                          | –    | –    | 0.6  | $^\circ\text{C/W}$ |
|                                      | $R_{th(l-c)F}$ | Brake FWD                           | –    | –    | 1.5  | $^\circ\text{C/W}$ |
| Contact Thermal Resistance           | $R_{th(c-f)}$  | Case to Fin, Thermal Grease Applied | –    | –    | 0.19 | $^\circ\text{C/W}$ |

**Recommended Operating Conditions**

| Characteristics     | Symbol         | Test Conditions                                                                                        | Value   | Units         |
|---------------------|----------------|--------------------------------------------------------------------------------------------------------|---------|---------------|
| Supply Voltage      | $V_{CC}$       | Applied across P - N Terminals                                                                         | 0 ~ 400 | Volts         |
|                     | $V_D$          | Applied between $V_{UP1} - V_{UPC}$ ,<br>$V_{N1} - V_{NC}$ , $V_{VP1} - V_{VPC}$ , $V_{WP1} - V_{WPC}$ | 15±1.5  | Volts         |
| Input On Voltage    | $V_{CIN(on)}$  | Applied between<br>$U_P$ , $V_P$ , $W_P$ , $U_N$ , $V_N$ , $W_N$ , $B_r$                               | 0 ~ 0.8 | Volts         |
| Input Off Voltage   | $V_{CIN(off)}$ |                                                                                                        | 4 ~ 15  | Volts         |
| PWM Input Frequency | $f_{PWM}$      | Using example Interface Circuit *                                                                      | 5 ~ 20  | kHz           |
| Minimum Dead Time   | $t_{DEAD}$     | Using example Interface Circuit *                                                                      | 5.0     | $\mu\text{S}$ |

\*See Intellimod-3 Applications Data Section 4.3.



POWEREX INC

51E D 7294621 0005700 125 PRX

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060

Intellimod-3 Modules


Three Phase + Brake IGBT Inverter Output

75 Amperes/110-230 Volt Line


Inverter Part

T-57-29


SATURATION VOLTAGE CHARACTERISTICS (TYPICAL)

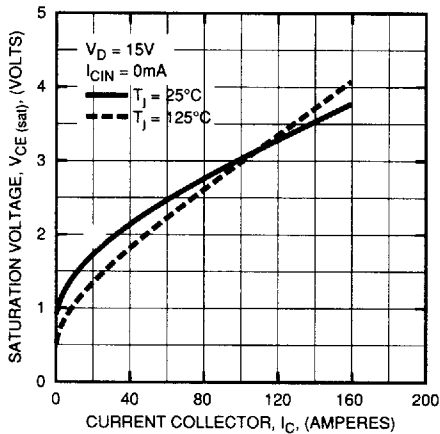


COLLECTOR-EMITTER SATURATION VOLTAGE (TYPICAL)

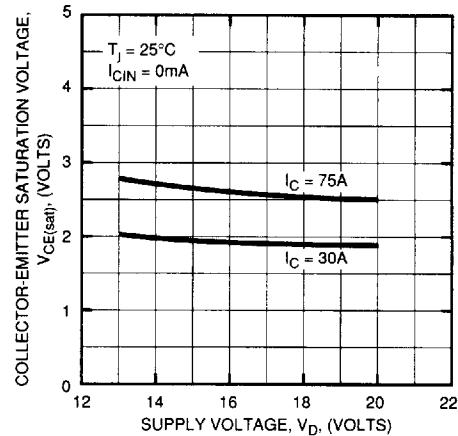


OUTPUT CHARACTERISTICS (TYPICAL)

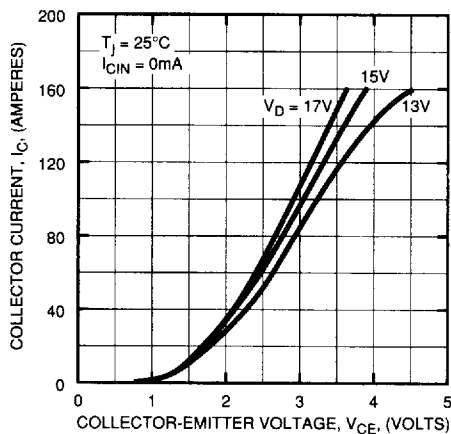


SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL)

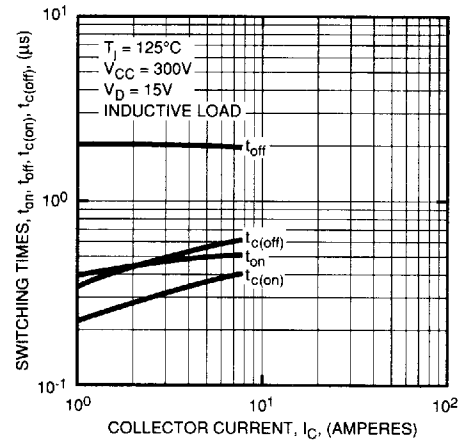

REVERSE RECOVERY CHARACTERISTICS OF FREE-WHEEL DIODE (TYPICAL)

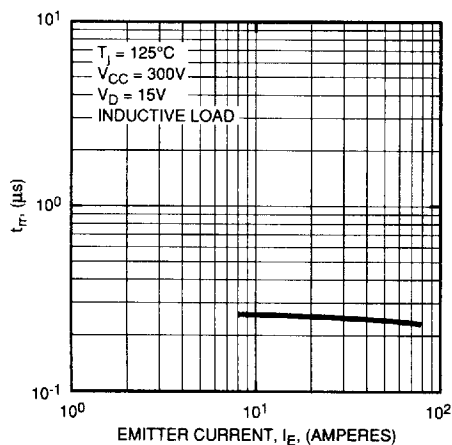

REVERSE COLLECTOR CURRENT VS. EMITTER-COLLECTOR VOLTAGE (DIODE FORWARD CHARACTERISTICS) (TYPICAL)

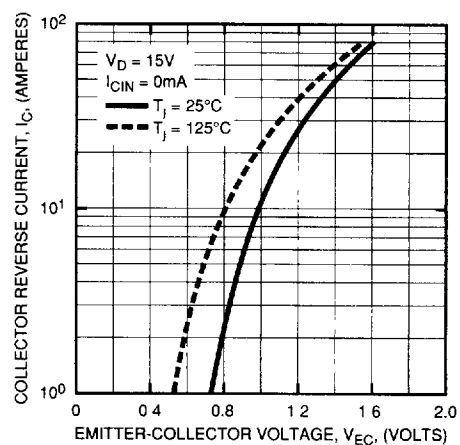







T-57-29

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

**PM75RHA060****IntelliMod-3 Modules****Three Phase + Brake IGBT Inverter Output**

75 Amperes/110-230 Volt Line

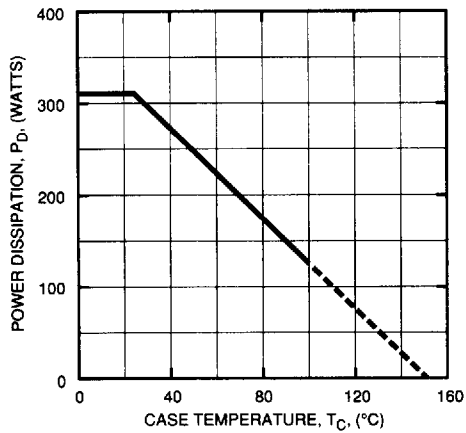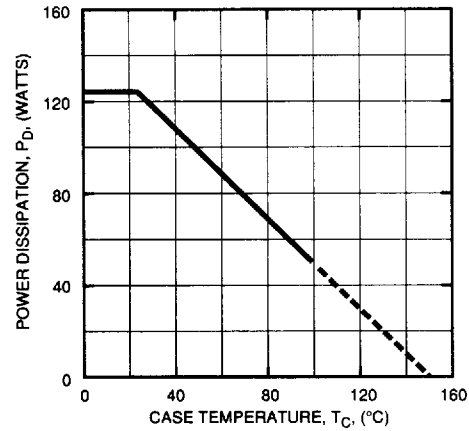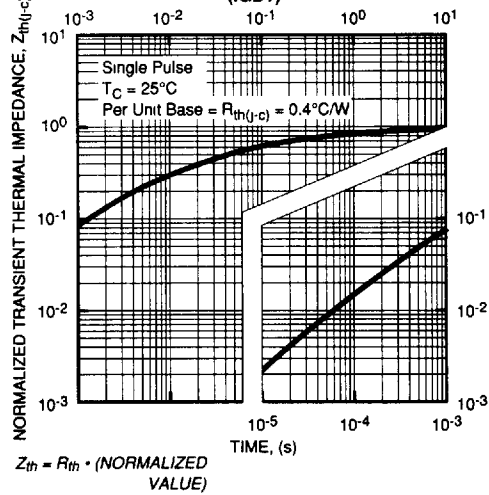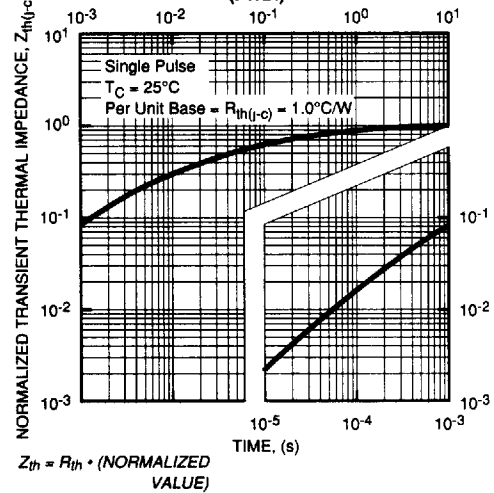**Inverter Part****POWER DISSIPATION DERATING CURVE  
(PER IGBT ELEMENT)****POWER DISSIPATION DERATING CURVE  
(PER FWDI ELEMENT)****TRANSIENT THERMAL  
IMPEDANCE CHARACTERISTICS  
(IGBT)****TRANSIENT THERMAL  
IMPEDANCE CHARACTERISTICS  
(FWDI)**



POWEREX INC

51E D 7294621 0005702 TT8 PRX

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

T-57-29

PM75RHA060


Intellimod-3 Modules

Three Phase + Brake IGBT Inverter Output


75 Amperes/110-230 Volt Line

Brake Part


SATURATION VOLTAGE  
CHARACTERISTICS (TYPICAL)

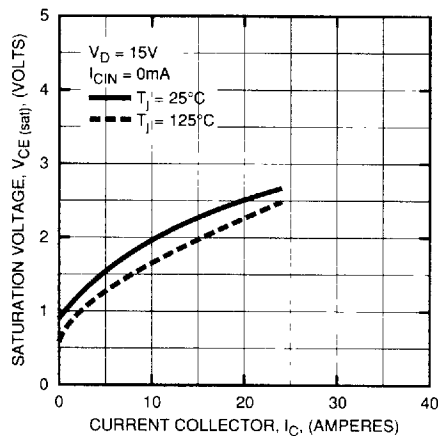


COLLECTOR-EMITTER SATURATION  
VOLTAGE (TYPICAL)

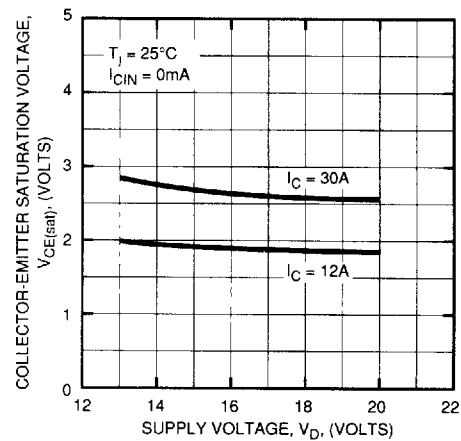

OUTPUT CHARACTERISTICS  
(TYPICAL)

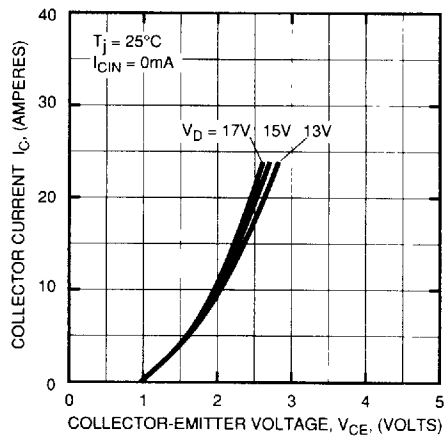

REVERSE COLLECTOR CURRENT VS.  
EMITTER-COLLECTOR VOLTAGE  
(DIODE FORWARD CHARACTERISTICS)  
(TYPICAL)

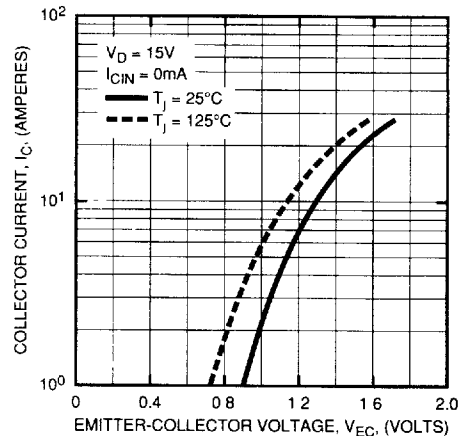

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060


Intellimod-3 Modules

Three Phase + Brake IGBT Inverter Output


75 Amperes/110-230 Volt Line

Brake Part


POWER DISSIPATION DERATING CURVE  
(PER IGBT ELEMENT)

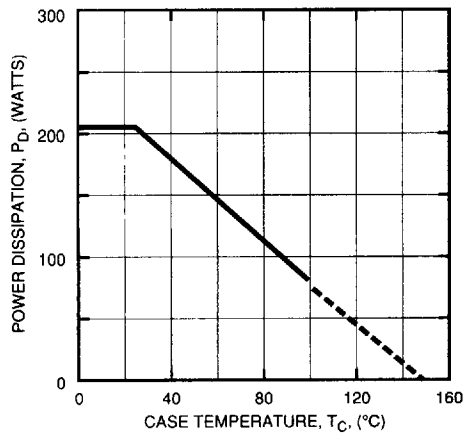


POWER DISSIPATION DERATING CURVE  
(PER FWDI ELEMENT)

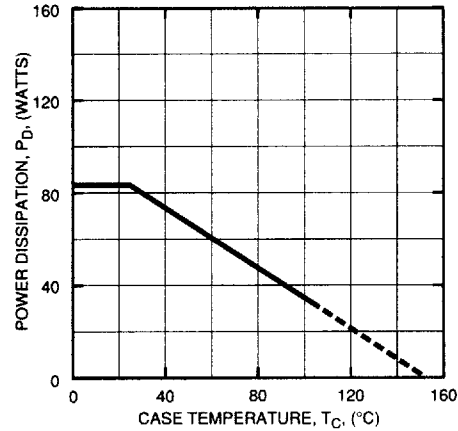

TRANSIENT THERMAL  
IMPEDANCE CHARACTERISTICS  
(IGBT)

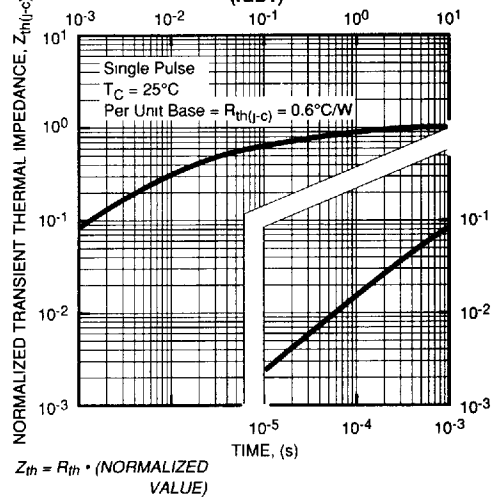

TRANSIENT THERMAL  
IMPEDANCE CHARACTERISTICS  
(FWDI)

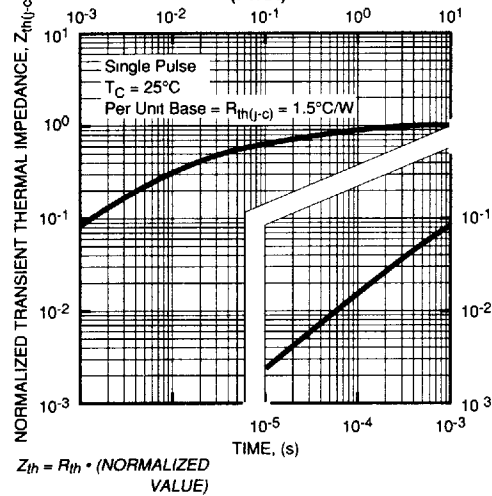



Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (412) 925-7272

Powerex, Europe, S.A. 428 Avenue G. Durand, BP107, 72003 Le Mans, France (43) 41.14.14

PM75RHA060

Intellimod-3 Modules

Three Phase + Brake IGBT Inverter Output

75 Amperes/110-230 Volt Line

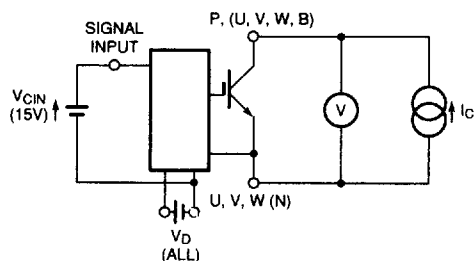


Figure 1  $V_{CES}$  Test

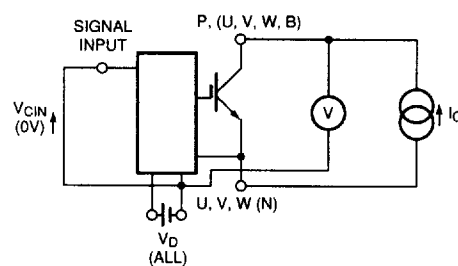


Figure 2  $V_{CE(SAT)}$  Test


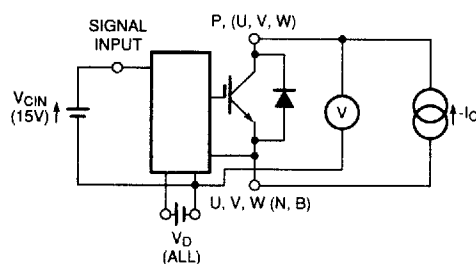


Figure 3  $V_{EC}$  Test

A) LOWER ARM SWITCHING

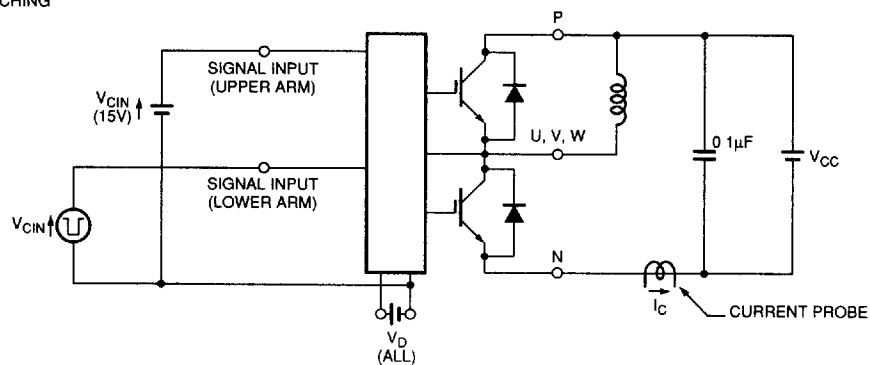

B) UPPER ARM SWITCHING

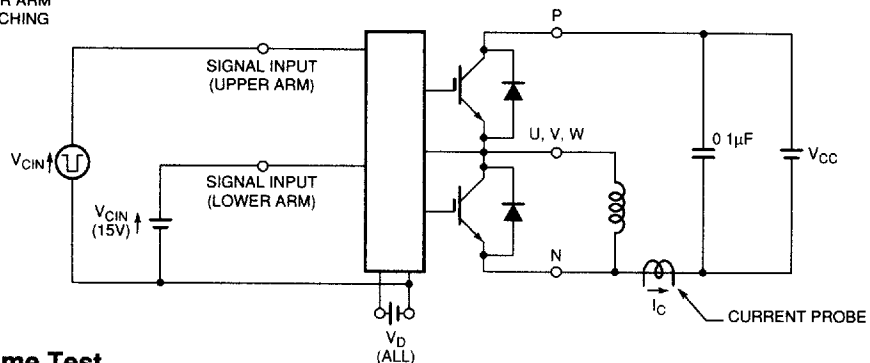


Figure 4 Switching Time Test

T-57-29

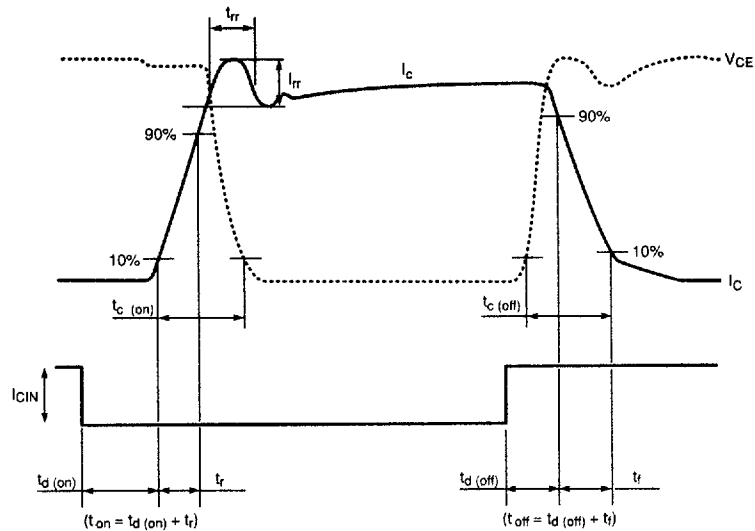


Figure 5 Switching Test Waveform

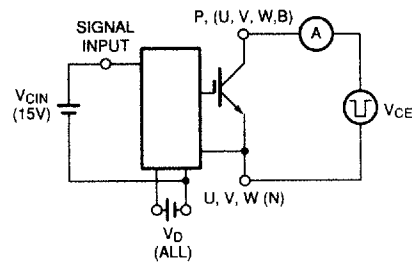


Figure 6  $I_{CES}$  Test

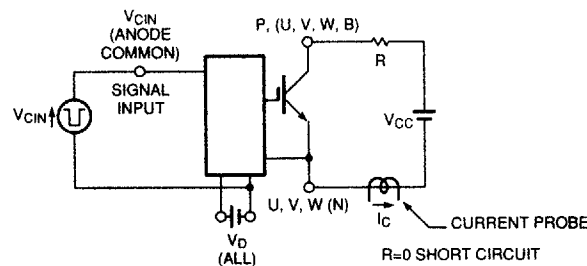


Figure 7 Over Current and Short Circuit Test