


FEATURES

- **12-Bit resolution**
- **Internal Sample/Hold amplifier**
- **10MHz minimum throughput**
- **Samples up to Nyquist**
- **Functionally complete**
- **Small 40-pin DIP**
- **Low-power, 3.85 Watts**
- **Three-State output buffers**
- **High input bandwidth**
- **Overflow pin**

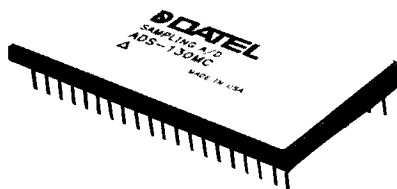

GENERAL DESCRIPTION

DATeL's ADS-130 is a 12-bit, functionally complete, sampling A/D converter packaged in a small 40-pin DIP. A 10MHz minimum throughput rate in digitizing sinusoidal signals is achieved while only dissipating 3.85 Watts.

INPUT/OUTPUT CONNECTIONS

PIN	FUNCTION	PIN	FUNCTION
1	+15V	40	DIGITAL GROUND
2	-15V	39	COMP BIN
3	ANALOG GROUND	38	ENABLE
4	ANALOG -5V	37	DATA READY
5	ANALOG +5V	36	DIGITAL +5V
6	ANALOG INPUT	35	START CONVERT
7	S/H OUT	34	OVERFLOW
8	DIGITAL +5V	33	BIT 1 (MSB)
9	DIGITAL GROUND	32	BIT 2 OUT
10	DIGITAL -5V	31	BIT 3 OUT
11	OFFSET ADJUST	30	BIT 4 OUT
12	ANALOG +5V	29	BIT 5 OUT
13	ANALOG GROUND	28	BIT 6 OUT
14	ANALOG -5V	27	DIGITAL GROUND
15	GAIN ADJUST	26	BIT 7 OUT
16	+10V REFERENCE	25	BIT 8 OUT
17	+15V SUPPLY	24	BIT 9 OUT
18	ANALOG -5V	23	BIT 10 OUT
19	ANALOG GROUND	22	BIT 11 OUT
20	ANALOG +5V	21	BIT 12 OUT (LSB)

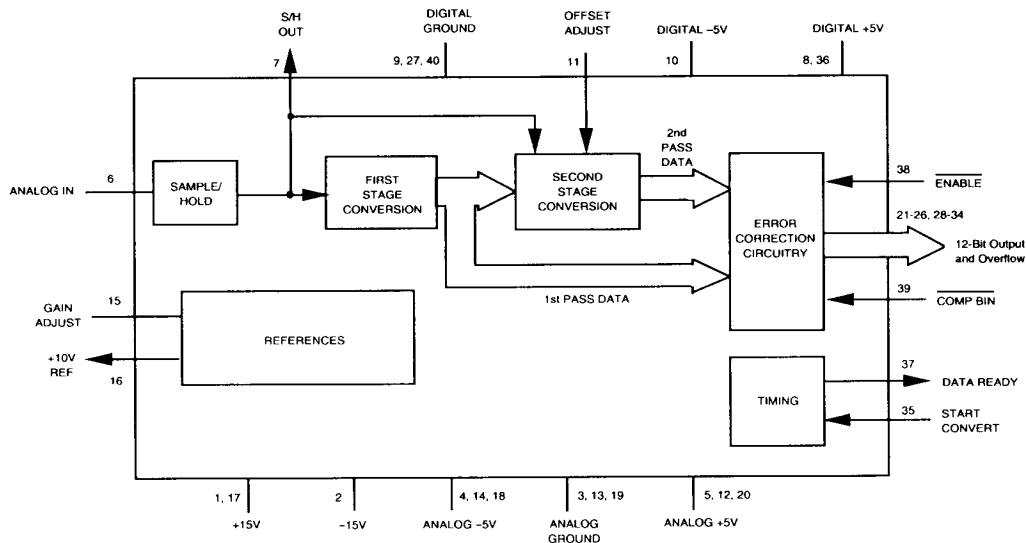


Figure 1. ADS-130 Simplified Block Diagram

ABSOLUTE MAXIMUM RATINGS

PARAMETERS	LIMITS	UNITS
+15V Supply (Pin 1,17)	0 to +18	Volts
-15V Supply (Pin 2)	0 to -18	Volts
+5V Supply (Pin 5, 8,12,20,36)	-0.5 to +7.0	Volts
-5V Supply (Pin 4,10,14,18)	+0.5 to -7.0	Volts
Digital Inputs (Pins 35,38,39)	-0.3 to V_{DD} +0.3	Volts
Analog Input (Pin 6)	± 5	Volts
Lead Temp. (10 Sec.)	300	$^{\circ}\text{C}$

FUNCTIONAL SPECIFICATIONS

Apply over the operating temperature range and at $\pm 15\text{V}$ and $\pm 5\text{V}$ unless otherwise specified.

INPUTS	MIN.	TYP.	MAX.	UNITS
ANALOG				
Input Voltage Range	—	± 1.25	—	Volts
Input Impedance	50	160	—	K Ω
Input Capacitance	—	2.5	10	pF
DIGITAL				
Logic Level "1"	+2.0	—	—	Volts
Logic Level "0"	—	—	+0.8	Volts
Logic Loading "1"	—	—	5.0	μA
Logic Loading "0"	—	—	-200	μA

OUTPUTS	MIN.	TYP.	MAX.	UNITS
Resolution				
Output Coding (Pin 39 HI) (Pin 39 Low)	12 Bits Offset Binary Complementary Offset Binary			
Logic Level "1"	+2.4	—	—	Volts
Logic Level "0"	—	—	+0.4	Volts
Logic Loading "1"	—	—	-160	μA
Logic Loading "0"	—	—	6.4	μA
Internal VREF, (pin 16)	+9.9	+10.0	+10.1	Volts
External Current	—	—	2	μA

PERFORMANCE

Int. Non- Lin. , $f_{\text{IN}} = 5.0 \text{ MHz}$	—	± 1.5	± 2.0	LSB
Diff. Non- Lin. , $f_{\text{IN}} = 5.0 \text{ MHz}$	—	± 1.0	± 1.5	LSB
Full Scale Absolute Accuracy	—	± 0.4	± 0.8	%FSR
Bipolar Zero Error	—	± 0.2	± 0.4	%FSR
Bipolar Offset Error	—	± 0.2	± 0.4	%FSR
Gain Error, $+25^{\circ}\text{C}$	—	± 0.2	± 0.4	%FSR

DYNAMIC PERFORMANCE

Conversion Rate	10	—	—	MHz
Total Harm. Distort. (-0.5dB)				
DC to 500kHz	—	-70	-65	dB
500kHz to 2.5MHz	—	-65	-60	dB
2.5MHz to 5MHz	—	-65	-60	dB
Signal-to-Noise Ratio (w/o distortion, -0.5dB)				
DC to 500kHz	62	65	—	dB
500kHz to 2.5MHz	60	64	—	dB
2.5MHz to 5MHz	60	63	—	dB
Signal-to-Noise Ratio and Distortion (-0.5dB)				
DC to 500kHz	60	63	—	dB
500kHz to 2.5MHz	58	60	—	dB
2.5MHz to 5MHz	58	60	—	dB
Spurious Free Dynamic Range				
DC to 500kHz (-0.5dB)①	—	-68	-64	dB
500kHz to 2.5MHz	—	-65	-61	dB
2.5MHz to 5MHz	—	-65	-61	dB

DYNAMIC PERF. (Cont.)	MIN.	TYP.	MAX.	UNITS
Effective Bits				
DC to 500kHz	—	10.5	—	Bits
500kHz to 2.5MHz	—	10.0	—	Bits
2.5MHz to 5MHz	—	9.6	—	Bits
Two-tone Intermodulation				
Distortion ($f_{\text{IN}} = 2.2 \text{ MHz}$, 2.3MHz, $F_s = 8 \text{ MHz}$)	—	-75	—	dB
Input Bandwidth				
Small Signal (-20dB)	50	65	—	MHz
Large Signal (-3dB)	30	40	—	MHz
Slew Rate	175	200	—	V/ μs
Aperture Delay Time	—	5	7	ns
Aperture Uncertainty	—	5	7	ps
S/H Acquisition Time to 0.01% FS (2.5V step) $+25^{\circ}\text{C}$	—	30	50	ns
Feedthrough Rejection 2.5V step	—	-66	-62	dB
Overvoltage Recovery, $\pm 2.5\text{V}$	—	100	200	ns

POWER REQUIREMENTS

Power Supply Range				
+15V Supply (V_{CC})	+14.25	+15.0	+15.75	Volts
-15V Supply (V_{EE})	-14.25	-15.0	-15.75	Volts
+5V Supply (V_{DD})	+4.75	+5.0	+5.25	Volts
-5V Supply (V_{SS})	-4.75	-5.0	-5.25	Volts
Power Supply Current				
+15V Supply	—	+26	+28	mA
-15V Supply	—	-30	-33	mA
+5V Supply②	—	+347	+372	mA
-5V Supply	—	-255	-285	mA
Power Dissipation	—	3.85	4.2	Watts
Power Supply Rejection	—	0.05	0.1	%FSR/%V

PHYSICAL/ENVIRONMENTAL

Operating Temp. Range (Case)	0	—	+70	$^{\circ}\text{C}$
-MC	-65	—	+150	$^{\circ}\text{C}$
Storage Temperature Range				
Weight	0.56 oz. (16 grams) Max.			
Package Type	40-Pin TDIP			

① The same specifications apply to In-band harmonics.

② +5V power usage at 1 TTL logic loading per data output bit.

TECHNICAL NOTES

1. Use external potentiometers to remove system errors or to reduce the small initial errors to zero. Use a 20k trimpot for gain adjustment with the wiper tied to pin 15 (tie pin 15 to ANALOG GROUND for operation without adjustments). Use a 20k trimpot with the wiper tied to pin 11 for zero/offset adjustment (tie pin 11 to ANALOG GROUND for operation without adjustment).

2. Rated performance requires using high-frequency circuit board layout techniques. Avoid ground-related problems by connecting the digital and analog grounds to one point, the ground plane beneath the converter.

In most cases, users will use a single +5V supply for both analog +5V and digital +5V (applicable for the -5V supply also). If using separate supplies, the difference between the analog and digital supply should be within $\pm 100\text{mV}$ to avoid performance degradation.

Due to the inductance and resistance of the power supply return paths, return the analog and digital ground separately to the power supplies. This prevents contamination of the analog ground by noisy digital ground currents.

TECHNICAL NOTES (Cont.)

- Bypass all the analog and digital power supply pins with a 2.2 μ F, 25V tantalum electrolytic capacitor in parallel with a 0.1 μ F ceramic capacitor to their respective analog and digital grounds. Use of chip capacitors is recommended.
- Obtain offset binary output coding by tying COMP BIN (pin 39) to +5V. To obtain complementary offset binary output coding, tie pin 39 to ground. The pin 39 signal is compatible to CMOS/TTL logic levels for those users desiring logic control of this function.
- To obtain three-state outputs, connect the ENABLE pin (pin 38) to a logic "1" (high). Otherwise, connect pin 38 to a logic "0" (low).
- The ADS-130 guarantees it's specified throughput rate over the temperature range when the START CONVERT pulse of 10ns minimum, 90ns maximum is provided at the specified rate. Start convert pulses greater than 90 nano-seconds will result in slower throughput rates.
- The ADS-130 is capable of digitizing sinusoidal input frequencies up to the Nyquist frequency. The acquisition time for pulse or dc level signals is 50ns maximum over the 0 to +70°C temperature range. Acquisition time is 70ns maximum from -55 to +125°C.
- The specifications listed in Figure 2 (timing diagram) apply over the full operating temperature range unless otherwise specified.
- The OVERFLOW pin goes high for signals greater than +full scale (no overflow flag given for signals greater than -FS). The OVERFLOW pin is a three-state output and is enabled by pin 38.
- The ADS-130 has a one pipeline delay in obtaining output data. Refer to the Timing Diagram in Figure 3.
- The ADS-130 goes into the hold mode on the rising edge of the start convert pulse.

CALIBRATION PROCEDURE

- Connect the converter per Figure 2.**
Apply a pulse of 10ns typical to the START CONVERT input (pin 35) at a rate of 500kHz. This rate is chosen to reduce flicker if LED's are used on the outputs for calibration purposes.
- Zero Adjustments**
Apply a precision voltage reference source between the analog input (pin 6) and analog ground. Adjust the output of the reference source per Table 2 for the bipolar zero adjustment (zero +1/2 LSB). Adjust the potentiometer such that the code flickers equally between 1000 0000 0000 and 1000 0000 0001 with COMP BIN (pin 39) tied high (offset binary) or between 0111 1111 1111 and 0111 1111 1110 with pin 39 tied low (complementary offset binary).
- Full-Scale Adjustment**
Set the output of the voltage reference used in step 2 to the value shown in Table 2 for the bipolar gain adjustment (+FS -1 1/2 LSB). Adjust the gain trimming potentiometer so that the output code flickers equally between 1111 1111 1110 and 1111 1111 1111 with pin 39 tied high or between 0000 0000 0000 and 0000 0000 0001 with pin 39 tied low.

To confirm proper operation of the device, vary the precision reference voltage source to obtain the output coding listed in Table 3.

Table 2. Zero and Gain Adjust

FSR	ZERO ADJUST 0 + 1/2 LSB	GAIN ADJUST +FS -1 1/2 LSB
$\pm 1.25V$	+305 μV	+1.249085V

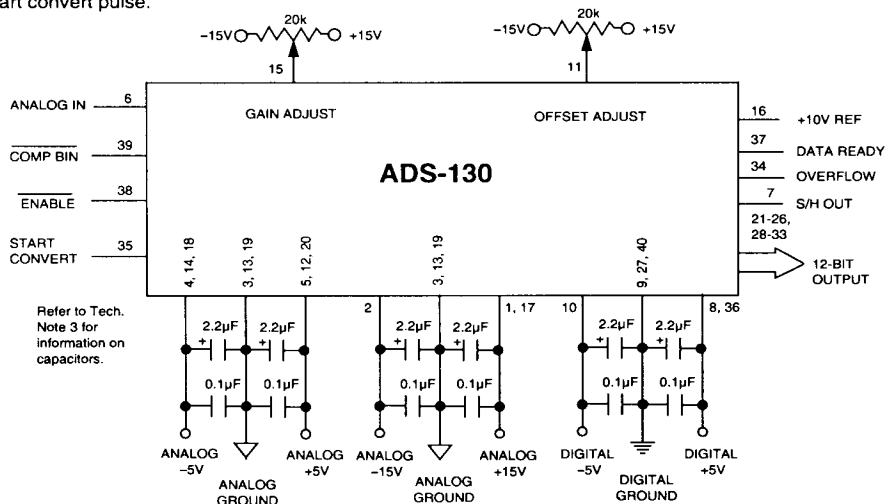



Figure 2. Typical ADS-130 Connections

BIPOLAR SCALE	INPUT RANGE ±1.25V	OUTPUT CODING			
		OFFSET BINARY		COMP OFF. BINARY	
		MSB	LSB	MSB	LSB
+FS -1 LSB	+1.24939V	1111	1111 1111	0000	0000 0000
+3/4 FS	+0.9375V	1110	0000 0000	0001	1111 1111
+1/2 FS	+0.625V	1100	0000 0000	0011	1111 1111
0	0.0000V	1000	0000 0000	0111	1111 1111
-1/2 FS	-0.625V	0100	0000 0000	1011	1111 1111
-3/4 FS	-0.9375V	0010	0000 0000	1101	1111 1111
-FS +1 LSB	-1.24939V	0000	0000 0001	1111	1111 1110
-FS	-1.2500V	0000	0000 0000	1111	1111 1111



1. Not drawn to scale
2. Rising edge of the Start Convert pulse puts the internal S/H into hold mode.

MECHANICAL DIMENSIONS INCHES (mm)

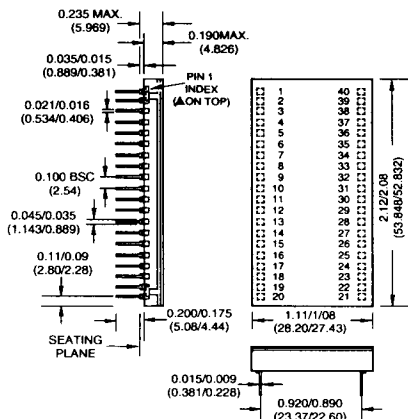

**MODEL
NUMBER**

ADS-130MC
ADS-B130/131

**OPERATING
TEMP. RANGE**

0 to +70°C
Evaluation Board (without
ADS-130)

Receptacle for PC board mounting can be ordered through AMP Inc., Part # 3-331272-8 (Component Lead Socket), 40 required.

For availability of extended temperature versions, contact DATEL.

39902

DATEL makes no representation that the use of these products in the circuits described herein, or use of other technical information contained herein, will not infringe upon existing or future patent rights nor do the descriptions contained herein imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications subject to change without notice.

D[®] DATEL[®]

DATEL, Inc.
INTERNATIONAL:

11 CABOT BOULEVARD, MANSFIELD, MA 02048-1194 TEL. (508) 339-3000 / FAX (508) 339-6356
DATEL (UNITED KINGDOM) Basingstoke Tel. (256) 880-444 • DATEL (FRANCE) Tel. (1) 3460.0101
DATEL (GERMANY) Tel. (89) 54 4334-0 • DATEL (JAPAN) Tokyo Tel. (3) 3779-1031 • Osaka Tel. (6) 354-2025

For Applications Assistance, dial 1-800-233-2765, 8:30 a.m. to 4:30 p.m. EST

Printed in U.S.A. © Copyright 1993 DATEL, Inc. All Rights Reserved

DS-0196C

4/93