

1.1 Scope.

This specification covers the detail requirements for a monolithic CMOS 12-bit multiplying digital-to-analog converter designed for serial interface applications.

1.2 Part Number.

The complete part number per Table 1 of this specification is as follows:

Device	Part Number ¹
-1	AD7543S(X)/883B
-2	AD7543T(X)/883B
-3	AD7543GT(X)/883B

NOTE

¹See paragraph 1.2.3 for package identifier.

1.2.3 Case Outline.

See Appendix 1 of General Specification ADI-M-1000: package outline:

(X)	Package	Description
Q	Q-16	16-Pin Cerdip
E	E-20A	20-Contact LCC

1.3 Absolute Maximum Ratings. ($T_A = 25^\circ\text{C}$ unless otherwise noted. Pin numbers refer to DIP package.)

V_{DD} to AGND	0V, +7V
V_{DD} to DGND	0V, +7V
AGND to DGND	V_{DD}
DGND to AGND	V_{DD}
Digital Input Voltage to DGND (Pins 4-11, 13)	-0.3V, +15V
V_{PIN1}, V_{PIN2} to AGND	-0.3V, +15V
V_{REF} to AGND	$\pm 25\text{V}$
V_{RFB} to AGND	$\pm 25\text{V}$
Power Dissipation	
Up to $+75^\circ\text{C}$	450mW
Derates above $+75^\circ\text{C}$	6mW/ $^\circ\text{C}$
Operating Temperature Range	-55°C to $+125^\circ\text{C}$
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Lead Temperature (Soldering 10sec)	$+300^\circ\text{C}$

1.5 Thermal Characteristics.

Thermal Resistance $\theta_{JC} = 35^\circ\text{C/W}$ for Q-16 and E-20A
 $\theta_{JA} = 120^\circ\text{C/W}$ for Q-16 and E-20A

AD7543—SPECIFICATIONS

Table 1.

Test	Symbol	Device	Design Limit T_{min}, T_{max}	Sub Group 1	Sub Group 2, 3	Sub Group 4	Test Condition ¹	Units
Resolution	RES	-1, 2, 3	12					Bits
Relative Accuracy	RA	-1	1	1	1			± LSB max
		-2, 3	1/2	1	1/2	1/2		
Differential Nonlinearity	DNL	-1	2	2	2		Monotonic to 11 Bit from T_{min} to T_{max}	± LSB max
		-2, 3	1	2	1	1	Monotonic to 12 Bit from T_{min} to T_{max}	
Gain Error ²	AE	-1, 2	14.5	12.3	14.5			± LSB max
		-3	2	12.3	2	1		
Gain Tempco	TC _{AE}	-1, 2, 3	5					± ppm/°C max
Supply Rejection (Δ Gain/ ΔV_{DD})	PSRR	-1, 2, 3	0.01	0.005	0.01		$\Delta V_{DD} = \pm 5\%$	± % per % max
Output Leakage Current I_{OUT1} (Pin 4) I_{OUT2} (Pin 5)	I_{OUT1}	-1, 2, 3	200	± 10	200		DAC Register Loads with All 0's	± nA max
	I_{OUT2}	-1, 2, 3	200	± 10	200		DAC Register Loads with All 1's	
Output Current Settling Time	t_{SI}	-1, 2, 3	2				To ± 1/2LSB $R_{OUT1} = 100\Omega$, $C_{OUT1} = 13pF$ DAC. Output Measured from Falling Edge of LD1 and LD2.	µs max
Feedthrough Error ³	FTE	-1, 2, 3	2.5				$V_{REF} = 10V$, 10kHz Sinewave	mV p-p max
Reference Input Resistance (Pin 15)	R_{IN}	-1, 2, 3	8	8	8			kΩ min
			25	25	25			kΩ max
Digital Input High Voltage	V_{IH}	-1, 2, 3	3.0	3.0	3.0			V min
Digital Input Low Voltage	V_{IL}	-1, 2, 3	0.8	0.8	0.8			V max
Digital Input Leakage Current	I_{IN}	-1, 2, 3	1	1	1		$V_{IN} = 0V$ or V_{DD}	± µA max
Digital Input Capacitance	C_{IN}	-1, 2, 3	8					pF max
Output Capacitance C_{OUT1} (Pin 1)	C_{OUT1}	-1, 2, 3	260				Digital Inputs = V_{IH} . DAC Register Loaded with 1111 1111 1111	pF max
C_{OUT2} (Pin 2)	C_{OUT2}	-1, 2, 3	75				Digital Inputs = V_{IH} . DAC Register Loaded with 1111 1111 1111	pF max
C_{OUT1} (Pin 1)	C_{OUT1}	-1, 2, 3	75				Digital Inputs = V_{IL} . DAC Register Loaded with 0000 0000 0000	pF max
C_{OUT2} (Pin 2)	C_{OUT2}	-1, 2, 3	260				Digital Inputs = V_{IL} . DAC Register Loaded with 0000 0000 0000	pF max
Serial Input to Strobe Setup Time ⁴	t_{DS1}	-1, 2, 3	100				STB1 Used as a Strobe	ns min
	t_{DS4}	-1, 2, 3	0				STB4 Used as a Strobe	
	t_{DS3}	-1, 2, 3	0				STB3 Used as a Strobe	
	t_{DS2}	-1, 2, 3	40				STB2 Used as a Strobe	
Serial Input to Strobe Hold Time ⁴	t_{DH1}	-1, 2, 3	70				STB1 Used as a Strobe	ns min
	t_{DH4}	-1, 2, 3	250				STB4 Used as a Strobe	
	t_{DH3}	-1, 2, 3	250				STB3 Used as a Strobe	
	t_{DH2}	-1, 2, 3	200				STB2 Used as a Strobe	
	t_{SR1}	-1, 2, 3	160				SR1 Data Pulse Width ⁴	
	t_{STB1}	-1, 2, 3	160				STB1 Pulse Width ⁴	
	t_{STB4}	-1, 2, 3	230				STB4 Pulse Width ⁴	
	t_{STB3}	-1, 2, 3	230				STB3 Pulse Width ⁴	
	t_{STB2}	-1, 2, 3	180				STB2 Pulse Width ⁴	
	t_{LD1} , t_{LD2}	-1, 2, 3	300				Min Time Between Strobing LSB into Register A and Loading Register B ⁴	
	t_{ASB}	-1, 2, 3	80				Min Time Between Strobing LSB into Register A and Loading Register B ⁴	
	t_{CLR}	-1, 2, 3	400				CLK Pulse Width ⁴	

NOTES


¹ $V_{DD} = +5V$; $V_{OUT1} = V_{OUT2} = 0V$, $V_{REF} = +10V$ unless otherwise stated.

²Measured using internal feedback resistor and includes the effect of 5ppm max gain TC.


³Feedthrough can be further reduced by connecting the metal lid to ground.

⁴Timing per Figure 1.


3.2.1 Functional Block Diagram and Terminal Assignments.

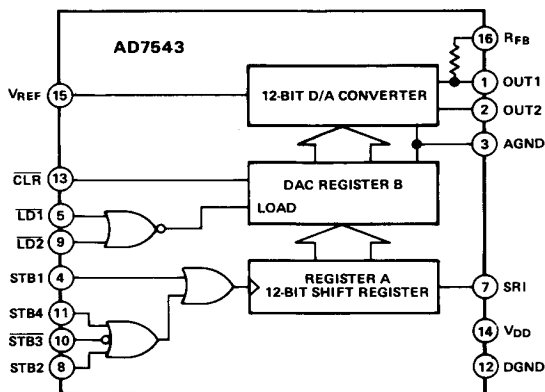

DIP (Q) Package



LCC (E) Package





3.2.4 Microcircuit Technology Group.

This microcircuit is covered by technology group (80).

4.2.1 Life Test/Burn-In Circuit.

Steady state life test is per MIL-STD-883 Method 1005. Burn-in is per MIL-STD-883 Method 1015 test condition (B).

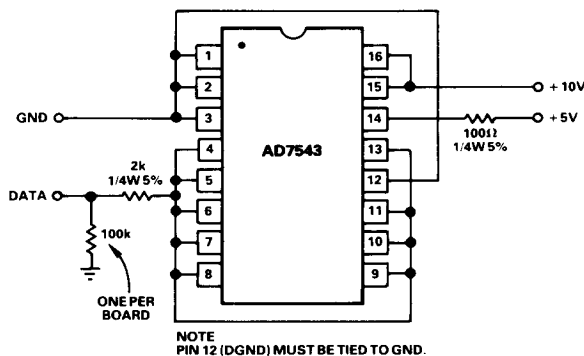

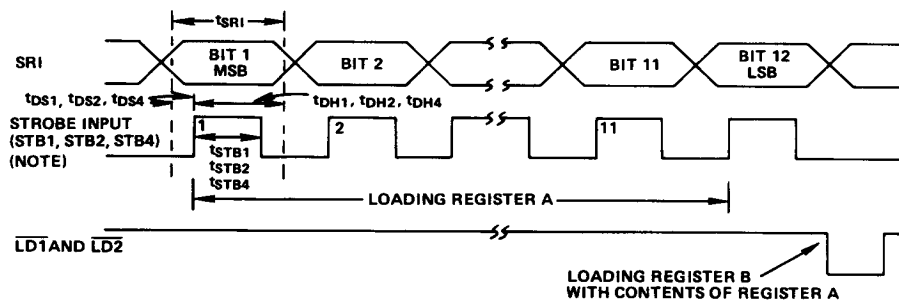

NOTE:
STROBE WAVEFORM IS INVERTED IF
STB3 IS USED TO STROBE SERIAL DATA
BITS INTO REGISTER A.

Figure 1. Timing Diagram

Table 2. Truth Table

AD7543 Logic Inputs							AD7543 Operation	Notes
Register A Control Inputs				Register B Control Inputs				
STB4	STB3	STB2	STB1	CLR	LD2	LD1		
0	1	0		X	X	X	Data Appearing At SRI Strobed Into Register A	2,3
0	1		0	X	X	X	Data Appearing At SRI Strobed Into Register A	2,3
0		0	0	X	X	X	Data Appearing At SRI Strobed Into Register A	2,3
	1	0	0	X	X	X	Data Appearing At SRI Strobed Into Register A	2,3
1	X	X	X				No Operation (Register A)	3
X	0	X	X					
X	X	1	X					
X	X	X	1					
				0	X	X	Clear Register B To Code 0000 0000 0000 (Asynchronous Operation)	1,3
				1	1	X	No Operation (Register B)	3
				1	X	1	No Operation (Register B)	3
				1	0	0	Load Register B With The Contents Of Register A	3

NOTES:

- CLR = 0 Asynchronously resets Register B to 0000 0000 0000, but has no effect on Register A.
- Serial data is loaded into Register A MSB first, on edges shown. is positive edge is negative edge.
- 0 = Logic LOW, 1 = Logic HIGH, X = Don't Care.