

Model 408

Single Element

Pyroelectric Detector with


Current Mode Amplifier



Manufactured under one or more of the following U.S. patents: 3,839,640 - 4,218,620 - 4,326,663 - 4,384,207 - 4,437,003 - 4,441,023 - 4,523,095



Model 408 consists of a single lithium tantalate sensing element, a JFET-input op amp and high megohm feedback resistor sealed into a TO-5 transistor housing with optical filter.

Designed primarily for large input thermal contrasts, additional amplification stages may not be needed as the Model 408 provides substantial gain through its current-to-voltage converter. Although this model incorporates an operational amplifier, only a single power supply is needed. The voltage reference is provided internally.

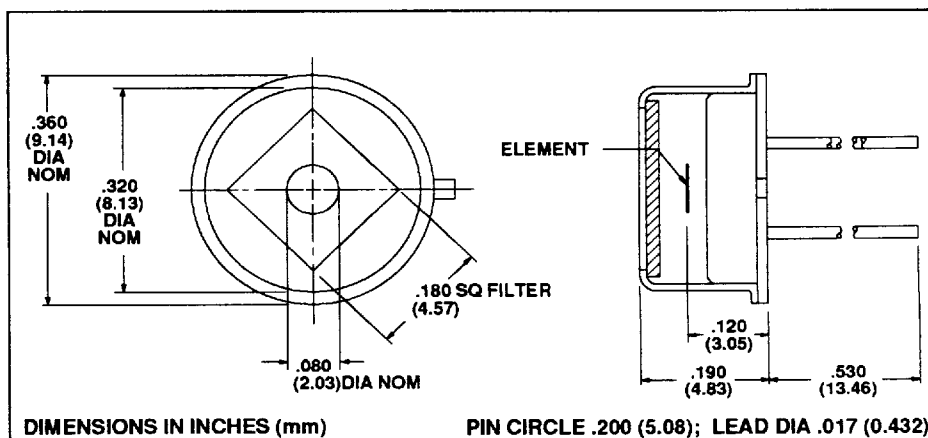

Applications

- Lighting Control
- Intruder Alarms
- People/Object Counting
- Industrial Control
- Robotics
- Heating/AC Control

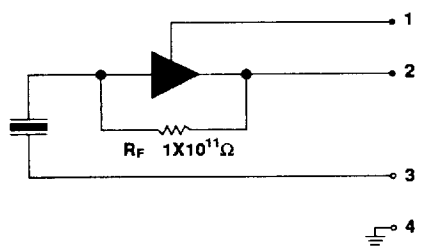


1. V+
2. OUTPUT
3. COMMON
4. GND/CASE

Characteristics	408	Unit	Test Conditions	ELTECdata Reference
Detector Type:	Single	—		
Element Size:	2.0	mm, DIA	Nominal	
Optical Bandwidth:	1.5 to 1,000	μm	Various filters	101
Responsivity (Typ):	90,000	V/W	8 - 14 μm , 1Hz	
Responsivity (Typ):	45,000	V/W	8 - 14 μm , 10Hz	
Responsivity (Min):	33,750			
Noise (Typ):	1.0	$\text{mV}/\sqrt{\text{Hz}}$	1.0Hz, p-p (1 minute)	
Noise (Typ):	0.5	$\text{mV}/\sqrt{\text{Hz}}$	10.0Hz, p-p (1 minute)	
NEP (Typ):	2.5×10^{-9}	$\text{W}/\sqrt{\text{Hz}}$	8 - 14 μm , 1-10Hz, BW 1 Hz	100
D^* (Typ):	7.0×10^7	$\text{cm}\sqrt{\text{Hz}}/\text{W}$	8 - 14 μm , 1-10Hz, BW 1 Hz	100
Operating Voltage (Min):	5	VDC		104
Operating Voltage (Max):	15			(4.1.c)
Operating Current (Typ):	0.8	mA		104
Operating Current (Max):	3.0			(4.1.c)
Offset Voltage (Min):	1.5	VDC		104
Offset Voltage (Typ):	2.5			Fig 4
Offset Voltage (Max):	4.0			
Output Impedance:	< 100	Ω		
Thermal Breakpoint f_T (Typ):	0.25	Hz		102
Electrical Breakpoint f_e (Typ):	6.0	Hz	$R_F = 1 \times 10^{11} \Omega$	102
Recommended Operating Temperature:	0 +40	$^{\circ}\text{C}$		
Package Sealing (Max):	10^{-8}	cm^3/sec	Helium	
Storage Temperature:	-55 +125	$^{\circ}\text{C}$	$\Delta T < 50 ^{\circ}\text{C}/\text{minute}$	

Characteristics 25 $^{\circ}\text{C}$, with -3 filter, $V_S = +10 \text{ VDC}$

Data established on a sample basis and is believed to be representative.

FIELD OF VIEW

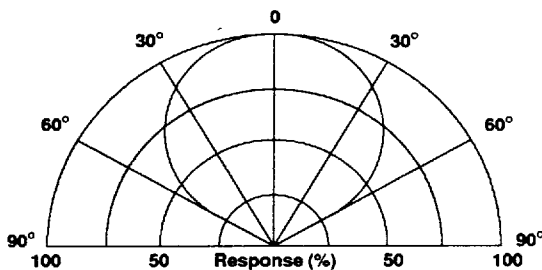

For -3 filter only. For other filters, consider refractive index and thickness.

Symmetrical crystal gives same FOV in vertical and horizontal planes.

For best results, the following precautions and recommendations should be observed. (See ELTECdata #101):


Mounting: Avoid mechanical stresses on case and leads.

Soldering: Use minimum heat and a heat sink between case and leads. Leave minimum lead length of .250 inch (6.35mm). DO NOT MACHINE SOLDER.

Static Discharge: Protect detectors from electrostatic charges.

Thermal Shock: Temperature changes and rate of change must be kept to a minimum (<50°C/min.) to prevent damage.

Transmission Characteristics of -3 Filter (HP7)

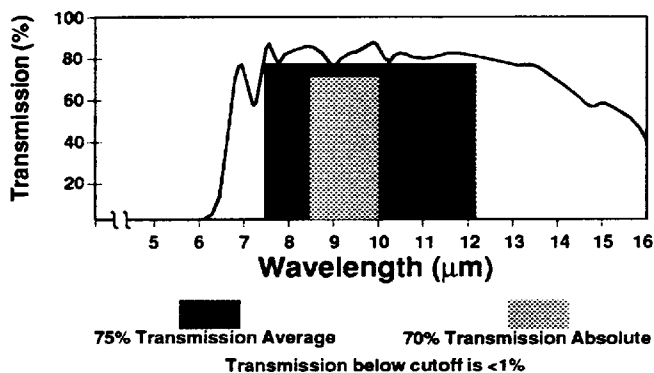

For information on other standard filters available, refer to ELTECdata # 101.

Noise: As a resolution or lower information limit, noise is established not only by the detector. Other noise sources are:

- Radiated and conducted RF signals
- Subsequent amplification or signal conditioning stages
- Power supply noise
- Components, such as high value resistors and capacitors (tantalum and aluminum electrolytic)
- Mechanical contacts and weak solder joints
- Vibration excited microphonics
- Outside thermal influences on the detector other than the desired infrared input, i.e. drafts.

All of these noise sources should be considered carefully when the information signal is <20mV.

Light Leakage: Slight sensitivity to visible light leaking through the glass-to-metal seal on the base may be observed.

Power Polarity: Carefully note power supply polarity connections to avoid damage to internal op amp.

Output Protection: Output is short circuit protected.

Current Mode Output: Output in the current mode is inverting (negative output for positive temperature change output).

Optical Design: Use of a detector with a filter in an optical system may require consideration of the image displacement toward the filter. This displacement (s) caused by the insertion of a planoparallel plate (filter thickness = t; refractive index = N) is given by $s = (t/N)(N-1)$.



ELTEC Instruments, Inc. P.O. Box 9610 Daytona Beach, Florida 32120-9610 U.S.A.
Tel: (800) 874-7780 Fax: (904) 258-3791

©ELTEC INSTRUMENTS, INC. 11/94 Printed in U.S.A. Form DS408