



# M28W320FST, M28W320FSB, M28W640FSB, M28W640FST

32Mbit (2Mb x16) and 64Mbit (4Mb x16)  
3V Supply, Boot Block, Secure Flash Memories

## FEATURES SUMMARY

- SUPPLY VOLTAGE
  - $V_{DD}$  = 2.7V to 3.6V Core Power Supply
  - $V_{DDQ}$  = 1.65V to 3.6V for Input/Output
  - $V_{PP}$  = 12V for fast Program (optional)
- ACCESS TIME: 70ns
- PROGRAMMING TIME:
  - 10 $\mu$ s typical
  - Double Word Programming Option
  - Quadruple Word Programming Option
- COMMON FLASH INTERFACE
- MEMORY BLOCKS
  - Parameter Blocks (Top or Bottom location)
  - Main Blocks
- HARDWARE PROTECTION
  - $V_{PP}$  Pin for write protect of all blocks
- SECURITY FEATURES
  - 128 bit User-programmable OTP segment
  - 64 bit Unique Device Identifier
  - KRYPTO Features:
    - Modify Protection,
    - Read Protection,
    - Device Authentication
- AUTOMATIC STAND-BY MODE
- PROGRAM and ERASE SUSPEND
- 100,000 PROGRAM/ERASE CYCLES per BLOCK
- ELECTRONIC SIGNATURE
  - Manufacturer Code: 20h
  - Device Codes:
    - M28W320FST: 880Ah,
    - M28W320FSB: 880Bh
    - M28W640FST: 8858h,
    - M28W640FSB: 8859h
- ECOPACK® PACKAGE AVAILABLE

Figure 1. Package



## TABLE OF CONTENTS

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>FEATURES SUMMARY</b>                               | <b>1</b>  |
| Figure 1. Package                                     | 1         |
| <b>SUMMARY DESCRIPTION</b>                            | <b>5</b>  |
| Table 1. M28W320FS and M28W640FS Memory Architecture  | 5         |
| Figure 2. M28W320FS Logic Diagram                     | 6         |
| Figure 3. M28W640FS Logic Diagram                     | 6         |
| Table 2. Signal Names                                 | 6         |
| Figure 4. TBGA Connections (Top view through package) | 7         |
| Figure 5. M28W320FST and M28W320FSB Block Addresses   | 8         |
| Figure 6. M28W640FST and M28W640FSB Block Addresses   | 9         |
| Figure 7. Protection Register Memory Map              | 9         |
| <b>SIGNAL DESCRIPTIONS</b>                            | <b>10</b> |
| Address Inputs                                        | 10        |
| Data Input/Output (DQ0-DQ15)                          | 10        |
| Chip Enable ( $\overline{E}$ )                        | 10        |
| Output Enable ( $\overline{G}$ )                      | 10        |
| Write Enable ( $\overline{W}$ )                       | 10        |
| Reset ( $\overline{RP}$ )                             | 10        |
| V <sub>DD</sub> Supply Voltage                        | 10        |
| V <sub>DDQ</sub> Supply Voltage                       | 10        |
| V <sub>PP</sub> Program Supply Voltage                | 10        |
| V <sub>SS</sub> Ground                                | 10        |
| <b>BUS OPERATIONS</b>                                 | <b>11</b> |
| Read                                                  | 11        |
| Write                                                 | 11        |
| Output Disable                                        | 11        |
| Standby                                               | 11        |
| Automatic Standby                                     | 11        |
| Reset                                                 | 11        |
| Table 3. Bus Operations                               | 11        |
| <b>HARDWARE PROTECTION</b>                            | <b>12</b> |
| V <sub>PP</sub> ≤ V <sub>PPLK</sub>                   | 12        |
| <b>SECURITY FEATURES</b>                              | <b>12</b> |
| <b>COMMAND INTERFACE</b>                              | <b>13</b> |
| Read Memory Array Command                             | 13        |
| Read Status Register Command                          | 13        |
| Read Electronic Signature Command                     | 13        |

|                                                                                               |           |
|-----------------------------------------------------------------------------------------------|-----------|
| Table 4. Command Codes . . . . .                                                              | 13        |
| <b>Read CFI Query Command . . . . .</b>                                                       | <b>13</b> |
| <b>Block Erase Command . . . . .</b>                                                          | <b>13</b> |
| <b>Program Command . . . . .</b>                                                              | <b>14</b> |
| <b>Double Word Program Command . . . . .</b>                                                  | <b>14</b> |
| <b>Quadruple Word Program Command . . . . .</b>                                               | <b>14</b> |
| <b>Clear Status Register Command . . . . .</b>                                                | <b>14</b> |
| <b>Program/Erase Suspend Command . . . . .</b>                                                | <b>14</b> |
| <b>Program/Erase Resume Command . . . . .</b>                                                 | <b>15</b> |
| <b>Protection Register Program Command . . . . .</b>                                          | <b>15</b> |
| Table 5. Commands . . . . .                                                                   | 16        |
| Table 6. Read Electronic Signature . . . . .                                                  | 16        |
| Table 7. Read Protection Register and Protection Register Lock . . . . .                      | 17        |
| Table 8. Program, Erase Times and Program/Erase Endurance Cycles . . . . .                    | 18        |
| <b>STATUS REGISTER . . . . .</b>                                                              | <b>19</b> |
| Program/Erase Controller Status (Bit 7) . . . . .                                             | 19        |
| Erase Suspend Status (Bit 6) . . . . .                                                        | 19        |
| Erase Status (Bit 5) . . . . .                                                                | 19        |
| Program Status (Bit 4) . . . . .                                                              | 19        |
| V <sub>PP</sub> Status (Bit 3) . . . . .                                                      | 19        |
| Program Suspend Status (Bit 2) . . . . .                                                      | 19        |
| Block Protection Status (Bit 1) . . . . .                                                     | 20        |
| Reserved (Bit 0) . . . . .                                                                    | 20        |
| Table 9. Status Register Bits . . . . .                                                       | 20        |
| <b>MAXIMUM RATING . . . . .</b>                                                               | <b>21</b> |
| Table 10. Absolute Maximum Ratings . . . . .                                                  | 21        |
| <b>DC and AC PARAMETERS . . . . .</b>                                                         | <b>22</b> |
| Table 11. Operating and AC Measurement Conditions . . . . .                                   | 22        |
| Figure 8. AC Measurement I/O Waveform . . . . .                                               | 22        |
| Figure 9. AC Measurement Load Circuit . . . . .                                               | 22        |
| Table 12. Capacitance . . . . .                                                               | 22        |
| Table 13. DC Characteristics . . . . .                                                        | 23        |
| Figure 10. Read AC Waveforms . . . . .                                                        | 24        |
| Table 14. Read AC Characteristics . . . . .                                                   | 24        |
| Figure 11. Write AC Waveforms, Write Enable Controlled . . . . .                              | 25        |
| Table 15. Write AC Characteristics, Write Enable Controlled . . . . .                         | 26        |
| Figure 12. Write AC Waveforms, Chip Enable Controlled . . . . .                               | 27        |
| Table 16. Write AC Characteristics, Chip Enable Controlled . . . . .                          | 28        |
| Figure 13. Power-Up and Reset AC Waveforms . . . . .                                          | 29        |
| Table 17. Power-Up and Reset AC Characteristics . . . . .                                     | 29        |
| <b>PACKAGE MECHANICAL . . . . .</b>                                                           | <b>30</b> |
| Figure 14. TBGA64 - 10x13 active ball array, 1mm pitch, Bottom View Package Outline . . . . . | 30        |

|                                                                                          |           |
|------------------------------------------------------------------------------------------|-----------|
| Table 18. TBGA64 - 10x13 active ball array, 1mm pitch, Package Mechanical Data . . . . . | 30        |
| <b>PART NUMBERING . . . . .</b>                                                          | <b>31</b> |
| Table 19. Ordering Information Scheme . . . . .                                          | 31        |
| Table 20. Daisy Chain Ordering Scheme . . . . .                                          | 32        |
| <b>APPENDIX A.BLOCK ADDRESS TABLES . . . . .</b>                                         | <b>33</b> |
| Table 21. Top Boot Block Addresses, M28W320FST . . . . .                                 | 33        |
| Table 22. Bottom Boot Block Addresses, M28W320FSB . . . . .                              | 34        |
| Table 23. Top Boot Block Addresses, M28W640FST . . . . .                                 | 35        |
| Table 24. Bottom Boot Block Addresses, M28W640FSB . . . . .                              | 37        |
| <b>APPENDIX B.COMMON FLASH INTERFACE (CFI) . . . . .</b>                                 | <b>39</b> |
| Table 25. Query Structure Overview . . . . .                                             | 39        |
| Table 26. CFI Query Identification String. . . . .                                       | 39        |
| Table 27. CFI Query System Interface Information . . . . .                               | 40        |
| Table 28. Device Geometry Definition . . . . .                                           | 41        |
| Table 29. Primary Algorithm-Specific Extended Query Table . . . . .                      | 43        |
| Table 30. Security Code Area . . . . .                                                   | 44        |
| <b>APPENDIX C.FLOWCHARTS AND PSEUDO CODES . . . . .</b>                                  | <b>45</b> |
| Figure 15.Program Flowchart and Pseudo Code . . . . .                                    | 45        |
| Figure 16.Double Word Program Flowchart and Pseudo Code . . . . .                        | 46        |
| Figure 17.Quadruple Word Program Flowchart and Pseudo Code. . . . .                      | 47        |
| Figure 18.Program Suspend & Resume Flowchart and Pseudo Code . . . . .                   | 48        |
| Figure 19.Erase Flowchart and Pseudo Code. . . . .                                       | 49        |
| Figure 20.Erase Suspend & Resume Flowchart and Pseudo Code . . . . .                     | 50        |
| Figure 21.Protection Register Program Flowchart and Pseudo Code. . . . .                 | 51        |
| <b>APPENDIX D.COMMAND INTERFACE AND PROGRAM/ERASE CONTROLLER STATE. . . . .</b>          | <b>52</b> |
| Table 31. Write State Machine Current/Next, sheet 1 of 2. . . . .                        | 52        |
| Table 32. Write State Machine Current/Next, sheet 2 of 2. . . . .                        | 53        |
| <b>REVISION HISTORY. . . . .</b>                                                         | <b>54</b> |
| Table 33. Document Revision History . . . . .                                            | 54        |

## SUMMARY DESCRIPTION

The M28W320FS and M28W640FS are 32 Mbit (2Mbit x 16) and 64 Mbit (4Mbit x 16) Secure Flash memories. The devices can be erased electrically at block level and programmed in-system on a Word-by-Word basis using a 2.7V to 3.6V  $V_{DD}$  supply for the circuitry and a 1.65V to 3.6V  $V_{DDQ}$  supply for the Input/Output pins. An optional 12V  $V_{PP}$  power supply is provided to speed up custom-er programming.

The M28W320FS and M28W640FS feature 32Mbit and 64 Mbits respectively and have an asymmetrical block architecture with 4 KWord Parameter Blocks and 32 KWord Main Blocks. The M28W320FST and M28W640FST have the Parameter Blocks at the top of the memory address space while the M28W320FSB and M28W640FSB locate the Parameter Blocks starting from the bottom. Refer to Table 1., Figure 5. and Figure 6. for a detailed description of the devices memory architecture and map.

All devices are equipped with hardware and software block protection features to avoid unwanted program/erase (modify) or read of the Flash memory content:

- **Hardware Protection:**
  - When  $V_{PP} \leq V_{PPLK}$  all blocks are protected against program or erase.
- **Software Protection thanks to KRYPTO Security Features:**
  - Modify Protection: volatile and non-volatile.
  - Read Protection.

The KRYPTO Security features are described in a dedicated Application Note. Please contact STMicroelectronics for further details.

Two registers are available for protection purpose:

- The Protection Register
- The KRYPTO Protection Register.

The Protection Register is a 192 bit Protection Register to increase the protection of a system design. The Protection Register is divided into a 64

bit segment and a 128 bit segment. The 64 bit segment contains a unique device number written by ST, while the second one is one-time-programmable by the user. The user programmable segment can be permanently protected. Figure 7., shows the Protection Register Memory Map.

The KRYPTO Protection Register is used to manage the Modify and Read protection modes. It also features a Device Authentication mechanism. The KRYPTO Protection Register is described in a dedicated Application Note. Please contact STMicroelectronics for further details.

Each block can be erased separately. Erase can be suspended in order to perform either read or program in any other block and then resumed. Program can be suspended to read data in any other block and then resumed. Each block can be programmed and erased over 100,000 cycles.

Program and Erase commands are written to the Command Interface of the memory. An on-chip Program/Erase Controller takes care of the timings necessary for program and erase operations. The end of a program or erase operation can be detected and any error conditions identified. The command set required to control the memory is consistent with JEDEC standards.

All the devices are offered in a TBGA64 (10 x 13mm) package.

In order to meet environmental requirements, ST offers the M28W320FS and M28W640FS in ECO-PACK<sup>®</sup> packages. ECOPACK packages are Lead-free. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label.

ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com).

All devices are supplied with all the bits erased (set to '1').

**Table 1. M28W320FS and M28W640FS Memory Architecture**

| Device    | Parameter Blocks |                           | Main Blocks   |            |
|-----------|------------------|---------------------------|---------------|------------|
|           | No. of Blocks    | Block Size <sup>(1)</sup> | No. of Blocks | Block Size |
| M28W320FS | 8                | 4 KWords                  | 63            | 32 KWords  |
| M28W640FS | 8                | 4 KWords                  | 127           | 32 KWords  |

Note: 1. Erasable Block size.

Figure 2. M28W320FS Logic Diagram

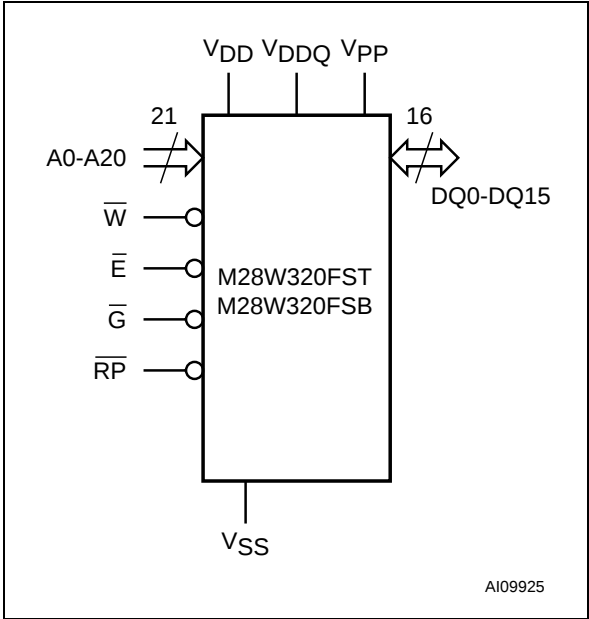


Figure 3. M28W640FS Logic Diagram


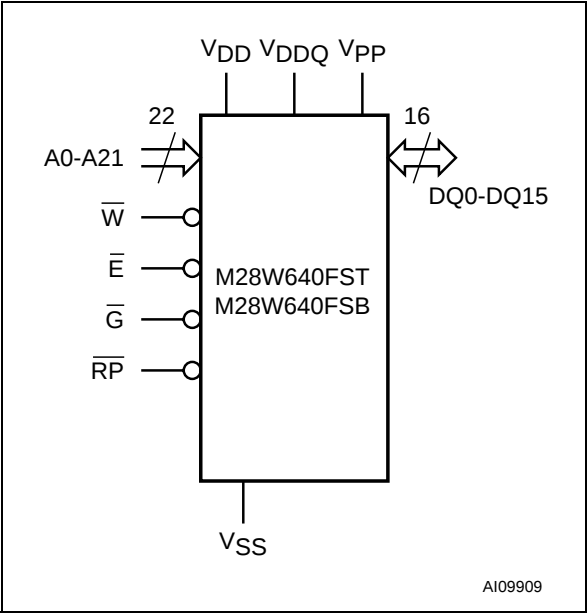


Table 2. Signal Names

| M28W320FST and<br>M28W320FSB | M28W640FST and<br>M28W640FSB | Signal Names                                        |
|------------------------------|------------------------------|-----------------------------------------------------|
| A0-A20                       | A0-A21                       | Address Inputs                                      |
| DQ0-DQ15                     |                              | Data Input/Output                                   |
| $\overline{E}$               |                              | Chip Enable                                         |
| $\overline{G}$               |                              | Output Enable                                       |
| $\overline{W}$               |                              | Write Enable                                        |
| $\overline{RP}$              |                              | Reset                                               |
| VDD                          |                              | Core Power Supply                                   |
| VDDQ                         |                              | Power Supply for<br>Input/Output                    |
| VPP                          |                              | Optional Supply Voltage for<br>Fast Program & Erase |
| VSS                          |                              | Ground                                              |
| NC                           |                              | Not Connected Internally                            |

Figure 4. TBGA Connections (Top view through package)

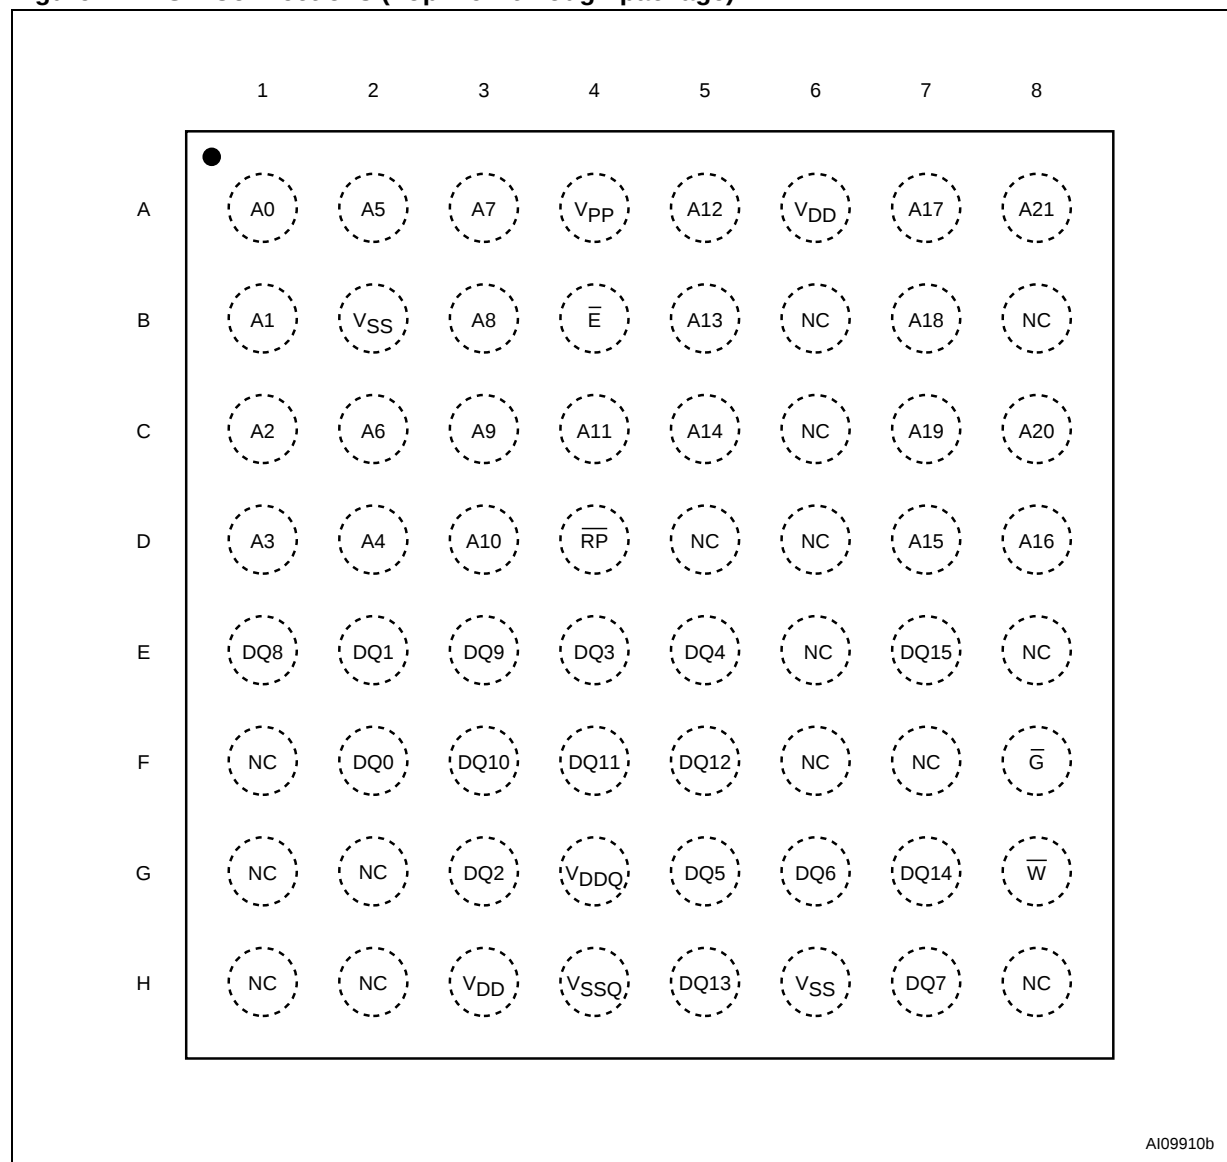

Note: 1. The above figure gives the TBGA connections for M28W640FST and M28W640FSB. On M28W320FST and M28W320FSB devices, A21 is NC.

Figure 5. M28W320FST and M28W320FSB Block Addresses



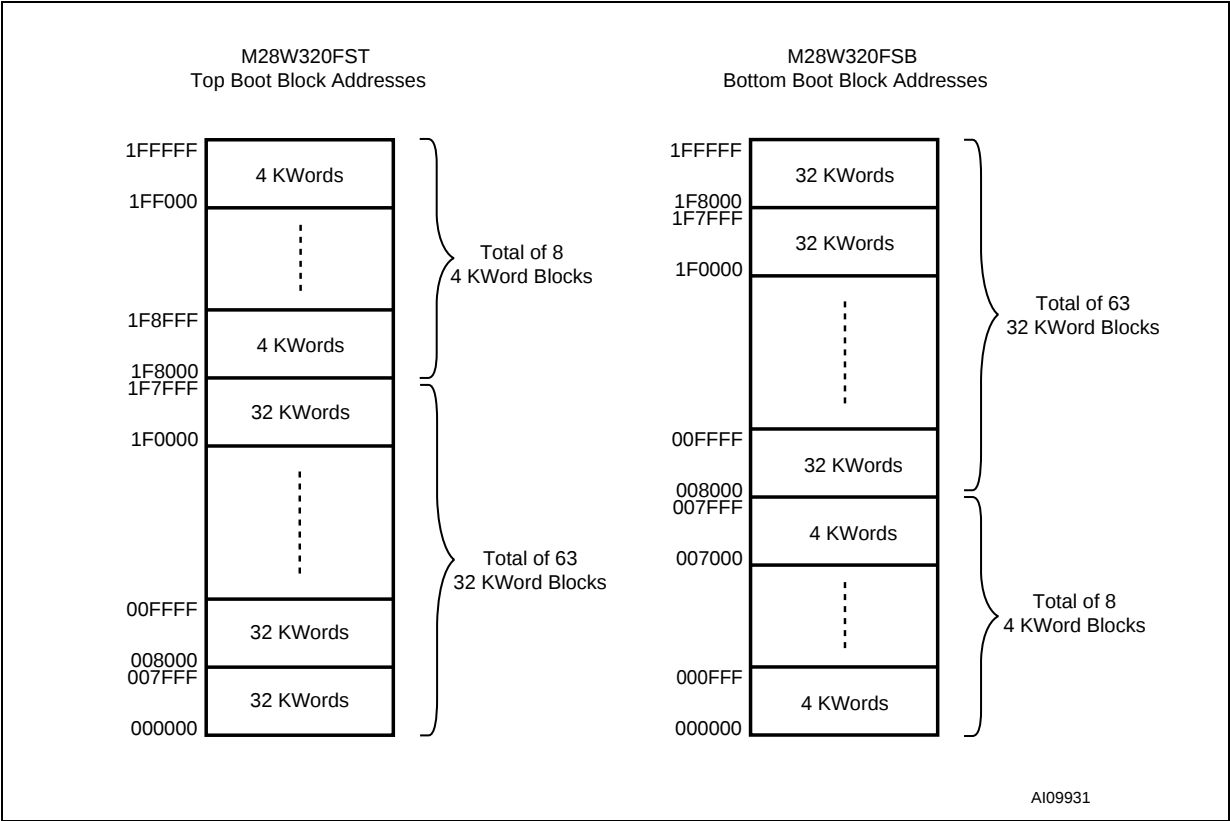


Figure 6. M28W640FST and M28W640FSB Block Addresses

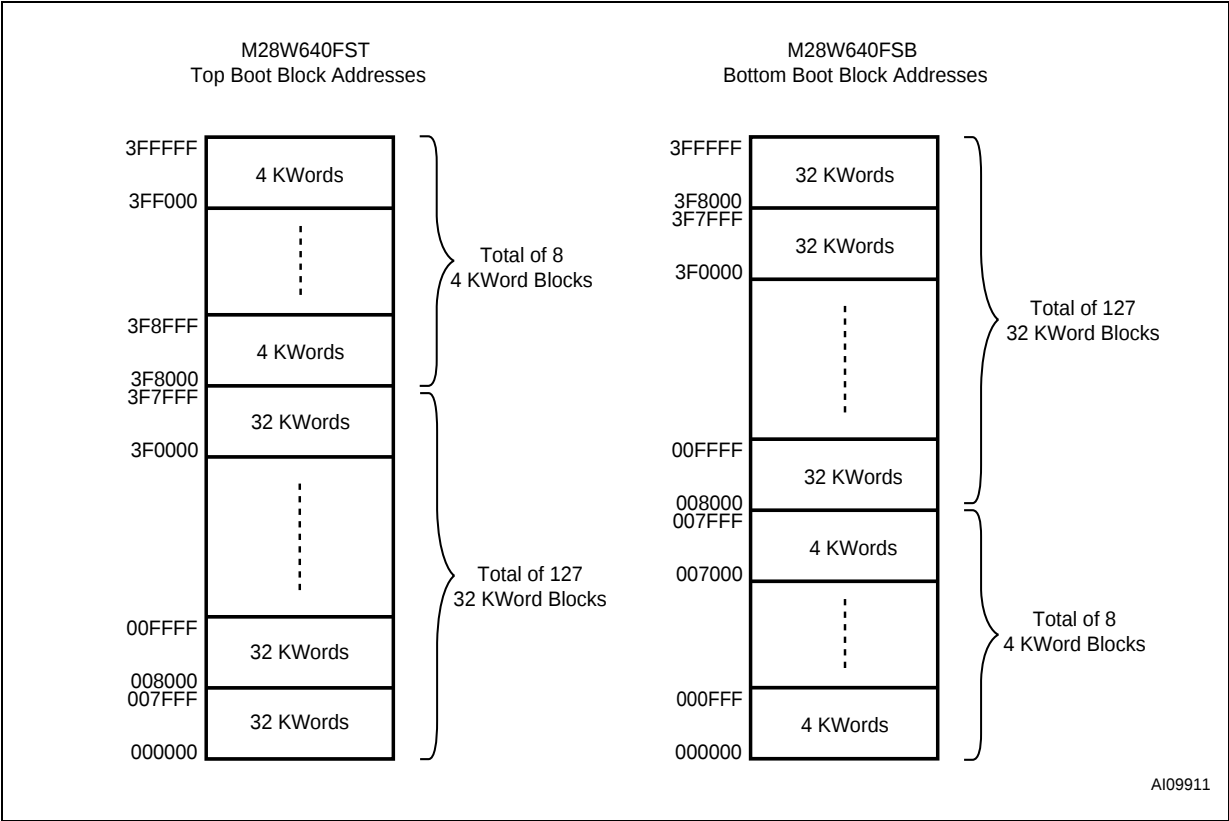

Note: Also see [APPENDIX A.](#), Tables 23 and 24 for a full listing of the Block Addresses.

Figure 7. Protection Register Memory Map

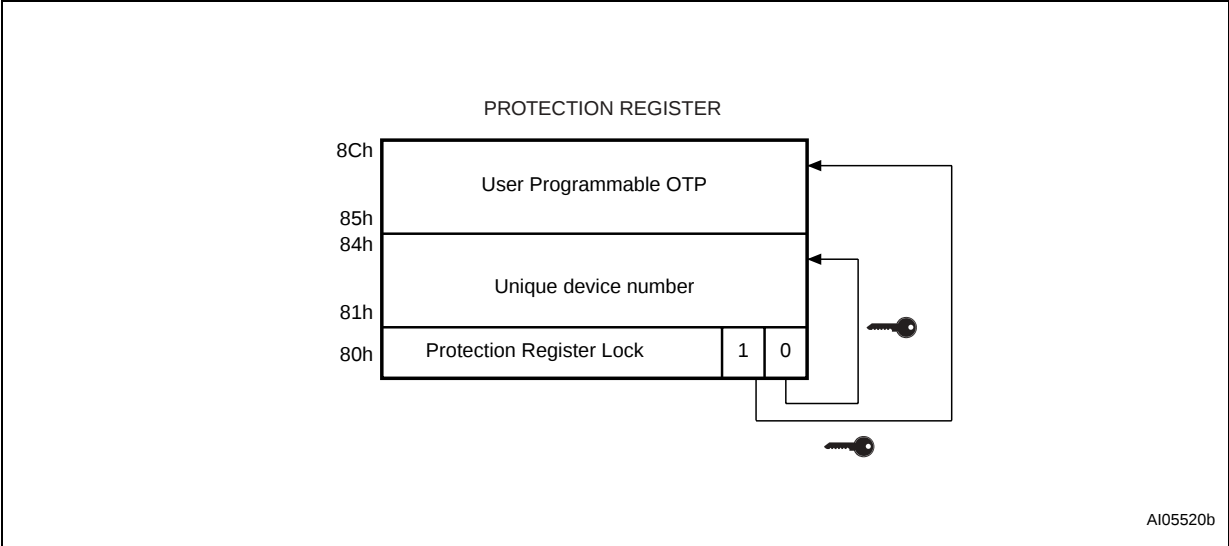

## SIGNAL DESCRIPTIONS

See Figures 2 and 3, Logic Diagrams and Table 2., Signal Names, for a brief overview of the signals connected to this device.

**Address Inputs.** The Address Inputs select the cells in the memory array to access during Bus Read operations. Address Inputs range from A0 to A20 for the M28W320FS. The M28W640FS has an additional A21 address line. During Bus Write operations they control the commands sent to the Command Interface of the internal state machine.

**Data Input/Output (DQ0-DQ15).** The Data I/O outputs the data stored at the selected address during a Bus Read operation or inputs a command or the data to be programmed during a Write Bus operation.

**Chip Enable ( $\overline{E}$ ).** The Chip Enable input activates the memory control logic, input buffers, decoders and sense amplifiers. When Chip Enable is at  $V_{IL}$  and Reset is at  $V_{IH}$  the device is in active mode. When Chip Enable is at  $V_{IH}$  the memory is deselected, the outputs are high impedance and the power consumption is reduced to the stand-by level.

**Output Enable ( $\overline{G}$ ).** The Output Enable controls data outputs during the Bus Read operation of the memory.

**Write Enable ( $\overline{W}$ ).** The Write Enable controls the Bus Write operation of the memory's Command Interface. The data and address inputs are latched on the rising edge of Chip Enable,  $\overline{E}$ , or Write Enable,  $\overline{W}$ , whichever occurs first.

**Reset ( $\overline{RP}$ ).** The Reset input provides a hardware reset of the memory. When Reset is at  $V_{IL}$ , the memory is in reset mode: the outputs are high impedance and the current consumption is minimized. After Reset all blocks are in the Locked state. When Reset is at  $V_{IH}$ , the device is in normal operation. Exiting reset mode the device enters read array mode, but a negative transition of Chip

Enable or a change of the address is required to ensure valid data outputs.

**V<sub>DD</sub> Supply Voltage.** V<sub>DD</sub> provides the power supply to the internal core of the memory device. It is the main power supply for all operations (Read, Program and Erase).

**V<sub>DDQ</sub> Supply Voltage.** V<sub>DDQ</sub> provides the power supply to the I/O pins and enables all Outputs to be powered independently from V<sub>DD</sub>. V<sub>DDQ</sub> can be tied to V<sub>DD</sub> or can use a separate supply.

**V<sub>PP</sub> Program Supply Voltage.** V<sub>PP</sub> is both a control input and a power supply pin. The two functions are selected by the voltage range applied to the pin. The Supply Voltage V<sub>DD</sub> and the Program Supply Voltage V<sub>PP</sub> can be applied in any order.

If V<sub>PP</sub> is kept in a low voltage range (0V to 3.6V) V<sub>PP</sub> is seen as a control input. In this case a voltage lower than V<sub>PP<sub>LK</sub></sub> gives an absolute protection against program or erase, while V<sub>PP</sub> > V<sub>PP1</sub> enables these functions (see Table 13., DC Characteristics, for the relevant values). V<sub>PP</sub> is only sampled at the beginning of a program or erase; a change in its value after the operation has started does not have any effect on Program or Erase.

If V<sub>PP</sub> is set to V<sub>PPH</sub>, it acts as a power supply pin. In this condition V<sub>PP</sub> must be stable until the Program/Erase algorithm is completed (see Table 15. and Table 16.). A Quadruple Word Program command will be ignored if V<sub>PP</sub> is not set to V<sub>PPH</sub> while a Double Word Program can be performed even if V<sub>PP</sub> is set to V<sub>DD</sub>.

**V<sub>SS</sub> Ground.** V<sub>SS</sub> is the reference for all voltage measurements.

**Note:** Each device in a system should have V<sub>DD</sub>, V<sub>DDQ</sub> and V<sub>PP</sub> decoupled with a 0.1μF capacitor close to the pin. See Figure 9., AC Measurement Load Circuit. The PCB track widths should be sufficient to carry the required V<sub>PP</sub> program and erase currents.

## BUS OPERATIONS

There are six standard bus operations that control the device. These are Bus Read, Bus Write, Output Disable, Standby, Automatic Standby and Reset. See [Table 3., Bus Operations](#), for a summary.

Typically glitches of less than 5ns on Chip Enable or Write Enable are ignored by the memory and do not affect bus operations.

**Read.** Read Bus operations are used to output the contents of the Memory Array, the Electronic Signature, the Status Register and the Common Flash Interface. Both Chip Enable and Output Enable must be at  $V_{IL}$  in order to perform a read operation. The Chip Enable input should be used to enable the device. Output Enable should be used to gate data onto the output. The data read depends on the previous command written to the memory (see Command Interface section). See [Figure 10., Read AC Waveforms](#), and [Table 14., Read AC Characteristics](#), for details of when the output becomes valid.

Read mode is the default state of the device when exiting Reset or after power-up.

**Write.** Bus Write operations write Commands to the memory or latch Input Data to be programmed. A write operation is initiated when Chip Enable and Write Enable are at  $V_{IL}$  with Output Enable at  $V_{IH}$ . Commands, Input Data and Addresses are latched on the rising edge of Write Enable or Chip Enable, whichever occurs first.

See [Figure 11.](#) and [Figure 12.,](#) Write AC Waveforms, and [Table 15.](#) and [Table 16.,](#) Write AC

Characteristics, for details of the timing requirements.

**Output Disable.** The data outputs are high impedance when the Output Enable is at  $V_{IH}$ .

**Standby.** Standby disables most of the internal circuitry allowing a substantial reduction of the current consumption. The memory is in stand-by when Chip Enable is at  $V_{IH}$  and the device is in read mode. The power consumption is reduced to the stand-by level and the outputs are set to high impedance, independently from the Output Enable or Write Enable inputs. If Chip Enable switches to  $V_{IH}$  during a program or erase operation, the device enters Standby mode when finished.

**Automatic Standby.** Automatic Standby provides a low power consumption state during Read mode. Following a read operation, the device enters Automatic Standby after 150ns of bus inactivity even if Chip Enable is Low,  $V_{IL}$ , and the supply current is reduced to  $I_{DD1}$ . The data Inputs/Outputs will still output data if a bus Read operation is in progress.

**Reset.** During Reset mode when Output Enable is Low,  $V_{IL}$ , the memory is deselected and the outputs are high impedance. The memory is in Reset mode when Reset is at  $V_{IL}$ . The power consumption is reduced to the Standby level, independently from the Chip Enable, Output Enable or Write Enable inputs. If Reset is pulled to  $V_{SS}$  during a Program or Erase, this operation is aborted and the memory content is no longer valid.

**Table 3. Bus Operations**

| Operation      | $\overline{E}$ | $\overline{G}$ | $\overline{W}$ | $\overline{RP}$ | $V_{PP}$              | DQ0-DQ15    |
|----------------|----------------|----------------|----------------|-----------------|-----------------------|-------------|
| Bus Read       | $V_{IL}$       | $V_{IL}$       | $V_{IH}$       | $V_{IH}$        | Don't Care            | Data Output |
| Bus Write      | $V_{IL}$       | $V_{IH}$       | $V_{IL}$       | $V_{IH}$        | $V_{DD}$ or $V_{PPH}$ | Data Input  |
| Output Disable | $V_{IL}$       | $V_{IH}$       | $V_{IH}$       | $V_{IH}$        | Don't Care            | Hi-Z        |
| Standby        | $V_{IH}$       | X              | X              | $V_{IH}$        | Don't Care            | Hi-Z        |
| Reset          | X              | X              | X              | $V_{IL}$        | Don't Care            | Hi-Z        |

Note: X =  $V_{IL}$  or  $V_{IH}$ ,  $V_{PPH} = 12V \pm 5\%$ .

## **HARDWARE PROTECTION**

All devices feature hardware protection. Refer to [SIGNAL DESCRIPTIONS](#) section for a detailed description of these signals.

**V<sub>PP</sub> ≤ V<sub>PPLK</sub>.** The VPP pin protects all the blocks. Refer to [SIGNAL DESCRIPTIONS](#) section for a detailed description of these signals.

## **SECURITY FEATURES**

The M28W320FS and M28W640FS are equipped with KRYPTO Security features performing software protection. They allow any block to be protected from program/erase or read operations:

- Modify Protection including Volatile Block Lock/Unlock, Non-Volatile Block Modify Protection, Non-Volatile Password Modify Protection and Irreversible Protection.
- Read Protection.

The KRYPTO features (Modify Protection mode, Read Protection mode and Device Authentication mechanism) are not described in this Datasheet. For further details concerning these additional protection modes please contact ST Sales Offices.

The devices also feature a 64 bit Unique Device Identifier and a 128 bit user-programmable OTP segment (see [Figure 7.](#), [Protection Register Memory Map](#) and [Protection Register Program Command](#)).

## COMMAND INTERFACE

All Bus Write operations to the memory are interpreted by the Command Interface. Commands consist of one or more sequential Bus Write operations. An internal Program/Erase Controller handles all timings and verifies the correct execution of the Program and Erase commands. The Program/Erase Controller provides a Status Register whose output may be read at any time during, to monitor the progress of the operation, or the Program/Erase states. See [Table 4., Command Codes](#), for a summary of the commands and see [APPENDIX D., Table 31., Write State Machine Current/Next, sheet 1 of 2.](#), for a summary of the Command Interface.

The Command Interface is reset to Read mode when power is first applied, when exiting from Reset or whenever  $V_{DD}$  is lower than  $V_{LKO}$ . Command sequences must be followed exactly. Any invalid combination of commands will reset the device to Read mode. Refer to [Table 5., Commands](#), in conjunction with the text descriptions below.

### Read Memory Array Command

The Read command returns the memory to its Read mode. One Bus Write cycle is required to issue the Read Memory Array command and return the memory to Read mode. Subsequent read operations will read the addressed location and output the data. When a device Reset occurs, the memory defaults to Read mode.

### Read Status Register Command

The Status Register indicates when a program or erase operation is complete and the success or failure of the operation itself. Issue a Read Status Register command to read the Status Register's contents. Subsequent Bus Read operations read the Status Register at any address, until another command is issued. See [Table 9., Status Register Bits](#), for details on the definitions of the bits.

The Read Status Register command may be issued at any time, even during a Program/Erase operation. Any Read attempt during a Program/Erase operation will automatically output the content of the Status Register.

### Read Electronic Signature Command

The Read Electronic Signature command reads the Manufacturer and Device Codes, and the Protection Register.

The Read Electronic Signature command consists of one write cycle, a subsequent read will output the Manufacturer Code, the Device Code and the Protection Register. See [Tables 6, and 7](#) for the valid address.

**Table 4. Command Codes**

| Hex Code | Command                     |
|----------|-----------------------------|
| 01h      | Block Lock confirm          |
| 10h      | Program                     |
| 20h      | Erase                       |
| 30h      | Double Word Program         |
| 40h      | Program                     |
| 50h      | Clear Status Register       |
| 56h      | Quadruple Word Program      |
| 70h      | Read Status Register        |
| 90h      | Read Electronic Signature   |
| 98h      | Read CFI Query              |
| B0h      | Program/Erase Suspend       |
| C0h      | Protection Register Program |
| D0h      | Program/Erase Resume        |
| FFh      | Read Memory Array           |

### Read CFI Query Command

The Read Query Command is used to read data from the Common Flash Interface (CFI) Memory Area, allowing programming equipment or applications to automatically match their interface to the characteristics of the device. One Bus Write cycle is required to issue the Read Query Command. Once the command is issued subsequent Bus Read operations read from the Common Flash Interface Memory Area. See [APPENDIX B., COMMON FLASH INTERFACE \(CFI\)](#), [Tables 25, 26, 27, 28, 29 and 30](#) for details on the information contained in the Common Flash Interface memory area.

### Block Erase Command

The Block Erase command can be used to erase a block. It sets all the bits within the selected block to '1'. All previous data in the block is lost. If the block is protected then the Erase operation will abort, the data in the block will not be changed and the Status Register will output the error.

Two Bus Write cycles are required to issue the command.

- The first bus cycle sets up the Erase command.
- The second latches the block address in the internal state machine and starts the Program/Erase Controller.

If the second bus cycle is not Write Erase Confirm (D0h), Status Register bits b4 and b5 are set and the command aborts.

Erase aborts if Reset turns to  $V_{IL}$ . As data integrity cannot be guaranteed when the Erase operation is aborted, the block must be erased again.

During Erase operations the memory will accept the Read Status Register command and the Program/Erase Suspend command, all other commands will be ignored. Typical Erase times are given in [Table 8., Program, Erase Times and Program/Erase Endurance Cycles](#).

See [APPENDIX C., Figure 19., Erase Flowchart and Pseudo Code](#), for a suggested flowchart for using the Erase command.

#### **Program Command**

The memory array can be programmed word-by-word. Two bus write cycles are required to issue the Program Command.

- The first bus cycle sets up the Program command.
- The second latches the Address and the Data to be written and starts the Program/Erase Controller.

During Program operations the memory will accept the Read Status Register command and the Program/Erase Suspend command. Typical Program times are given in [Table 8., Program, Erase Times and Program/Erase Endurance Cycles](#).

Programming aborts if Reset goes to  $V_{IL}$ . As data integrity cannot be guaranteed when the program operation is aborted, the block containing the memory location must be erased and reprogrammed.

See [APPENDIX C., Figure 15., Program Flowchart and Pseudo Code](#), for the flowchart for using the Program command.

#### **Double Word Program Command**

This feature is offered to improve the programming throughput, writing a page of two adjacent words in parallel. The two words must differ only for the address A0.

Three bus write cycles are necessary to issue the Double Word Program command.

- The first bus cycle sets up the Double Word Program Command.
- The second bus cycle latches the Address and the Data of the first word to be written.
- The third bus cycle latches the Address and the Data of the second word to be written and starts the Program/Erase Controller.

Read operations output the Status Register content after the programming has started. Programming aborts if Reset goes to  $V_{IL}$ . As data integrity cannot be guaranteed when the program operation

is aborted, the block containing the memory location must be erased and reprogrammed.

See [APPENDIX C., Figure 16., Double Word Program Flowchart and Pseudo Code](#) for the flowchart for using the Double Word Program command.

#### **Quadruple Word Program Command**

This feature is offered to improve the programming throughput, writing a page of four adjacent words in parallel. The four words must differ only for the addresses A0 and A1.

A Quadruple word Program command will be ignored if  $V_{PP}$  is not set to  $V_{PPH}$ .

Five bus write cycles are necessary to issue the Quadruple Word Program command.

- The first bus cycle sets up the Quadruple Word Program Command.
- The second bus cycle latches the Address and the Data of the first word to be written.
- The third bus cycle latches the Address and the Data of the second word to be written.
- The fourth bus cycle latches the Address and the Data of the third word to be written.
- The fifth bus cycle latches the Address and the Data of the fourth word to be written and starts the Program/Erase Controller.

Read operations output the Status Register content after the programming has started. Programming aborts if Reset goes to  $V_{IL}$ . As data integrity cannot be guaranteed when the program operation is aborted, the block containing the memory location must be erased and reprogrammed.

See [APPENDIX C., Figure 17., Quadruple Word Program Flowchart and Pseudo Code](#), for the flowchart for using the Quadruple Word Program command.

#### **Clear Status Register Command**

The Clear Status Register command can be used to reset bits 1, 3, 4 and 5 in the Status Register to '0'. One bus write cycle is required to issue the Clear Status Register command.

The bits in the Status Register do not automatically return to '0' when a new Program or Erase command is issued. The error bits in the Status Register should be cleared before attempting a new Program or Erase command.

#### **Program/Erase Suspend Command**

The Program/Erase Suspend command is used to pause a Program or Erase operation. One bus write cycle is required to issue the Program/Erase command and pause the Program/Erase controller.

During Program/Erase Suspend the Command Interface will accept the Program/Erase Resume,

Read Array, Read Status Register, Read Electronic Signature and Read CFI Query commands. Additionally, if the suspend operation was Erase then the Program, Double Word Program, Quadruple Word Program, Block Lock, or Protection Program commands will also be accepted. The block being erased may be protected by issuing the Block Protect, Block Lock or Protection Program commands. When the Program/Erase Resume command is issued the operation will complete. Only the blocks not being erased may be read or programmed correctly.

During a Program/Erase Suspend, the device can be placed in a pseudo-standby mode by taking Chip Enable to  $V_{IH}$ . Program/Erase is aborted if Reset turns to  $V_{IL}$ .

See [APPENDIX C., Figure 18., Program Suspend & Resume Flowchart and Pseudo Code](#), and [Figure 20., Erase Suspend & Resume Flowchart and Pseudo Code](#), for flowcharts for using the Program/Erase Suspend command.

#### **Program/Erase Resume Command**

The Program/Erase Resume command can be used to restart the Program/Erase Controller after a Program/Erase Suspend operation has paused it. One Bus Write cycle is required to issue the command. Once the command is issued subsequent Bus Read operations read the Status Register.

See [APPENDIX C., Figure 18., Program Suspend & Resume Flowchart and Pseudo Code](#), and [Figure 20., Erase Suspend & Resume Flowchart and Pseudo Code](#), for flowcharts for using the Program/Erase Resume command.

#### **Protection Register Program Command**

The Protection Register Program command is used to Program the 128 bit user One-Time-Programmable (OTP) segment of the Protection Register. The segment is programmed 16 bits at a time. When shipped all bits in the segment are set to '1'. The user can only program the bits to '0'.

Two write cycles are required to issue the Protection Register Program command.

- The first bus cycle sets up the Protection Register Program command.
- The second latches the Address and the Data to be written to the Protection Register and starts the Program/Erase Controller.

Read operations output the Status Register content after the programming has started.

The segment can be protected by programming bit 1 of the Protection Lock Register (see [Figure 7., Protection Register Memory Map](#)). Attempting to program a previously protected Protection Register will result in a Status Register error. The protection of the Protection Register is not reversible. The Protection Register Program cannot be suspended.

Table 5. Commands

| Commands                              | Cycles | Bus Write Operations |     |            |           |                   |      |           |     |      |           |     |      |           |     |      |
|---------------------------------------|--------|----------------------|-----|------------|-----------|-------------------|------|-----------|-----|------|-----------|-----|------|-----------|-----|------|
|                                       |        | 1st Cycle            |     |            | 2nd Cycle |                   |      | 3rd Cycle |     |      | 4th Cycle |     |      | 5th Cycle |     |      |
|                                       |        | Op.                  | Add | Data       | Op.       | Add               | Data | Op.       | Add | Data | Op.       | Add | Data | Op.       | Add | Data |
| Read Memory Array                     | 1+     | Write                | X   | FFh        | Read      | RA                | RD   |           |     |      |           |     |      |           |     |      |
| Read Status Register                  | 1+     | Write                | X   | 70h        | Read      | X                 | SRD  |           |     |      |           |     |      |           |     |      |
| Read Electronic Signature             | 1+     | Write                | X   | 90h        | Read      | SA <sup>(2)</sup> | IDh  |           |     |      |           |     |      |           |     |      |
| Read CFI Query                        | 1+     | Write                | X   | 98h        | Read      | QA                | QD   |           |     |      |           |     |      |           |     |      |
| Erase                                 | 2      | Write                | X   | 20h        | Write     | BA                | D0h  |           |     |      |           |     |      |           |     |      |
| Program                               | 2      | Write                | X   | 40h or 10h | Write     | PA                | PD   |           |     |      |           |     |      |           |     |      |
| Double Word Program <sup>(3)</sup>    | 3      | Write                | X   | 30h        | Write     | PA1               | PD1  | Write     | PA2 | PD2  |           |     |      |           |     |      |
| Quadruple Word Program <sup>(4)</sup> | 5      | Write                | X   | 56h        | Write     | PA1               | PD1  | Write     | PA2 | PD2  | Write     | PA3 | PD3  | Write     | PA4 | PD4  |
| Clear Status Register                 | 1      | Write                | X   | 50h        |           |                   |      |           |     |      |           |     |      |           |     |      |
| Program/Erase Suspend                 | 1      | Write                | X   | B0h        |           |                   |      |           |     |      |           |     |      |           |     |      |
| Program/Erase Resume                  | 1      | Write                | X   | D0h        |           |                   |      |           |     |      |           |     |      |           |     |      |
| Protection Register Program           | 2      | Write                | X   | C0h        | Write     | PRA               | PRD  |           |     |      |           |     |      |           |     |      |

Note: 1. X = Don't Care, RA=Read Address, RD=Read Data, SRD=Status Register Data, ID=Identifier (Manufacture and Device Code), QA=Query Address, QD=Query Data, BA=Block Address, PA=Program Address, PD=Program Data, PRA=Protection Register Address, PRD=Protection Register Data.

2. The signature addresses are listed in Tables 6 and 7.

3. Program Addresses 1 and 2 must be consecutive Addresses differing only for A0.

4. Program Addresses 1,2,3 and 4 must be consecutive Addresses differing only for A0 and A1.

Table 6. Read Electronic Signature

| Code             | Device     | $\bar{E}$       | $\bar{G}$       | $\bar{W}$       | A0              | A1              | A2-A7 | A8-A20<br>A8-A21 <sup>(2)</sup> | DQ0-DQ7 | DQ8-DQ15 |
|------------------|------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------|---------------------------------|---------|----------|
| Manufacture Code |            | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | V <sub>IL</sub> | V <sub>IL</sub> | 0     | Don't Care                      | 20h     | 00h      |
| Device Code      | M28W320FST | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | V <sub>IH</sub> | V <sub>IL</sub> | 0     | Don't Care                      | 0Ah     | 88h      |
|                  | M28W320FSB | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | V <sub>IH</sub> | V <sub>IL</sub> | 0     | Don't Care                      | 0Bh     | 88h      |
|                  | M28W640FST | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | V <sub>IH</sub> | V <sub>IL</sub> | 0     | Don't Care                      | 58h     | 88h      |
|                  | M28W640FSB | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | V <sub>IH</sub> | V <sub>IL</sub> | 0     | Don't Care                      | 59h     | 88h      |

Note: 1.  $\bar{RP} = V_{IH}$ .

2. Addresses range from A0 to A20 for the M28W320FS and from A0 to A21 for the M29W640FS.

Table 7. Read Protection Register and Protection Register Lock

| Word        | $\bar{E}$       | $\bar{G}$       | $\bar{W}$       | A0-A7 | A8-A21 <sup>(1)</sup> | DQ0      | DQ1            | DQ2      | DQ3-DQ7  | DQ8-DQ15 |
|-------------|-----------------|-----------------|-----------------|-------|-----------------------|----------|----------------|----------|----------|----------|
| Lock        | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 80h   | Don't Care            | 0        | OTP Prot. data | 0        | 00h      | 00h      |
| Unique ID 0 | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 81h   | Don't Care            | ID data  | ID data        | ID data  | ID data  | ID data  |
| Unique ID 1 | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 82h   | Don't Care            | ID data  | ID data        | ID data  | ID data  | ID data  |
| Unique ID 2 | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 83h   | Don't Care            | ID data  | ID data        | ID data  | ID data  | ID data  |
| Unique ID 3 | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 84h   | Don't Care            | ID data  | ID data        | ID data  | ID data  | ID data  |
| OTP 0       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 85h   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 1       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 86h   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 2       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 87h   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 3       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 88h   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 4       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 89h   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 5       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 8Ah   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 6       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 8Bh   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |
| OTP 7       | V <sub>IL</sub> | V <sub>IL</sub> | V <sub>IH</sub> | 8Ch   | Don't Care            | OTP data | OTP data       | OTP data | OTP data | OTP data |

Note: 1. Addresses range from A0 to A20 for the M28W320FS and from A0 to A21 for the M29W640FS.

**Table 8. Program, Erase Times and Program/Erase Endurance Cycles**

| Parameter                        | Test Conditions        | M28W320FST, M28W320FSB<br>M28W640FST, M28W640FSB |                          |     | Unit    |
|----------------------------------|------------------------|--------------------------------------------------|--------------------------|-----|---------|
|                                  |                        | Min                                              | Typ                      | Max |         |
| Word Program                     | $V_{PP} = V_{DD}$      |                                                  | 10                       | 200 | $\mu s$ |
| Double Word Program              | $V_{PP} = 12V \pm 5\%$ |                                                  | 10                       | 200 | $\mu s$ |
| Quadruple Word Program           | $V_{PP} = 12V \pm 5\%$ |                                                  | 10                       | 200 | $\mu s$ |
| Main Block Program               | $V_{PP} = 12V \pm 5\%$ |                                                  | 0.16/0.08 <sup>(1)</sup> | 5   | s       |
|                                  | $V_{PP} = V_{DD}$      |                                                  | 0.32                     | 5   | s       |
| Parameter Block Program          | $V_{PP} = 12V \pm 5\%$ |                                                  | 0.02/0.01 <sup>(1)</sup> | 4   | s       |
|                                  | $V_{PP} = V_{DD}$      |                                                  | 0.04                     | 4   | s       |
| Main Block Erase                 | $V_{PP} = 12V \pm 5\%$ |                                                  | 1                        | 10  | s       |
|                                  | $V_{PP} = V_{DD}$      |                                                  | 1                        | 10  | s       |
| Parameter Block Erase            | $V_{PP} = 12V \pm 5\%$ |                                                  | 0.4                      | 10  | s       |
|                                  | $V_{PP} = V_{DD}$      |                                                  | 0.4                      | 10  | s       |
| Program/Erase Cycles (per Block) |                        | 100,000                                          |                          |     | cycles  |
| Data Retention                   |                        | 20                                               |                          |     | years   |

Note: 1. Typical time to program a Main or Parameter Block using the Double Word Program and the Quadruple Word Program commands respectively.

## STATUS REGISTER

The Status Register provides information on the current or previous Program or Erase operation. The various bits convey information and errors on the operation. To read the Status register the Read Status Register command can be issued, refer to Read Status Register Command section. To output the contents, the Status Register is latched on the falling edge of the Chip Enable or Output Enable signals, and can be read until Chip Enable or Output Enable returns to  $V_{IH}$ . Either Chip Enable or Output Enable must be toggled to update the latched data.

Bus Read operations from any address always read the Status Register during Program and Erase operations.

The bits in the Status Register are summarized in [Table 9., Status Register Bits](#). Refer to [Table 9.](#) in conjunction with the following text descriptions.

**Program/Erase Controller Status (Bit 7).** The Program/Erase Controller Status bit indicates whether the Program/Erase Controller is active or inactive. When the Program/Erase Controller Status bit is Low (set to '0'), the Program/Erase Controller is active; when the bit is High (set to '1'), the Program/Erase Controller is inactive, and the device is ready to process a new command.

The Program/Erase Controller Status is Low immediately after a Program/Erase Suspend command is issued until the Program/Erase Controller pauses. After the Program/Erase Controller pauses the bit is High.

During Program, Erase, operations the Program/Erase Controller Status bit can be polled to find the end of the operation. Other bits in the Status Register should not be tested until the Program/Erase Controller completes the operation and the bit is High.

After the Program/Erase Controller completes its operation the Erase Status, Program Status,  $V_{PP}$  Status and Block Lock Status bits should be tested for errors.

**Erase Suspend Status (Bit 6).** The Erase Suspend Status bit indicates that an Erase operation has been suspended or is going to be suspended. When the Erase Suspend Status bit is High (set to '1'), a Program/Erase Suspend command has been issued and the memory is waiting for a Program/Erase Resume command.

The Erase Suspend Status should only be considered valid when the Program/Erase Controller Status bit is High (Program/Erase Controller inactive). Bit 7 is set within 30 $\mu$ s of the Program/Erase Suspend command being issued therefore the memory may still complete the operation rather than entering the Suspend mode.

When a Program/Erase Resume command is issued the Erase Suspend Status bit returns Low.

**Erase Status (Bit 5).** The Erase Status bit can be used to identify if the memory has failed to verify that the block has erased correctly. When the Erase Status bit is High (set to '1'), the Program/Erase Controller has applied the maximum number of pulses to the block and still failed to verify that the block has erased correctly. The Erase Status bit should be read once the Program/Erase Controller Status bit is High (Program/Erase Controller inactive).

Once set High, the Erase Status bit can only be reset Low by a Clear Status Register command or a hardware reset. If set High it should be reset before a new Program or Erase command is issued, otherwise the new command will appear to fail.

**Program Status (Bit 4).** The Program Status bit is used to identify a Program failure. When the Program Status bit is High (set to '1'), the Program/Erase Controller has applied the maximum number of pulses to the byte and still failed to verify that it has programmed correctly. The Program Status bit should be read once the Program/Erase Controller Status bit is High (Program/Erase Controller inactive).

Once set High, the Program Status bit can only be reset Low by a Clear Status Register command or a hardware reset. If set High it should be reset before a new command is issued, otherwise the new command will appear to fail.

**$V_{PP}$  Status (Bit 3).** The  $V_{PP}$  Status bit can be used to identify an invalid voltage on the  $V_{PP}$  pin during Program and Erase operations. The  $V_{PP}$  pin is only sampled at the beginning of a Program or Erase operation. Indeterminate results can occur if  $V_{PP}$  becomes invalid during an operation.

When the  $V_{PP}$  Status bit is Low (set to '0'), the voltage on the  $V_{PP}$  pin was sampled at a valid voltage; when the  $V_{PP}$  Status bit is High (set to '1'), the  $V_{PP}$  pin has a voltage that is below the  $V_{PP}$  Lockout Voltage,  $V_{PPLK}$ , the memory is protected and Program and Erase operations cannot be performed.

Once set High, the  $V_{PP}$  Status bit can only be reset Low by a Clear Status Register command or a hardware reset. If set High it should be reset before a new Program or Erase command is issued, otherwise the new command will appear to fail.

**Program Suspend Status (Bit 2).** The Program Suspend Status bit indicates that a Program operation has been suspended. When the Program Suspend Status bit is High (set to '1'), a Program/Erase Suspend command has been issued and the memory is waiting for a Program/Erase Resume command. The Program Suspend Status should only be considered valid when the Pro-

gram/Erase Controller Status bit is High (Program/Erase Controller inactive). Bit 2 is set within 5 $\mu$ s of the Program/Erase Suspend command being issued therefore the memory may still complete the operation rather than entering the Suspend mode. When a Program/Erase Resume command is issued the Program Suspend Status bit returns Low.

**Block Protection Status (Bit 1).** The Block Protection Status bit can be used to identify if a Program or Erase operation has tried to modify the contents of a locked block.

When the Block Protection Status bit is High (set to '1'), a Program or Erase operation has been attempted on a locked block.

Once set High, the Block Protection Status bit can only be reset Low by a Clear Status Register command or a hardware reset. If set High it should be reset before a new command is issued, otherwise the new command will appear to fail.

**Reserved (Bit 0).** Bit 0 of the Status Register is reserved. Its value must be masked.

**Note:** Refer to [APPENDIX C., FLOWCHARTS AND PSEUDO CODES](#), for using the Status Register.

**Table 9. Status Register Bits**

| Bit | Name                    | Logic Level | Definition                              |
|-----|-------------------------|-------------|-----------------------------------------|
| 7   | P/E.C. Status           | '1'         | Ready                                   |
|     |                         | '0'         | Busy                                    |
| 6   | Erase Suspend Status    | '1'         | Suspended                               |
|     |                         | '0'         | In progress or Completed                |
| 5   | Erase Status            | '1'         | Erase Error                             |
|     |                         | '0'         | Erase Success                           |
| 4   | Program Status          | '1'         | Program Error                           |
|     |                         | '0'         | Program Success                         |
| 3   | V <sub>PP</sub> Status  | '1'         | V <sub>PP</sub> Invalid, Abort          |
|     |                         | '0'         | V <sub>PP</sub> OK                      |
| 2   | Program Suspend Status  | '1'         | Suspended                               |
|     |                         | '0'         | In Progress or Completed                |
| 1   | Block Protection Status | '1'         | Program/Erase on protected Block, Abort |
|     |                         | '0'         | No operation to protected blocks        |
| 0   | Reserved                |             |                                         |

Note: Logic level '1' is High, '0' is Low.

## MAXIMUM RATING

Stressing the device above the rating listed in the Absolute Maximum Ratings table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the Operating sections of this specification is not im-

plied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality documents.

**Table 10. Absolute Maximum Ratings**

| Symbol            | Parameter                                    | Value |               | Unit |
|-------------------|----------------------------------------------|-------|---------------|------|
|                   |                                              | Min   | Max           |      |
| $T_A$             | Ambient Operating Temperature <sup>(1)</sup> | – 40  | 85            | °C   |
| $T_{BIAS}$        | Temperature Under Bias                       | – 40  | 125           | °C   |
| $T_{STG}$         | Storage Temperature                          | – 55  | 155           | °C   |
| $V_{IO}$          | Input or Output Voltage                      | – 0.6 | $V_{DDQ}+0.6$ | V    |
| $V_{DD}, V_{DDQ}$ | Supply Voltage                               | – 0.6 | 4.1           | V    |
| $V_{PP}$          | Program Voltage                              | – 0.6 | 13            | V    |

Note: 1. Depends on range.

## DC AND AC PARAMETERS


This section summarizes the operating and measurement conditions, and the DC and AC characteristics of the device. The parameters in the DC and AC characteristics Tables that follow, are derived from tests performed under the Measure-

ment Conditions summarized in [Table 11., Operating and AC Measurement Conditions](#). Designers should check that the operating conditions in their circuit match the measurement conditions when relying on the quoted parameters.


**Table 11. Operating and AC Measurement Conditions**

| Parameter                                                             | M28W320FST, M28W320FSB, M28W640FST, M28W640FSB |     |                       |     |                       |     |                       |     |       |
|-----------------------------------------------------------------------|------------------------------------------------|-----|-----------------------|-----|-----------------------|-----|-----------------------|-----|-------|
|                                                                       | 70                                             |     | 85                    |     | 90                    |     | 10                    |     | Units |
|                                                                       | Min                                            | Max | Min                   | Max | Min                   | Max | Min                   | Max |       |
| V <sub>DD</sub> Supply Voltage                                        | 2.7                                            | 3.6 | 2.7                   | 3.6 | 2.7                   | 3.6 | 2.7                   | 3.6 | V     |
| V <sub>DDQ</sub> Supply Voltage (V <sub>DDQ</sub> ≤ V <sub>DD</sub> ) | 2.7                                            | 3.6 | 2.7                   | 3.6 | 2.7                   | 3.6 | 1.65                  | 3.6 | V     |
| Ambient Operating Temperature                                         | −40                                            | 85  | −40                   | 85  | −40                   | 85  | −40                   | 85  | °C    |
| Load Capacitance (C <sub>L</sub> )                                    | 50                                             |     | 50                    |     | 50                    |     | 50                    |     | pF    |
| Input Rise and Fall Times                                             |                                                | 5   |                       | 5   |                       | 5   |                       | 5   | ns    |
| Input Pulse Voltages                                                  | 0 to V <sub>DDQ</sub>                          |     | 0 to V <sub>DDQ</sub> |     | 0 to V <sub>DDQ</sub> |     | 0 to V <sub>DDQ</sub> |     | V     |
| Input and Output Timing Ref. Voltages                                 | V <sub>DDQ</sub> /2                            |     | V <sub>DDQ</sub> /2   |     | V <sub>DDQ</sub> /2   |     | V <sub>DDQ</sub> /2   |     | V     |

**Figure 8. AC Measurement I/O Waveform**

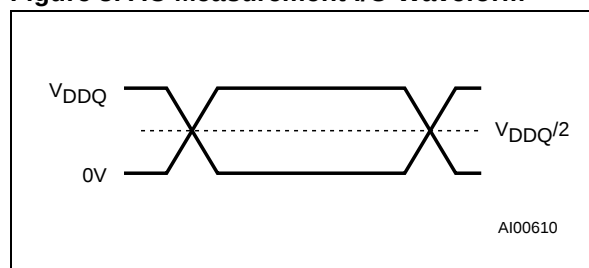

**Figure 9. AC Measurement Load Circuit**

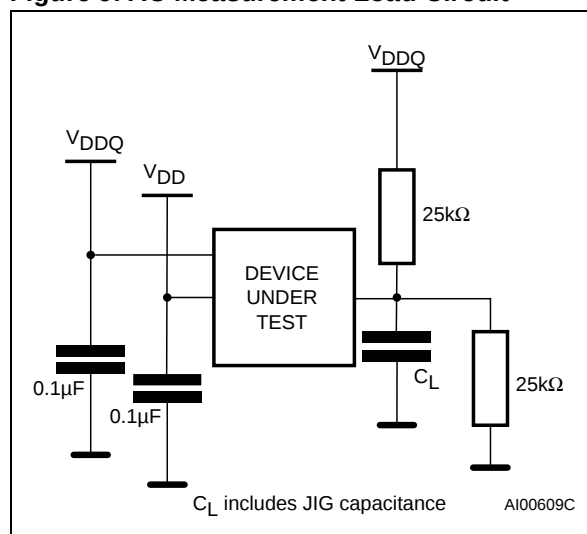

**Table 12. Capacitance**


| Symbol           | Parameter          | Test Condition        | Min | Max | Unit |
|------------------|--------------------|-----------------------|-----|-----|------|
| C <sub>IN</sub>  | Input Capacitance  | V <sub>IN</sub> = 0V  |     | 6   | pF   |
| C <sub>OUT</sub> | Output Capacitance | V <sub>OUT</sub> = 0V |     | 12  | pF   |

Note: Sampled only, not 100% tested.

Table 13. DC Characteristics

| Symbol     | Parameter                                            | Test Condition                                                                        | Min             | Typ | Max             | Unit    |
|------------|------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------|-----|-----------------|---------|
| $I_{LI}$   | Input Leakage Current                                | $0V \leq V_{IN} \leq V_{DDQ}$                                                         |                 |     | $\pm 1$         | $\mu A$ |
| $I_{LO}$   | Output Leakage Current                               | $0V \leq V_{OUT} \leq V_{DDQ}$                                                        |                 |     | $\pm 10$        | $\mu A$ |
| $I_{DD}$   | Supply Current (Read)                                | $\bar{E} = V_{SS}, \bar{G} = V_{IH}, f = 5MHz$                                        |                 | 9   | 18              | mA      |
| $I_{DD1}$  | Supply Current (Stand-by or Automatic Stand-by)      | $\bar{E} = V_{DDQ} \pm 0.2V,$<br>$\bar{RP} = V_{DDQ} \pm 0.2V$                        |                 | 15  | 50              | $\mu A$ |
| $I_{DD2}$  | Supply Current (Reset)                               | $\bar{RP} = V_{SS} \pm 0.2V$                                                          |                 | 15  | 50              | $\mu A$ |
| $I_{DD3}$  | Supply Current (Program)                             | Program in progress<br>$V_{PP} = 12V \pm 5\%$                                         |                 | 5   | 10              | mA      |
|            |                                                      | Program in progress<br>$V_{PP} = V_{DD}$                                              |                 | 10  | 20              | mA      |
| $I_{DD4}$  | Supply Current (Erase)                               | Erase in progress<br>$V_{PP} = 12V \pm 5\%$                                           |                 | 5   | 20              | mA      |
|            |                                                      | Erase in progress<br>$V_{PP} = V_{DD}$                                                |                 | 10  | 20              | mA      |
| $I_{DD5}$  | Supply Current (Program/Erase Suspend)               | $\bar{E} = V_{DDQ} \pm 0.2V,$<br>Erase suspended                                      |                 | 15  | 50              | $\mu A$ |
| $I_{PP}$   | Program Current (Read or Stand-by)                   | $V_{PP} > V_{DD}$                                                                     |                 |     | 400             | $\mu A$ |
| $I_{PP1}$  | Program Current (Read or Stand-by)                   | $V_{PP} \leq V_{DD}$                                                                  |                 | 1   | 5               | $\mu A$ |
| $I_{PP2}$  | Program Current (Reset)                              | $\bar{RP} = V_{SS} \pm 0.2V$                                                          |                 | 1   | 5               | $\mu A$ |
| $I_{PP3}$  | Program Current (Program)                            | Program in progress<br>$V_{PP} = 12V \pm 5\%$                                         |                 | 1   | 10              | mA      |
|            |                                                      | Program in progress<br>$V_{PP} = V_{DD}$                                              |                 | 1   | 5               | $\mu A$ |
| $I_{PP4}$  | Program Current (Erase)                              | Erase in progress<br>$V_{PP} = 12V \pm 5\%$                                           |                 | 3   | 10              | mA      |
|            |                                                      | Erase in progress<br>$V_{PP} = V_{DD}$                                                |                 | 1   | 5               | $\mu A$ |
| $V_{IL}$   | Input Low Voltage                                    |                                                                                       | -0.5            |     | 0.4             | V       |
|            |                                                      | $V_{DDQ} \geq 2.7V$                                                                   | -0.5            |     | 0.8             | V       |
| $V_{IH}$   | Input High Voltage                                   |                                                                                       | $V_{DDQ} - 0.4$ |     | $V_{DDQ} + 0.4$ | V       |
|            |                                                      | $V_{DDQ} \geq 2.7V$                                                                   | $0.7 V_{DDQ}$   |     | $V_{DDQ} + 0.4$ | V       |
| $V_{OL}$   | Output Low Voltage                                   | $I_{OL} = 100\mu A, V_{DD} = V_{DD} \text{ min},$<br>$V_{DDQ} = V_{DDQ} \text{ min}$  |                 |     | 0.1             | V       |
| $V_{OH}$   | Output High Voltage                                  | $I_{OH} = -100\mu A, V_{DD} = V_{DD} \text{ min},$<br>$V_{DDQ} = V_{DDQ} \text{ min}$ | $V_{DDQ} - 0.1$ |     |                 | V       |
| $V_{PP1}$  | Program Voltage (Program or Erase operations)        |                                                                                       | 1.65            |     | 3.6             | V       |
| $V_{PPH}$  | Program Voltage (Program or Erase operations)        |                                                                                       | 11.4            |     | 12.6            | V       |
| $V_{PPLK}$ | Program Voltage (Program and Erase lock-out)         |                                                                                       |                 |     | 1               | V       |
| $V_{LKO}$  | $V_{DD}$ Supply Voltage (Program and Erase lock-out) |                                                                                       |                 |     | 2               | V       |

Figure 10. Read AC Waveforms

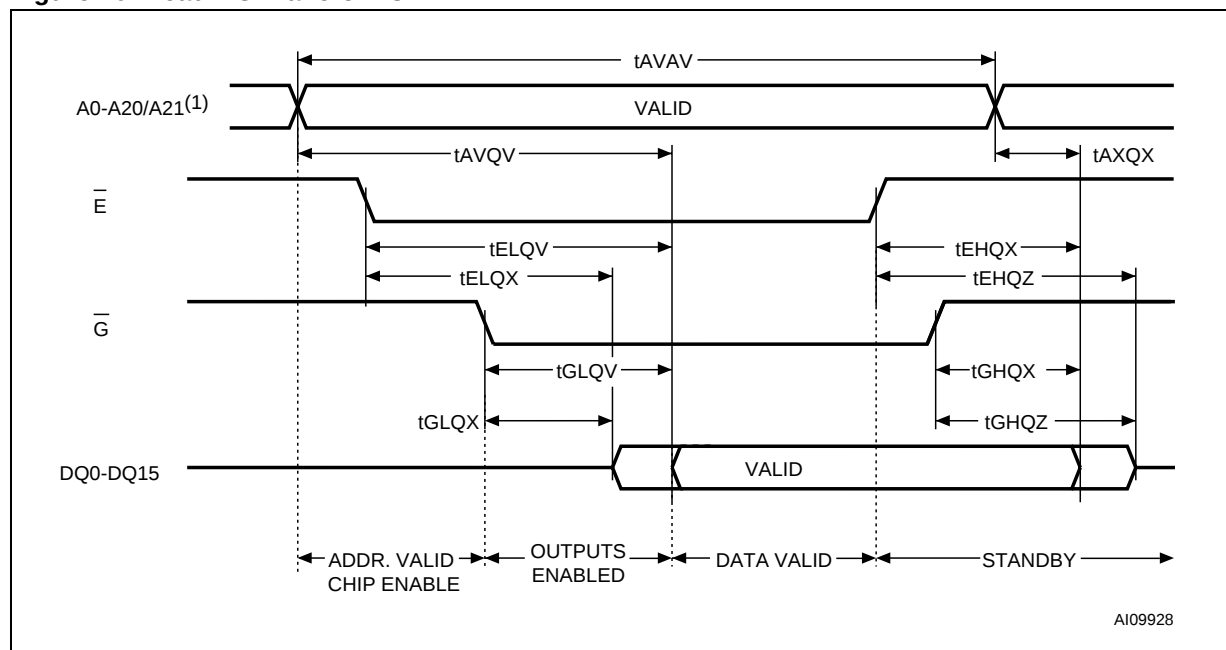

Note: 1. Addresses range from A0 to A20 for the M28W320FS and from A0 to A21 for the M29W640FS.

Table 14. Read AC Characteristics

| Symbol           | Alt       | Parameter                               |     | M28W320FST,<br>M28W320FSB | M28W640FST,<br>M28W640FSB | Unit |
|------------------|-----------|-----------------------------------------|-----|---------------------------|---------------------------|------|
|                  |           |                                         |     | 70                        | 70                        |      |
| $t_{AVAV}$       | $t_{RC}$  | Address Valid to Next Address Valid     | Min | 70                        | 70                        | ns   |
| $t_{AVQV}$       | $t_{ACC}$ | Address Valid to Output Valid           | Max | 70                        | 70                        | ns   |
| $t_{AXQX}^{(1)}$ | $t_{OH}$  | Address Transition to Output Transition | Min | 0                         | 0                         | ns   |
| $t_{EHQX}^{(1)}$ | $t_{OH}$  | Chip Enable High to Output Transition   | Min | 0                         | 0                         | ns   |
| $t_{EHQZ}^{(1)}$ | $t_{HZ}$  | Chip Enable High to Output Hi-Z         | Max | 20                        | 20                        | ns   |
| $t_{ELQV}^{(2)}$ | $t_{CE}$  | Chip Enable Low to Output Valid         | Max | 70                        | 70                        | ns   |
| $t_{ELQX}^{(1)}$ | $t_{LZ}$  | Chip Enable Low to Output Transition    | Min | 0                         | 0                         | ns   |
| $t_{GHQX}^{(1)}$ | $t_{OH}$  | Output Enable High to Output Transition | Min | 0                         | 0                         | ns   |
| $t_{GHQZ}^{(1)}$ | $t_{DF}$  | Output Enable High to Output Hi-Z       | Max | 20                        | 20                        | ns   |
| $t_{GLQV}^{(2)}$ | $t_{OE}$  | Output Enable Low to Output Valid       | Max | 20                        | 20                        | ns   |
| $t_{GLQX}^{(1)}$ | $t_{OLZ}$ | Output Enable Low to Output Transition  | Min | 0                         | 0                         | ns   |

Note: 1. Sampled only, not 100% tested.

2.  $\bar{G}$  may be delayed by up to  $t_{ELQV} - t_{GLQV}$  after the falling edge of  $\bar{E}$  without increasing  $t_{ELQV}$ .





Table 15. Write AC Characteristics, Write Enable Controlled

| Symbol                | Alt       | Parameter                               |     | M28W320FST,<br>M28W320FSB | M28W640FST,<br>M28W640FSB | Unit |
|-----------------------|-----------|-----------------------------------------|-----|---------------------------|---------------------------|------|
|                       |           |                                         |     | 70                        | 70                        |      |
| $t_{AVAV}$            | $t_{WC}$  | Write Cycle Time                        | Min | 70                        | 70                        | ns   |
| $t_{AVWH}$            | $t_{AS}$  | Address Valid to Write Enable High      | Min | 45                        | 45                        | ns   |
| $t_{DVWH}$            | $t_{DS}$  | Data Valid to Write Enable High         | Min | 45                        | 45                        | ns   |
| $t_{ELWL}$            | $t_{CS}$  | Chip Enable Low to Write Enable Low     | Min | 0                         | 0                         | ns   |
| $t_{ELQV}$            |           | Chip Enable Low to Output Valid         | Min | 70                        | 70                        | ns   |
| $t_{QVVPPL}$<br>(1,2) |           | Output Valid to $V_{PP}$ Low            | Min | 0                         | 0                         | ns   |
| $t_{VPHWH}$<br>(1)    | $t_{VPS}$ | $V_{PP}$ High to Write Enable High      | Min | 200                       | 200                       | ns   |
| $t_{WHAX}$            | $t_{AH}$  | Write Enable High to Address Transition | Min | 0                         | 0                         | ns   |
| $t_{WHDX}$            | $t_{DH}$  | Write Enable High to Data Transition    | Min | 0                         | 0                         | ns   |
| $t_{WHEH}$            | $t_{CH}$  | Write Enable High to Chip Enable High   | Min | 0                         | 0                         | ns   |
| $t_{WHEL}$            |           | Write Enable High to Chip Enable Low    | Min | 25                        | 25                        | ns   |
| $t_{WHGL}$            |           | Write Enable High to Output Enable Low  | Min | 20                        | 20                        | ns   |
| $t_{WHWL}$            | $t_{WPH}$ | Write Enable High to Write Enable Low   | Min | 25                        | 25                        | ns   |
| $t_{WLWH}$            | $t_{WP}$  | Write Enable Low to Write Enable High   | Min | 45                        | 45                        | ns   |

Note: 1. Sampled only, not 100% tested.

2. Applicable if  $V_{PP}$  is seen as a logic input ( $V_{PP} < 3.6V$ ).

Figure 12. Write AC Waveforms, Chip Enable Controlled

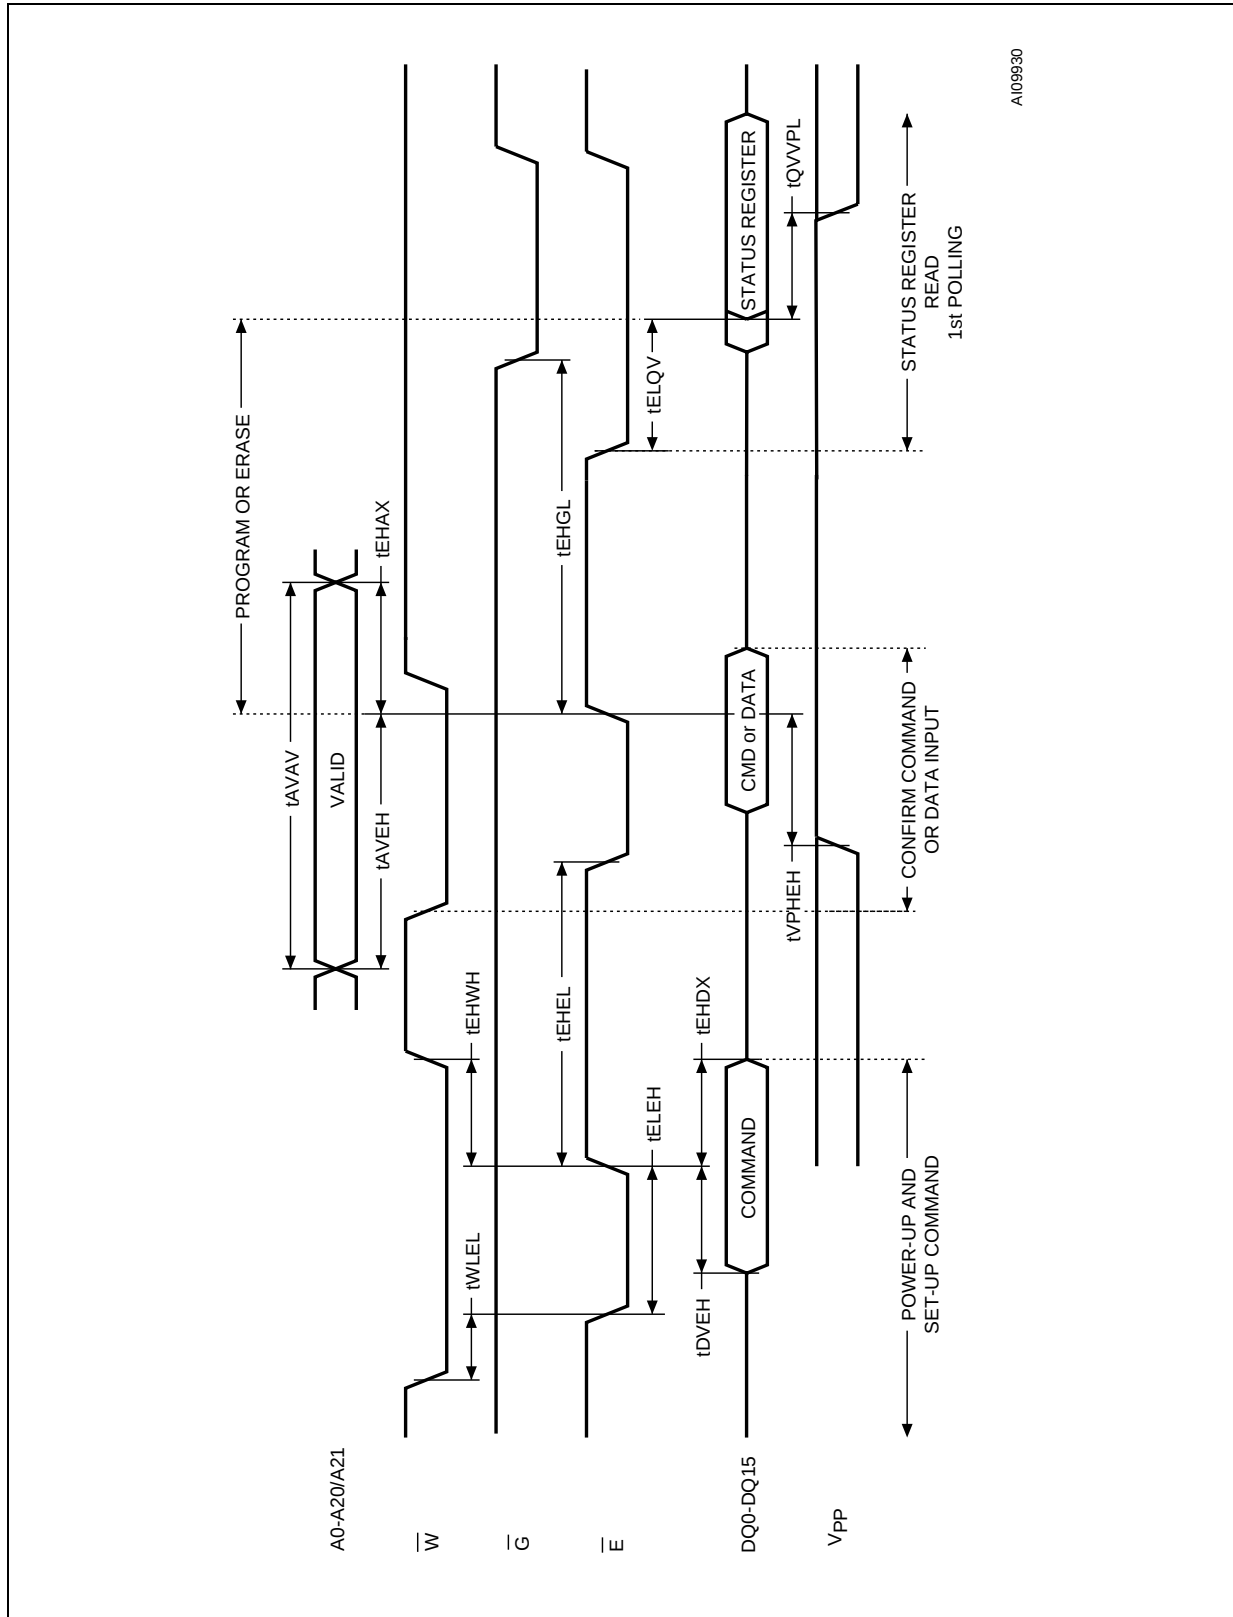

Note: 1. Addresses range from A0 to A20 for the M28W320FS and from A0 to A21 for the M29W640FS.

**Table 16. Write AC Characteristics, Chip Enable Controlled**

| Symbol                     | Alt              | Parameter                                |     | M28W320FST,<br>M28W320FSB | M28W640FST,<br>M28W640FSB | Unit |
|----------------------------|------------------|------------------------------------------|-----|---------------------------|---------------------------|------|
|                            |                  |                                          |     | 70                        | 70                        |      |
| t <sub>AVAV</sub>          | t <sub>WC</sub>  | Write Cycle Time                         | Min | 70                        | 70                        | ns   |
| t <sub>AVEH</sub>          | t <sub>AS</sub>  | Address Valid to Chip Enable High        | Min | 45                        | 45                        | ns   |
| t <sub>DVEH</sub>          | t <sub>DS</sub>  | Data Valid to Chip Enable High           | Min | 45                        | 45                        | ns   |
| t <sub>EHAX</sub>          | t <sub>AH</sub>  | Chip Enable High to Address Transition   | Min | 0                         | 0                         | ns   |
| t <sub>EHDX</sub>          | t <sub>DH</sub>  | Chip Enable High to Data Transition      | Min | 0                         | 0                         | ns   |
| t <sub>EHCL</sub>          | t <sub>CPH</sub> | Chip Enable High to Chip Enable Low      | Min | 25                        | 25                        | ns   |
| t <sub>EHGL</sub>          |                  | Chip Enable High to Output Enable Low    | Min | 25                        | 25                        | ns   |
| t <sub>EHWH</sub>          | t <sub>WH</sub>  | Chip Enable High to Write Enable High    | Min | 0                         | 0                         | ns   |
| t <sub>ELEH</sub>          | t <sub>CP</sub>  | Chip Enable Low to Chip Enable High      | Min | 45                        | 45                        | ns   |
| t <sub>ELQV</sub>          |                  | Chip Enable Low to Output Valid          | Min | 70                        | 70                        | ns   |
| t <sub>QVPL</sub><br>(1,2) |                  | Output Valid to V <sub>PP</sub> Low      | Min | 0                         | 0                         | ns   |
| t <sub>VPHEH</sub><br>(1)  | t <sub>VP</sub>  | V <sub>PP</sub> High to Chip Enable High | Min | 200                       | 200                       | ns   |
| t <sub>WLEL</sub>          | t <sub>CS</sub>  | Write Enable Low to Chip Enable Low      | Min | 0                         | 0                         | ns   |

Note: 1. Sampled only, not 100% tested.

2. Applicable if V<sub>PP</sub> is seen as a logic input (V<sub>PP</sub> < 3.6V).

Figure 13. Power-Up and Reset AC Waveforms

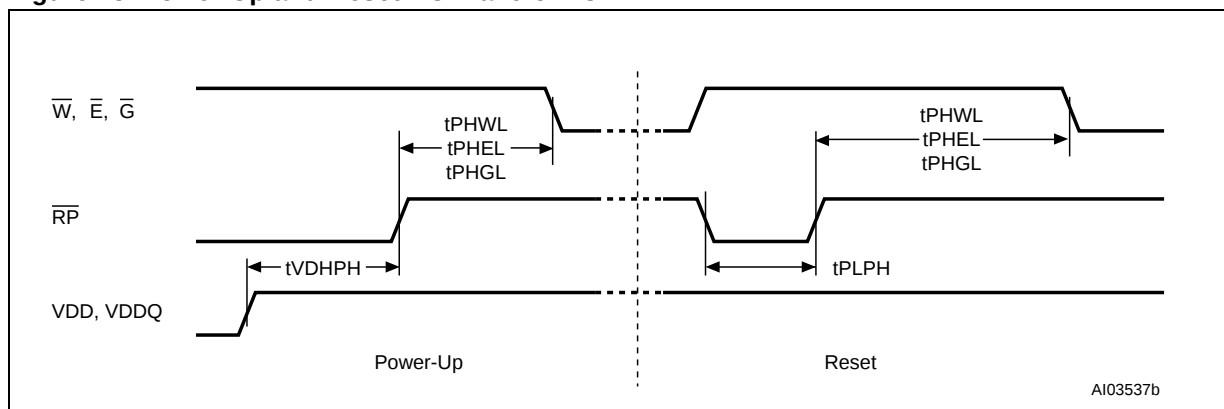


Table 17. Power-Up and Reset AC Characteristics

| Symbol                                                      | Parameter                                                          | Test Condition           |     | M28W320FST,<br>M28W320FSB,<br>M28W640FST,<br>M28W640FSB | Unit |
|-------------------------------------------------------------|--------------------------------------------------------------------|--------------------------|-----|---------------------------------------------------------|------|
|                                                             |                                                                    |                          |     | 70                                                      |      |
| t <sub>PHWL</sub><br>t <sub>PHEL</sub><br>t <sub>PHGL</sub> | Reset High to Write Enable Low, Chip Enable Low, Output Enable Low | During Program and Erase | Min | 50                                                      | μs   |
|                                                             |                                                                    | others                   | Min | 30                                                      | ns   |
| t <sub>PLPH</sub> <sup>(1,2)</sup>                          | Reset Low to Reset High                                            |                          | Min | 100                                                     | ns   |
| t <sub>VDHPH</sub> <sup>(3)</sup>                           | Supply Voltages High to Reset High                                 |                          | Min | 50                                                      | μs   |


Note: 1. The device Reset is possible but not guaranteed if t<sub>PLPH</sub> < 100ns.

2. Sampled only, not 100% tested.

3. It is important to assert  $\overline{RP}$  in order to allow proper CPU initialization during power up or reset.

## PACKAGE MECHANICAL

Figure 14. TBGA64 - 10x13 active ball array, 1mm pitch, Bottom View Package Outline

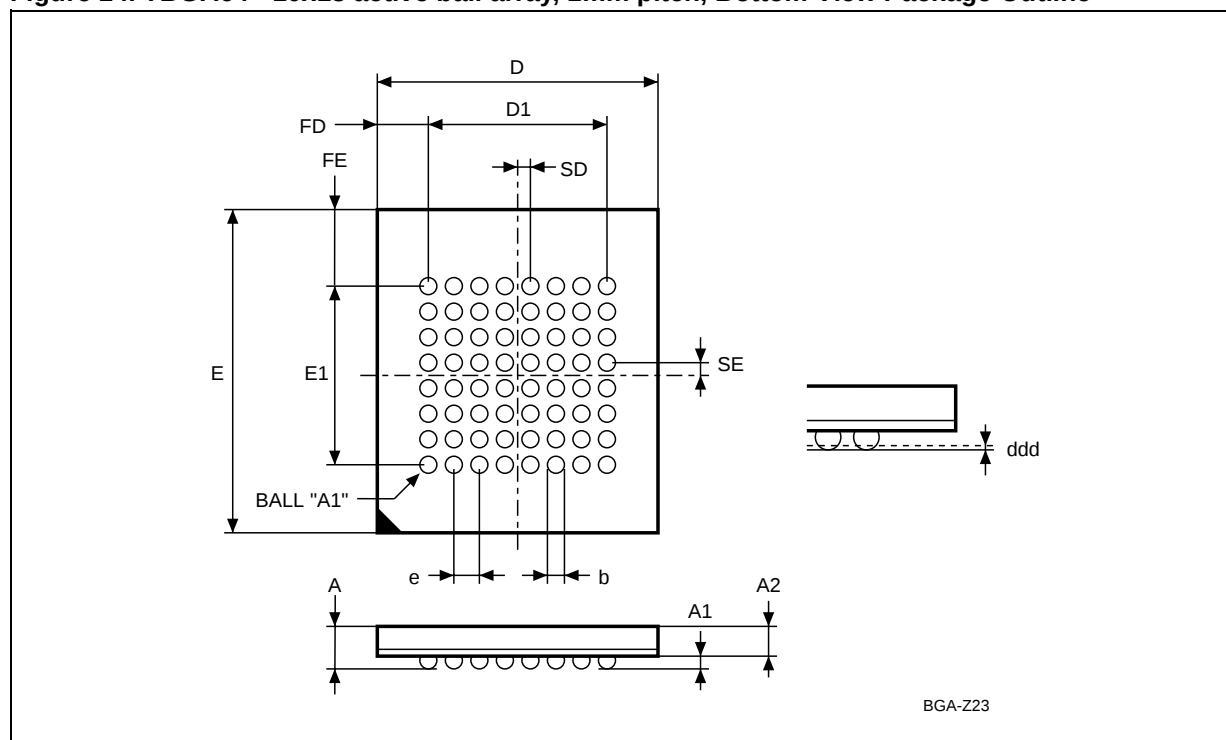

Note: Drawing is not to scale.

Table 18. TBGA64 - 10x13 active ball array, 1mm pitch, Package Mechanical Data

| Symbol | millimeters |        |        | inches |        |        |
|--------|-------------|--------|--------|--------|--------|--------|
|        | Typ         | Min    | Max    | Typ    | Min    | Max    |
| A      |             |        | 1.200  |        |        | 0.0472 |
| A1     | 0.300       | 0.200  | 0.350  | 0.0118 | 0.0079 | 0.0138 |
| A2     | 0.800       |        |        | 0.0315 |        |        |
| b      |             | 0.350  | 0.500  |        | 0.0138 | 0.0197 |
| D      | 10.000      | 9.900  | 10.100 | 0.3937 | 0.3898 | 0.3976 |
| D1     | 7.000       | —      | —      | 0.2756 | —      | —      |
| ddd    |             |        | 0.100  |        |        | 0.0039 |
| e      | 1.000       | —      | —      | 0.0394 | —      | —      |
| E      | 13.000      | 12.900 | 13.100 | 0.5118 | 0.5079 | 0.5157 |
| E1     | 7.000       | —      | —      | 0.2756 | —      | —      |
| FD     | 1.500       | —      | —      | 0.0591 | —      | —      |
| FE     | 3.000       | —      | —      | 0.1181 | —      | —      |
| SD     | 0.500       | —      | —      | 0.0197 | —      | —      |
| SE     | 0.500       | —      | —      | 0.0197 | —      | —      |

## PART NUMBERING

**Table 19. Ordering Information Scheme**

Example:

|                                                                                                                                               | M | 28 | W | 640 | F | S | T | 70 | ZA | 6 | T |
|-----------------------------------------------------------------------------------------------------------------------------------------------|---|----|---|-----|---|---|---|----|----|---|---|
| <b>Device Type</b>                                                                                                                            |   |    |   |     |   |   |   |    |    |   |   |
| M28                                                                                                                                           |   |    |   |     |   |   |   |    |    |   |   |
| <b>Operating Voltage</b>                                                                                                                      |   |    |   |     |   |   |   |    |    |   |   |
| W = $V_{DD}$ = 2.7V to 3.6V; $V_{DDQ}$ = 1.65V to 3.6V                                                                                        |   |    |   |     |   |   |   |    |    |   |   |
| <b>Device Function</b>                                                                                                                        |   |    |   |     |   |   |   |    |    |   |   |
| 320FS = 32 Mbit (2 Mb x16), Boot Block, Secure, 0.13 $\mu$ m<br>640FS = 64 Mbit (4 Mb x16), Boot Block, Secure, 0.13 $\mu$ m                  |   |    |   |     |   |   |   |    |    |   |   |
| <b>Array Matrix</b>                                                                                                                           |   |    |   |     |   |   |   |    |    |   |   |
| T = Top Boot<br>B = Bottom Boot                                                                                                               |   |    |   |     |   |   |   |    |    |   |   |
| <b>Speed</b>                                                                                                                                  |   |    |   |     |   |   |   |    |    |   |   |
| 70 = 70ns                                                                                                                                     |   |    |   |     |   |   |   |    |    |   |   |
| <b>Package</b>                                                                                                                                |   |    |   |     |   |   |   |    |    |   |   |
| ZA = TBGA64:10 x 13mm, 1mm pitch                                                                                                              |   |    |   |     |   |   |   |    |    |   |   |
| <b>Temperature Range</b>                                                                                                                      |   |    |   |     |   |   |   |    |    |   |   |
| 1 = 0 to 70 °C<br>6 = -40 to 85 °C                                                                                                            |   |    |   |     |   |   |   |    |    |   |   |
| <b>Option</b>                                                                                                                                 |   |    |   |     |   |   |   |    |    |   |   |
| Blank = Standard Packing<br>T = Tape & Reel Packing<br>E = ECOPACK Package, Standard Packing<br>F = ECOPACK Package, Tape & Reel 24mm Packing |   |    |   |     |   |   |   |    |    |   |   |

Table 20. Daisy Chain Ordering Scheme

|                                               |           |     |   |
|-----------------------------------------------|-----------|-----|---|
| Example:                                      | M28W640FS | -ZA | T |
| <b>Device Type</b>                            |           |     |   |
| M28W640FS                                     |           |     |   |
| M28W320FS                                     |           |     |   |
| <b>Daisy Chain</b>                            |           |     |   |
| -ZA = TBGA64: 10 x 13, 1mm pitch              |           |     |   |
| <b>Option</b>                                 |           |     |   |
| Blank = Standard Packing                      |           |     |   |
| T = Tape & Reel Packing                       |           |     |   |
| E = ECOPACK Package, Standard Packing         |           |     |   |
| F = ECOPACK Package, Tape & Reel 24mm Packing |           |     |   |

Note: Devices are shipped from the factory with the memory content bits erased to '1'. For a list of available options (Speed, Package, etc.) or for further information on any aspect of this device, please contact the ST Sales Office nearest to you.

## APPENDIX A. BLOCK ADDRESS TABLES

Table 21. Top Boot Block Addresses, M28W320FST

| #  | Size (KWord) | Address Range  |
|----|--------------|----------------|
| 0  | 4            | 1FF000-1FFFFFF |
| 1  | 4            | 1FE000-1FEFFF  |
| 2  | 4            | 1FD000-1FDFFF  |
| 3  | 4            | 1FC000-1FCFFF  |
| 4  | 4            | 1FB000-1FBFFF  |
| 5  | 4            | 1FA000-1FAFFF  |
| 6  | 4            | 1F9000-1F9FFF  |
| 7  | 4            | 1F8000-1F8FFF  |
| 8  | 32           | 1F0000-1F7FFF  |
| 9  | 32           | 1E8000-1EFFFF  |
| 10 | 32           | 1E0000-1E7FFF  |
| 11 | 32           | 1D8000-1DFFFF  |
| 12 | 32           | 1D0000-1D7FFF  |
| 13 | 32           | 1C8000-1CFFFF  |
| 14 | 32           | 1C0000-1C7FFF  |
| 15 | 32           | 1B8000-1BFFFF  |
| 16 | 32           | 1B0000-1B7FFF  |
| 17 | 32           | 1A8000-1AFFFF  |
| 18 | 32           | 1A0000-1A7FFF  |
| 19 | 32           | 198000-19FFFF  |
| 20 | 32           | 190000-197FFF  |
| 21 | 32           | 188000-18FFFF  |
| 22 | 32           | 180000-187FFF  |
| 23 | 32           | 178000-17FFFF  |
| 24 | 32           | 170000-177FFF  |
| 25 | 32           | 168000-16FFFF  |
| 26 | 32           | 160000-167FFF  |
| 27 | 32           | 158000-15FFFF  |
| 28 | 32           | 150000-157FFF  |
| 29 | 32           | 148000-14FFFF  |
| 30 | 32           | 140000-147FFF  |
| 31 | 32           | 138000-13FFFF  |
| 32 | 32           | 130000-137FFF  |
| 33 | 32           | 128000-12FFFF  |

|    |    |               |
|----|----|---------------|
| 34 | 32 | 120000-127FFF |
| 35 | 32 | 118000-11FFFF |
| 36 | 32 | 110000-117FFF |
| 37 | 32 | 108000-10FFFF |
| 38 | 32 | 100000-107FFF |
| 39 | 32 | 0F8000-0FFFFF |
| 40 | 32 | 0F0000-0F7FFF |
| 41 | 32 | 0E8000-0EFFFF |
| 42 | 32 | 0E0000-0E7FFF |
| 43 | 32 | 0D8000-0DFFFF |
| 44 | 32 | 0D0000-0D7FFF |
| 45 | 32 | 0C8000-0CFFFF |
| 46 | 32 | 0C0000-0C7FFF |
| 47 | 32 | 0B8000-0BFFFF |
| 48 | 32 | 0B0000-0B7FFF |
| 49 | 32 | 0A8000-0AFFFF |
| 50 | 32 | 0A0000-0A7FFF |
| 51 | 32 | 098000-09FFFF |
| 52 | 32 | 090000-097FFF |
| 53 | 32 | 088000-08FFFF |
| 54 | 32 | 080000-087FFF |
| 55 | 32 | 078000-07FFFF |
| 56 | 32 | 070000-077FFF |
| 57 | 32 | 068000-06FFFF |
| 58 | 32 | 060000-067FFF |
| 59 | 32 | 058000-05FFFF |
| 60 | 32 | 050000-057FFF |
| 61 | 32 | 048000-04FFFF |
| 62 | 32 | 040000-047FFF |
| 63 | 32 | 038000-03FFFF |
| 64 | 32 | 030000-037FFF |
| 65 | 32 | 028000-02FFFF |
| 66 | 32 | 020000-027FFF |
| 67 | 32 | 018000-01FFFF |
| 68 | 32 | 010000-017FFF |
| 69 | 32 | 008000-00FFFF |
| 70 | 32 | 000000-007FFF |

**Table 22. Bottom Boot Block Addresses, M28W320FSB**

| #  | Size (KWord) | Address Range   |
|----|--------------|-----------------|
| 70 | 32           | 1F8000-1FFFFFFF |
| 69 | 32           | 1F0000-1F7FFF   |
| 68 | 32           | 1E8000-1EFFFF   |
| 67 | 32           | 1E0000-1E7FFF   |
| 66 | 32           | 1D8000-1DFFFF   |
| 65 | 32           | 1D0000-1D7FFF   |
| 64 | 32           | 1C8000-1CFFFF   |
| 63 | 32           | 1C0000-1C7FFF   |
| 62 | 32           | 1B8000-1BFFFF   |
| 61 | 32           | 1B0000-1B7FFF   |
| 60 | 32           | 1A8000-1AFFFF   |
| 59 | 32           | 1A0000-1A7FFF   |
| 58 | 32           | 198000-19FFFF   |
| 57 | 32           | 190000-197FFF   |
| 56 | 32           | 188000-18FFFF   |
| 55 | 32           | 180000-187FFF   |
| 54 | 32           | 178000-17FFFF   |
| 53 | 32           | 170000-177FFF   |
| 52 | 32           | 168000-16FFFF   |
| 51 | 32           | 160000-167FFF   |
| 50 | 32           | 158000-15FFFF   |
| 49 | 32           | 150000-157FFF   |
| 48 | 32           | 148000-14FFFF   |
| 47 | 32           | 140000-147FFF   |
| 46 | 32           | 138000-13FFFF   |
| 45 | 32           | 130000-137FFF   |
| 44 | 32           | 128000-12FFFF   |
| 43 | 32           | 120000-127FFF   |
| 42 | 32           | 118000-11FFFF   |
| 41 | 32           | 110000-117FFF   |
| 40 | 32           | 108000-10FFFF   |
| 39 | 32           | 100000-107FFF   |
| 38 | 32           | 0F8000-0FFFFFFF |
| 37 | 32           | 0F0000-0F7FFF   |
| 36 | 32           | 0E8000-0EFFFF   |

|    |    |               |
|----|----|---------------|
| 35 | 32 | 0E0000-0E7FFF |
| 34 | 32 | 0D8000-0DFFFF |
| 33 | 32 | 0D0000-0D7FFF |
| 32 | 32 | 0C8000-0CFFFF |
| 31 | 32 | 0C0000-0C7FFF |
| 30 | 32 | 0B8000-0BFFFF |
| 29 | 32 | 0B0000-0B7FFF |
| 28 | 32 | 0A8000-0AFFFF |
| 27 | 32 | 0A0000-0A7FFF |
| 26 | 32 | 098000-09FFFF |
| 25 | 32 | 090000-097FFF |
| 24 | 32 | 088000-08FFFF |
| 23 | 32 | 080000-087FFF |
| 22 | 32 | 078000-07FFFF |
| 21 | 32 | 070000-077FFF |
| 20 | 32 | 068000-06FFFF |
| 19 | 32 | 060000-067FFF |
| 18 | 32 | 058000-05FFFF |
| 17 | 32 | 050000-057FFF |
| 16 | 32 | 048000-04FFFF |
| 15 | 32 | 040000-047FFF |
| 14 | 32 | 038000-03FFFF |
| 13 | 32 | 030000-037FFF |
| 12 | 32 | 028000-02FFFF |
| 11 | 32 | 020000-027FFF |
| 10 | 32 | 018000-01FFFF |
| 9  | 32 | 010000-017FFF |
| 8  | 32 | 008000-00FFFF |
| 7  | 4  | 007000-007FFF |
| 6  | 4  | 006000-006FFF |
| 5  | 4  | 005000-005FFF |
| 4  | 4  | 004000-004FFF |
| 3  | 4  | 003000-003FFF |
| 2  | 4  | 002000-002FFF |
| 1  | 4  | 001000-001FFF |
| 0  | 4  | 000000-000FFF |

**Table 23. Top Boot Block Addresses, M28W640FST**

| #  | Size (KWord) | Address Range  |
|----|--------------|----------------|
| 0  | 4            | 3FF000-3FFFFFF |
| 1  | 4            | 3FE000-3FEFFF  |
| 2  | 4            | 3FD000-3FDFFF  |
| 3  | 4            | 3FC000-3FCFFF  |
| 4  | 4            | 3FB000-3FBFFF  |
| 5  | 4            | 3FA000-3FAFFF  |
| 6  | 4            | 3F9000-3F9FFF  |
| 7  | 4            | 3F8000-3F8FFF  |
| 8  | 32           | 3F0000-3F7FFF  |
| 9  | 32           | 3E8000-3EFFFF  |
| 10 | 32           | 3E0000-3E7FFF  |
| 11 | 32           | 3D8000-3DFFFF  |
| 12 | 32           | 3D0000-3D7FFF  |
| 13 | 32           | 3C8000-3CFFFF  |
| 14 | 32           | 3C0000-3C7FFF  |
| 15 | 32           | 3B8000-3BFFFF  |
| 16 | 32           | 3B0000-3B7FFF  |
| 17 | 32           | 3A8000-3AFFFF  |
| 18 | 32           | 3A0000-3A7FFF  |
| 19 | 32           | 398000-39FFFF  |
| 20 | 32           | 390000-397FFF  |
| 21 | 32           | 388000-38FFFF  |
| 22 | 32           | 380000-387FFF  |
| 23 | 32           | 378000-37FFFF  |
| 24 | 32           | 370000-377FFF  |
| 25 | 32           | 368000-36FFFF  |
| 26 | 32           | 360000-367FFF  |
| 27 | 32           | 358000-35FFFF  |
| 28 | 32           | 350000-357FFF  |
| 29 | 32           | 348000-34FFFF  |
| 30 | 32           | 340000-347FFF  |
| 31 | 32           | 338000-33FFFF  |
| 32 | 32           | 330000-337FFF  |
| 33 | 32           | 328000-32FFFF  |
| 34 | 32           | 320000-327FFF  |
| 35 | 32           | 318000-31FFFF  |
| 36 | 32           | 310000-317FFF  |
| 37 | 32           | 308000-30FFFF  |
| 38 | 32           | 300000-307FFF  |
| 39 | 32           | 2F8000-2FFFFFF |
| 40 | 32           | 2F0000-2F7FFF  |
| 41 | 32           | 2E8000-2EFFFF  |

| #  | Size (KWord) | Address Range |
|----|--------------|---------------|
| 42 | 32           | 2E0000-2E7FFF |
| 43 | 32           | 2D8000-2DFFFF |
| 44 | 32           | 2D0000-2D7FFF |
| 45 | 32           | 2C8000-2CFFFF |
| 46 | 32           | 2C0000-2C7FFF |
| 47 | 32           | 2B8000-2BFFFF |
| 48 | 32           | 2B0000-2B7FFF |
| 49 | 32           | 2A8000-2AFFFF |
| 50 | 32           | 2A0000-2A7FFF |
| 51 | 32           | 298000-29FFFF |
| 52 | 32           | 290000-297FFF |
| 53 | 32           | 288000-28FFFF |
| 54 | 32           | 280000-287FFF |
| 55 | 32           | 278000-27FFFF |
| 56 | 32           | 270000-277FFF |
| 57 | 32           | 268000-26FFFF |
| 58 | 32           | 260000-267FFF |
| 59 | 32           | 258000-25FFFF |
| 60 | 32           | 250000-257FFF |
| 61 | 32           | 248000-24FFFF |
| 62 | 32           | 240000-247FFF |
| 63 | 32           | 238000-23FFFF |
| 64 | 32           | 230000-237FFF |
| 65 | 32           | 228000-22FFFF |
| 66 | 32           | 220000-227FFF |
| 67 | 32           | 218000-21FFFF |
| 68 | 32           | 210000-217FFF |
| 69 | 32           | 208000-20FFFF |
| 70 | 32           | 200000-207FFF |
| 71 | 32           | 1F8000-1FFFFF |
| 72 | 32           | 1F0000-1F7FFF |
| 73 | 32           | 1E8000-1EFFFF |
| 74 | 32           | 1E0000-1E7FFF |
| 75 | 32           | 1D8000-1DFFFF |
| 76 | 32           | 1D0000-1D7FFF |
| 77 | 32           | 1C8000-1CFFFF |
| 78 | 32           | 1C0000-1C7FFF |
| 79 | 32           | 1B8000-1BFFFF |
| 80 | 32           | 1B0000-1B7FFF |
| 81 | 32           | 1A8000-1AFFFF |
| 82 | 32           | 1A0000-1A7FFF |
| 83 | 32           | 198000-19FFFF |
| 84 | 32           | 190000-197FFF |
| 85 | 32           | 188000-18FFFF |

**M28W320FST, M28W320FSB, M28W640FST, M28W640FSB**

| #   | Size<br>(KWord) | Address Range |
|-----|-----------------|---------------|
| 86  | 32              | 180000-187FFF |
| 87  | 32              | 178000-17FFFF |
| 88  | 32              | 170000-177FFF |
| 89  | 32              | 168000-16FFFF |
| 90  | 32              | 160000-167FFF |
| 91  | 32              | 158000-15FFFF |
| 92  | 32              | 150000-157FFF |
| 93  | 32              | 148000-14FFFF |
| 94  | 32              | 140000-147FFF |
| 95  | 32              | 138000-13FFFF |
| 96  | 32              | 130000-137FFF |
| 97  | 32              | 128000-12FFFF |
| 98  | 32              | 120000-127FFF |
| 99  | 32              | 118000-11FFFF |
| 100 | 32              | 110000-117FFF |
| 101 | 32              | 108000-10FFFF |
| 102 | 32              | 100000-107FFF |
| 103 | 32              | 0F8000-0FFFFF |
| 104 | 32              | 0F0000-0F7FFF |
| 105 | 32              | 0E8000-0EFFFF |
| 106 | 32              | 0E0000-0E7FFF |
| 107 | 32              | 0D8000-0DFFFF |
| 108 | 32              | 0D0000-0D7FFF |
| 109 | 32              | 0C8000-0CFFFF |
| 110 | 32              | 0C0000-0C7FFF |
| 111 | 32              | 0B8000-0BFFFF |
| 112 | 32              | 0B0000-0B7FFF |
| 113 | 32              | 0A8000-0AFFFF |
| 114 | 32              | 0A0000-0A7FFF |
| 115 | 32              | 098000-09FFFF |
| 116 | 32              | 090000-097FFF |
| 117 | 32              | 088000-08FFFF |
| 118 | 32              | 080000-087FFF |
| 119 | 32              | 078000-07FFFF |
| 120 | 32              | 070000-077FFF |
| 121 | 32              | 068000-06FFFF |
| 122 | 32              | 060000-067FFF |
| 123 | 32              | 058000-05FFFF |
| 124 | 32              | 050000-057FFF |
| 125 | 32              | 048000-04FFFF |
| 126 | 32              | 040000-047FFF |
| 127 | 32              | 038000-03FFFF |
| 128 | 32              | 030000-037FFF |
| 129 | 32              | 028000-02FFFF |

| #   | Size<br>(KWord) | Address Range |
|-----|-----------------|---------------|
| 130 | 32              | 020000-027FFF |
| 131 | 32              | 018000-01FFFF |
| 132 | 32              | 010000-017FFF |
| 133 | 32              | 008000-00FFFF |
| 134 | 32              | 000000-007FFF |

**Table 24. Bottom Boot Block Addresses, M28W640FSB**

| #   | Size (KWord) | Address Range  |
|-----|--------------|----------------|
| 134 | 32           | 3F8000-3FFFFFF |
| 133 | 32           | 3F0000-3F7FFF  |
| 132 | 32           | 3E8000-3EFFFF  |
| 131 | 32           | 3E0000-3E7FFF  |
| 130 | 32           | 3D8000-3DFFFF  |
| 129 | 32           | 3D0000-3D7FFF  |
| 128 | 32           | 3C8000-3CFFFF  |
| 127 | 32           | 3C0000-3C7FFF  |
| 126 | 32           | 3B8000-3BFFFF  |
| 125 | 32           | 3B0000-3B7FFF  |
| 124 | 32           | 3A8000-3AFFFF  |
| 123 | 32           | 3A0000-3A7FFF  |
| 122 | 32           | 398000-39FFFF  |
| 121 | 32           | 390000-397FFF  |
| 120 | 32           | 388000-38FFFF  |
| 119 | 32           | 380000-387FFF  |
| 118 | 32           | 378000-37FFFF  |
| 117 | 32           | 370000-377FFF  |
| 116 | 32           | 368000-36FFFF  |
| 115 | 32           | 360000-367FFF  |
| 114 | 32           | 358000-35FFFF  |
| 113 | 32           | 350000-357FFF  |
| 112 | 32           | 348000-34FFFF  |
| 111 | 32           | 340000-347FFF  |
| 110 | 32           | 338000-33FFFF  |
| 109 | 32           | 330000-337FFF  |
| 108 | 32           | 328000-32FFFF  |
| 107 | 32           | 320000-327FFF  |
| 106 | 32           | 318000-31FFFF  |
| 105 | 32           | 310000-317FFF  |
| 104 | 32           | 308000-30FFFF  |
| 103 | 32           | 300000-307FFF  |
| 102 | 32           | 2F8000-2FFFFFF |
| 101 | 32           | 2F0000-2F7FFF  |
| 100 | 32           | 2E8000-2EFFFF  |
| 99  | 32           | 2E0000-2E7FFF  |
| 98  | 32           | 2D8000-2DFFFF  |
| 97  | 32           | 2D0000-2D7FFF  |
| 96  | 32           | 2C8000-2CFFFF  |
| 95  | 32           | 2C0000-2C7FFF  |
| 94  | 32           | 2B8000-2BFFFF  |
| 93  | 32           | 2B0000-2B7FFF  |

| #  | Size (KWord) | Address Range  |
|----|--------------|----------------|
| 92 | 32           | 2A8000-2AFFFF  |
| 91 | 32           | 2A0000-2A7FFF  |
| 90 | 32           | 298000-29FFFF  |
| 89 | 32           | 290000-297FFF  |
| 88 | 32           | 288000-28FFFF  |
| 87 | 32           | 280000-287FFF  |
| 86 | 32           | 278000-27FFFF  |
| 85 | 32           | 270000-277FFF  |
| 84 | 32           | 268000-26FFFF  |
| 83 | 32           | 260000-267FFF  |
| 82 | 32           | 258000-25FFFF  |
| 81 | 32           | 250000-257FFF  |
| 80 | 32           | 248000-24FFFF  |
| 79 | 32           | 240000-247FFF  |
| 78 | 32           | 238000-23FFFF  |
| 77 | 32           | 230000-237FFF  |
| 76 | 32           | 228000-22FFFF  |
| 75 | 32           | 220000-227FFF  |
| 74 | 32           | 218000-21FFFF  |
| 73 | 32           | 210000-217FFF  |
| 72 | 32           | 208000-20FFFF  |
| 71 | 32           | 200000-207FFF  |
| 70 | 32           | 1F8000-1FFFFFF |
| 69 | 32           | 1F0000-1F7FFF  |
| 68 | 32           | 1E8000-1EFFFF  |
| 67 | 32           | 1E0000-1E7FFF  |
| 66 | 32           | 1D8000-1DFFFF  |
| 65 | 32           | 1D0000-1D7FFF  |
| 64 | 32           | 1C8000-1CFFFF  |
| 63 | 32           | 1C0000-1C7FFF  |
| 62 | 32           | 1B8000-1BFFFF  |
| 61 | 32           | 1B0000-1B7FFF  |
| 60 | 32           | 1A8000-1AFFFF  |
| 59 | 32           | 1A0000-1A7FFF  |
| 58 | 32           | 198000-19FFFF  |
| 57 | 32           | 190000-197FFF  |
| 56 | 32           | 188000-18FFFF  |
| 55 | 32           | 180000-187FFF  |
| 54 | 32           | 178000-17FFFF  |
| 53 | 32           | 170000-177FFF  |
| 52 | 32           | 168000-16FFFF  |
| 51 | 32           | 160000-167FFF  |
| 50 | 32           | 158000-15FFFF  |
| 49 | 32           | 150000-157FFF  |

**M28W320FST, M28W320FSB, M28W640FST, M28W640FSB**

| #  | Size<br>(KWord) | Address Range |
|----|-----------------|---------------|
| 48 | 32              | 148000-14FFFF |
| 47 | 32              | 140000-147FFF |
| 46 | 32              | 138000-13FFFF |
| 45 | 32              | 130000-137FFF |
| 44 | 32              | 128000-12FFFF |
| 43 | 32              | 120000-127FFF |
| 42 | 32              | 118000-11FFFF |
| 41 | 32              | 110000-117FFF |
| 40 | 32              | 108000-10FFFF |
| 39 | 32              | 100000-107FFF |
| 38 | 32              | 0F8000-0FFFFF |
| 37 | 32              | 0F0000-0F7FFF |
| 36 | 32              | 0E8000-0EFFFF |
| 35 | 32              | 0E0000-0E7FFF |
| 34 | 32              | 0D8000-0DFFFF |
| 33 | 32              | 0D0000-0D7FFF |
| 32 | 32              | 0C8000-0CFFFF |
| 31 | 32              | 0C0000-0C7FFF |
| 30 | 32              | 0B8000-0BFFFF |
| 29 | 32              | 0B0000-0B7FFF |
| 28 | 32              | 0A8000-0AFFFF |
| 27 | 32              | 0A0000-0A7FFF |
| 26 | 32              | 098000-09FFFF |
| 25 | 32              | 090000-097FFF |
| 24 | 32              | 088000-08FFFF |
| 23 | 32              | 080000-087FFF |
| 22 | 32              | 078000-07FFFF |
| 21 | 32              | 070000-077FFF |
| 20 | 32              | 068000-06FFFF |
| 19 | 32              | 060000-067FFF |
| 18 | 32              | 058000-05FFFF |
| 17 | 32              | 050000-057FFF |
| 16 | 32              | 048000-04FFFF |
| 15 | 32              | 040000-047FFF |
| 14 | 32              | 038000-03FFFF |
| 13 | 32              | 030000-037FFF |
| 12 | 32              | 028000-02FFFF |
| 11 | 32              | 020000-027FFF |
| 10 | 32              | 018000-01FFFF |
| 9  | 32              | 010000-017FFF |
| 8  | 32              | 008000-00FFFF |
| 7  | 4               | 007000-007FFF |
| 6  | 4               | 006000-006FFF |
| 5  | 4               | 005000-005FFF |

| # | Size<br>(KWord) | Address Range |
|---|-----------------|---------------|
| 4 | 4               | 004000-004FFF |
| 3 | 4               | 003000-003FFF |
| 2 | 4               | 002000-002FFF |
| 1 | 4               | 001000-001FFF |
| 0 | 4               | 000000-000FFF |

## APPENDIX B. COMMON FLASH INTERFACE (CFI)

The Common Flash Interface is a JEDEC approved, standardized data structure that can be read from the Flash memory device. It allows a system software to query the device to determine various electrical and timing parameters, density information and functions supported by the memory. The system can interface easily with the device, enabling the software to upgrade itself when necessary.

When the CFI Query Command (RCFI) is issued the device enters CFI Query mode and the data

structure is read from the memory. Tables 25, 26, 27, 28, 29 and 30 show the addresses used to retrieve the data.

The CFI data structure also contains a security area where a 64 bit unique security number is written (see Table 30., Security Code Area). This area can be accessed only in Read mode by the final user. It is impossible to change the security number after it has been written by ST. Issue a Read command to return to Read mode.

**Table 25. Query Structure Overview**

| Offset | Sub-section Name                                  | Description                                                           |
|--------|---------------------------------------------------|-----------------------------------------------------------------------|
| 00h    | Reserved                                          | Reserved for algorithm-specific information                           |
| 10h    | CFI Query Identification String                   | Command set ID and algorithm data offset                              |
| 1Bh    | System Interface Information                      | Device timing & voltage information                                   |
| 27h    | Device Geometry Definition                        | Flash device layout                                                   |
| P      | Primary Algorithm-specific Extended Query table   | Additional information specific to the Primary Algorithm (optional)   |
| A      | Alternate Algorithm-specific Extended Query table | Additional information specific to the Alternate Algorithm (optional) |

Note: Query data are always presented on the lowest order data outputs.

**Table 26. CFI Query Identification String**

| Offset  | Data                             | Description                                                                                                                        | Value            |
|---------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------|------------------|
| 00h     | 0020h                            | Manufacturer Code                                                                                                                  | ST               |
| 01h     | 8858h<br>8859h<br>880Ah<br>880Bh | Device Code                                                                                                                        | Top<br>Bottom    |
| 02h-0Fh | reserved                         | Reserved                                                                                                                           |                  |
| 10h     | 0051h                            | Query Unique ASCII String "QRY"                                                                                                    | "Q"              |
| 11h     | 0052h                            |                                                                                                                                    | "R"              |
| 12h     | 0059h                            |                                                                                                                                    | "Y"              |
| 13h     | 0003h                            | Primary Algorithm Command Set and Control Interface ID code 16 bit ID code defining a specific algorithm                           | Intel compatible |
| 14h     | 0000h                            |                                                                                                                                    |                  |
| 15h     | 0035h                            | Address for Primary Algorithm extended Query table (see Table 28.)                                                                 | P = 35h          |
| 16h     | 0000h                            |                                                                                                                                    |                  |
| 17h     | 0000h                            | Alternate Vendor Command Set and Control Interface ID Code second vendor - specified algorithm supported (0000h means none exists) | NA               |
| 18h     | 0000h                            |                                                                                                                                    |                  |
| 19h     | 0000h                            | Address for Alternate Algorithm extended Query table (0000h means none exists)                                                     | NA               |
| 1Ah     | 0000h                            |                                                                                                                                    |                  |

Note: Query data are always presented on the lowest order data outputs (DQ7-DQ0) only. DQ8-DQ15 are '0'.

Table 27. CFI Query System Interface Information

| Offset | Data  | Description                                                                                                                          | Value |
|--------|-------|--------------------------------------------------------------------------------------------------------------------------------------|-------|
| 1Bh    | 0027h | V <sub>DD</sub> Logic Supply Minimum Program/Erase or Write voltage<br>bit 7 to 4BCD value in volts<br>bit 3 to 0BCD value in 100 mV | 2.7V  |
| 1Ch    | 0036h | V <sub>DD</sub> Logic Supply Maximum Program/Erase or Write voltage<br>bit 7 to 4BCD value in volts<br>bit 3 to 0BCD value in 100 mV | 3.6V  |
| 1Dh    | 00B4h | V <sub>PP</sub> [Programming] Supply Minimum Program/Erase voltage<br>bit 7 to 4HEX value in volts<br>bit 3 to 0BCD value in 100 mV  | 11.4V |
| 1Eh    | 00C6h | V <sub>PP</sub> [Programming] Supply Maximum Program/Erase voltage<br>bit 7 to 4HEX value in volts<br>bit 3 to 0BCD value in 100 mV  | 12.6V |
| 1Fh    | 0004h | Typical time-out per single word program = 2 <sup>n</sup> μs                                                                         | 16μs  |
| 20h    | 0004h | Typical time-out for Double/Quadruple Word Program = 2 <sup>n</sup> μs                                                               | 16μs  |
| 21h    | 000Ah | Typical time-out per individual block erase = 2 <sup>n</sup> ms                                                                      | 1s    |
| 22h    | 0000h | Typical time-out for full chip erase = 2 <sup>n</sup> ms                                                                             | NA    |
| 23h    | 0005h | Maximum time-out for Word program = 2 <sup>n</sup> times typical                                                                     | 512μs |
| 24h    | 0005h | Maximum time-out for Double/Quadruple Word Program = 2 <sup>n</sup> times typical                                                    | 512μs |
| 25h    | 0003h | Maximum time-out per individual block erase = 2 <sup>n</sup> times typical                                                           | 8s    |
| 26h    | 0000h | Maximum time-out for chip erase = 2 <sup>n</sup> times typical                                                                       | NA    |

Table 28. Device Geometry Definition

| Offset Word Mode         |            | Data           | Description                                                                                                                                                   | Value         |
|--------------------------|------------|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| M28W320FST<br>M28W320FSB | 27h        | 0016h          | Device Size = 2 <sup>n</sup> in number of bytes                                                                                                               | 4 MByte       |
|                          |            | 0017h          |                                                                                                                                                               | 8 MByte       |
| 28h<br>29h               |            | 0001h<br>0000h | Flash Device Interface Code description                                                                                                                       | x16<br>Async. |
| 2Ah<br>2Bh               |            | 0003h<br>0000h | Maximum number of bytes in multi-byte program or page = 2 <sup>n</sup>                                                                                        | 8             |
| 2Ch                      |            | 0002h          | Number of Erase Block Regions within the device.<br>It specifies the number of regions within the device containing contiguous Erase Blocks of the same size. | 2             |
| M28W320FST               | 2Dh<br>2Eh | 003Eh<br>0000h | Region 1 Information<br>Number of identical-size erase block = 003Eh+1                                                                                        | 63            |
|                          | 2Fh<br>30h | 0000h<br>0001h | Region 1 Information<br>Block size in Region 1 = 0100h * 256 byte                                                                                             | 64 KByte      |
|                          | 31h<br>32h | 0007h<br>0000h | Region 2 Information<br>Number of identical-size erase block = 0007h+1                                                                                        | 8             |
|                          | 33h<br>34h | 0020h<br>0000h | Region 2 Information<br>Block size in Region 2 = 0020h * 256 byte                                                                                             | 8 KByte       |
| M28W320FSB               | 2Dh<br>2Eh | 0007h<br>0000h | Region 1 Information<br>Number of identical-size erase block = 0007h+1                                                                                        | 8             |
|                          | 2Fh<br>30h | 0020h<br>0000h | Region 1 Information<br>Block size in Region 1 = 0020h * 256 byte                                                                                             | 8 KByte       |
|                          | 31h<br>32h | 003Eh<br>0000h | Region 2 Information<br>Number of identical-size erase block = 003Eh+1                                                                                        | 63            |
|                          | 33h<br>34h | 0000h<br>0001h | Region 2 Information<br>Block size in Region 2 = 0100h * 256 byte                                                                                             | 64 KByte      |
| M28W640FST               | 2Dh<br>2Eh | 007Eh<br>0000h | Region 1 Information<br>Number of identical-size erase block = 007Eh+1                                                                                        | 127           |
|                          | 2Fh<br>30h | 0000h<br>0001h | Region 1 Information<br>Block size in Region 1 = 0100h * 256 byte                                                                                             | 64 KByte      |
|                          | 31h<br>32h | 0007h<br>0000h | Region 2 Information<br>Number of identical-size erase block = 0007h+1                                                                                        | 8             |
|                          | 33h<br>34h | 0020h<br>0000h | Region 2 Information<br>Block size in Region 2 = 0020h * 256 byte                                                                                             | 8 KByte       |

**M28W320FST, M28W320FSB, M28W640FST, M28W640FSB**

| Offset Word Mode |            | Data           | Description                                                            | Value    |
|------------------|------------|----------------|------------------------------------------------------------------------|----------|
| M28W640FSB       | 2Dh<br>2Eh | 0007h<br>0000h | Region 1 Information<br>Number of identical-size erase block = 0007h+1 | 8        |
|                  | 2Fh<br>30h | 0020h<br>0000h | Region 1 Information<br>Block size in Region 1 = 0020h * 256 byte      | 8 KByte  |
|                  | 31h<br>32h | 007Eh<br>0000h | Region 2 Information<br>Number of identical-size erase block = 007Eh=1 | 127      |
|                  | 33h<br>34h | 0000h<br>0001h | Region 2 Information<br>Block size in Region 2 = 0100h * 256 byte      | 64 KByte |

Table 29. Primary Algorithm-Specific Extended Query Table

| Offset<br>P = 35h (1) | Data  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Value |
|-----------------------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| (P+0)h = 35h          | 0050h | Primary Algorithm extended Query table unique ASCII string "PRI"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | "P"   |
| (P+1)h = 36h          | 0052h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | "R"   |
| (P+2)h = 37h          | 0049h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | "I"   |
| (P+3)h = 38h          | 0031h | Major version number, ASCII                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | "1"   |
| (P+4)h = 39h          | 0030h | Minor version number, ASCII                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | "0"   |
| (P+5)h = 3Ah          | 0066h | Extended Query table contents for Primary Algorithm. Address (P+5)h contains less significant byte.<br>bit 0Chip Erase supported(1 = Yes, 0 = No)<br>bit 1Suspend Erase supported(1 = Yes, 0 = No)<br>bit 2Suspend Program supported(1 = Yes, 0 = No)<br>bit 3Legacy Lock/Unlock supported(1 = Yes, 0 = No)<br>bit 4Queued Erase supported(1 = Yes, 0 = No)<br>bit 5Instant individual block locking supported(1 = Yes, 0 = No)<br>bit 6Protection bits supported(1 = Yes, 0 = No)<br>bit 7Page mode read supported(1 = Yes, 0 = No)<br>bit 8Synchronous read supported(1 = Yes, 0 = No)<br>bit 31 to 9Reserved; undefined bits are '0' | No    |
| (P+6)h = 3Bh          | 0000h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Yes   |
| (P+7)h = 3Ch          | 0000h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Yes   |
| (P+8)h = 3Dh          | 0000h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | No    |
| (P+9)h = 3Eh          | 0001h | Supported Functions after Suspend<br>Read Array, Read Status Register and CFI Query are always supported during Erase or Program operation<br>bit 0Program supported after Erase Suspend (1 = Yes, 0 = No)<br>bit 7 to 1Reserved; undefined bits are '0'                                                                                                                                                                                                                                                                                                                                                                                | Yes   |
| (P+A)h = 3Fh          | 0003h | Block Lock Status<br>Defines which bits in the Block Status Register section of the Query are implemented.<br>Address (P+A)h contains less significant byte<br>bit 0Block Lock Status Register Lock/Unlock bit active(1 = Yes, 0 = No)<br>bit 15 to 1Reserved for future use; undefined bits are '0'                                                                                                                                                                                                                                                                                                                                    | Yes   |
| (P+B)h = 40h          | 0000h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Yes   |
| (P+C)h = 41h          | 0030h | V <sub>DD</sub> Logic Supply Optimum Program/Erase voltage (highest performance)<br>bit 7 to 4HEX value in volts<br>bit 3 to 0BCD value in 100 mV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 3V    |
| (P+D)h = 42h          | 00C0h | V <sub>PP</sub> Supply Optimum Program/Erase voltage<br>bit 7 to 4HEX value in volts<br>bit 3 to 0BCD value in 100 mV                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 12V   |
| (P+E)h = 43h          | 0001h | Number of Protection register fields in JEDEC ID space.<br>"00h," indicates that 256 protection bytes are available                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 01    |

## M28W320FST, M28W320FSB, M28W640FST, M28W640FSB

| Offset<br>P = 35h (1)                          |               | Data  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Value    |
|------------------------------------------------|---------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| (P+F)h = 44h<br>(P+10)h = 45h<br>(P+11)h = 46h |               | 0080h | Protection Field 1: Protection Description<br>This field describes user-available One Time Programmable (OTP) Protection Register bytes. Some are pre-programmed with device unique serial numbers. Others are user programmable. Bits 0–15 point to the Protection Register Lock byte, the section's first byte.<br>The following bytes are factory pre-programmed and user-programmable.<br>bit 0 to 7 Lock/bytes JEDEC-plane physical low address<br>bit 8 to 15 Lock/bytes JEDEC-plane physical high address<br>bit 16 to 23 "n" such that 2 <sup>n</sup> = factory pre-programmed bytes<br>bit 24 to 31 "n" such that 2 <sup>n</sup> = user programmable bytes | 80h      |
|                                                |               | 0000h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 00h      |
|                                                |               | 0003h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 8 Bytes  |
| M28W320FST,<br>M28W320FSB                      | (P+12)h = 47h | 0003h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 8 Bytes  |
| M28W640FST,<br>M28W640FSB                      |               | 0004h |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 16 Bytes |
| (P+13)h = 48h                                  |               |       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |          |


Note: 1. See [Table 26](#), offset 15 for P pointer definition.

**Table 30. Security Code Area**

| Offset | Data | Description                     |
|--------|------|---------------------------------|
| 80h    | 00XX | Protection Register Lock        |
| 81h    | XXXX | 64 bits: unique device number   |
| 82h    | XXXX |                                 |
| 83h    | XXXX |                                 |
| 84h    | XXXX |                                 |
| 85h    | XXXX | 128 bits: User Programmable OTP |
| 86h    | XXXX |                                 |
| 87h    | XXXX |                                 |
| 88h    | XXXX |                                 |
| 89h    | XXXX |                                 |
| 8Ah    | XXXX |                                 |
| 8Bh    | XXXX |                                 |
| 8Ch    | XXXX |                                 |

## APPENDIX C. FLOWCHARTS AND PSEUDO CODES


Figure 15. Program Flowchart and Pseudo Code

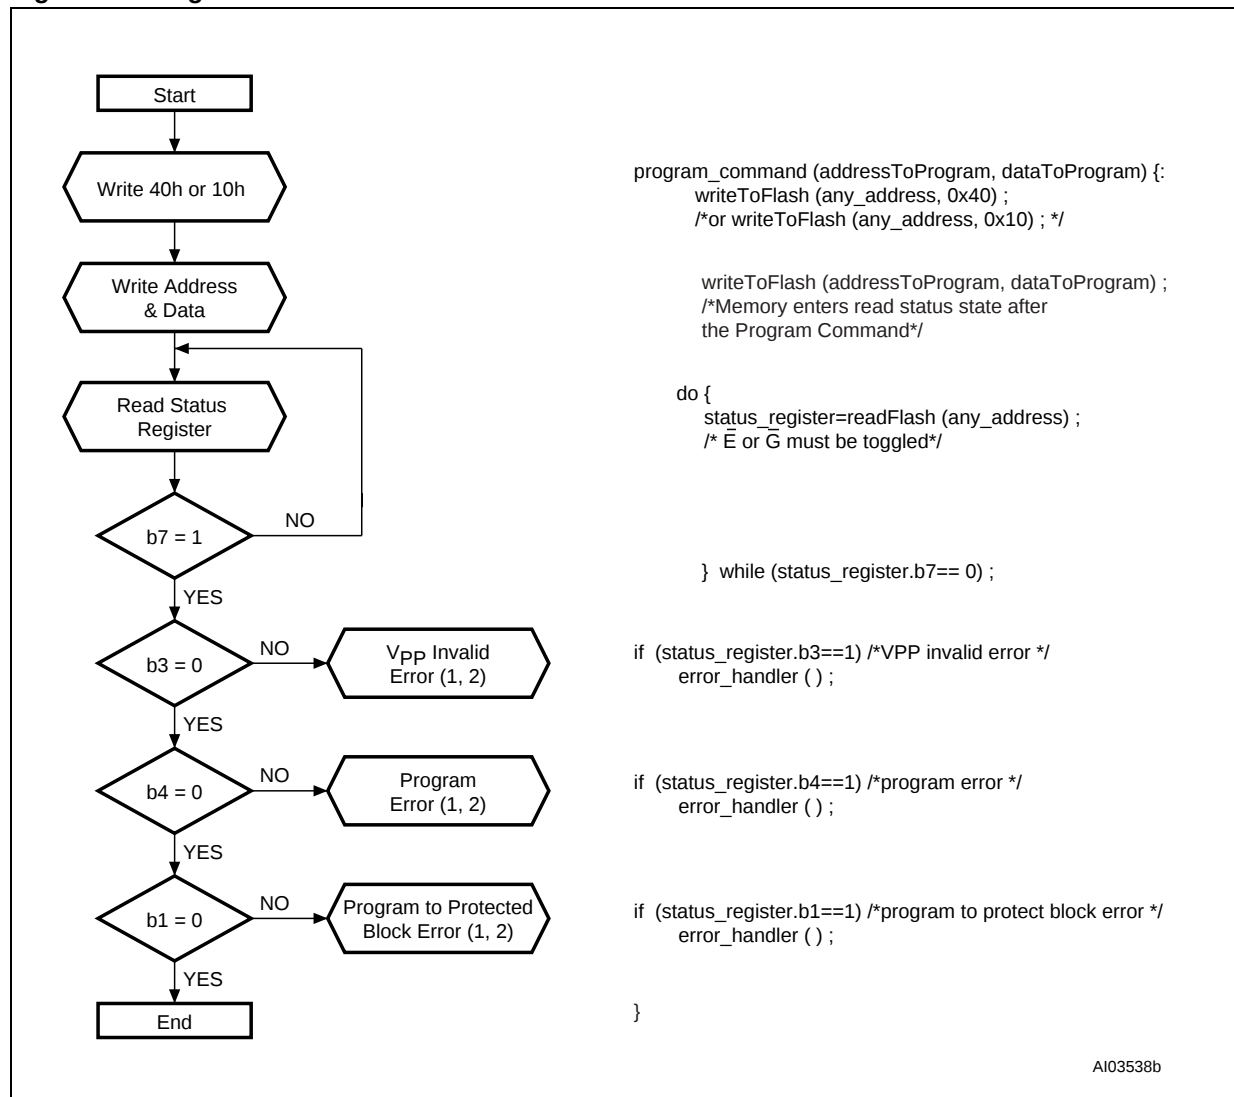

Note: 1. Status check of b1 (Protected Block), b3 (VPP Invalid) and b4 (Program Error) can be made after each program operation or after a sequence.


2. If an error is found, the Status Register must be cleared before further Program/Erase Controller operations.

Figure 16. Double Word Program Flowchart and Pseudo Code

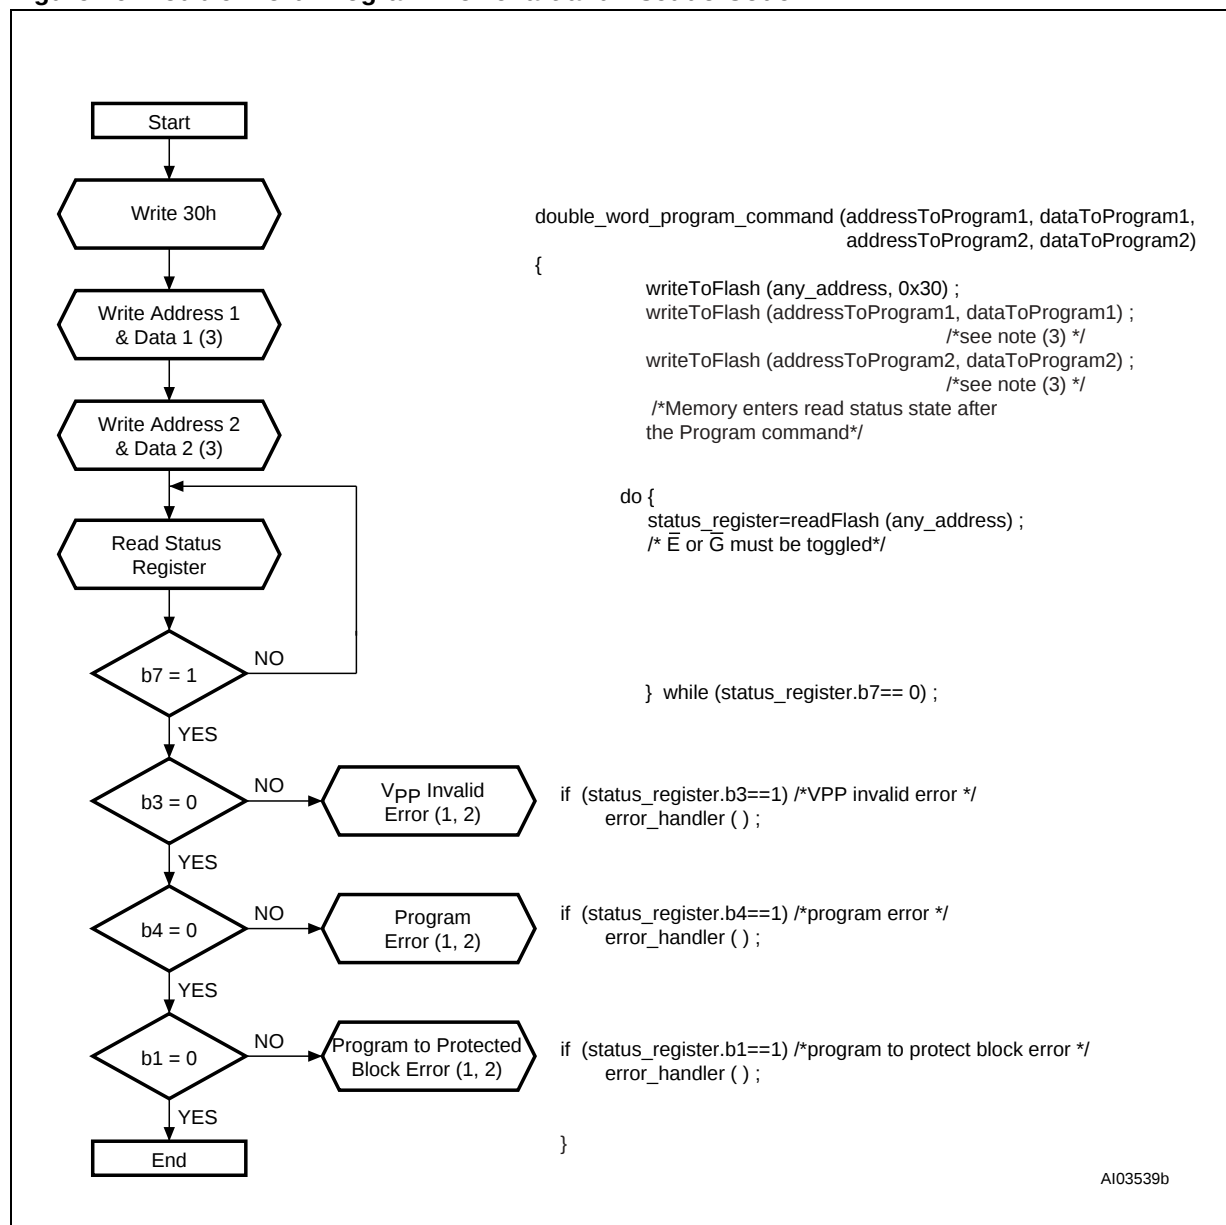

Note: 1. Status check of b1 (Protected Block), b3 (VPP Invalid) and b4 (Program Error) can be made after each program operation or after a sequence.  
 2. If an error is found, the Status Register must be cleared before further Program/Erase operations.  
 3. Address 1 and Address 2 must be consecutive addresses differing only for bit A0.

Figure 17. Quadruple Word Program Flowchart and Pseudo Code

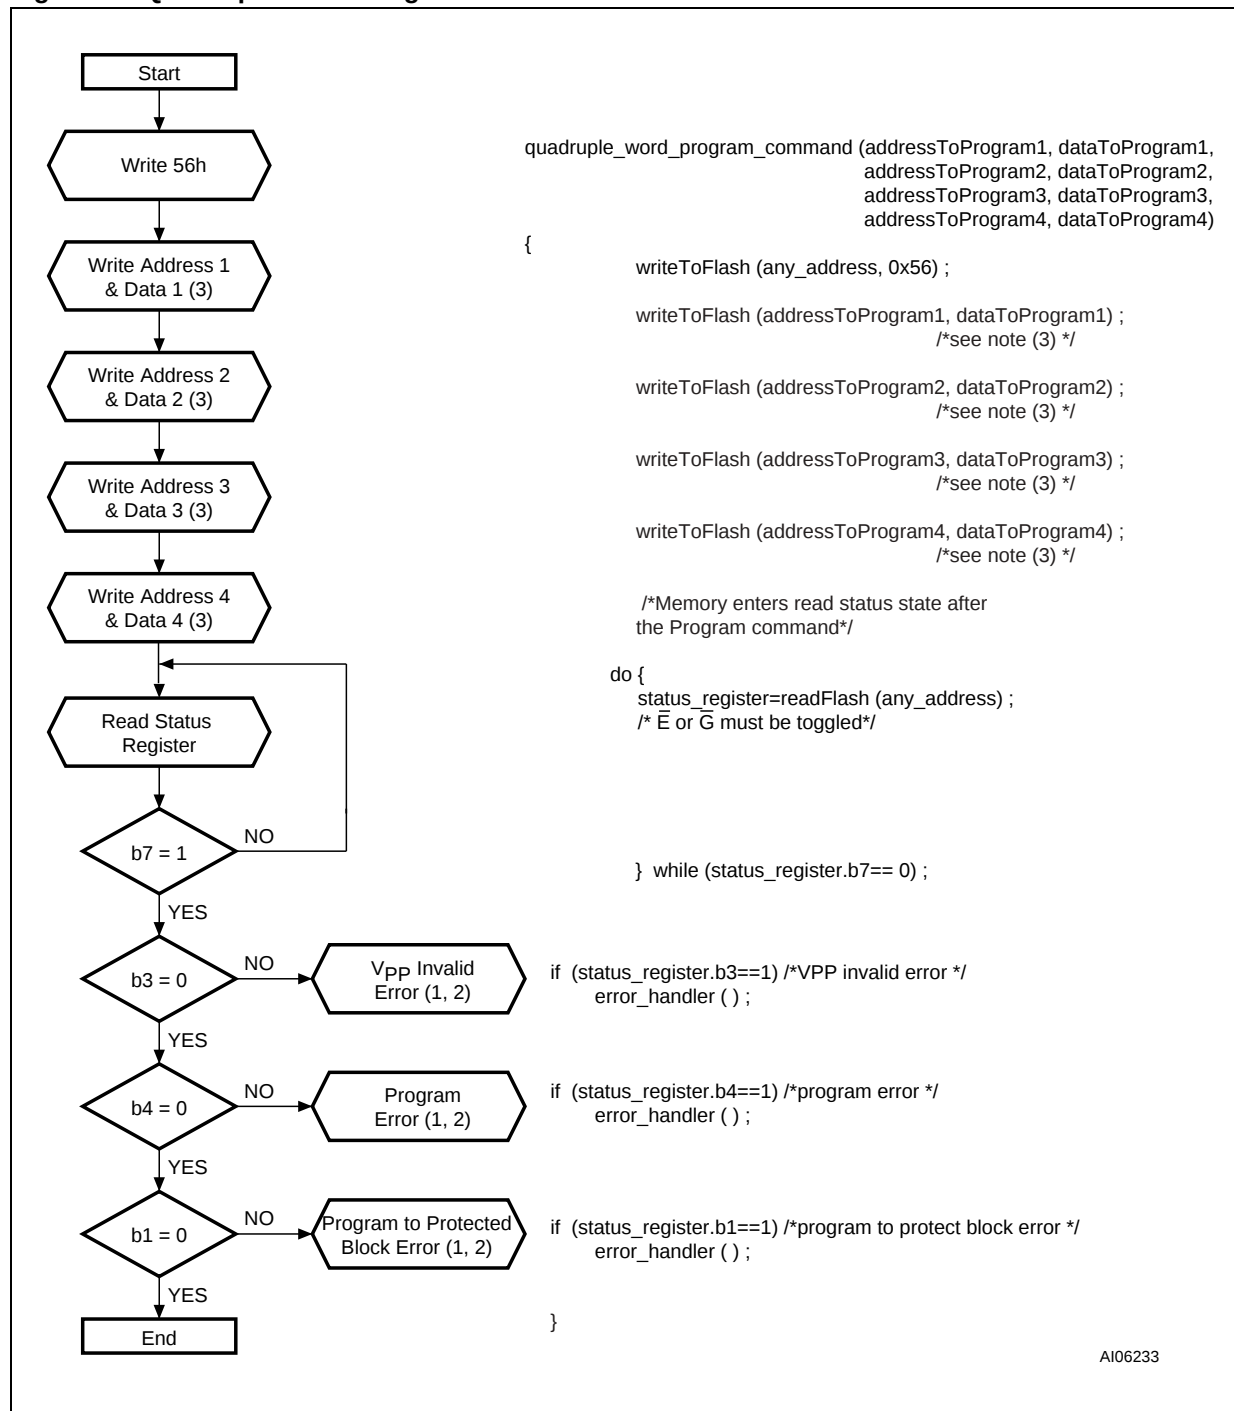

Note: 1. Status check of b1 (Protected Block), b3 (VPP Invalid) and b4 (Program Error) can be made after each program operation or after a sequence.

2. If an error is found, the Status Register must be cleared before further Program/Erase operations.

3. Address 1 to Address 4 must be consecutive addresses differing only for bits A0 and A1.

Figure 18. Program Suspend &amp; Resume Flowchart and Pseudo Code


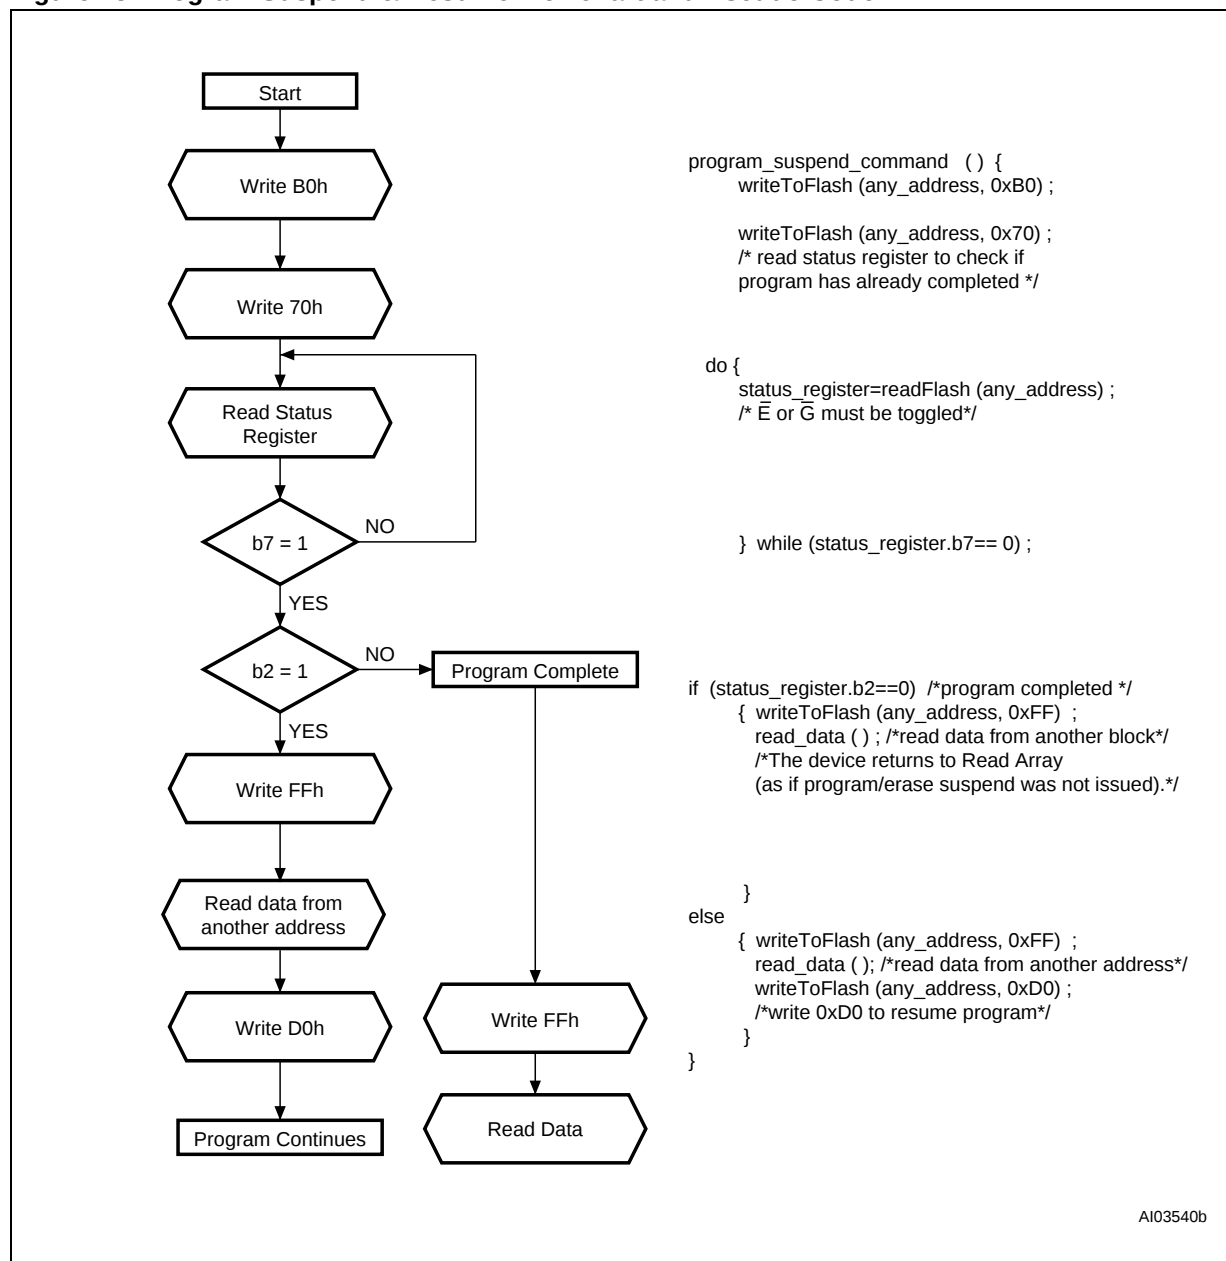


Figure 19. Erase Flowchart and Pseudo Code

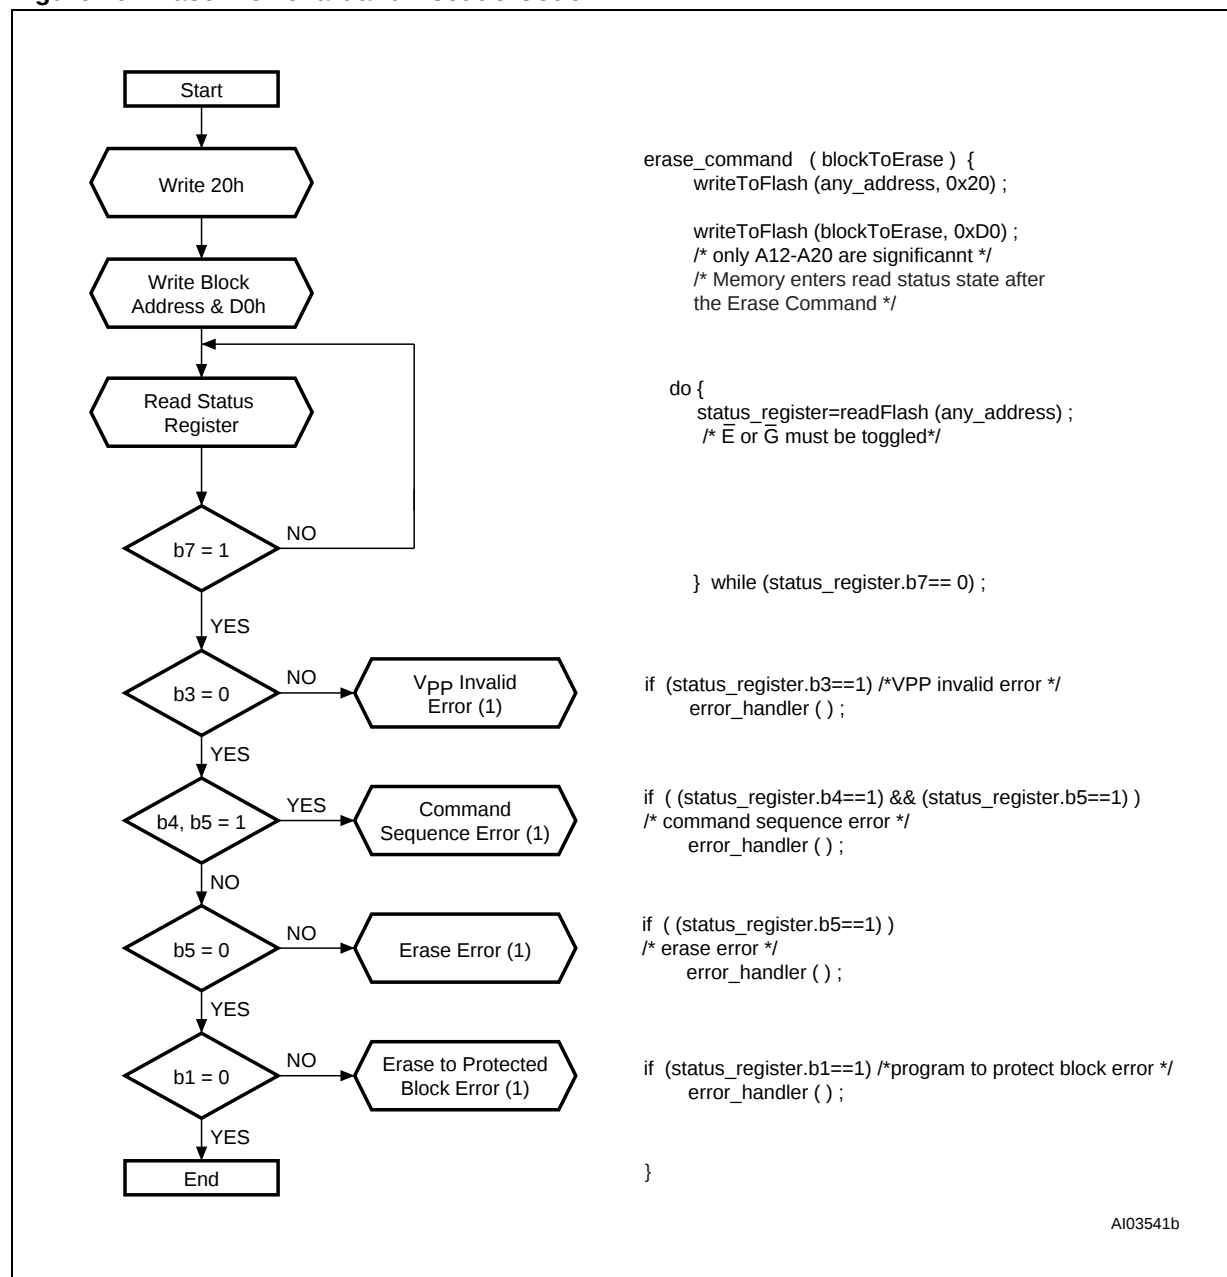

Note: If an error is found, the Status Register must be cleared before further Program/Erase operations.

Figure 20. Erase Suspend &amp; Resume Flowchart and Pseudo Code


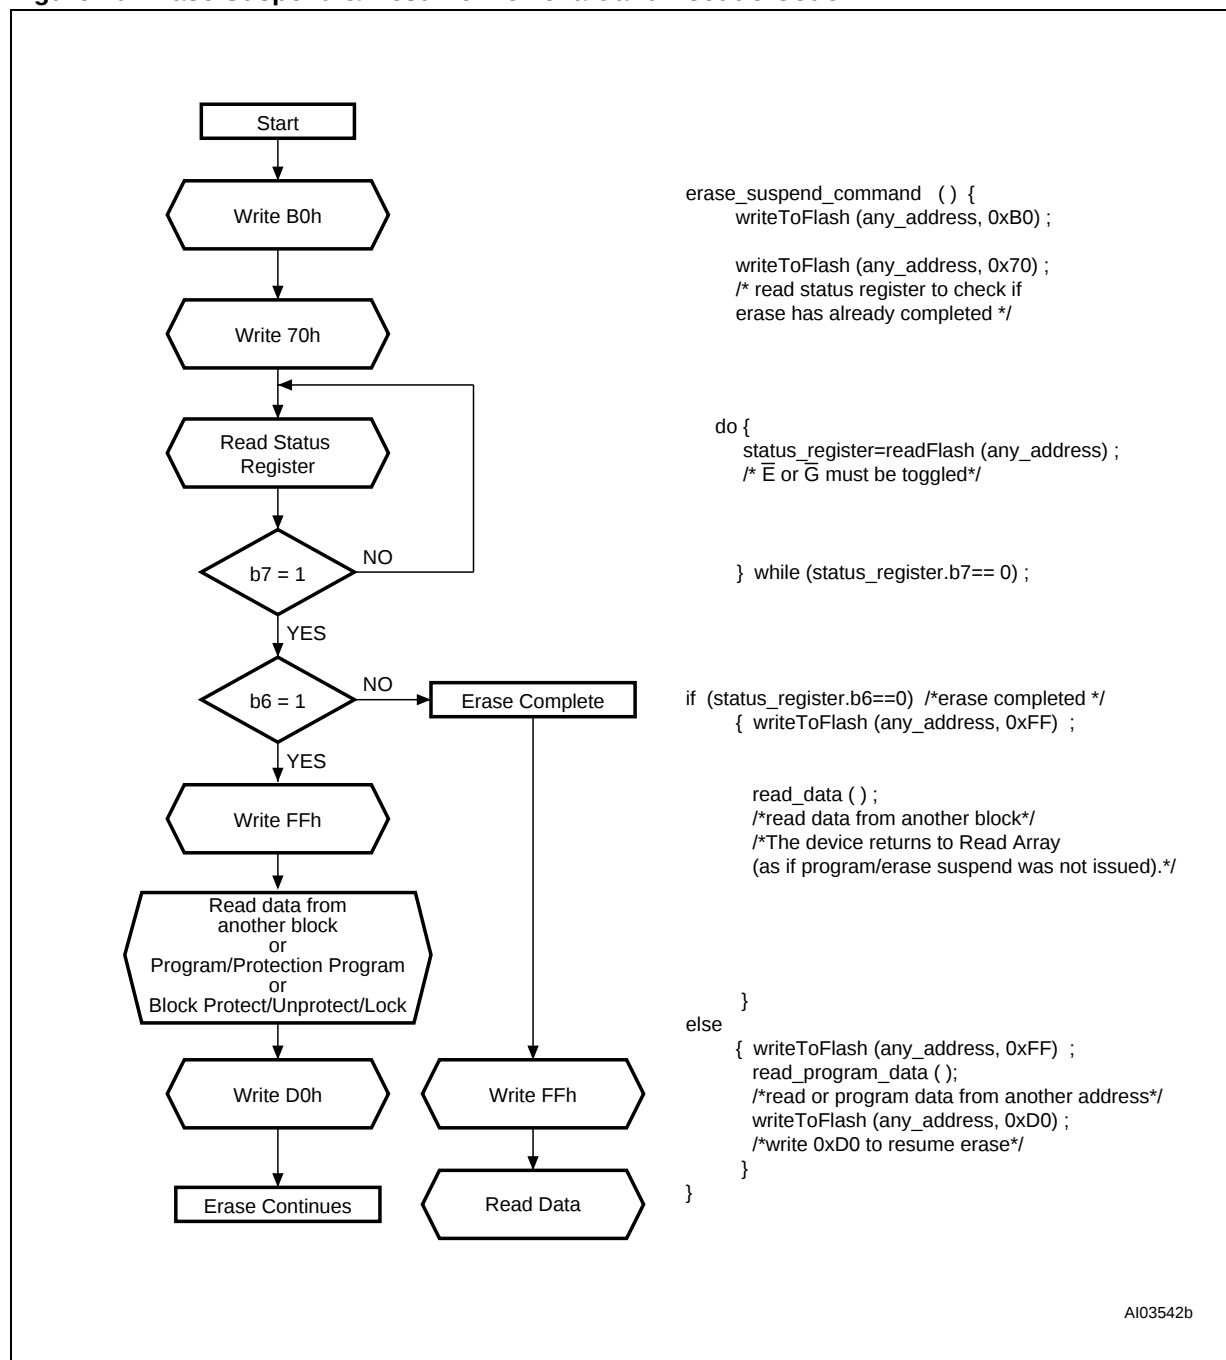


Figure 21. Protection Register Program Flowchart and Pseudo Code

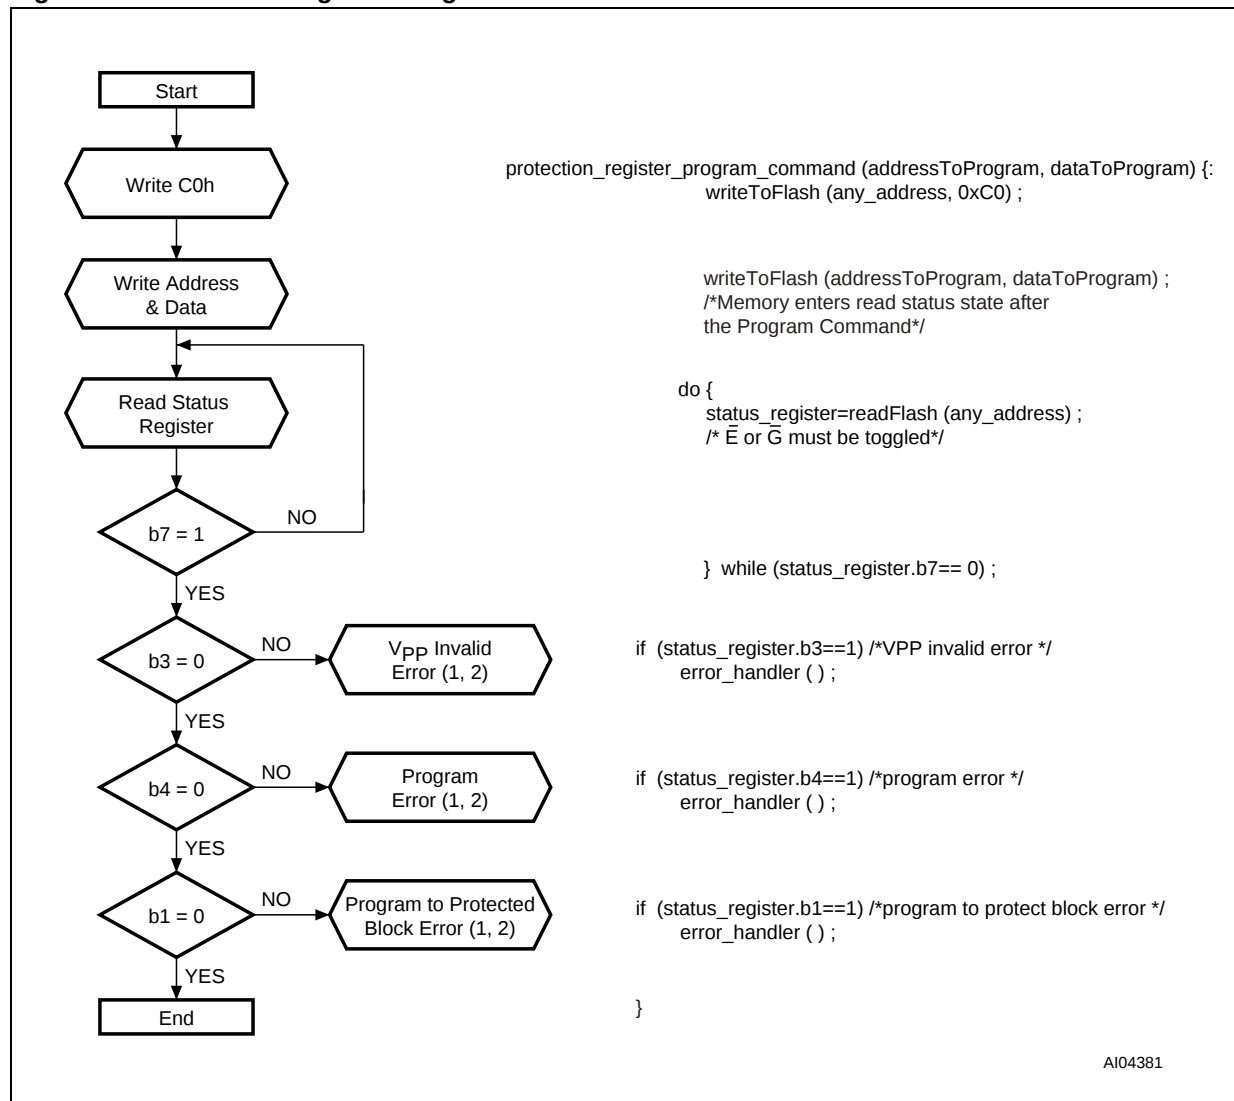

Note: 1. Status check of b1 (Protected Block), b3 (V<sub>PP</sub> Invalid) and b4 (Program Error) can be made after each program operation or after a sequence.

2. If an error is found, the Status Register must be cleared before further Program/Erase Controller operations.

## APPENDIX D. COMMAND INTERFACE AND PROGRAM/ERASE CONTROLLER STATE

Table 31. Write State Machine Current/Next, sheet 1 of 2.

| Current State            | SR bit 7 | Data When Read       | Command Input (and Next State)       |                               |                      |                     |                        |                       |                     |                      |
|--------------------------|----------|----------------------|--------------------------------------|-------------------------------|----------------------|---------------------|------------------------|-----------------------|---------------------|----------------------|
|                          |          |                      | Read Array (FFh)                     | Program Setup (10/40h)        | Erase Setup (20h)    | Erase Confirm (D0h) | Prog/Ers Suspend (B0h) | Prog/Ers Resume (D0h) | Read Status (70h)   | Clear Status (50h)   |
| Read Array               | "1"      | Array                | Read Array                           | Prog.Setup                    | Ers. Setup           | Read Array          |                        |                       | Read Sts.           | Read Array           |
| Read Status              | "1"      | Status               | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |
| Read Elect.Sg.           | "1"      | Electronic Signature | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |
| Read CFI Query           | "1"      | CFI                  | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |
| Prot. Prog. Setup        | "1"      | Status               | Protection Register Program          |                               |                      |                     |                        |                       |                     |                      |
| Prot. Prog. (continue)   | "0"      | Status               | Protection Register Program continue |                               |                      |                     |                        |                       |                     |                      |
| Prot. Prog. (complete)   | "1"      | Status               | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |
| Prog. Setup              | "1"      | Status               | Program                              |                               |                      |                     |                        |                       |                     |                      |
| Program (continue)       | "0"      | Status               | Program (continue)                   |                               |                      |                     | Prog. Sus Read Sts     | Program (continue)    |                     |                      |
| Prog. Sus Status         | "1"      | Status               | Prog. Sus Read Array                 | Program Suspend to Read Array |                      | Program (continue)  | Prog. Sus Read Array   | Program (continue)    | Prog. Sus Read Sts  | Prog. Sus Read Array |
| Prog. Sus Read Array     | "1"      | Array                | Prog. Sus Read Array                 | Program Suspend to Read Array |                      | Program (continue)  | Prog. Sus Read Array   | Program (continue)    | Prog. Sus Read Sts  | Prog. Sus Read Array |
| Prog. Sus Read Elect.Sg. | "1"      | Electronic Signature | Prog. Sus Read Array                 | Program Suspend to Read Array |                      | Program (continue)  | Prog. Sus Read Array   | Program (continue)    | Prog. Sus Read Sts  | Prog. Sus Read Array |
| Prog. Sus Read CFI       | "1"      | CFI                  | Prog. Sus Read Array                 | Program Suspend to Read Array |                      | Program (continue)  | Prog. Sus Read Array   | Program (continue)    | Prog. Sus Read Sts  | Prog. Sus Read Array |
| Program (complete)       | "1"      | Status               | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |
| Erase Setup              | "1"      | Status               | Erase Command Error                  |                               |                      | Erase (continue)    | Erase CmdError         | Erase (continue)      | Erase Command Error |                      |
| Erase Cmd.Error          | "1"      | Status               | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |
| Erase (continue)         | "0"      | Status               | Erase (continue)                     |                               |                      |                     | Erase Sus Read Sts     | Erase (continue)      |                     |                      |
| Erase Sus Read Sts       | "1"      | Status               | Erase Sus Read Array                 | Program Setup                 | Erase Sus Read Array | Erase (continue)    | Erase Sus Read Array   | Erase (continue)      | Erase Sus Read Sts  | Erase Sus Read Array |
| Erase Sus Read Array     | "1"      | Array                | Erase Sus Read Array                 | Program Setup                 | Erase Sus Read Array | Erase (continue)    | Erase Sus Read Array   | Erase (continue)      | Erase Sus Read Sts  | Erase Sus Read Array |
| Erase Sus Read Elect.Sg. | "1"      | Electronic Signature | Erase Sus Read Array                 | Program Setup                 | Erase Sus Read Array | Erase (continue)    | Erase Sus Read Array   | Erase (continue)      | Erase Sus Read Sts  | Erase Sus Read Array |
| Erase Sus Read CFI       | "1"      | CFI                  | Erase Sus Read Array                 | Program Setup                 | Erase Sus Read Array | Erase (continue)    | Erase Sus Read Array   | Erase (continue)      | Erase Sus Read Sts  | Erase Sus Read Array |
| Erase (complete)         | "1"      | Status               | Read Array                           | Program Setup                 | Erase Setup          | Read Array          |                        |                       | Read Status         | Read Array           |

Note: Cmd = Command, Elect.Sg. = Electronic Signature, Ers = Erase, Prog. = Program, Prot = Protection, Sus = Suspend.

Table 32. Write State Machine Current/Next, sheet 2 of 2.

| Current State                   | Command Input (and Next State)         |                                 |                            |
|---------------------------------|----------------------------------------|---------------------------------|----------------------------|
|                                 | Read Elect.Sg.<br>(90h)                | Read CFI Query<br>(98h)         | Prot. Prog. Setup (C0h)    |
| Read Array                      | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |
| Read Status                     | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |
| Read Elect.Sg.                  | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |
| Read CFI Query                  | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |
| Prot. Prog. Setup               | Protection Register Program            |                                 |                            |
| Prot. Prog. (continue)          | Protection Register Program (continue) |                                 |                            |
| Prot. Prog. (complete)          | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |
| Prog. Setup                     | Program                                |                                 |                            |
| Program (continue)              | Program (continue)                     |                                 |                            |
| Prog. Suspend<br>Read Status    | Prog. Suspend Read Elect.Sg.           | Prog. Suspend Read CFI Query    | Program Suspend Read Array |
| Prog. Suspend<br>Read Array     | Prog. Suspend Read Elect.Sg.           | Prog. Suspend Read CFI Query    | Program Suspend Read Array |
| Prog. Suspend<br>Read Elect.Sg. | Prog. Suspend Read Elect.Sg.           | Prog. Suspend Read CFI Query    | Program Suspend Read Array |
| Prog. Suspend<br>Read CFI       | Prog. Suspend Read Elect.Sg.           | Prog. Suspend Read CFI Query    | Program Suspend Read Array |
| Program (complete)              | Read Elect.Sg.                         | Read CFIQuery                   | Prot. Prog. Setup          |
| Erase Setup                     | Erase Command Error                    |                                 |                            |
| Erase Cmd.Error                 | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |
| Erase (continue)                | Erase (continue)                       |                                 |                            |
| Erase Suspend<br>Read Ststus    | Erase Suspend Read Elect.Sg.           | Erase Suspend<br>Read CFI Query | Erase Suspend Read Array   |
| Erase Suspend Read Array        | Erase Suspend Read Elect.Sg.           | Erase Suspend Read CFI Query    | Erase Suspend Read Array   |
| Erase Suspend Read Elect.Sg.    | Erase Suspend Read Elect.Sg.           | Erase Suspend Read CFI Query    | Erase Suspend Read Array   |
| Erase Suspend Read CFI Query    | Erase Suspend Read Elect.Sg.           | Erase Suspend Read CFI Query    | Erase Suspend Read Array   |
| Erase (complete)                | Read Elect.Sg.                         | Read CFI Query                  | Prot. Prog. Setup          |

Note: Cmd = Command, Elect.Sg. = Electronic Signature, Prog. = Program, Prot = Protection.

## REVISION HISTORY

**Table 33. Document Revision History**

| Date        | Version | Revision Details                                                                                                                               |
|-------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 13-Jul-2004 | 0.1     | First Issue.                                                                                                                                   |
| 05-Nov-2004 | 0.2     | DU ('Do Not Use') pins changed to NC ('Not Connected') in <a href="#">Figure 4., TBGA Connections (Top view through package)</a> .             |
| 20-Jan-2005 | 0.3     | Data at address 47h differentiated for M28W320FS and M28W640FS in <a href="#">Table 29., Primary Algorithm-Specific Extended Query Table</a> . |
| 15-Mar-2005 | 1.0     | Datasheet status promoted to PRELIMINARY DATA.                                                                                                 |
| 01-Aug-2005 | 2.0     | Datasheet status promoted to FULL DATASHEET.<br>ECOPACK text updated.                                                                          |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
ECOPACK is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies  
Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America  
**www.st.com**