

## LOW INPUT VOLTAGE, 1-A LOW-DROPOUT LINEAR REGULATORS WITH SUPERVISOR

### FEATURES

- 1-A Low-Dropout Regulator Supports Input Voltages Down to 1.8-V
- Available in 1.26-V, 1.5-V, 1.6-V, 1.8-V, 2.5-V, and Adjustable (1.22-V to 5.5-V)
- Stable With Any Type/Value Output Capacitor
- $\pm 2\%$  Output Voltage Tolerance Over Line, Load, and Temperature ( $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ )
- Integrated Supervisor (SVS) With 200-ms RESET Delay Time
- Low 170-mV Dropout Voltage at 1 A (TPS72625)
- Low 210- $\mu\text{A}$  Ground Current at Full Load
- Less than 1- $\mu\text{A}$  Standby Current
- Integrated UVLO with Thermal and Overcurrent Protection
- 5-Lead SOT223-5 or DDPAK Surface-Mount Package

### APPLICATIONS

- PCI Cards
- Modem Banks and Telecom Boards
- DSP, FPGA, and Microprocessor Power Supplies
- Portable, Battery-Powered Applications
- 1.26-V Core Voltage for the Following DSPs:
  - TMS320vC5501
  - TMS320vC5502


### DESCRIPTION

The TPS726xx family of 1-A low-dropout (LDO) linear regulators has fixed voltage options available that are commonly used to power the latest DSPs, FPGAs, and microcontrollers. The integrated supervisory circuitry provides an active low RESET signal when the output falls out of regulation. The no capacitor/any capacitor feature allows the customer to tailor output transient performance as needed. Therefore, compared to other regulators capable of providing the same output current, this family of regulators can provide a stand alone power supply solution or a post regulator for a switch mode power supply.

These regulators operate over a wide range of input voltages (1.8 V to 6 V) and have very low dropout (170 mV at 1-A). Ground current is typically 210  $\mu\text{A}$  at full load and drops to less than 80  $\mu\text{A}$  at no load. Standby current is less than 1  $\mu\text{A}$ .

Unlike some regulators that have a minimum current requirement, the TPS726xx family is stable with no output load current. The low noise capability of this family, coupled with its high current operation and ease of power dissipation, make it ideal for telecom boards, modem banks, and other noise sensitive applications.

The TPS726xx is available in either a SOT223-5 or DDPAK package. The TPS726126 is available in a SOT223-5 package only.

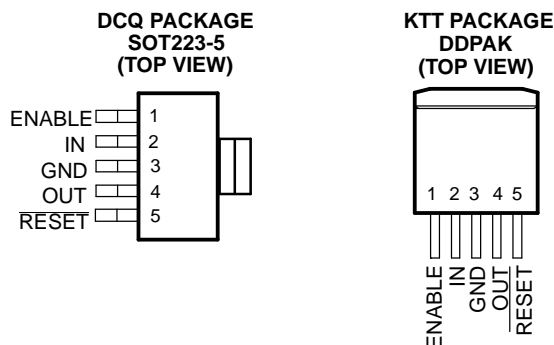

Note: Tab is GND for both packages



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## ORDERING INFORMATION<sup>(1)</sup>

| PRODUCT       | V <sub>OUT</sub>  |
|---------------|---|
| TPS726xxxxyyz | <b>XXX</b> is nominal output voltage (for example, 126 = 1.26V, 15 = 1.5V).<br><b>YYY</b> is package designator.<br><b>Z</b> is package quantity. |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at [www.ti.com](http://www.ti.com).

## ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted<sup>(1)</sup>

|  |                              | UNIT |
|--|------------------------------|------|
| Input voltage, V <sub>I</sub> <sup>(2)</sup>         | –0.3 to 7                    | V    |
| Voltage range at EN, FB                              | –0.3 to V <sub>I</sub> + 0.3 | V    |
| Voltage on RESET                                     | V <sub>IN</sub> + 0.3        | V    |
| Voltage on OUT                                       | 6                            | V    |
| ESD rating, HBM                                      | 2                            | kV   |
| Continuous total power dissipation                   | See Dissipation Rating Table |      |
| Operating junction temperature range, T <sub>J</sub> | –50 to 150                   | °C   |
| Maximum junction temperature range, T <sub>J</sub>   | 150                          | °C   |
| Storage temperature, T <sub>stg</sub>                | –65 to 150                   | °C   |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.

## PACKAGE DISSIPATION RATINGS

| PACKAGE | BOARD                 | R <sub>θJC</sub> | R <sub>θJA</sub> |
|---------|-----------------------|------------------|------------------|
| DDPAK   | High K <sup>(1)</sup> | 2 °C/W           | 23 °C/W          |
| SOT223  | Low K <sup>(2)</sup>  | 15 °C/W          | 53 °C/W          |

- (1) The JEDEC high K (2s2p) board design used to derive this data was a 3-inch x 3-inch (7,5-cm x 7,5-cm), multilayer board with 1 ounce internal power and ground planes and 2 ounce copper traces on top and bottom of the board.
- (2) The JEDEC low K (1s) board design used to derive this data was a 3-inch x 3-inch (7,5-cm x 7,5-cm), two-layer board with 2 ounce copper traces on top of the board.

## ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range  $V_I = V_{O(typ)} + 1\text{ V}$ ,  $I_O = 1\text{ mA}$ ,  $EN = IN$ ,  $C_O = 1\text{ }\mu\text{F}$ ,  $C_I = 1\text{ }\mu\text{F}$  (unless otherwise noted). Typical values are at +25°C.

| PARAMETER  |   |                       | TEST CONDITIONS                               |                                | MIN   | TYP   | MAX   | UNIT            |
|--|---|-----------------------|---|--------------------------------|-------|-------|-------|-----------------|
| V <sub>I</sub> <sup>(1)</sup>  | Input voltage   |                       |   |                                | 1.8   |       | 6     | V               |
| I <sub>O</sub>   | Continuous output current                                 |                       |   |                                | 0     |       | 1     | A               |
| Bandgap voltage reference  |   |                       |   |                                | 1.177 | 1.220 | 1.263 | V               |
| V <sub>O</sub>   | Output voltage  | TPS726126             | 0 μA < I <sub>O</sub> < 1 A                   | 1.8 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.222 | 1.26  | 1.298 | V               |
|  |   | TPS72615              | 0 μA < I <sub>O</sub> < 1 A                   | 1.8 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.47  | 1.5   | 1.53  |                 |
|  |   | TPS72616              | 0 μA < I <sub>O</sub> < 1 A                   | 2.6 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.568 | 1.6   | 1.632 |                 |
|  |   | TPS72618              | 0 μA < I <sub>O</sub> < 1 A                   | 2.8 V ≤ V <sub>I</sub> ≤ 5.5 V | 1.764 | 1.8   | 1.836 |                 |
|  |   | TPS72625              | 0 μA < I <sub>O</sub> < 1 A                   | 3.5 V ≤ V <sub>I</sub> ≤ 5.5 V | 2.45  | 2.5   | 2.55  |                 |
| I  | Ground current  | I <sub>O</sub> = 0 μA |   |                                |       | 75    | 120   | μA              |
|  |   | I <sub>O</sub> = 1 A  |   |                                |       | 210   | 300   |                 |
| Standby current  |   |                       | EN < 0.4 V                                    |                                |       | 0.2   | 1     | μA              |
| V <sub>n</sub>   | Output noise voltage                                      |                       | BW = 200 Hz to 100 kHz                        | C <sub>O</sub> = 10 μF         |       | 150   |       | μV              |
| PSRR   | Ripple rejection  |                       | f = 1 kHz, C <sub>O</sub> = 10 μF             |                                |       | 60    |       | dB              |
| Current limit <sup>(2)</sup>   |   |                       |   |                                | 1.1   | 1.6   | 2.3   | A               |
| Output voltage line regulation (ΔV <sub>O</sub> /V <sub>O</sub> ) <sup>(3)</sup> |   |                       | V <sub>O</sub> + 1 V < V <sub>I</sub> ≤ 5.5 V |                                | −0.15 | 0.02  | 0.15  | %/V             |
| Output voltage load regulation   |   |                       | 0 μA < I <sub>O</sub> < 1 A                   |                                | −0.25 | 0.05  | 0.25  | %/A             |
| V <sub>IH</sub>  | EN high level input                                       |                       |   |                                | 1.3   |       |       | V               |
| V <sub>IL</sub>  | EN low level input  |                       |   |                                | −0.2  |       | 0.4   |                 |
| I <sub>I</sub>   | EN input current  |                       | EN = 0 V or V <sub>I</sub>                    |                                |       | 0.01  | 100   | nA              |
| UVLO threshold   |   |                       | V <sub>CC</sub> rising                        |                                | 1.45  | 1.57  | 1.70  | V               |
| UVLO hysteresis  |   |                       | V <sub>CC</sub> rising                        |                                |       | 50    |       | mV              |
| UVLO deglitch  |   |                       | V <sub>CC</sub> rising                        |                                |       | 10    |       | μs              |
| UVLO delay   |   |                       | V <sub>CC</sub> rising                        |                                |       | 100   |       | μs              |
| V <sub>DO</sub>  | Dropout voltage <sup>(4)</sup>                            | TPS72625              | I <sub>O</sub> = 1 A                          |                                |       | 170   | 280   | mV              |
|  |   | TPS72618              | I <sub>O</sub> = 1 A                          |                                |       | 210   | 320   |                 |
| RESET  | Minimum input voltage for valid RESET (V <sub>RES</sub> ) |                       |   |                                | 1.3   |       |       | V               |
|  | Trip threshold voltage                                    |                       |   |                                | 90    | 93    | 96    | %V <sub>O</sub> |
|  | Hysteresis voltage  |                       |   |                                |       | 10    |       | mV              |
|  | t <sub>I(RESET)</sub> delay time                          |                       |   |                                | 100   | 200   | 300   | ms              |
|  | Rising edge deglitch                                      |                       |   |                                |       | 10    |       | μs              |
|  | Output low voltage (at 700 μA)                            |                       |   |                                | −0.3  |       | 0.4   | V               |
|  | Leakage current   |                       |   |                                |       |       | 100   | nA              |
| T <sub>J</sub>   | Operating junction temperature                            |                       |   |                                | −40   |       | +125  | °C              |

(1) Minimum  $V_{IN}$  is 1.800 V or  $V_O + V_{DO}$ , whichever is greater.


(2) Test condition includes, output voltage  $V_O = V_O - 15\%$  and pulse duration = 10 ms.

(3)  $V_{Imin} = (V_O + 1)$  or 1.8 V whichever is greater.

$$\text{Line regulation (mV)} = (\%/\text{V}) \times \frac{V_O(5.5\text{ V} - V_{Imin})}{100} \times 1000$$

(4) Dropout voltage is defined as the differential voltage between  $V_O$  and  $V_I$  when  $V_O$  drops 100 mV below the value measured with  $V_I = V_O + 1\text{ V}$ .


## FUNCTIONAL BLOCK DIAGRAM

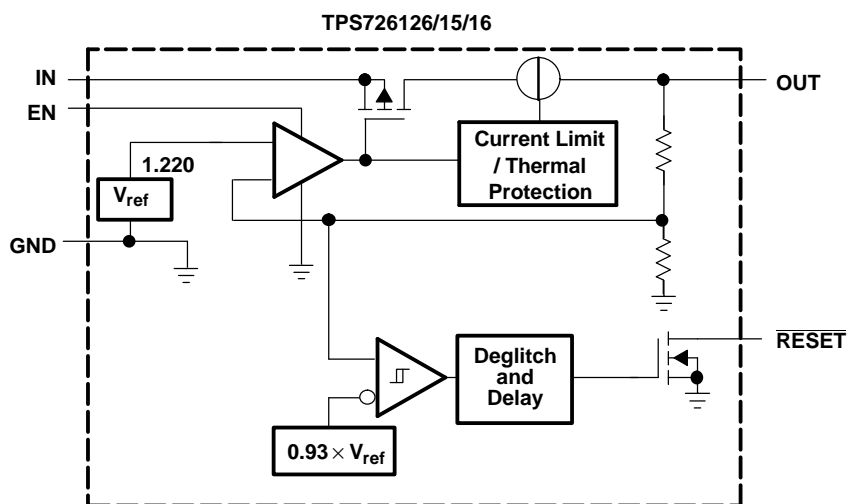

## Terminal Functions

| TERMINAL<br>NAME          | NO. | DESCRIPTION  |
|---------------------------|-----|--|
| GND                       | 3   | Ground   |
| ENABLE                    | 1   | Enable input   |
| IN                        | 2   | Input supply voltage   |
| $\overline{\text{RESET}}$ | 5   | This terminal is the $\overline{\text{RESET}}$ output. When used with a pull-up resistor, this open-drain output provides the active low $\overline{\text{RESET}}$ signal when the regulator output voltage drops more than 5% below its nominal output voltage. The $\overline{\text{RESET}}$ delay time is typically 200 ms. |
| OUT                       | 4   | Regulated output voltage   |

## $\overline{\text{RESET}}$ TIMING DIAGRAM

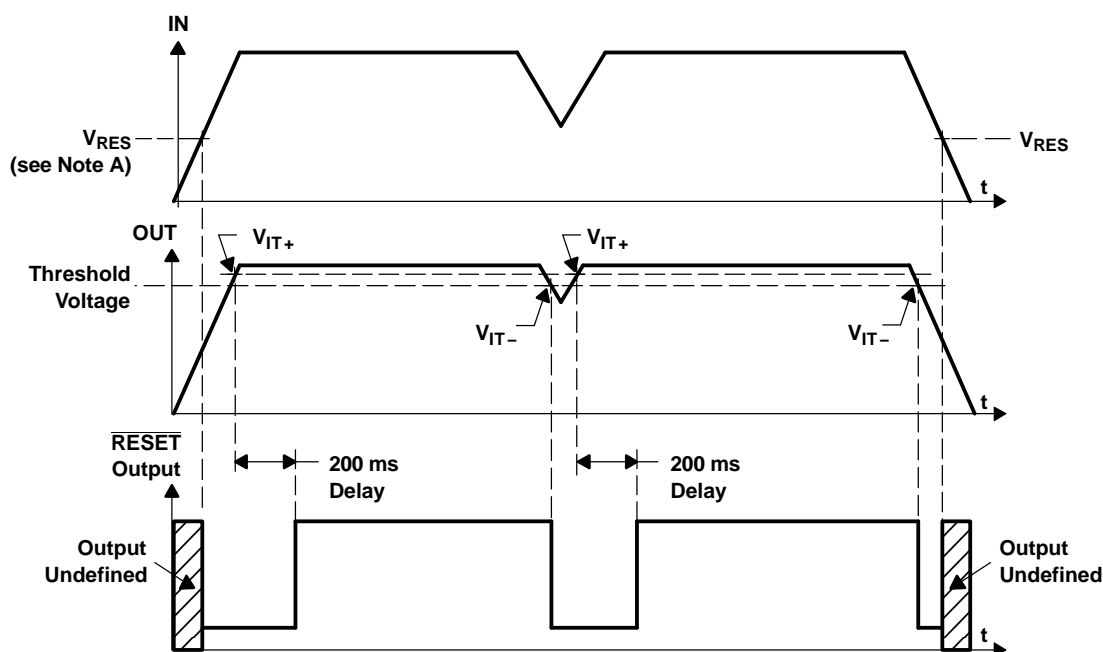

NOTES:A.  $V_{\text{RES}}$  is the minimum input voltage for a valid  $\overline{\text{RESET}}$ .

## TYPICAL CHARACTERISTICS

**TPS72618 OUTPUT VOLTAGE  
vs  
OUTPUT CURRENT**

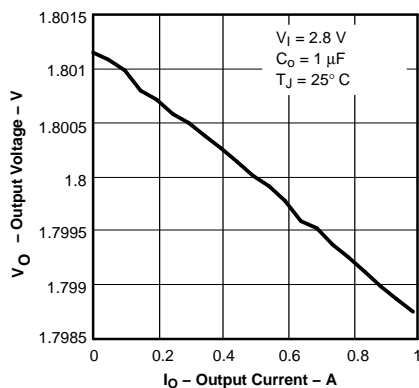


Figure 1.

**TPS72618 OUTPUT VOLTAGE  
vs  
JUNCTION TEMPERATURE**

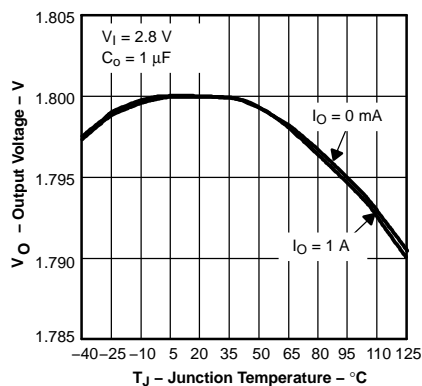


Figure 2.

**TPS72618 GROUND CURRENT  
vs  
JUNCTION TEMPERATURE**

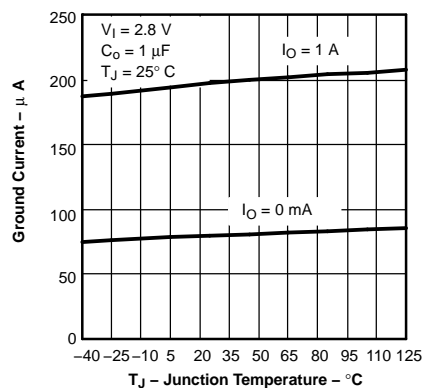


Figure 3.

**TPS72618 GROUND CURRENT  
vs  
OUTPUT CURRENT**

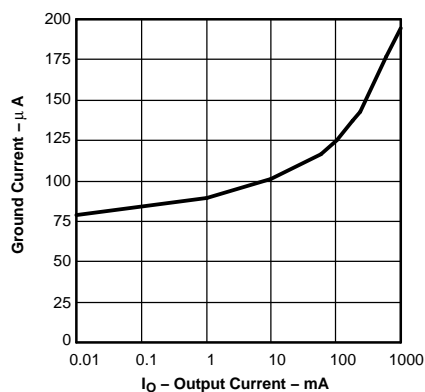


Figure 4.

**TPS72625 DC DROPOUT VOLTAGE  
vs  
OUTPUT CURRENT**

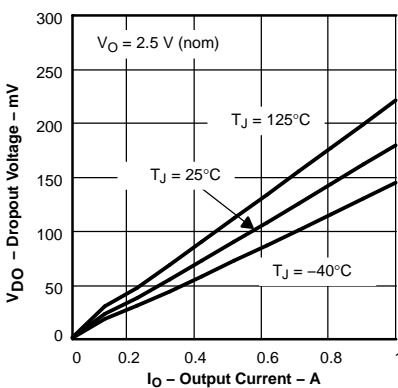


Figure 5.

**TPS72618 DROPOUT VOLTAGE  
vs  
JUNCTION TEMPERATURE**

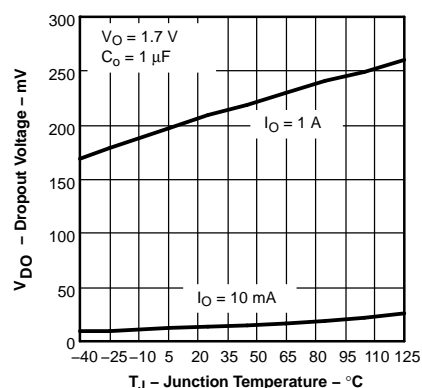


Figure 6.

**MINIMUM REQUIRED  
INPUT VOLTAGE  
vs  
OUTPUT VOLTAGE**

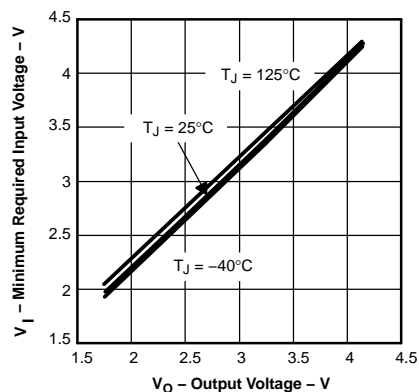


Figure 7.

**TPS72618 LINE TRANSIENT  
RESPONSE**

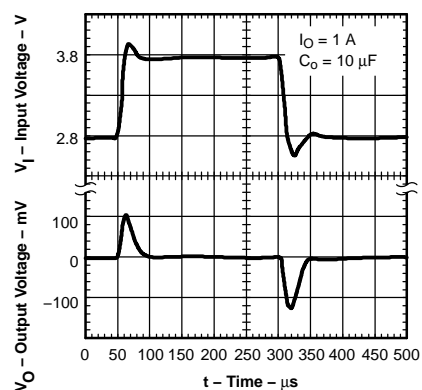


Figure 8.

**TPS72618 LOAD TRANSIENT  
RESPONSE**

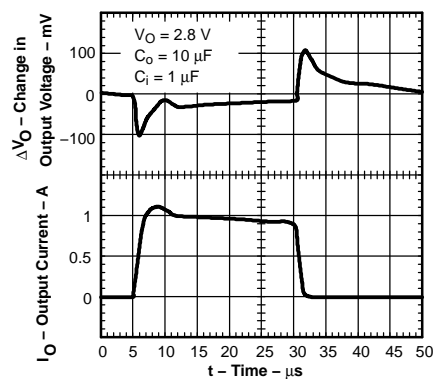


Figure 9.

## TYPICAL CHARACTERISTICS (continued)

**TPS72618 LOAD TRANSIENT RESPONSE**

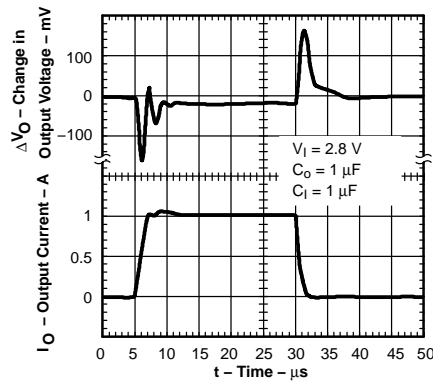


Figure 10.

**TPS72618 OUTPUT VOLTAGE, ENABLE VOLTAGE VS TIME (START-UP)**

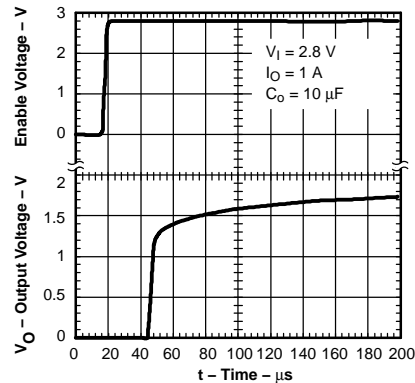


Figure 11.

**TPS72618 POWER UP/POWER DOWN**

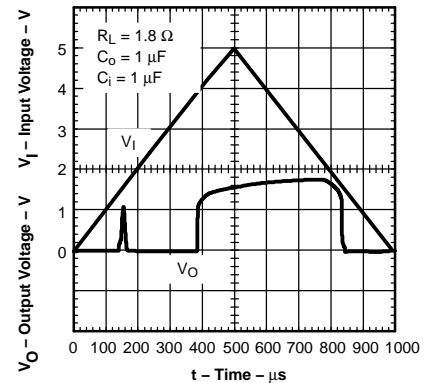


Figure 12.

**TPS72618 OUTPUT SPECTRAL NOISE DENSITY VS FREQUENCY**

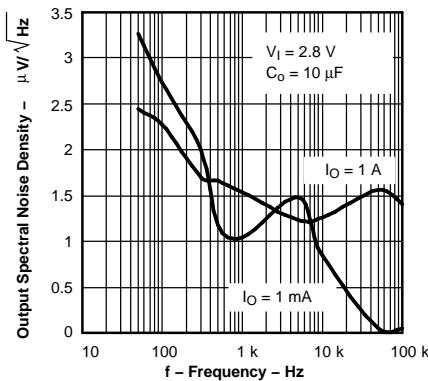


Figure 13.

**OUTPUT IMPEDANCE VS FREQUENCY**

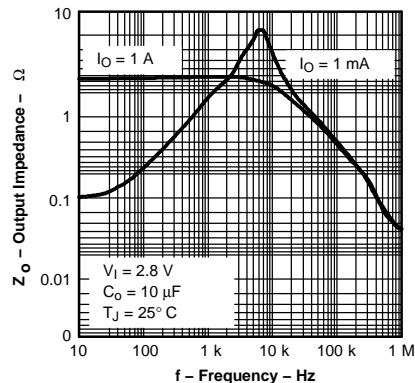


Figure 14.

**TPS72618 RIPPLE REJECTION VS FREQUENCY**

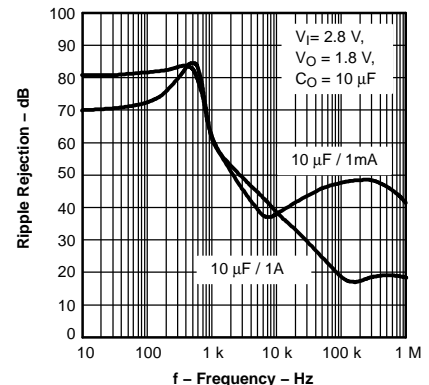


Figure 15.

**CURRENT LIMIT VS INPUT VOLTAGE**

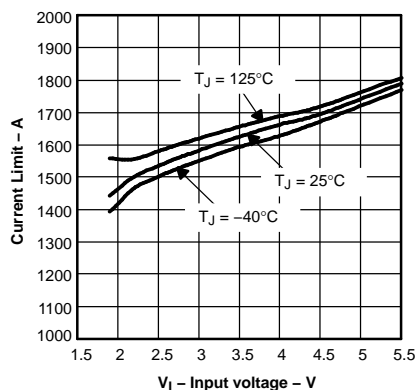


Figure 16.

**TPS72615 GROUND CURRENT VS INPUT VOLTAGE**

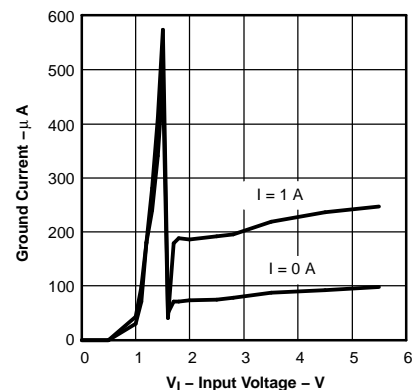


Figure 17.

**DROPOUT VOLTAGE VS INPUT VOLTAGE**

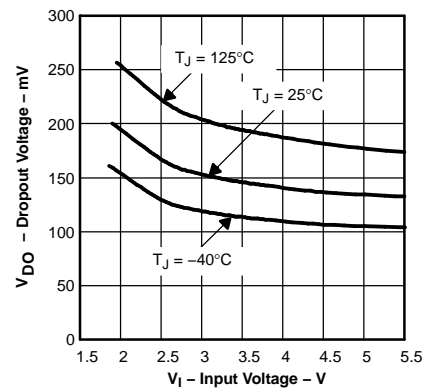


Figure 18.

## APPLICATION INFORMATION

The TPS726xx family of low-dropout (LDO) regulators have numerous features that make it apply to a wide range of applications. The family operates with very low input voltage ( $\geq 1.8$  V) and low dropout voltage (typically 200 mV at full load), making it an efficient stand-alone power supply or post regulator for battery or switch mode power supplies. Both the active low  $\overline{\text{RESET}}$  and 1-A output current, make the TPS726xx family ideal for powering processor and FPGA supplies. The TPS726xx family also has low output noise (typically 150  $\mu\text{V}_{\text{RMS}}$  with 10- $\mu\text{F}$  output capacitor), making it ideal for use in telecom equipment.

### External Capacitor Requirements

A 1- $\mu\text{F}$  or larger ceramic input bypass capacitor, connected between IN and GND and located close to the TPS726xx, is required for stability. To improve transient response, noise rejection, and ripple rejection, an additional 10- $\mu\text{F}$  or larger, low ESR capacitor is recommended. A higher-value, low ESR input capacitor may be necessary if large, fast-rise-time load transients are anticipated and the device is located several inches from the power source, especially if the minimum input voltage of 1.8 V is used.

Although an output capacitor is not required for stability, transient response and output noise are improved with a 10- $\mu\text{F}$  output capacitor.

### Regulator Protection

The TPS726xx pass element has a built-in back diode that safely conducts reverse current when the input voltage drops below the output voltage (e.g., during power down). Current is conducted from the output to the input and is not internally limited. If extended reverse voltage is anticipated, external limiting might be appropriate.

The TPS726xx also features internal current limiting and thermal protection. During normal operation, the TPS726xx limits output current to approximately 1.6 A. When current limiting engages, the output voltage scales back linearly until the overcurrent condition ends. While current limiting is designed to prevent gross device failure, care should be taken not to exceed the power dissipation ratings of the package. If the temperature of the device exceeds 165°C, thermal-protection circuitry shuts it down. Once the device has cooled down to below 145°C, regulator operation resumes.

## THERMAL INFORMATION

The amount of heat that an LDO linear regulator generates is directly proportional to the amount of power it dissipates during operation. All integrated circuits have a maximum allowable junction temperature ( $T_{\text{Jmax}}$ ) above which normal operation is not assured. A system designer must design the operating environment so that the operating junction temperature ( $T_{\text{J}}$ ) does not exceed the maximum junction temperature ( $T_{\text{Jmax}}$ ). The two main environmental variables that a designer can use to improve thermal performance are air flow and external heatsinks. The purpose of this information is to aid the designer in determining the proper operating environment for a linear regulator that is operating at a specific power level.

In general, the maximum expected power ( $P_{\text{D(max)}}$ ) consumed by a linear regulator is computed as:

$$P_{\text{Dmax}} = (V_{\text{I(avg)}} - V_{\text{O(avg)}}) \times I_{\text{O(avg)}} + V_{\text{I(avg)}} \times I_{\text{(Q)}} \quad (1)$$

Where:

- $V_{\text{I(avg)}}$  is the average input voltage.
- $V_{\text{O(avg)}}$  is the average output voltage.
- $I_{\text{O(avg)}}$  is the average output current.
- $I_{\text{(Q)}}$  is the quiescent current.

For most TI LDO regulators, the quiescent current is insignificant compared to the average output current; therefore, the term  $V_{\text{I(avg)}} \times I_{\text{(Q)}}$  can be neglected. The operating junction temperature is computed by adding the

## THERMAL INFORMATION (continued)

ambient temperature ( $T_A$ ) and the increase in temperature due to the regulator's power dissipation. The temperature rise is computed by multiplying the maximum expected power dissipation by the sum of the thermal resistances between the junction and the case ( $R_{\theta JC}$ ), the case to heatsink ( $R_{\theta CS}$ ), and the heatsink to ambient ( $R_{\theta SA}$ ). Thermal resistances are measures of how effectively an object dissipates heat. Typically, the larger the device, the more surface area available for power dissipation and the lower the object's thermal resistance.

Figure 19 illustrates these thermal resistances for (a) a SOT223 package mounted in a JEDEC low-K board, and (b) a DDPACK package mounted on a JEDEC high-K board.

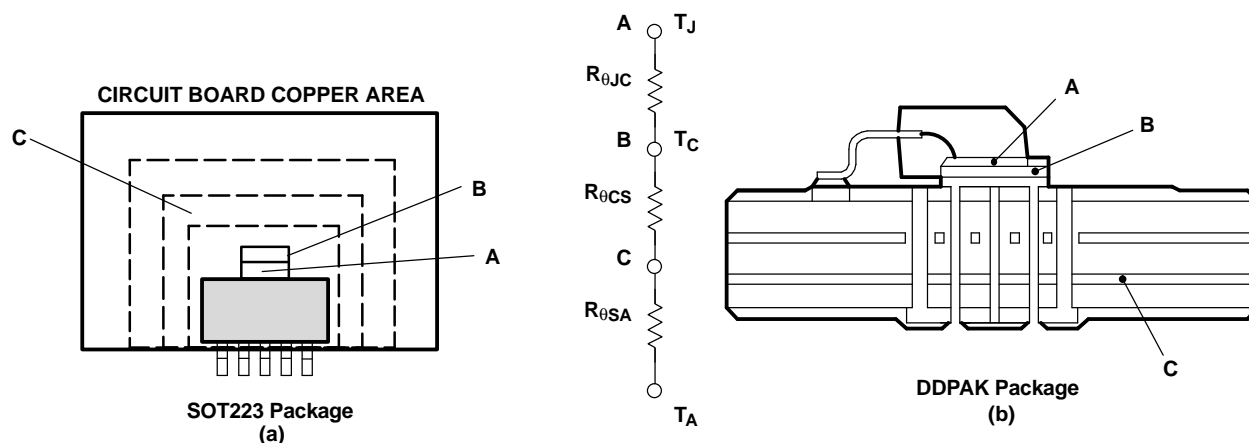


Figure 19. Thermal Resistances

Equation 2 summarizes the computation:

$$T_J = T_A + P_{Dmax} \times (R_{\theta JC} + R_{\theta CS} + R_{\theta SA}) \quad (2)$$

The  $R_{\theta JC}$  is specific to each regulator as determined by its package, lead frame, and die size provided in the regulator's data sheet. The  $R_{\theta SA}$  is a function of the type and size of heatsink. For example, *black body radiator* type heatsinks can have  $R_{\theta CS}$  values ranging from 5°C/W for very large heatsinks to 50°C/W for very small heatsinks. The  $R_{\theta CS}$  is a function of how the package is attached to the heatsink. For example, if a thermal compound is used to attach a heatsink to a SOT223 package,  $R_{\theta CS}$  of 1°C/W is reasonable.

Even if no external *black body radiator* type heatsink is attached to the package, the board on which the regulator is mounted provides some heatsinking through the pin solder connections. Some packages, like the DDPACK and SOT223 packages, use a copper plane underneath the package or the circuit board's ground plane for additional heatsinking to improve their thermal performance. Computer-aided thermal modeling can be used to compute very accurate approximations of an integrated circuit's thermal performance in different operating environments (e.g., different types of circuit boards, different types and sizes of heatsinks, and different air flows, etc.). Using these models, the three thermal resistances can be combined into one thermal resistance between junction and ambient ( $R_{\theta JA}$ ). This  $R_{\theta JA}$  is valid only for the specific operating environment used in the computer model.

Equation 2 simplifies into Equation 3:

$$T_J = T_A + P_{Dmax} \times R_{\theta JA} \quad (3)$$

Rearranging Equation 3 gives Equation 4:

$$R_{\theta JA} = \frac{T_J - T_A}{P_{Dmax}} \quad (4)$$

Using Equation 3 and the computer model generated curves shown in Figure 20 and Figure 23, a designer can quickly compute the required heatsink thermal resistance/board area for a given ambient temperature, power dissipation, and operating environment.



## THERMAL INFORMATION (continued)

### DDPAK Power Dissipation

The DDPACK package provides an effective means of managing power dissipation in surface mount applications. The DDPACK package dimensions are provided in the *Mechanical Data* section at the end of the data sheet. The addition of a copper plane directly underneath the DDPACK package enhances the thermal performance of the package.

To illustrate, the TPS72625 in a DDPACK package was chosen. For this example, the average input voltage is 5 V, the output voltage is 2.5 V, the average output current is 1 A, the ambient temperature 55°C, the air flow is 150 LFM, and the operating environment is the same as documented below. Neglecting the quiescent current, the maximum average power is:

$$P_{D\max} = (5 - 2.5) \text{ V} \times 1 \text{ A} = 2.5 \text{ W} \quad (5)$$

Substituting  $T_{J\max}$  for  $T_J$  into Equation 4 gives Equation 6:

$$R_{\theta JA\max} = (125 - 55)^\circ\text{C}/2.5 \text{ W} = 28^\circ\text{C}/\text{W} \quad (6)$$

From Figure 20, DDPACK Thermal Resistance vs Copper Heatsink Area, the ground plane needs to be 1 cm<sup>2</sup> for the part to dissipate 2.5 W. The operating environment used in the computer model to construct Figure 20 consisted of a standard JEDEC High-K board (2S2P) with a 1 oz. internal copper plane and ground plane. The package is soldered to a 2 oz. copper pad. The pad is tied through thermal vias to the 1 oz. ground plane. Figure 21 shows the side view of the operating environment used in the computer model.


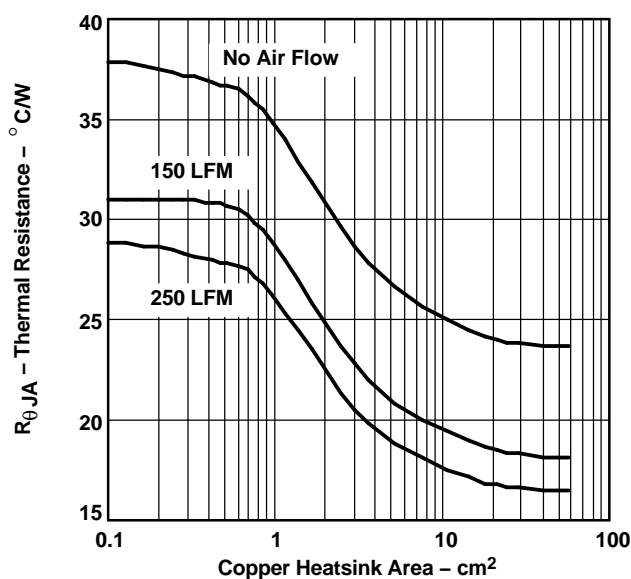



Figure 20. DDPACK Thermal Resistance vs Copper Heatsink Area

## THERMAL INFORMATION (continued)

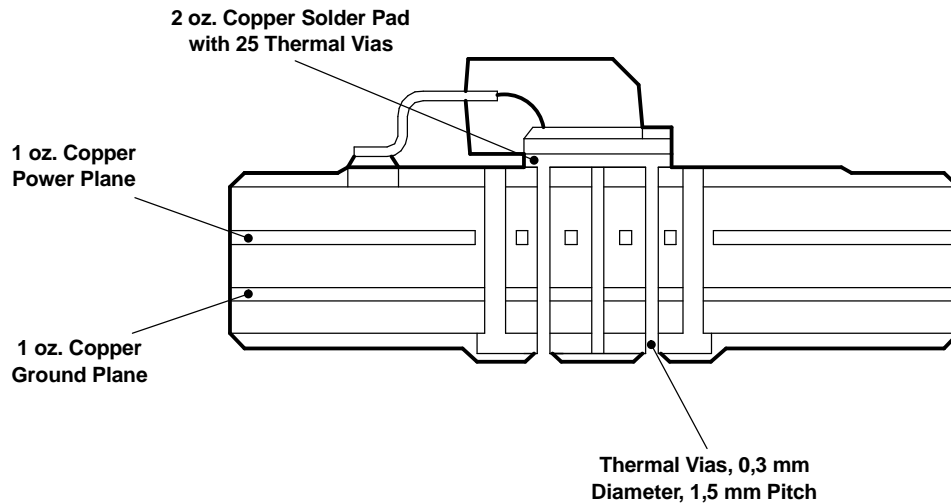

**Figure 21. DPAK Thermal Resistance**

From the data in [Figure 22](#) and rearranging [Equation 4](#), the maximum power dissipation for a different ground plane area and a specific ambient temperature can be computed.

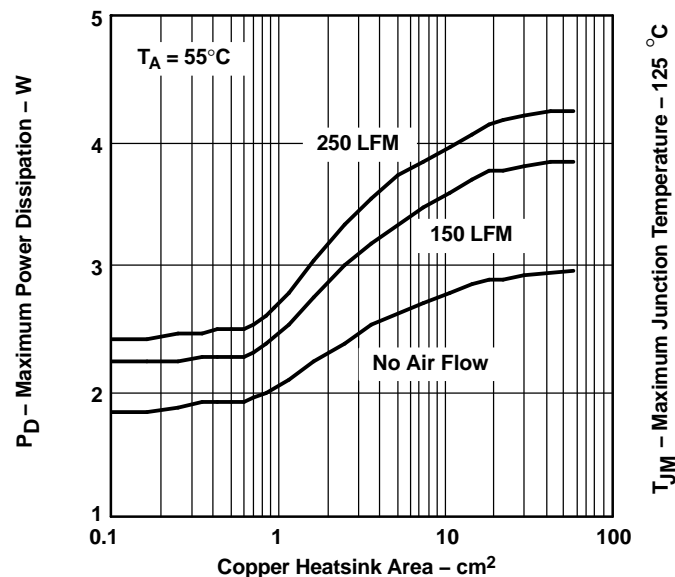

**Figure 22. Maximum Power Dissipation vs Copper Heatsink Area**

## SOT223 Power Dissipation

The SOT223 package provides an effective means of managing power dissipation in surface mount applications. The SOT223 package dimensions are provided in the *Mechanical Data* section at the end of the data sheet. The addition of a copper plane directly underneath the SOT223 package enhances the thermal performance of the package.

To illustrate, the TPS72625 in a SOT223 package was chosen. For this example, the average input voltage is 3.3 V, the output voltage is 2.5 V, the average output current is 1 A, the ambient temperature 55°C, no air flow is present, and the operating environment is the same as documented below. Neglecting the quiescent current, the maximum average power is:

## THERMAL INFORMATION (continued)

$$P_{D\max} = (3.3 - 2.5) \text{ V} \times 1 \text{ A} = 800 \text{ mW} \quad (7)$$

Substituting  $T_{J\max}$  for  $T_J$  into Equation 4 gives Equation 8:

$$R_{\theta JA\max} = (125 - 55)^\circ\text{C}/800 \text{ mW} = 87.5^\circ\text{C}/\text{W} \quad (8)$$

From Figure 23,  $R_{\theta JA}$  vs PCB Copper Area, the ground plane needs to be 0.55 in<sup>2</sup> for the part to dissipate 800 mW. The operating environment used to construct Figure 23 consisted of a board with 1 oz. copper planes. The package is soldered to a 1 oz. copper pad on the top of the board. The pad is tied through thermal vias to the 1 oz. ground plane.

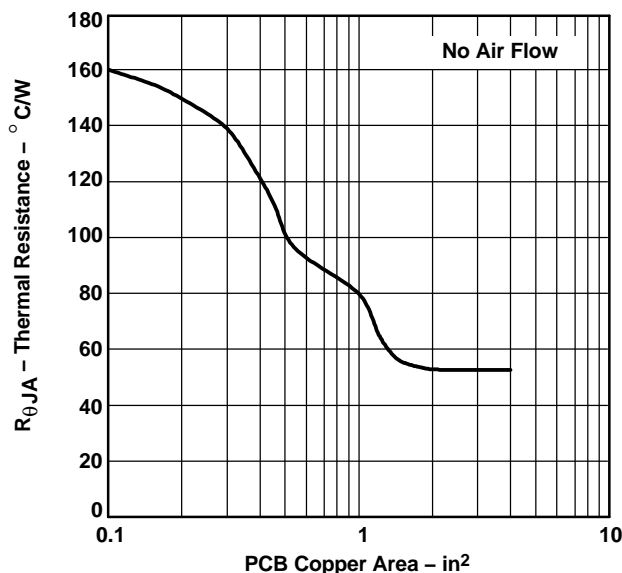


Figure 23. SOT223 Thermal Resistance vs PCB AREA

From the data in Figure 23 and rearranging Equation 4, the maximum power dissipation for a different ground plane area and a specific ambient temperature can be computed (as shown in Figure 24).

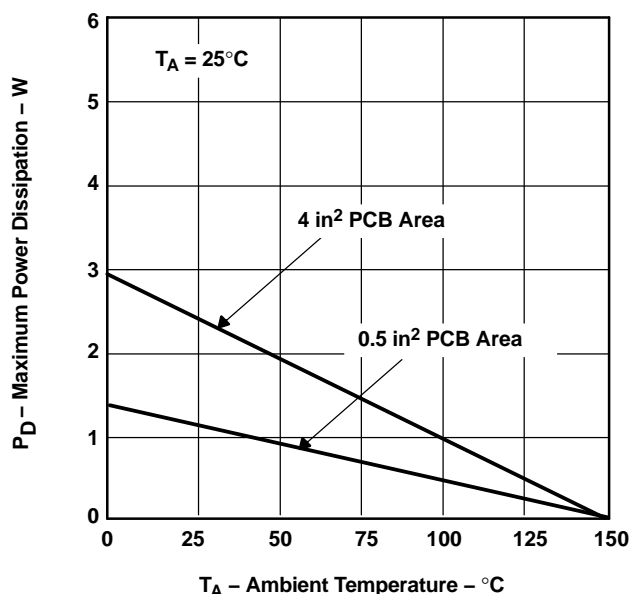


Figure 24. SOT223 Power Dissipation

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type     | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|------------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TPS726126DCQ     | ACTIVE                | SOP              | DCQ             | 6    | 78          | Green (RoHS & no Sb/Br) | Call TI          | Level-2-260C-1 YEAR          |
| TPS726126DCQR    | ACTIVE                | SOP              | DCQ             | 6    | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-2-260C-1 YEAR          |
| TPS72615DCQ      | ACTIVE                | SOP              | DCQ             | 6    | 78          | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72615DCQR     | ACTIVE                | SOP              | DCQ             | 6    | 2500        | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72615KTT      | OBSOLETE              | DDPAK/<br>TO-263 | KTT             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS72615KTTR     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 500         | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72615KTTT     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 50          | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72616DCQ      | ACTIVE                | SOP              | DCQ             | 6    | 78          | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72616DCQR     | ACTIVE                | SOP              | DCQ             | 6    | 2500        | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72616KTT      | OBSOLETE              | DDPAK/<br>TO-263 | KTT             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS72616KTTR     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 500         | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72616KTTT     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 50          | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72618DCQ      | ACTIVE                | SOP              | DCQ             | 6    | 78          | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72618DCQR     | ACTIVE                | SOP              | DCQ             | 6    | 2500        | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72618KTT      | OBSOLETE              | DDPAK/<br>TO-263 | KTT             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS72618KTTR     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 500         | TBD                     | Call TI          | Level-3-220C-168 HR          |
| TPS72618KTTT     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 50          | TBD                     | Call TI          | Level-3-220C-168 HR          |
| TPS72625DCQ      | ACTIVE                | SOP              | DCQ             | 6    | 78          | TBD                     | Call TI          | Call TI                      |
| TPS72625DCQR     | ACTIVE                | SOP              | DCQ             | 6    | 2500        | TBD                     | Call TI          | Call TI                      |
| TPS72625KTT      | OBSOLETE              | DDPAK/<br>TO-263 | KTT             | 5    |             | TBD                     | Call TI          | Call TI                      |
| TPS72625KTTR     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 500         | TBD                     | Call TI          | Level-3-235C-168 HR          |
| TPS72625KTTT     | ACTIVE                | DDPAK/<br>TO-263 | KTT             | 5    | 50          | TBD                     | Call TI          | Level-3-235C-168 HR          |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered

at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## DCQ (R-PDSO-G6)

## PLASTIC SMALL-OUTLINE

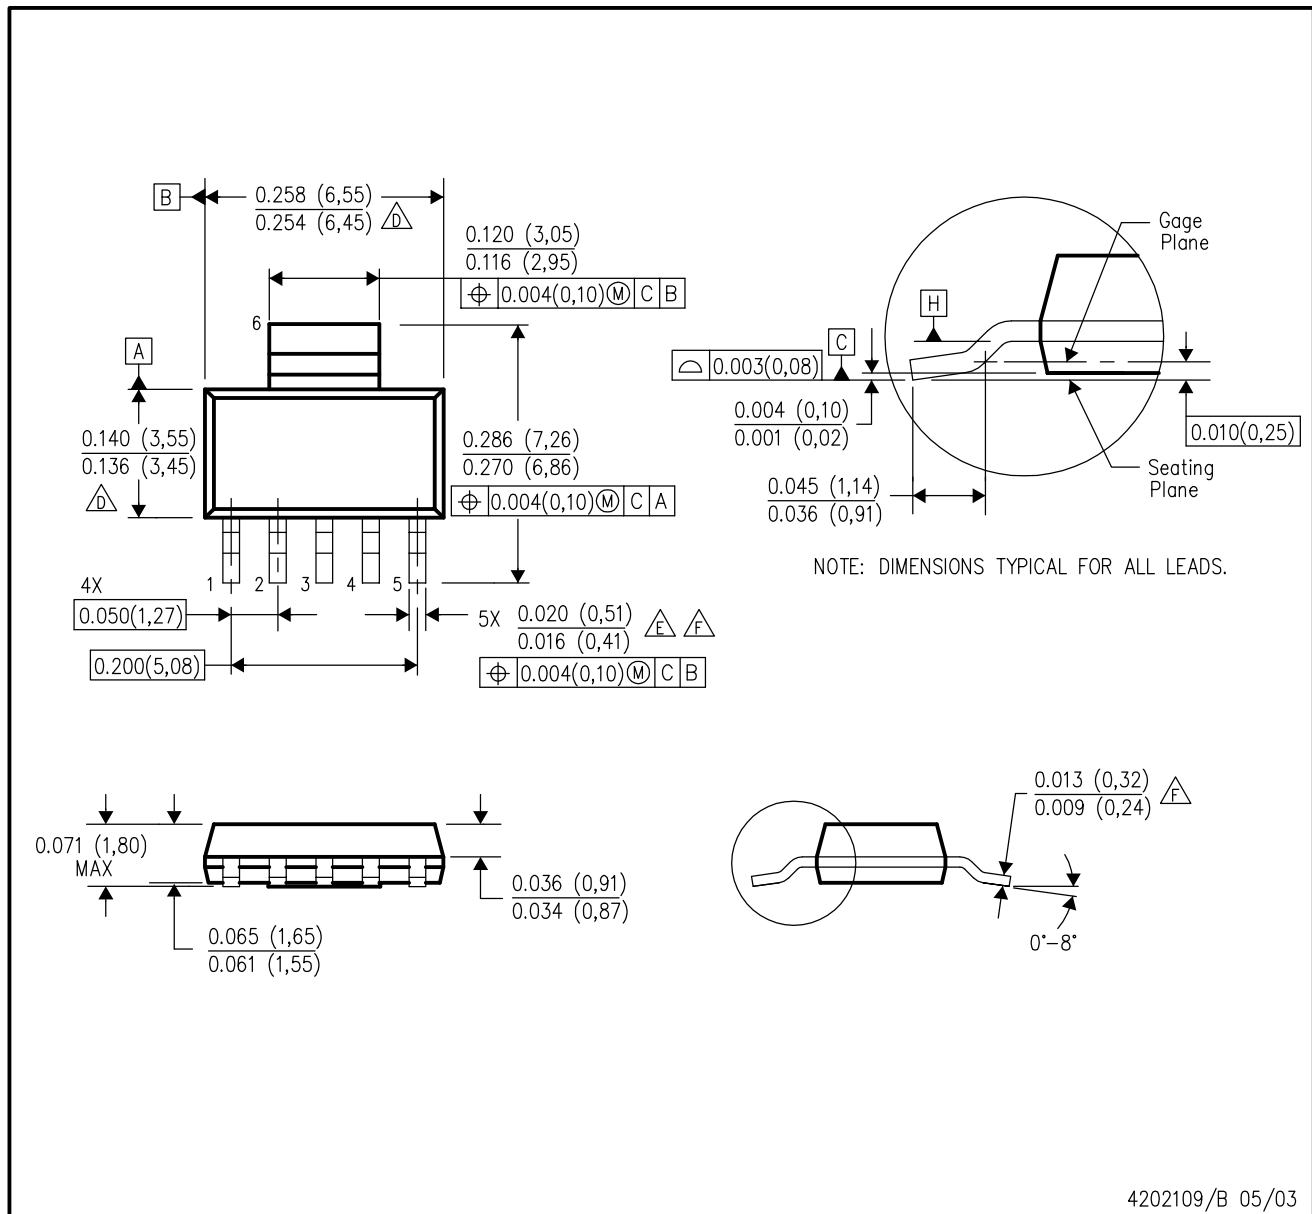


## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Controlling dimension in inches.
- Body length and width dimensions are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs, and interlead flash, but including any mismatch between the top and the bottom of the plastic body.
- Lead width dimension does not include dambar protrusion.
- Lead width and thickness dimensions apply to solder plated leads.
- G. Interlead flash allow 0.008 inch max.
- H. Gate burr/protrusion max. 0.006 inch.
- I. Datums A and B are to be determined at Datum H.
- J. Package dimensions per JEDEC outline drawing T0-261, issue B, dated Feb. 1999. This variation is not yet included.

## KTT (R-PSFM-G5)

## PLASTIC FLANGE-MOUNT PACKAGE

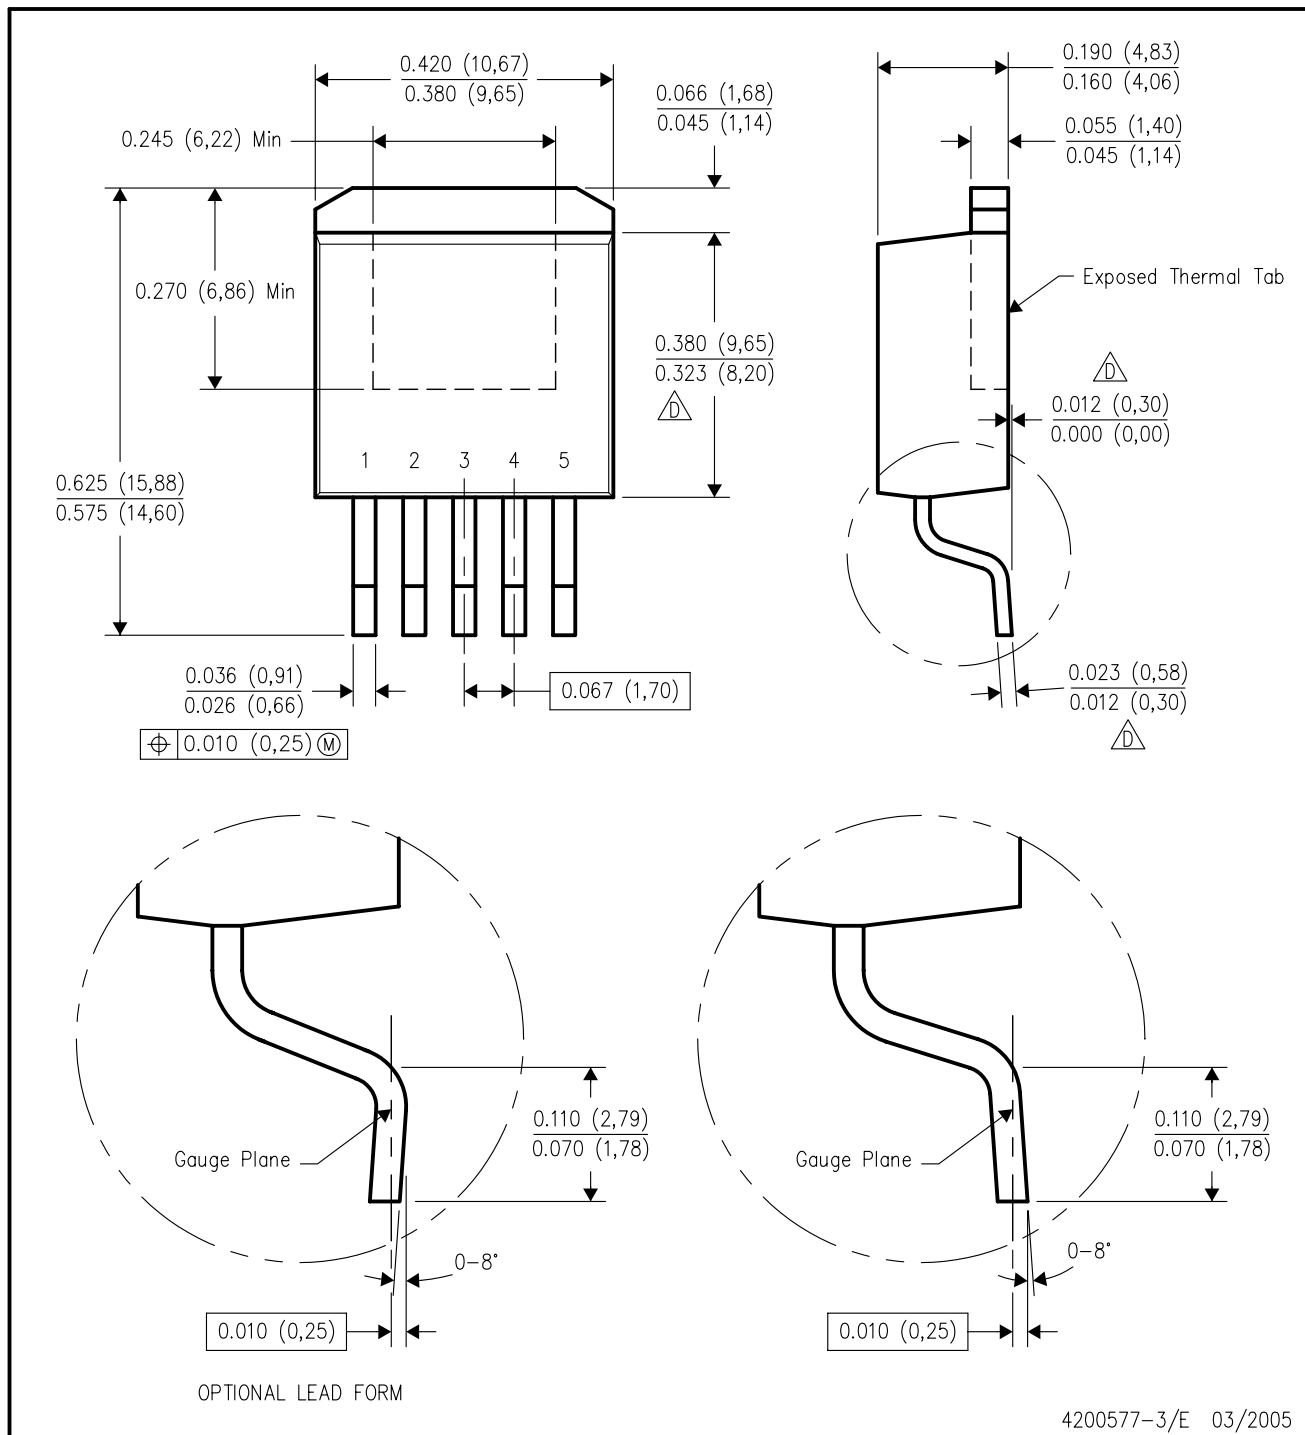

4200577-3/E 03/2005

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion. Mold flash or protrusion not to exceed 0.005 (0,13) per side.
- Ⓢ Falls within JEDEC TO-263 variation BA, except minimum lead thickness, maximum seating height, and minimum body length.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |  | <b>Applications</b> |  |
|------------------|--|---------------------|--|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |  | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |  | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |  | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated