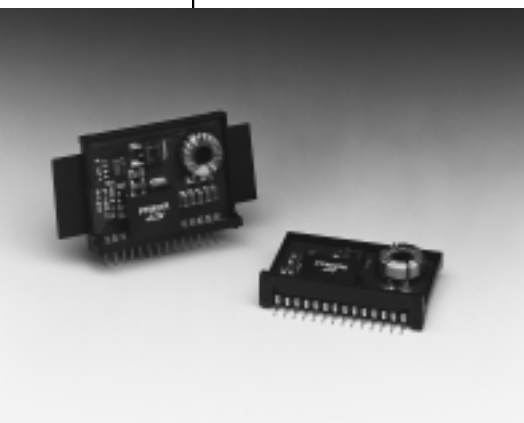


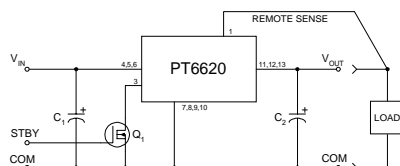
PT6620 Series**6 AMP 12V INPUT
INTEGRATED SWITCHING REGULATOR**[Application Notes](#)
[Mechanical Outline](#)
[Product Selector Guide](#)

- Single Device: 6A Output
- Input Voltage Range: 9V to 14V
- Adjustable Output Voltage
- 83% Efficiency
- Remote Sense Capability
- Standby Function
- Over-Temperature Protection

The PT6620 series is a new addition to Power Trends' line of 12V bus Integrated Switching Regulators (ISRs).

Designed for stand-alone operation in applications requiring as much as 6A of output current, the PT6620 is packaged in a 14-Pin SIP (Single In-line Package) and is available in a surface-mount configuration.

Only two external capacitors are required for proper operation. Please note that this product does not include short circuit protection.

Standard Application

C₁ = Required 330µF electrolytic
C₂ = Required 330µF electrolytic
Q₁ = NFET-or Open Collector Gate

Pin-Out Information


Pin	Function
1	Remote Sense
2	Do Not Connect
3	STBY*- Standby
4	V _{in}
5	V _{in}
6	V _{in}
7	GND
8	GND
9	GND
10	GND
11	V _{out}
12	V _{out}
13	V _{out}
14	V _{out} Adjust

Ordering Information

PT6621□ = +3.3 Volts
PT6622□ = +1.5 Volts
PT6623□ = +2.5 Volts
PT6624□ = +3.6 Volts
PT6625□ = +5.0 Volts
PT6626□ = +9.0 Volts

PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Spreader	Heat Spreader with Side Tabs
Vertical Through-Hole	P	R
Horizontal Through-Hole	D	G
Horizontal Surface Mount	E	B



Note: Back surface of product is conducting metal

Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT6620 SERIES			
			Min	Typ	Max	Units
Output Current	I _o	T _a = 60°C, 200 LFM, pkg P T _a = 25°C, natural convection	0.1* 0.1*	—	6.0** 6.5**	A A
Input Voltage Range	V _{in}	0.1A ≤ I _o ≤ 6.0A V _o ≤ +5V +6V ≤ V _o ≤ +9V	+9 V _o +3	—	+14 +14	V V
Output Voltage Tolerance T _a = 0 to 60°C	ΔV _o	V _{in} = +12V, I _o = 6.0A	V _o -0.1	—	V _o +0.1	V
Output Voltage Adjust Range	V _{oadj}	Pin 14 to V _o or ground V _o = +3.3V V _o = +1.5V V _o = +2.5V V _o = +3.6V V _o = +5.0V V _o = +9.0V	2.3 1.4 1.9 2.5 2.9 5.2	— — — — — —	4.5 2.7 3.7 4.8 6.5 10.0	V
Line Regulation	Reg _{line}	+9V ≤ V _{in} ≤ +14V, I _o = 6.0A	—	±0.5	±1.0	% V _o
Load Regulation	Reg _{load}	V _{in} = +12V, 0.1 ≤ I _o ≤ 6.0A	—	±0.5	±1.0	% V _o
V _o Ripple/Noise	V _n	V _{in} = +12V, I _o = 6.0A V _o ≤ +6V V _o > +6V	— —	50 1.0	— —	mVpp % V _o
Transient Response with C ₂ = 330µF	t _{tr} V _{os}	I _o step between 3.0A and 6.0A V _o over/undershoot	— —	100 150	— —	µSec mV
Efficiency	η	V _{in} = +12V, I _o = 3.0A V _o = +3.3/3.6V V _o = +1.5V V _o = +2.5V V _o = +5.0V V _o = +9.0V	— — — — — —	84 68 76 86 93	— — — — —	% % % % %
		V _{in} = +12V, I _o = 6.0A V _o = +3.3/3.6V V _o = +1.5V V _o = +2.5V V _o = +5.0V V _o = +9.0V	— — — — — —	83 66 75 85 92	— — — — —	% % % % %

* ISR will operate down to no load with reduced specifications.

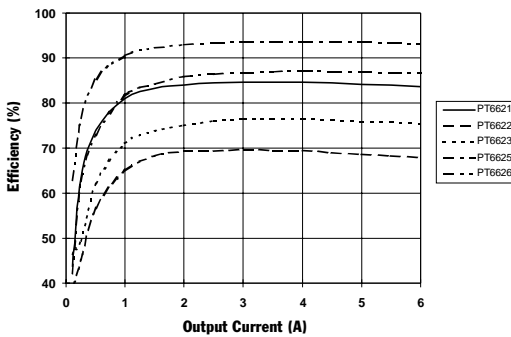
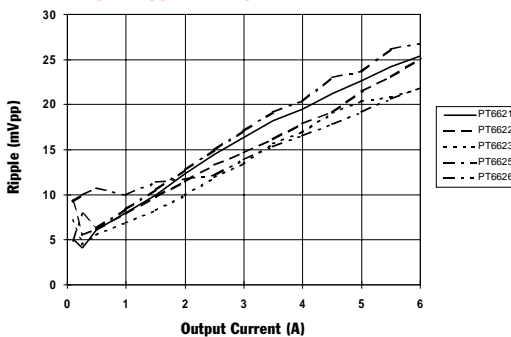
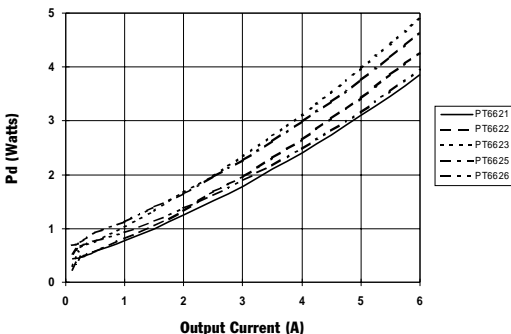
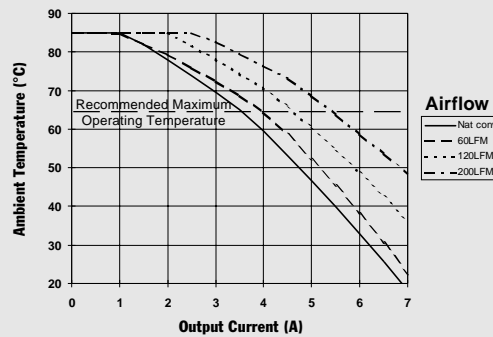
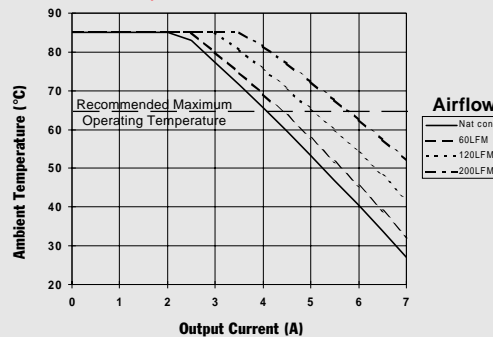
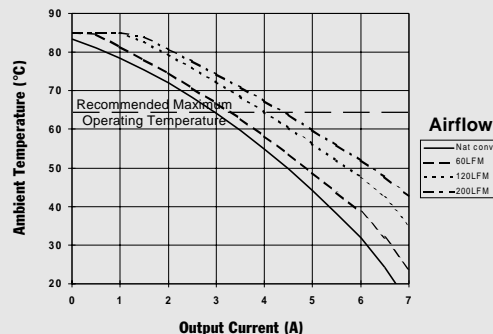
** See SOA curves - Output power is limited to 30W maximum.

Note: The PT6620 Series requires a 330µF (output) and 330µF (input) electrolytic capacitors for proper operation in all applications.

PT6620 Series**Specifications (continued)**

Characteristics ($T_a = 25^\circ\text{C}$ unless noted)	Symbols	Conditions	PT6620 SERIES			Units
			Min	Typ	Max	
Switching Frequency	f_o	$9\text{V} \leq V_{in} \leq 14\text{V}$ $0.1\text{A} \leq I_o \leq 6.0\text{A}$ PT6622	500 500	650 550	775 600	kHz kHz
Recommended Operating Temperature Range	T_a	Free Air Convection (40-60 LFM) Over V_{in} and I_o ranges with heat tab	-40	—	+65**	$^\circ\text{C}$
Absolute Maximum Operating Temperature Range	T_a		-40	—	+85	$^\circ\text{C}$
Storage Temperature	T_s	—	-40	—	+125	$^\circ\text{C}$
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, soldered in a PC board	—	7.5	—	G's
Weight	—	—	—	14	—	grams

** See SOA curves - Output power is limited to 30W maximum.

Note: The PT6620 Series requires a 330 μF (output) and 100 μF (input) electrolytic capacitors for proper operation in all applications.**CHARACTERISTIC DATA****PT6620 Series @ $V_{in}=+12\text{V}$** **Efficiency vs Output Current****Output Ripple vs Output Current****Power Dissipation vs Output Current****Safe Operating Area Curves @ $V_{in}=+12\text{V}$** **PT6621P, 3.3V****PT6622P, 1.5V****PT6625P, 5.0V****Note:** SOA curves represent operating conditions at which internal components are at or below manufacturer's maximum rated operating temperatures.

[More Application Notes](#)**Adjusting the Output Voltage of the PT6620 7Amp12V Bus Converter Series**

The output voltage of the Power Trends PT6650 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as V_a (min) and V_a (max).

Adjust Up: An increase in the output voltage is obtained by adding a resistor R_2 , between pin 14 (V_o adjust) and pins 7-10 (GND).

Adjust Down: Add a resistor (R_1), between pin 14 (V_o adjust) and pins 11-13 (V_{out}).

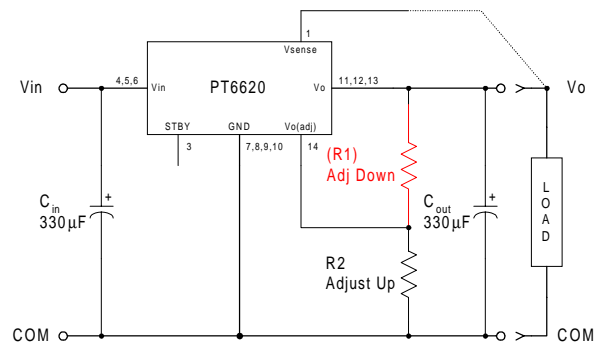
Refer to Figure 1 and Table 2 for both the placement and value of the required resistor, either (R_1) or R_2 as appropriate.

Notes:

1. Use only a single 1% resistor in either the (R_1) or R_2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors from V_o adjust to either GND, V_{out} , or the Remote Sense pin. Any capacitance added to the V_o adjust pin will affect the stability of the ISR.
3. If the Remote Sense feature is being used, connecting the resistor (R_1) between pin 14 (V_o adjust) and pin 1 (Remote Sense) can benefit load regulation.
4. The minimum input voltage required by the part is $V_{out} + 3$, or 9V, whichever is higher.
5. The maximum output current must be limited to the equivalent of 30Watts.

$$\text{i.e. } I_{out}(\text{max}) = \frac{12}{V_a} \quad \text{Adc,}$$

where V_a is the adjusted output voltage.

Figure 1

The values of (R_1) [adjust down], and R_2 [adjust up], can also be calculated using the following formulae.

$$(R_1) = \frac{R_o (V_a - 1.25)}{(V_o - V_a)} - R_s \quad \text{k}\Omega$$

$$R_2 = \frac{1.25 R_o}{V_a - V_o} - R_s \quad \text{k}\Omega$$

Where: V_o = Original output voltage
 V_a = Adjusted output voltage
 R_o = The resistance value in Table 1
 R_s = The series resistance from Table 1

Table 1**PT6620 ADJUSTMENT AND FORMULA PARAMETERS**

Series Pt #	PT6622	PT6623	PT6621	PT6624	PT6625	PT6626
V_o (nom)	1.5V	2.5V	3.3V	3.6V	5.0V	9.0V
V_a (min)	1.4V	1.9V	2.3V	2.5V	2.9V	5.2V
V_a (max)	2.7V	3.7V	4.5V	4.8V	6.5V	10.0V
R_o (k Ω)	4.99	10.0	12.1	12.1	16.2	12.1
R_s (k Ω)	2.49	4.99	12.1	12.1	12.1	12.1

PT6620 Series**Application****Notes****Table 2****PT6620 ADJUSTMENT RESISTOR VALUES**

Series Pt #	PT6622	PT6623	PT6621	PT6624	PT6625
Current	7.5A _{dc}	7.5A _{dc}	7.5A _{dc}	7.5A _{dc}	6.0A _{dc}
V _o (nom)	1.5V _{dc}	2.5V _{dc}	3.3V _{dc}	3.6V _{dc}	5.0V _{dc}
V _a (req'd)					
1.4	(5.0)kΩ				
1.5					
1.6	59.9k				
1.7	28.7k				
1.8	18.3k				
1.9	13.1k	(5.8)kΩ			
2.0	10.0k	(10.0)kΩ			
2.1	7.9k	(16.3)kΩ			
2.2	6.4k	(26.7)kΩ			
2.3	5.3k	(47.5)kΩ	(0.6)kΩ		
2.4	4.4k	(110.0)kΩ	(3.4)kΩ		
2.5	3.8k		(6.8)kΩ	(1.7)kΩ	
2.6	3.2k	120.0k	(11.2)kΩ	(4.2)kΩ	
2.7		57.5k	(17.1)kΩ	(7.4)kΩ	
2.8		36.7k	(25.4)kΩ	(11.3)kΩ	
2.9		26.3k	(37.8)kΩ	(16.4)kΩ	(0.6)kΩ
3.0		20.0k	(58.5)kΩ	(23.2)kΩ	(2.1)kΩ
3.1		15.8k	(99.8)kΩ	(32.7)kΩ	(3.7)kΩ
3.2		12.9k	(224.0)kΩ	(46.9)kΩ	(5.5)kΩ
3.3		10.6k		(70.6)kΩ	(7.4)kΩ
3.4		8.9k	139.0k	(118.0)kΩ	(9.7)kΩ
3.5		7.5k	63.5k	(260.0)kΩ	(12.2)kΩ
3.6		6.4k	38.3k		(15.1)kΩ
3.7		5.4k	25.7k	139.0k	(18.4)kΩ
3.8			18.2k	63.5k	(22.3)kΩ
3.9			13.1k	38.3k	(26.9)kΩ
4.0			9.5k	25.7k	(32.5)kΩ
4.1			6.8k	18.2k	(39.2)kΩ
4.2			4.7k	13.1k	(47.6)kΩ
4.3			3.0k	9.5k	(58.5)kΩ
4.4			1.7k	6.8k	(73.0)kΩ
4.5			0.5k	4.7k	(93.2)kΩ
4.6				3.0k	(124.0)kΩ
4.7				1.7k	(174.0)kΩ
4.8				0.5k	(275.0)kΩ
4.9					(579.0)kΩ
5.0					
5.1					190.0k

Series Pt #	PT6625	PT6626
Current	6A _{dc}	3.3A _{dc}
V _o (nom)	5.0V _{dc}	9.0V _{dc}
V _a (req'd)		
5.2	89.1k	(0.5)kΩ
5.3	55.4k	(1.1)kΩ
5.4	38.5k	(1.9)kΩ
5.5	28.4k	(2.6)kΩ
5.6	21.7k	(3.4)kΩ
5.7	16.8k	(4.2)kΩ
5.8	13.2k	(5.1)kΩ
5.9	10.4k	(6.1)kΩ
6.0	8.2k	(7.1)kΩ
6.1	6.3k	(8.1)kΩ
6.2	4.8k	(9.3)kΩ
6.3	3.5k	(10.5)kΩ
6.4	2.4k	(11.9)kΩ
6.5	1.4k	(13.3)kΩ
6.6		(14.9)kΩ
6.7		(16.6)kΩ
6.8		(18.4)kΩ
6.9		(20.5)kΩ
7.0		(22.7)kΩ
7.1		(25.2)kΩ
7.2		(27.9)kΩ
7.3		(31.0)kΩ
7.4		(34.4)kΩ
7.5		(38.3)kΩ
7.6		(42.8)kΩ
7.8		(53.9)kΩ
8.0		(69.6)kΩ
8.2		(93.0)kΩ
8.4		(132.0)kΩ
8.6		(210.0)kΩ
8.8		(445.0)kΩ
9.0		
9.2		63.5k
9.4		25.7k
9.6		13.1k
9.8		6.8k
10.0		3.0k

R1 = (Red) R2 = Black

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.