

# **TVP5146**

**NTSC/PAL/SECAM 4x10-Bit Digital Video Decoder With  
Macrovision™ Detection, YPbPr/RGB Inputs, 5-Line  
Comb Filter and SCART Support**

## *Data Manual*

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>  |                                                                    | <b>Applications</b> |                                                                          |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
|                  |                                                                    | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                  |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                  |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303, Dallas, Texas 75265

Copyright © 2004, Texas Instruments Incorporated

# Contents

| <i>Section</i> | <i>Title</i>                                           | <i>Page</i> |
|----------------|--------------------------------------------------------|-------------|
| <b>1</b>       | <b>Introduction .....</b>                              | <b>1-1</b>  |
| 1.1            | Detailed Functionality .....                           | 1-2         |
| 1.2            | Applications .....                                     | 1-3         |
| 1.3            | Related Products .....                                 | 1-3         |
| 1.4            | Ordering Information .....                             | 1-3         |
| 1.5            | Functional Block Diagram .....                         | 1-4         |
| 1.6            | Terminal Assignments .....                             | 1-5         |
| 1.7            | Terminal Functions .....                               | 1-6         |
| <b>2</b>       | <b>Functional Description .....</b>                    | <b>2-1</b>  |
| 2.1            | Analog Processing and A/D Converters .....             | 2-1         |
| 2.1.1          | Video Input Switch Control .....                       | 2-1         |
| 2.1.2          | Analog Input Clamping .....                            | 2-2         |
| 2.1.3          | Automatic Gain Control .....                           | 2-2         |
| 2.1.4          | A/D Converters .....                                   | 2-2         |
| 2.2            | Digital Video Processing .....                         | 2-2         |
| 2.2.1          | 2× Decimation Filter .....                             | 2-3         |
| 2.2.2          | Composite Processor .....                              | 2-3         |
| 2.2.3          | Luminance Processing .....                             | 2-7         |
| 2.2.4          | Component Video Processor .....                        | 2-8         |
| 2.2.5          | Color Space Conversion .....                           | 2-9         |
| 2.3            | Clock Circuits .....                                   | 2-9         |
| 2.4            | Real-Time Control (RTC) .....                          | 2-9         |
| 2.5            | Output Formatter .....                                 | 2-10        |
| 2.5.1          | Fast Switches for SCART .....                          | 2-11        |
| 2.5.2          | Separate Syncs .....                                   | 2-11        |
| 2.5.3          | Embedded Syncs .....                                   | 2-16        |
| 2.6            | I <sup>2</sup> C Host Interface .....                  | 2-16        |
| 2.6.1          | Reset and I <sup>2</sup> C Bus Address Selection ..... | 2-17        |
| 2.6.2          | I <sup>2</sup> C Operation .....                       | 2-17        |
| 2.6.3          | VBUS Access .....                                      | 2-17        |
| 2.6.4          | I <sup>2</sup> C Timing Requirements .....             | 2-19        |
| 2.7            | VBI Data Processor .....                               | 2-19        |
| 2.7.1          | VBI FIFO and Ancillary Data in Video Stream .....      | 2-20        |
| 2.7.2          | VBI Raw Data Output .....                              | 2-21        |
| 2.8            | Reset and Initialization .....                         | 2-21        |
| 2.9            | Adjusting External Syncs .....                         | 2-22        |
| 2.10           | Internal Control Registers .....                       | 2-22        |

|         |                                                 |      |
|---------|-------------------------------------------------|------|
| 2.11    | Register Definitions .....                      | 2-27 |
| 2.11.1  | Input Select Register .....                     | 2-27 |
| 2.11.2  | AFE Gain Control Register .....                 | 2-28 |
| 2.11.3  | Video Standard Register .....                   | 2-28 |
| 2.11.4  | Operation Mode Register .....                   | 2-29 |
| 2.11.5  | Autoswitch Mask Register .....                  | 2-29 |
| 2.11.6  | Color Killer Register .....                     | 2-30 |
| 2.11.7  | Luminance Processing Control 1 Register .....   | 2-30 |
| 2.11.8  | Luminance Processing Control 2 Register .....   | 2-31 |
| 2.11.9  | Luminance Processing Control 3 Register .....   | 2-31 |
| 2.11.10 | Luminance Brightness Register .....             | 2-31 |
| 2.11.11 | Luminance Contrast Register .....               | 2-32 |
| 2.11.12 | Chrominance Saturation Register .....           | 2-32 |
| 2.11.13 | Chroma Hue Register .....                       | 2-32 |
| 2.11.14 | Chrominance Processing Control 1 Register ..... | 2-33 |
| 2.11.15 | Chrominance Processing Control 2 Register ..... | 2-33 |
| 2.11.16 | Component Pr Saturation Register .....          | 2-33 |
| 2.11.17 | Component Y Contrast Register .....             | 2-34 |
| 2.11.18 | Component Pb Saturation Register .....          | 2-34 |
| 2.11.19 | Component Y Brightness Register .....           | 2-34 |
| 2.11.20 | AVID Start Pixel Register .....                 | 2-35 |
| 2.11.21 | AVID Stop Pixel Register .....                  | 2-35 |
| 2.11.22 | HSYNC Start Pixel Register .....                | 2-35 |
| 2.11.23 | HSYNC Stop Pixel Register .....                 | 2-36 |
| 2.11.24 | VSYNC Start Line Register .....                 | 2-36 |
| 2.11.25 | VSYNC Stop Line Register .....                  | 2-36 |
| 2.11.26 | VBLK Start Line Register .....                  | 2-36 |
| 2.11.27 | VBLK Stop Line Register .....                   | 2-37 |
| 2.11.28 | Fast-Switch Control Register .....              | 2-37 |
| 2.11.29 | Fast-Switch SCART Delay Register .....          | 2-37 |
| 2.11.30 | SCART Delay Register .....                      | 2-38 |
| 2.11.31 | CTI Delay Register .....                        | 2-38 |
| 2.11.32 | CTI Control Register .....                      | 2-38 |
| 2.11.33 | RTC Register .....                              | 2-39 |
| 2.11.34 | Sync Control Register .....                     | 2-39 |
| 2.11.35 | Output Formatter 1 Register .....               | 2-40 |
| 2.11.36 | Output Formatter 2 Register .....               | 2-40 |
| 2.11.37 | Output Formatter 3 Register .....               | 2-41 |
| 2.11.38 | Output Formatter 4 Register .....               | 2-42 |
| 2.11.39 | Output Formatter 5 Register .....               | 2-43 |
| 2.11.40 | Output Formatter 6 Register .....               | 2-44 |
| 2.11.41 | Clear Lost Lock Detect Register .....           | 2-44 |
| 2.11.42 | Status 1 Register .....                         | 2-45 |
| 2.11.43 | Status 2 Register .....                         | 2-46 |

|         |                                                                   |      |
|---------|-------------------------------------------------------------------|------|
| 2.11.44 | AGC Gain Status Register .....                                    | 2-46 |
| 2.11.45 | Video Standard Status Register .....                              | 2-47 |
| 2.11.46 | GPIO Input 1 Register .....                                       | 2-47 |
| 2.11.47 | GPIO Input 2 Register .....                                       | 2-48 |
| 2.11.48 | Vertical Line Count Register .....                                | 2-48 |
| 2.11.49 | AFE Coarse Gain for CH 1 Register .....                           | 2-49 |
| 2.11.50 | AFE Coarse Gain for CH 2 Register .....                           | 2-49 |
| 2.11.51 | AFE Coarse Gain for CH 3 Register .....                           | 2-50 |
| 2.11.52 | AFE Coarse Gain for CH 4 Register .....                           | 2-50 |
| 2.11.53 | AFE Fine Gain for Pb_B Register .....                             | 2-51 |
| 2.11.54 | AFE Fine Gain for Y_G_Chroma Register .....                       | 2-51 |
| 2.11.55 | AFE Fine Gain for R_Pr Register .....                             | 2-52 |
| 2.11.56 | AFE Fine Gain for CVBS_Luma Register .....                        | 2-52 |
| 2.11.57 | ROM Version Register .....                                        | 2-52 |
| 2.11.58 | AGC White Peak Processing Register .....                          | 2-53 |
| 2.11.59 | AGC Increment Speed Register .....                                | 2-54 |
| 2.11.60 | AGC Increment Delay Register .....                                | 2-54 |
| 2.11.61 | Chip ID MSB Register .....                                        | 2-54 |
| 2.11.62 | Chip ID LSB Register .....                                        | 2-54 |
| 2.11.63 | VDP TTX Filter And Mask Registers .....                           | 2-55 |
| 2.11.64 | VDP TTX Filter Control Register .....                             | 2-56 |
| 2.11.65 | VDP FIFO Word Count Register .....                                | 2-57 |
| 2.11.66 | VDP FIFO Interrupt Threshold Register .....                       | 2-58 |
| 2.11.67 | VDP FIFO Reset Register .....                                     | 2-58 |
| 2.11.68 | VDP FIFO Output Control Register .....                            | 2-58 |
| 2.11.69 | VDP Line Number Interrupt Register .....                          | 2-58 |
| 2.11.70 | VDP Pixel Alignment Register .....                                | 2-59 |
| 2.11.71 | VDP Line Start Register .....                                     | 2-59 |
| 2.11.72 | VDP Line Stop Register .....                                      | 2-59 |
| 2.11.73 | VDP Global Line Mode Register .....                               | 2-59 |
| 2.11.74 | VDP Full Field Enable Register .....                              | 2-60 |
| 2.11.75 | VDP Full Field Mode Register .....                                | 2-60 |
| 2.11.76 | VBUS Data Access With No VBUS Address Increment<br>Register ..... | 2-60 |
| 2.11.77 | VBUS Data Access With VBUS Address Increment<br>Register .....    | 2-60 |
| 2.11.78 | FIFO Read Data Register .....                                     | 2-61 |
| 2.11.79 | VBUS Address Access Register .....                                | 2-61 |
| 2.11.80 | Interrupt Raw Status 0 Register .....                             | 2-62 |
| 2.11.81 | Interrupt Raw Status 1 Register .....                             | 2-63 |
| 2.11.82 | Interrupt Status 0 Register .....                                 | 2-64 |
| 2.11.83 | Interrupt Status 1 Register .....                                 | 2-65 |
| 2.11.84 | Interrupt Mask 0 Register .....                                   | 2-66 |
| 2.11.85 | Interrupt Mask 1 Register .....                                   | 2-67 |

|          |                                                       |            |
|----------|-------------------------------------------------------|------------|
| 2.11.86  | Interrupt Clear 0 Register .....                      | 2-68       |
| 2.11.87  | Interrupt Clear 1 Register .....                      | 2-69       |
| 2.12     | VBUS Register Definitions .....                       | 2-70       |
| 2.12.1   | VDP Closed Caption Data Register .....                | 2-70       |
| 2.12.2   | VDP WSS Data Register .....                           | 2-70       |
| 2.12.3   | VDP VITC Data Register .....                          | 2-71       |
| 2.12.4   | VDP V-Chip TV Rating Block 1 Register .....           | 2-71       |
| 2.12.5   | VDP V-Chip TV Rating Block 2 Register .....           | 2-71       |
| 2.12.6   | VDP V-Chip TV Rating Block 3 Register .....           | 2-72       |
| 2.12.7   | VDP V-Chip MPAA Rating Data Register .....            | 2-72       |
| 2.12.8   | VDP General Line Mode and Line Address Register ..... | 2-73       |
| 2.12.9   | VDP VPS/Gemstar Data Register .....                   | 2-74       |
| 2.12.10  | VDP FIFO Read Register .....                          | 2-74       |
| 2.12.11  | Interrupt Configuration Register .....                | 2-75       |
| <b>3</b> | <b>Electrical Specifications .....</b>                | <b>3-1</b> |
| 3.1      | Absolute Maximum Ratings .....                        | 3-1        |
| 3.2      | Recommended Operating Conditions .....                | 3-1        |
| 3.2.1    | Crystal Specifications .....                          | 3-1        |
| 3.3      | Electrical Characteristics .....                      | 3-2        |
| 3.3.1    | DC Electrical Characteristics .....                   | 3-2        |
| 3.3.2    | Analog Processing and A/D Converters .....            | 3-2        |
| 3.3.3    | Timing .....                                          | 3-3        |
| <b>4</b> | <b>Example Register Settings .....</b>                | <b>4-1</b> |
| 4.1      | Example 1 .....                                       | 4-1        |
| 4.1.1    | Assumptions .....                                     | 4-1        |
| 4.1.2    | Recommended Settings .....                            | 4-1        |
| 4.2      | Example 2 .....                                       | 4-2        |
| 4.2.1    | Assumptions .....                                     | 4-2        |
| 4.2.2    | Recommended Settings .....                            | 4-2        |
| 4.3      | Example 3 .....                                       | 4-3        |
| 4.3.1    | Assumptions .....                                     | 4-3        |
| 4.3.2    | Recommended Settings .....                            | 4-3        |
| <b>5</b> | <b>Application Information .....</b>                  | <b>5-1</b> |
| 5.1      | Application Example .....                             | 5-1        |
| 5.2      | Designing With PowerPAD .....                         | 5-2        |
| <b>6</b> | <b>Mechanical Data .....</b>                          | <b>6-1</b> |

## List of Illustrations

| <i>Figure</i> | <i>Title</i>                                                                            | <i>Page</i> |
|---------------|-----------------------------------------------------------------------------------------|-------------|
| 1-1           | Functional Block Diagram .....                                                          | 1-4         |
| 1-2           | Terminal Assignments Diagram .....                                                      | 1-5         |
| 2-1           | Analog Processors and A/D Converters .....                                              | 2-1         |
| 2-2           | Digital Video Processor Block Diagram .....                                             | 2-3         |
| 2-3           | Composite and S-Video Processor Block Diagram .....                                     | 2-4         |
| 2-4           | Color Low-Pass Filter Frequency Response .....                                          | 2-5         |
| 2-5           | Color Low-Pass Filter With Filter Frequency Response, NTSC Square Pixel Sampling .....  | 2-5         |
| 2-6           | Color Low-Pass Filter With Filter Characteristics, NTSC/PAL ITU-R BT.601 Sampling ..... | 2-5         |
| 2-7           | Color Low-Pass Filter With Filter Characteristics, PAL Square Pixel Sampling .....      | 2-5         |
| 2-8           | Chroma Trap Filter Frequency Response, NTSC Square Pixel Sampling .....                 | 2-6         |
| 2-9           | Chroma Trap Filter Frequency Response, NTSC ITU-R BT.601 Sampling .....                 | 2-6         |
| 2-10          | Chroma Trap Filter Frequency Response, PAL ITU-R BT.601 Sampling .....                  | 2-6         |
| 2-11          | Chroma Trap Filter Frequency Response, PAL Square Pixel Sampling .....                  | 2-6         |
| 2-12          | Luminance Edge-Enhancer Peaking Block Diagram .....                                     | 2-7         |
| 2-13          | Peaking Filter Response, NTSC Square Pixel Sampling .....                               | 2-7         |
| 2-14          | Peaking Filter Response, NTSC/PAL ITU-R BT.601 Sampling .....                           | 2-7         |
| 2-15          | Peaking Filter Response, PAL Square Pixel Sampling .....                                | 2-8         |
| 2-16          | Y Component Gain, Offset, Limit .....                                                   | 2-8         |
| 2-17          | CbCr Component Gain, Offset, Limit .....                                                | 2-9         |
| 2-18          | Reference Clock Configurations .....                                                    | 2-9         |
| 2-19          | RTC Timing .....                                                                        | 2-10        |
| 2-20          | Vertical Synchronization Signals for 525-Line System .....                              | 2-12        |
| 2-21          | Vertical Synchronization Signals for 625-Line System .....                              | 2-13        |
| 2-22          | Horizontal Synchronization Signals for 10-Bit 4:2:2 Mode .....                          | 2-14        |
| 2-23          | Horizontal Synchronization Signals for 20-Bit 4:2:2 Mode .....                          | 2-15        |
| 2-24          | VSYNC Position With Respect to HSYNC .....                                              | 2-16        |
| 2-25          | VBUS Access .....                                                                       | 2-18        |

|      |                                           |      |
|------|-------------------------------------------|------|
| 2-26 | Reset Timing .....                        | 2-21 |
| 2-27 | Teletext Filter Function .....            | 2-57 |
| 3-1  | Clocks, Video Data, and Sync Timing ..... | 3-3  |
| 3-2  | I <sup>2</sup> C Host Port Timing .....   | 3-4  |
| 5-1  | Application Example .....                 | 5-1  |

## List of Tables

| <i>Table</i> | <i>Title</i>                                                        | <i>Page</i> |
|--------------|---------------------------------------------------------------------|-------------|
| 1-1          | Terminal Functions .....                                            | 1-6         |
| 2-1          | Output Format .....                                                 | 2-10        |
| 2-2          | Summary of Line Frequencies, Data Rates, and Pixel/Line Counts .... | 2-11        |
| 2-3          | EAV and SAV Sequence .....                                          | 2-16        |
| 2-4          | I <sup>2</sup> C Host Interface Terminal Description .....          | 2-17        |
| 2-5          | I <sup>2</sup> C Address Selection .....                            | 2-17        |
| 2-6          | Supported VBI Systems .....                                         | 2-19        |
| 2-7          | Ancillary Data Format and Sequence .....                            | 2-20        |
| 2-8          | VBI Raw Data Output Format .....                                    | 2-21        |
| 2-9          | Reset Sequence .....                                                | 2-21        |
| 2-10         | Register Summary .....                                              | 2-23        |
| 2-11         | VBUS Register Summary .....                                         | 2-26        |
| 2-12         | Analog Channel and Video Mode Selection .....                       | 2-27        |



# 1 Introduction

The TVP5146 device is a high quality, single-chip digital video decoder that digitizes and decodes all popular baseband analog video formats into digital component video. The TVP5146 decoder supports the analog-to-digital (A/D) conversion of component RGB and YPbPr signals, as well as the A/D conversion and decoding of NTSC, PAL, and SECAM composite and S-video into component YCbCr. This decoder includes four 10-bit 30-MSPS A/D converters (ADCs). Preceding each ADC in the device, the corresponding analog channel contains an analog circuit that clamps the input to a reference voltage and applies a programmable gain and offset. A total of 10 video input terminals can be configured to a combination of RGB, YPbPr, CVBS, or S-video video inputs.

Component, composite, or S-video signals are sampled at  $2\times$  the square-pixel or ITU-R BT.601 clock frequency, line-locked, and are then decimated to the  $1\times$  pixel rate. CVBS decoding utilizes five-line adaptive comb filtering for both the luma and chroma data paths to reduce both cross-luma and cross-chroma artifacts. A chroma trap filter is also available. On CVBS and S-video inputs, the user can control video characteristics such as contrast, brightness, saturation, and hue via an I<sup>2</sup>C host port interface. Furthermore, luma peaking (sharpness) with programmable gain is included, as well as a patented chroma transient improvement (CTI) circuit.

A built-in color space converter is applied to decoded component RGB data.

The following output formats can be selected: 20-bit 4:2:2 YCbCr or 10-bit 4:2:2 YCbCr.

The TVP5146 decoder generates synchronization, blanking, field, active video window, horizontal and vertical syncs, clock, genlock (for downstream video encoder synchronization), host CPU interrupt and programmable logic I/O signals, in addition to digital video outputs.

The TVP5146 decoder includes methods for advanced vertical blanking interval (VBI) data retrieval. The VBI data processor (VDP) slices, parses, and performs error checking on teletext, closed caption (CC), and other VBI data. A built-in FIFO stores up to 11 lines of teletext data, and with proper host port synchronization, full-screen teletext retrieval is possible. The TVP5146 decoder can pass through the output formatter  $2\times$  the sampled raw luma data for host-based VBI processing.

The decoder provides the option for concurrent processing of pixel-locked CVBS and RGB/YPbPr input formats.

The main blocks of the TVP5146 decoder include:

- Robust sync detection for weak and noisy signals as well as VCR trick modes
- Y/C separation by 2-D, 5-line, adaptive comb or chroma trap filter
- Fast-switch input for pixel-by-pixel switching between CVBS and YPbPr/RGB component video inputs (SCART support)
- Four 10-bit, 30-MSPS A/D converters with analog preprocessors [clamp and automatic gain control (AGC)]
- Luminance processor
- Chrominance processor
- Component processor
- Clock/timing processor and power-down control
- Software-controlled power-saving standby mode
- Output formatter
- I<sup>2</sup>C host port interface
- VBI data processor

- Macrovision™ copy protection detection circuit (Type 1, 2, 3, and separate color stripe detection)
- 3.3-V tolerant digital I/O ports

## 1.1 Detailed Functionality

- Four 30-MSPS, 10-bit A/D channels with programmable gain control
- Supports NTSC (J, M, 4.43), PAL (B, D, G, H, I, M, N, Nc, 60), SECAM (B, D, G, K, K1, L), CVBS, and S-video
- Supports analog component SD YPbPr/RGB video formats with embedded sync
- 10 analog video input terminals for multisource connection
- User-programmable video output formats
  - 10-bit ITU-R BT.656 4:2:2 YCbCr with embedded syncs
  - 10-bit 4:2:2 YCbCr with separate syncs
  - 20-bit 4:2:2 YCbCr with separate syncs
  - 2× sampled raw VBI data in active video during a vertical blanking period
  - Sliced VBI data during a vertical blanking period or active video period (full field mode)
- HSYNC/VSYNC outputs with programmable position, polarity, and width, and FID (field ID) output
- Component video processing
  - Gain (contrast) and offset (brightness) adjustments
  - Automatic component video detection (525/625)
  - Color space conversion from RGB to YCbCr
- Composite and S-video processing
  - Adaptive 2-D, 5-line, adaptive comb filter for composite video inputs; chroma trap available
  - Automatic video standard detection (NTSC/PAL/SECAM) and switching
  - Luma-peaking with programmable gain
  - Patented CTI circuit
  - Patented architecture for locking to weak, noisy, or unstable signals
  - Single 14.31818-MHz reference crystal for all standards (ITU-R.BT601 and square pixel)
  - Line-locked internal pixel sampling clock generation with horizontal- and vertical-lock signal outputs
  - Genlock output [real-time control (RTC) format] for downstream video encoder synchronization
- Certified Macrovision™ copy protection detection

Macrovision is a trademark of Macrovision Corporation.  
Other trademarks are the property of their respective owners.

- VBI data processor
  - Teletext (NABTS, WST)
  - CC and extended data service (EDS)
  - Wide screen signaling (WSS)
  - Copy generation management system (CGMS)
  - Video program system (VPS/PDC)
  - Vertical interval time code (VITC)
  - Gemstar™ 1×/2× electronic program guide compatible mode
  - Register readback of CC, WSS (CGMS), VPS/PDC, VITC, and Gemstar 1×/2× sliced data
- I<sup>2</sup>C host port interface
- Reduced power consumption: 1.8-V digital core, 3.3-V for digital I/O, and 1.8-V analog core with power-save and power-down modes
- 80-terminal TQFP PowerPAD™ package

## 1.2 Applications

- Digital TV
- LCD TV/monitors
- DVD-R
- PVR
- PC video cards
- Video capture/video editing
- Video conferencing

## 1.3 Related Products

- *TVP5150A/TVP5150AM1 Ultralow Power NTSC/PAL/SECAM Video Decoder With Robust Sync Detector, (SLES098)*

## 1.4 Ordering Information

| T <sub>A</sub> | PACKAGED DEVICES                        |
|----------------|-----------------------------------------|
|                | 80-TERMINAL PLASTIC FLAT-PACK PowerPAD™ |
| 0°C to 70°C    | TVP5146PFP                              |

Gemstar is a trademark of Gemstar-TV Guide International.  
PowerPAD is a trademark of Texas Instruments.

1.5 Functional Block Diagram


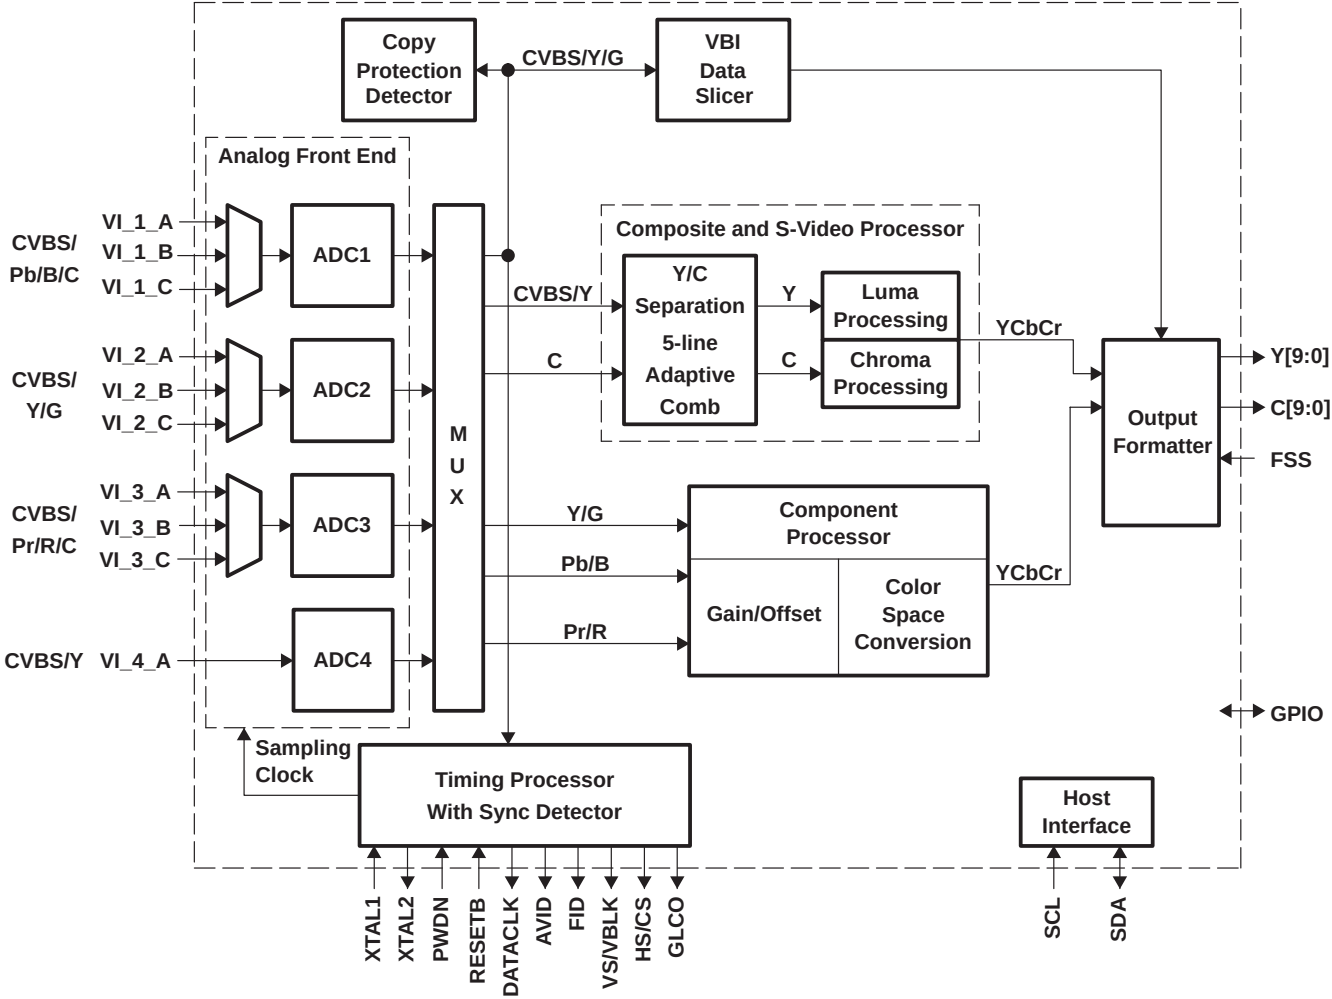


Figure 1-1. Functional Block Diagram

## 1.6 Terminal Assignments

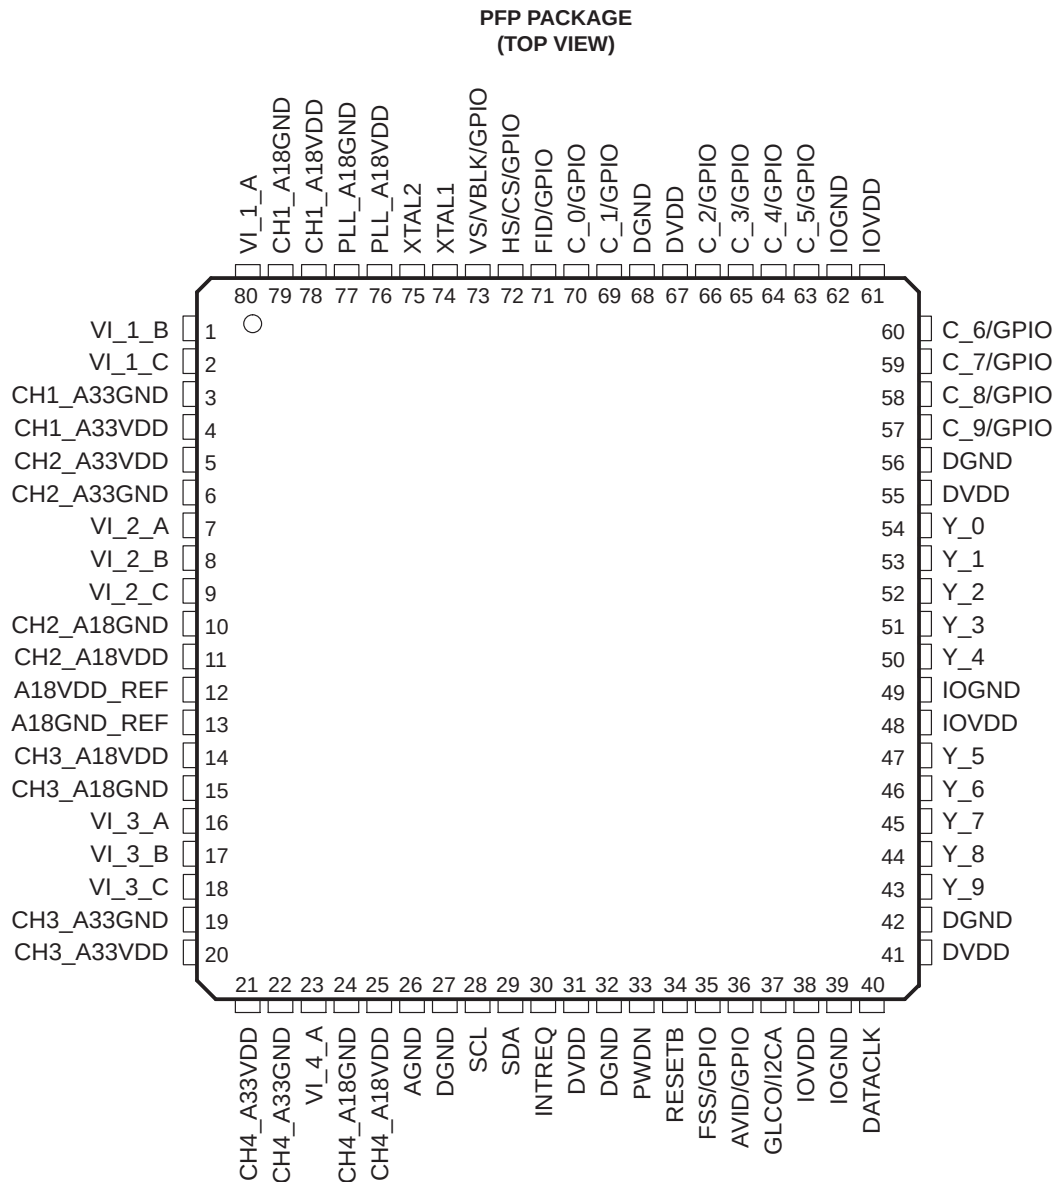

**Figure 1–2. Terminal Assignments Diagram**

## 1.7 Terminal Functions

**Table 1–1. Terminal Functions**

| TERMINAL<br>NAME      NUMBER |                                                    | I/O | DESCRIPTION                                                                                                                                                                                                                                                        |
|------------------------------|----------------------------------------------------|-----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analog Video                 |                                                    |     |                                                                                                                                                                                                                                                                    |
| VI_1_A                       | 80                                                 | I   | VI_1_x: Analog video input for CVBS/Pb/B/C                                                                                                                                                                                                                         |
| VI_1_B                       | 1                                                  |     | VI_2_x: Analog video input for CVBS/Y/G                                                                                                                                                                                                                            |
| VI_1_C                       | 2                                                  |     | VI_3_x: Analog video input for CVBS/Pr/R/C                                                                                                                                                                                                                         |
| VI_2_A                       | 7                                                  |     | VI_4_A: Analog video input for CVBS/Y                                                                                                                                                                                                                              |
| VI_2_B                       | 8                                                  |     | Up to 10 composite, 4 S-video, and 2 composite or 3 component video inputs (or a combination thereof) can be supported.                                                                                                                                            |
| VI_2_C                       | 9                                                  |     | The inputs must be ac-coupled. The recommended coupling capacitor is 0.1 μF.                                                                                                                                                                                       |
| VI_3_A                       | 16                                                 |     | The possible input configurations are listed in the input select register at I <sup>2</sup> C subaddress 00h (see Section 2.11.1).                                                                                                                                 |
| VI_3_B                       | 17                                                 |     |                                                                                                                                                                                                                                                                    |
| VI_3_C                       | 18                                                 |     |                                                                                                                                                                                                                                                                    |
| VI_4_A                       | 23                                                 |     |                                                                                                                                                                                                                                                                    |
| Clock Signals                |                                                    |     |                                                                                                                                                                                                                                                                    |
| DATACLK                      | 40                                                 | O   | Line-locked data output clock                                                                                                                                                                                                                                      |
| XTAL1                        | 74                                                 | I   | External clock reference input. It can be connected to an external oscillator with a 1.8-V compatible clock signal or to a 14.31818-MHz crystal oscillator.                                                                                                        |
| XTAL2                        | 75                                                 | O   | External clock reference output. Not connected if XTAL1 is driven by an external single-ended oscillator.                                                                                                                                                          |
| Digital Video                |                                                    |     |                                                                                                                                                                                                                                                                    |
| C_[9:0]/<br>GPIO             | 57, 58,<br>59, 60,<br>63, 64,<br>65, 66,<br>69, 70 | O   | Digital video output of CbCr, C_9 is MSB and C_0 is LSB. Unused outputs can be left unconnected. Also, these terminals can be programmable general-purpose I/O.<br>For the 8-bit mode, the two LSBs are ignored.<br>C1 needs a pulldown resistor (see Figure 5–1). |
| Y_[9:0]                      | 43, 44,<br>45, 46,<br>47, 50,<br>51, 52,<br>53, 54 | O   | Digital video output of Y/YCbCr, Y_9 is MSB and Y_0 is LSB.<br>For the 8-bit mode, the two LSBs are ignored. Unused outputs can be left unconnected.                                                                                                               |
| Miscellaneous Signals        |                                                    |     |                                                                                                                                                                                                                                                                    |
| FSS/GPIO                     | 35                                                 | I/O | Fast-switch (blanking) input. Switching signal between the synchronous component video (YPbPr/RGB) and the composite video input.<br>Programmable general-purpose I/O                                                                                              |
| GLCO/I2CA                    | 37                                                 | I/O | Genlock control output (GLCO)<br>During reset, this terminal is an input used to program the I <sup>2</sup> C address LSB.                                                                                                                                         |
| INTREQ                       | 30                                                 | O   | Interrupt request                                                                                                                                                                                                                                                  |
| PWDN                         | 33                                                 | I   | Power-down input:<br>1 = Power down<br>0 = Normal mode                                                                                                                                                                                                             |
| RESETB                       | 34                                                 | I   | Reset input, active low                                                                                                                                                                                                                                            |

**Table 1–1. Terminal Functions (Continued)**

| TERMINAL<br>NAME      | NUMBER                | I/O | DESCRIPTION                                                                                                                    |
|-----------------------|-----------------------|-----|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Host Interface</b> |                       |     |                                                                                                                                |
| SCL                   | 28                    | I   | I <sup>2</sup> C clock input                                                                                                   |
| SDA                   | 29                    | I/O | I <sup>2</sup> C data bus                                                                                                      |
| <b>Power Supplies</b> |                       |     |                                                                                                                                |
| AGND                  | 26                    | I   | Analog ground. Connect to analog ground.                                                                                       |
| A18GND_REF            | 13                    | I   | Analog 1.8-V return                                                                                                            |
| A18VDD_REF            | 12                    | I   | Analog power for reference 1.8 V                                                                                               |
| CH1_A18GND            | 79                    | I   | Analog 1.8-V return                                                                                                            |
| CH2_A18GND            | 10                    |     |                                                                                                                                |
| CH3_A18GND            | 15                    |     |                                                                                                                                |
| CH4_A18GND            | 24                    |     |                                                                                                                                |
| CH1_A18VDD            | 78                    | I   | Analog power. Connect to 1.8 V.                                                                                                |
| CH2_A18VDD            | 11                    |     |                                                                                                                                |
| CH3_A18VDD            | 14                    |     |                                                                                                                                |
| CH4_A18VDD            | 25                    |     |                                                                                                                                |
| CH1_A33GND            | 3                     | I   | Analog 3.3-V return                                                                                                            |
| CH2_A33GND            | 6                     |     |                                                                                                                                |
| CH3_A33GND            | 19                    |     |                                                                                                                                |
| CH4_A33GND            | 22                    |     |                                                                                                                                |
| CH1_A33VDD            | 4                     | I   | Analog power. Connect to 3.3 V.                                                                                                |
| CH2_A33VDD            | 5                     |     |                                                                                                                                |
| CH3_A33VDD            | 20                    |     |                                                                                                                                |
| CH4_A33VDD            | 21                    |     |                                                                                                                                |
| DGND                  | 27, 32, 42,<br>56, 68 | I   | Digital return                                                                                                                 |
| DVDD                  | 31, 41, 55,<br>67     | I   | Digital power. Connect to 1.8 V.                                                                                               |
| IOGND                 | 39, 49, 62            | I   | Digital power return                                                                                                           |
| IOVDD                 | 38, 48, 61            | I   | Digital power. Connect to 3.3 V or less for reduced noise.                                                                     |
| PLL_A18GND            | 77                    | I   | Analog power return                                                                                                            |
| PLL_A18VDD            | 76                    | I   | Analog power. Connect to 1.8 V.                                                                                                |
| <b>Sync Signals</b>   |                       |     |                                                                                                                                |
| HS/CS/GPIO            | 72                    | I/O | Horizontal sync output or digital composite sync output<br>Programmable general-purpose I/O                                    |
| VS/VBLK/GPIO          | 73                    | I/O | Vertical sync output (for modes with dedicated VSYNC) or VBLK output<br>Programmable general-purpose I/O                       |
| FID/GPIO              | 71                    | I/O | Odd/even field indicator output. This terminal needs a pulldown resistor (see Figure 5–1).<br>Programmable general-purpose I/O |
| AVID/GPIO             | 36                    | I/O | Active video indicator output<br>Programmable general-purpose I/O                                                              |





## 2 Functional Description

### 2.1 Analog Processing and A/D Converters

Figure 2–1 shows a functional diagram of the analog processors and ADCs. This block provides the analog interface to all video inputs. It accepts up to 10 inputs and performs source selection, video clamping, video amplification, A/D conversion, and gain and offset adjustments to center the digitized video signal.

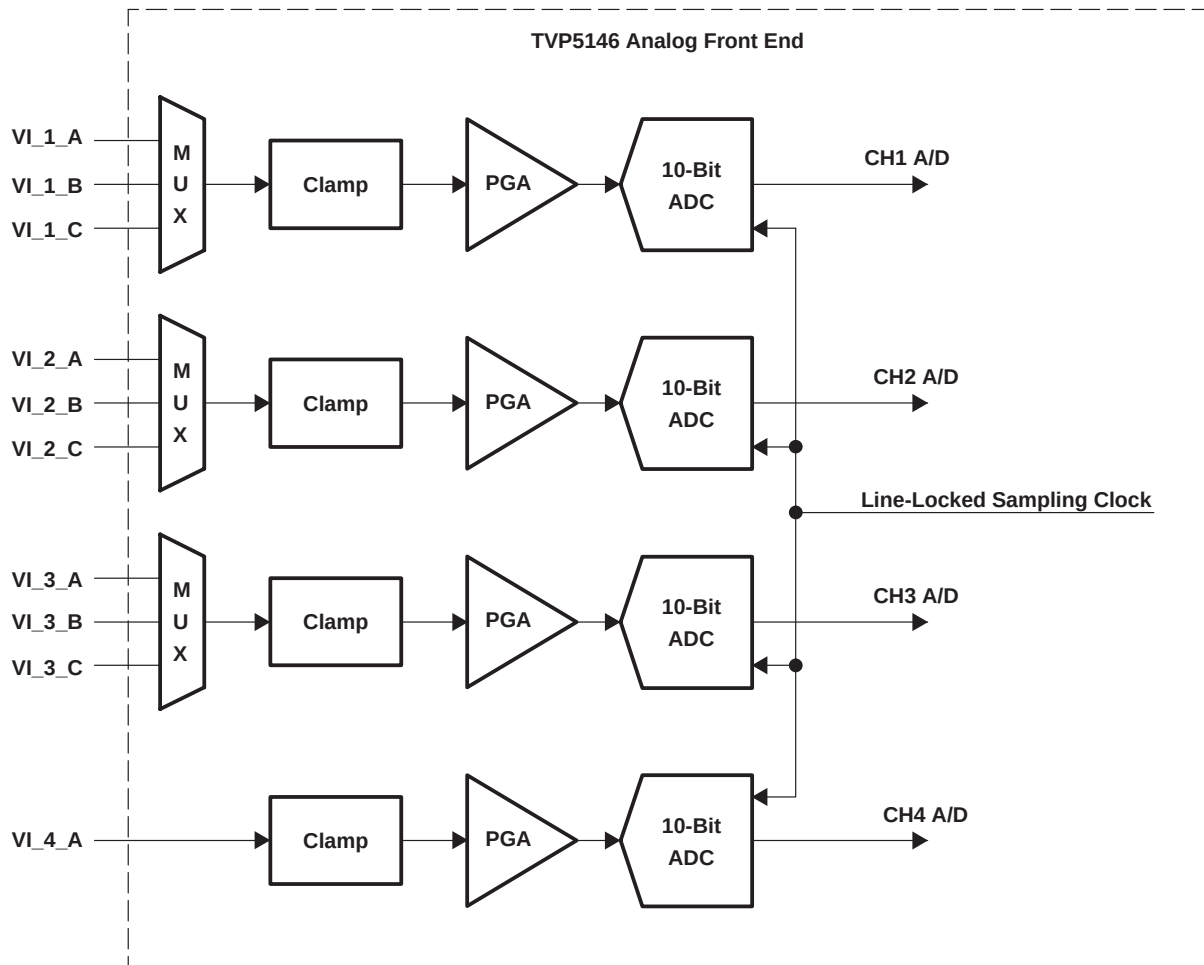


Figure 2–1. Analog Processors and A/D Converters

#### 2.1.1 Video Input Switch Control

The TVP5146 decoder has 4 analog channels that accept up to 10 video inputs. The user can configure the internal analog video switches via the I<sup>2</sup>C interface. The 10 analog video inputs can be used for different input configurations, some of which are:

- Up to 10 selectable individual composite video inputs
- Up to four selectable S-video inputs
- Up to three selectable analog YPbPr/RGB video inputs and one CVBS input
- Up to two selectable analog YPbPr/RGB video inputs, two S-video inputs, and two CVBS inputs

The input selection is performed by the input select register at I<sup>2</sup>C subaddress 00h (see Section 2.11.1).

### 2.1.2 Analog Input Clamping

An internal clamping circuit restores the ac-coupled video signal to a fixed dc level. The clamping circuit provides line-by-line restoration of the video sync level to a fixed dc reference voltage. The selection between bottom and mid clamp is performed automatically by the TVP5146 decoder.

### 2.1.3 Automatic Gain Control

The TVP5146 decoder uses four programmable gain amplifiers (PGAs), one per channel. The PGA can scale a signal with a voltage-input compliance of  $0.5-V_{PP}$  to  $2-V_{PP}$  to a full-scale 10-bit A/D output code range. A 4-bit code sets the coarse gain with individual adjustment per channel. Minimum gain corresponds to a code 0x0 ( $2-V_{PP}$  full-scale input, -6-dB gain) while maximum gain corresponds to code 0xF ( $0.5 V_{PP}$  full scale, +6-dB gain). The TVP5146 decoder also has 12-bit fine gain controls for each channel and applies independently to coarse gain controls. For composite video, the input video signal amplitude can vary significantly from the nominal level of  $1 V_{PP}$ . The TVP5146 decoder can adjust its PGA setting automatically: an AGC can be enabled and can adjust the signal amplitude such that the maximum range of the ADC is reached without clipping. Some nonstandard video signals contain peak white levels that saturate the ADC. In these cases, the AGC automatically cuts back gain to avoid clipping. If the AGC is on, then the TVP5146 decoder can read the gain currently being used.

The TVP5146 AGC comprises the front-end AGC before Y/C separation and the back-end AGC after Y/C separation. The back-end AGC restores the optimum system gain whenever an amplitude reference such as the composite peak (which is only relevant before Y/C separation) forces the front-end AGC to set the gain too low. The front-end and back-end AGC algorithms can use up to four amplitude references: sync height, color burst amplitude, composite peak, and luma peak.

The specific amplitude references being used by the front-end and back-end AGC algorithms can be independently controlled using the AGC white peak processing register located at subaddress 74h. The TVP5146 gain increment speed and gain increment delay can be controlled using the AGC increment speed register located at subaddress 78h and the AGC increment delay register located at subaddress 79h, respectively.

### 2.1.4 A/D Converters

All ADCs have a resolution of 10 bits and can operate up to 30 MSPS. All A/D channels receive an identical clock from the on-chip phase-locked loop (PLL) at a frequency between 24 MHz and 30 MHz. All ADC reference voltages are generated internally.

## 2.2 Digital Video Processing

Figure 2-2 is a block diagram of the TVP5146 digital video decoder processor. This processor receives digitized video signals from the ADCs and performs composite processing for CVBS and S-video inputs, YCbCr signal enhancements for CVBS and S-video inputs, and YPbPr/RGB processing for component video inputs. It also generates horizontal and vertical syncs and other output control signals such as genlock for CVBS and S-video inputs. Additionally, it can provide field identification, horizontal and vertical lock, vertical blanking, and active video window indication signals. The digital data output can be programmed to two formats: 20-bit 4:2:2 with external syncs or 10-bit 4:2:2 with embedded/separate syncs. The circuit detects pseudosync pulses, AGC pulses, and color striping in Macrovision-encoded copy-protected material. Information present in the VBI interval can be retrieved and either inserted in the ITU-R BT.656 output as ancillary data or stored in internal FIFO and/or registers for retrieval via the host port interface.

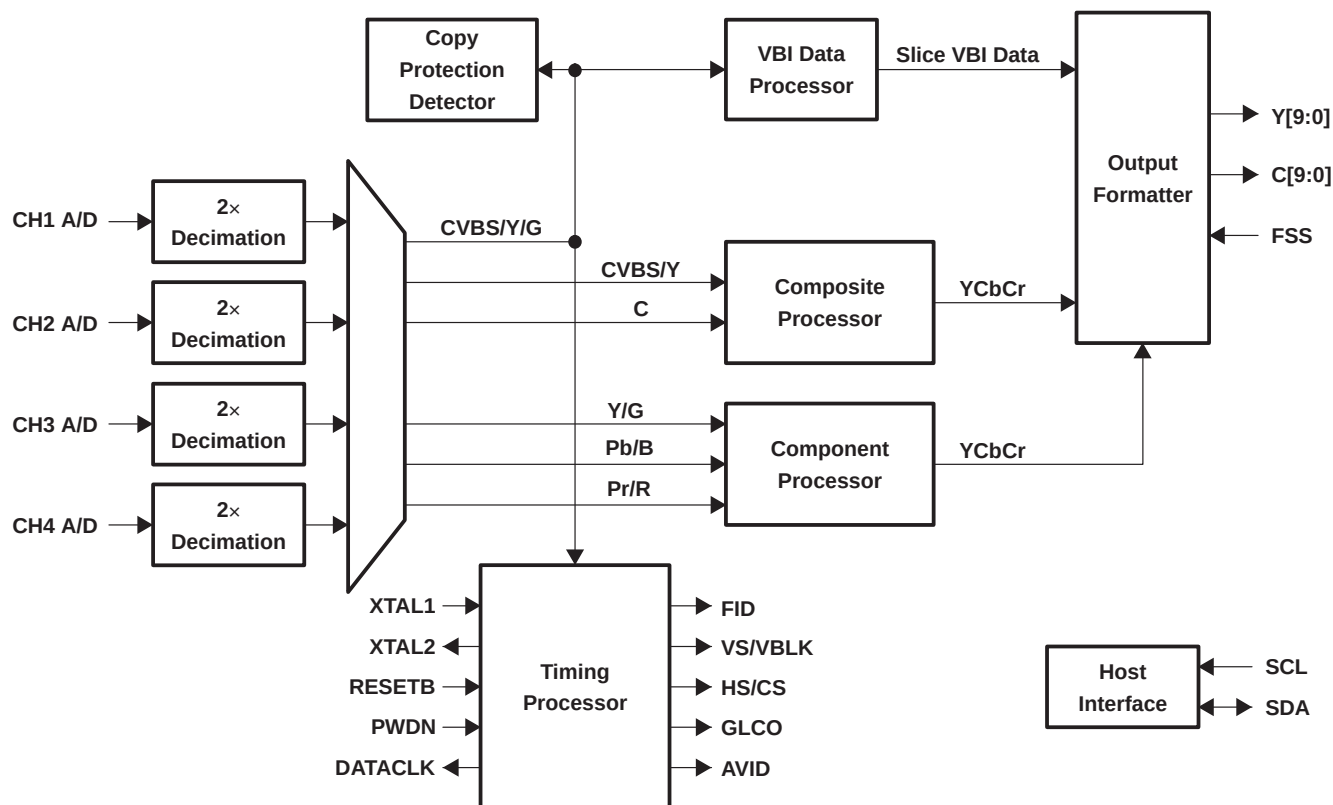


Figure 2-2. Digital Video Processor Block Diagram

### 2.2.1 2× Decimation Filter

All input signals are oversampled by a factor of 2 (27 MHz). The A/D outputs first pass through decimation filters that reduce the data rate to 1× the pixel rate. The decimation filter is a half-band filter. Oversampling and decimation filtering can effectively increase the overall signal-to-noise ratio by 3 dB.

### 2.2.2 Composite Processor

Figure 2-3 is a block diagram of the TVP5146 digital composite video processing circuit. This circuit receives a digitized composite or S-video signal from the ADCs and performs Y/C separation (bypassed for S-video input), chroma demodulation for PAL/NTSC and SECAM, and YUV signal enhancements.

The 10-bit composite video is multiplied by the subcarrier signals in the quadrature demodulator to generate color difference signals U and V. The U and V signals are then sent to low-pass filters to achieve the desired bandwidth. An adaptive 5-line comb filter separates UV from Y based on the unique property of color phase shifts from line to line. The chroma is remodulated through a quadrature modulator and subtracted from line-delayed composite video to generate luma. This form of Y/C separation is completely complementary, thus there is no loss of information. However, in some applications, it is desirable to limit the U/V bandwidth to avoid crosstalk. In that case, notch filters can be turned on. To accommodate some viewing preferences, a peaking filter is also available in the luma path. Contrast, brightness, sharpness, hue, and saturation controls are programmable through the host port.

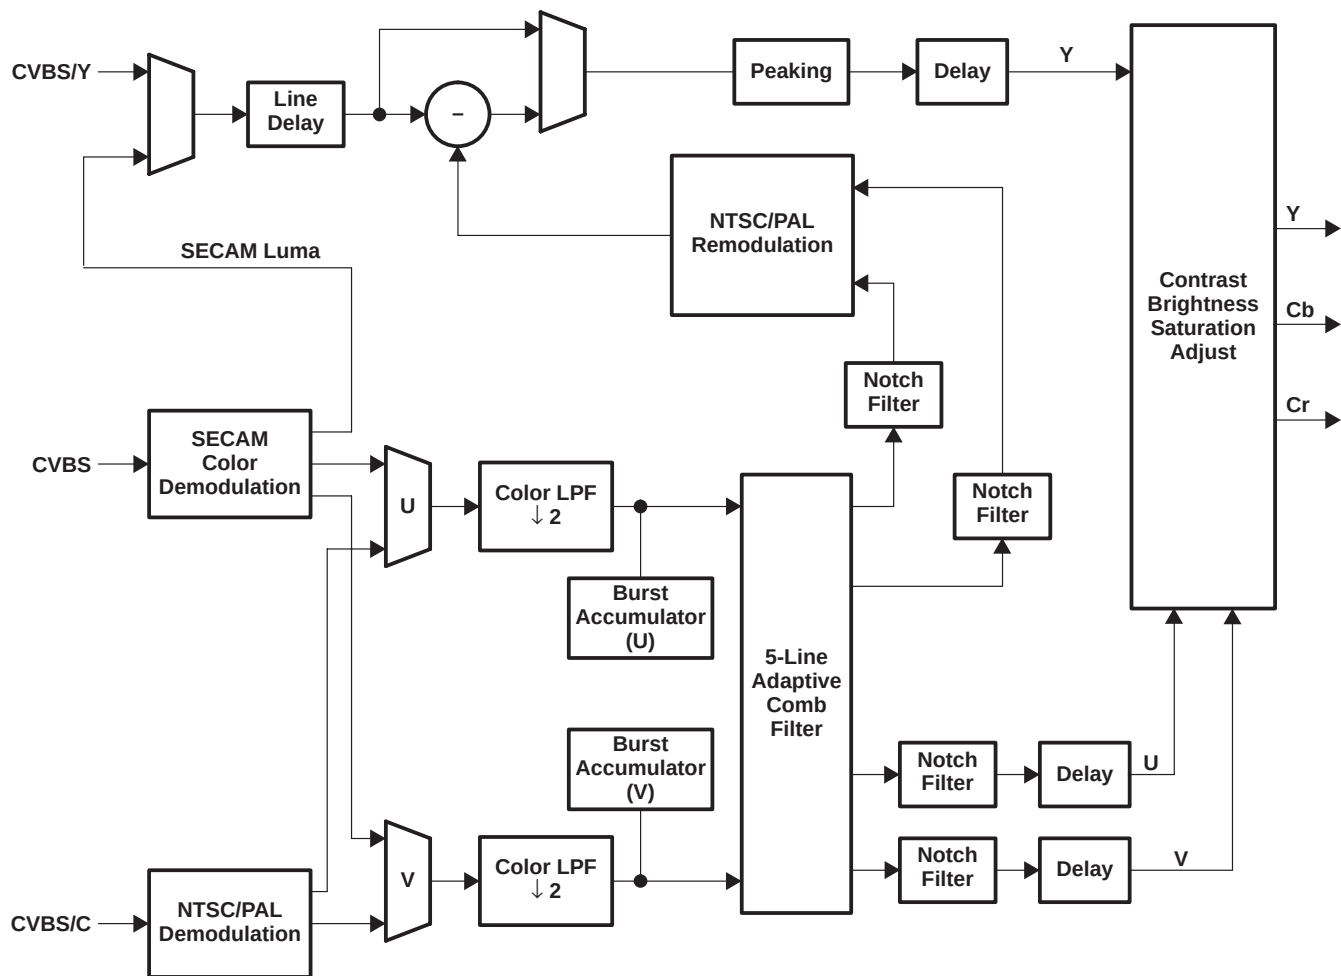


Figure 2-3. Composite and S-Video Processor Block Diagram

#### 2.2.2.1 Color Low-Pass Filter

High filter bandwidth preserves sharp color transitions and produces crisp color boundaries. However, for video sources that have asymmetrical U and V side bands, it is desirable to limit the filter bandwidth to avoid UV crosstalk. The color low-pass filter bandwidth is programmable to enable one of the three notch filters. Figure 2-4 through Figure 2-7 represent the frequency responses of the wideband color low-pass filters.

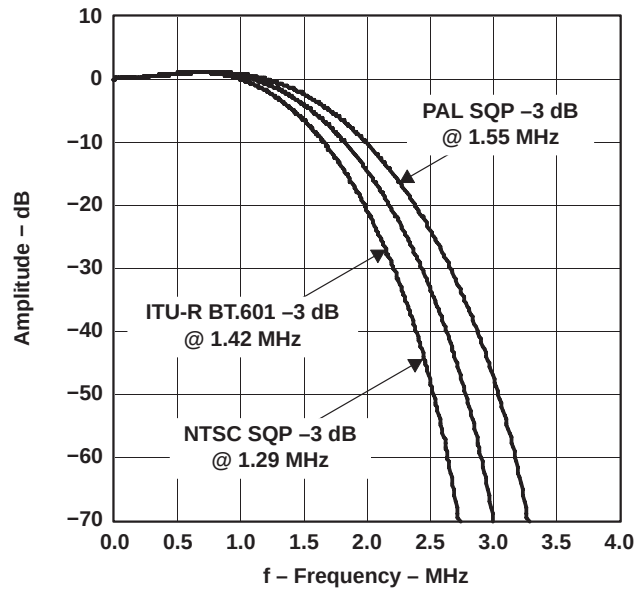


Figure 2-4. Color Low-Pass Filter Frequency Response

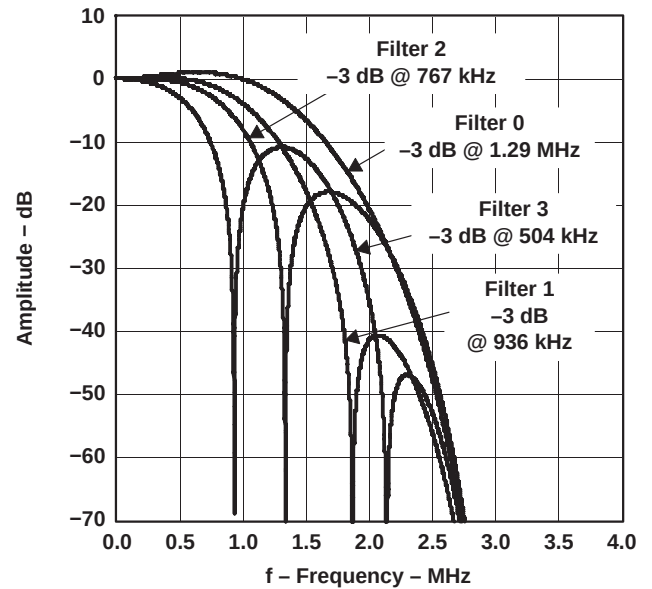


Figure 2-5. Color Low-Pass Filter With Filter Frequency Response, NTSC Square Pixel Sampling

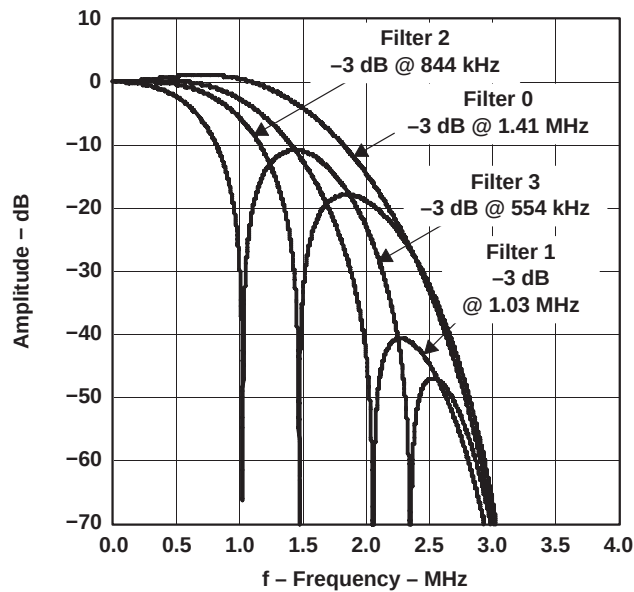


Figure 2-6. Color Low-Pass Filter With Filter Characteristics, NTSC/PAL ITU-R BT.601 Sampling

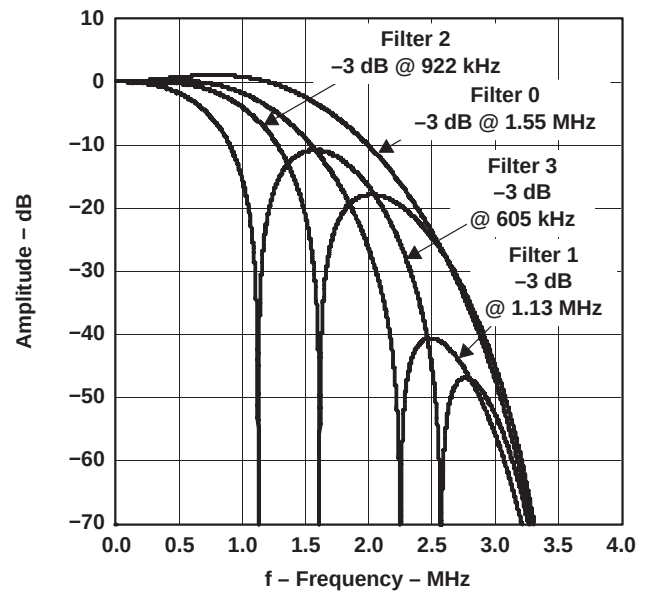


Figure 2-7. Color Low-Pass Filter With Filter Characteristics, PAL Square Pixel Sampling

2.2.2.2 Y/C Separation

Y/C separation can be done using adaptive 5-line (5-H delay) comb filters or a chroma trap filter. The comb filter can be selectively bypassed in the luma or chroma path. If the comb filter is bypassed in the luma path, then chroma trap filters are used which are shown in Figure 2–8 through Figure 2–11. TI’s patented adaptive comb filter algorithm reduces artifacts such as hanging dots at color boundaries. It detects and properly handles false colors in high frequency luminance images, such as a multiburst pattern or circle pattern. Adaptive comb filtering is the recommended mode of operation.

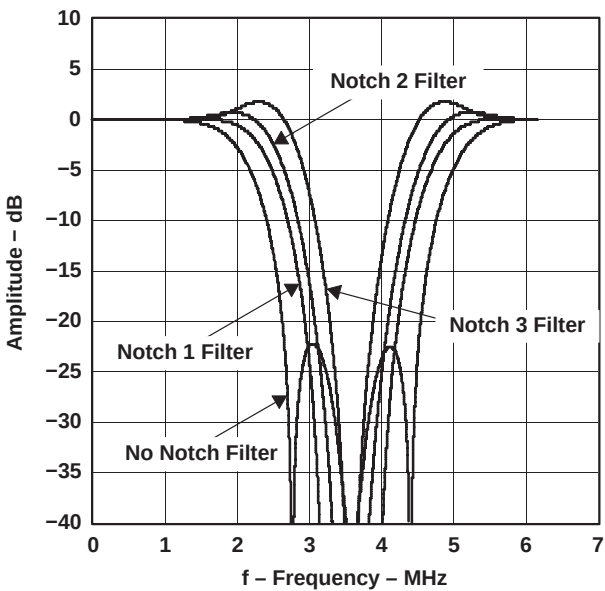


Figure 2–8. Chroma Trap Filter Frequency Response, NTSC Square Pixel Sampling

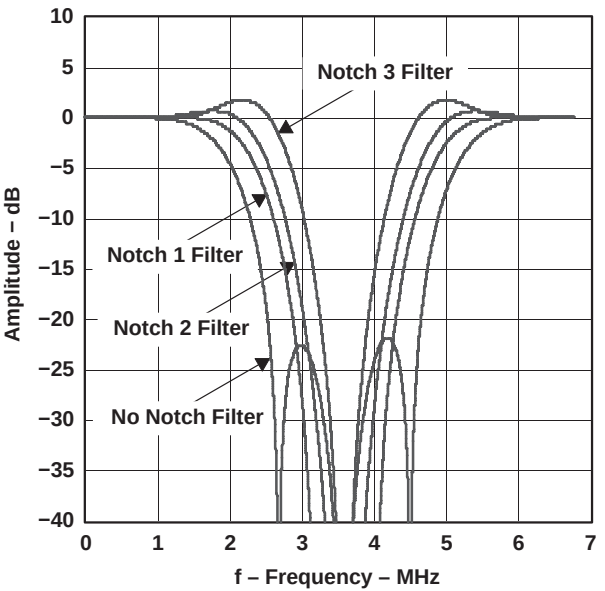


Figure 2–9. Chroma Trap Filter Frequency Response, NTSC ITU-R BT.601 Sampling

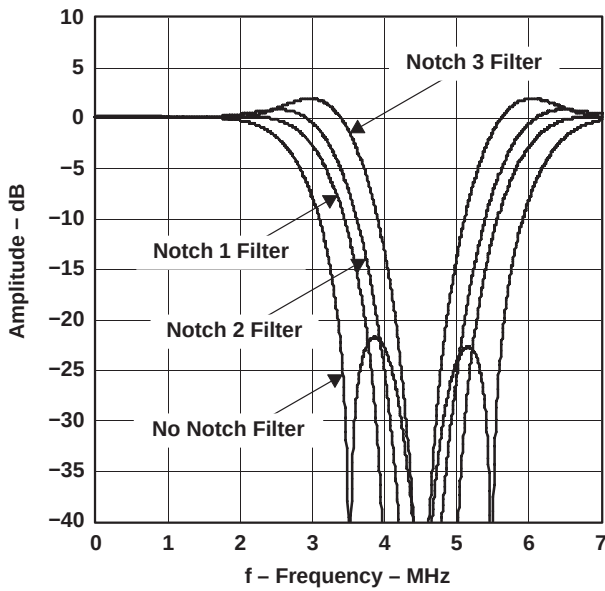


Figure 2–10. Chroma Trap Filter Frequency Response, PAL ITU-R BT.601 Sampling

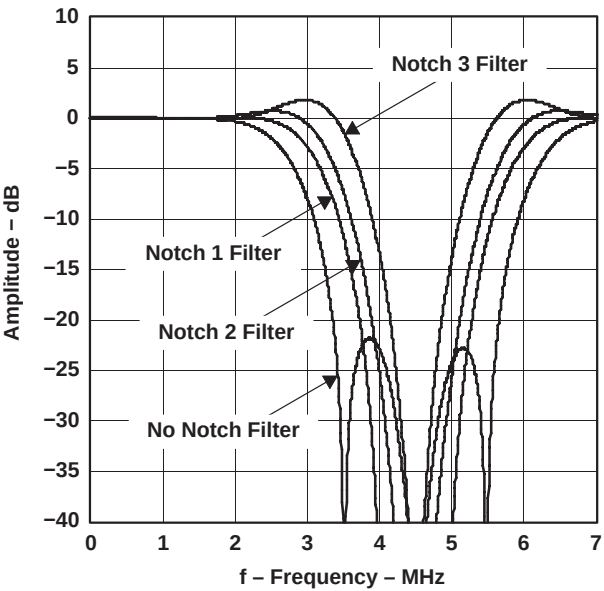


Figure 2–11. Chroma Trap Filter Frequency Response, PAL Square Pixel Sampling

### 2.2.3 Luminance Processing

The digitized composite video signal passes through either a luminance comb filter or a chroma trap filter, either of which removes chrominance information from the composite signal to generate a luminance signal. The luminance signal is then fed into the input of a peaking circuit. Figure 2–12 illustrates the basic functions of the luminance data path. In the case of S-video, the luminance signal bypasses the comb filter or chroma trap filter and is fed directly to the circuit. High-frequency components of the luminance signal are enhanced by a peaking filter (sharpness). Figure 2–13, Figure 2–14, and Figure 2–15 show the characteristics of the peaking filter at four different gain settings that are programmable via the host port.

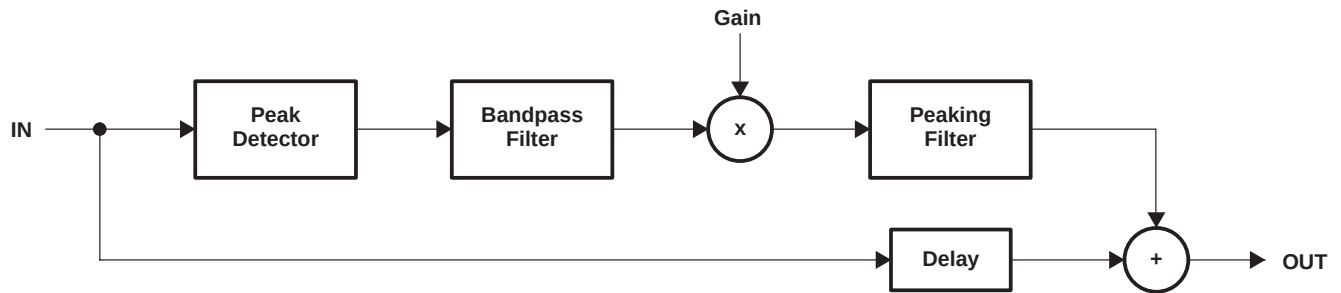


Figure 2–12. Luminance Edge-Enhancer Peaking Block Diagram

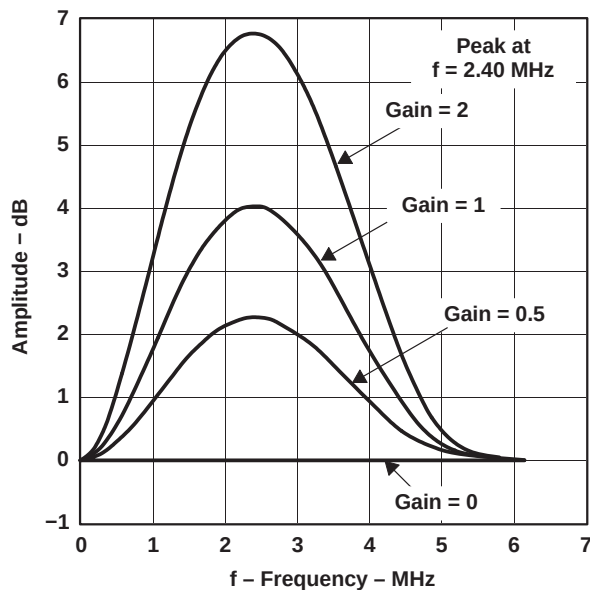


Figure 2–13. Peaking Filter Response, NTSC Square Pixel Sampling

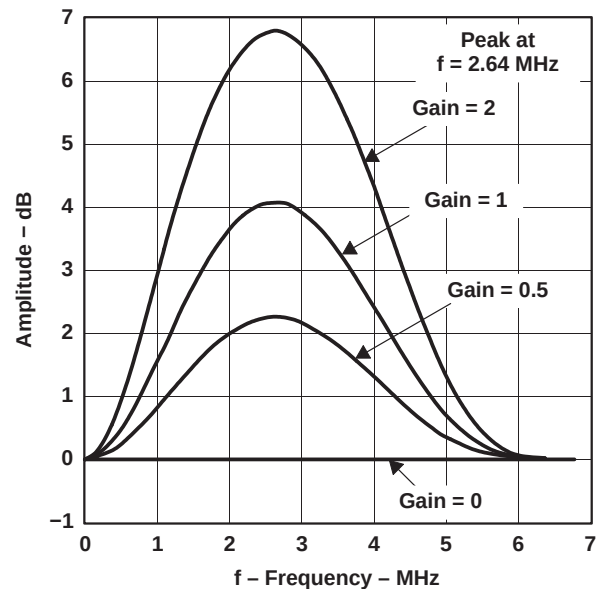


Figure 2–14. Peaking Filter Response, NTSC/PAL ITU-R BT.601 Sampling

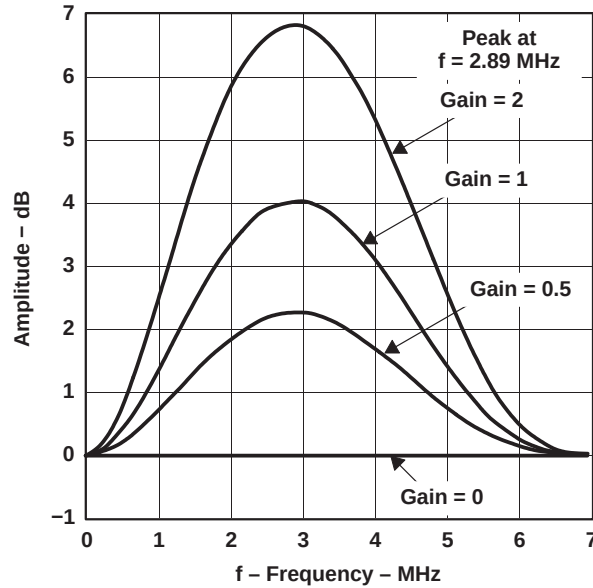


Figure 2–15. Peaking Filter Response, PAL Square Pixel Sampling

#### 2.2.3.1 Color Transient Improvement

Color transient improvement (CTI) enhances horizontal color transients by delay modulation for both color difference signals. The operation must be performed only on YCbCr-formatted data. The color difference signal transition points are maintained, but the edges are enhanced for signals which have bandwidth-limited color components (for example, CVBS and S-video).

#### 2.2.4 Component Video Processor

The component video processing block supports a user-selectable contrast, brightness, and saturation adjustment in YCbCr output formats. For YCbCr output formats, gain and offset values are applied to the luma data path in order to map the pixel values to the correct output range (for 10-bit  $Y_{\min} = 64$  and  $Y_{\max} = 940$ ), and to provide a means of adjusting contrast and brightness. For Y, digital contrast (gain) and brightness (offset) factors can vary from 0 to 255. The contrast control adjusts the amplitude range of the Y output centered at the midpoint of the output code range. The limit block limits the output to the ITU-R BT.601 range ( $Y_{\min}$  to  $Y_{\max}$ ) or an extended range, depending on a user setting.

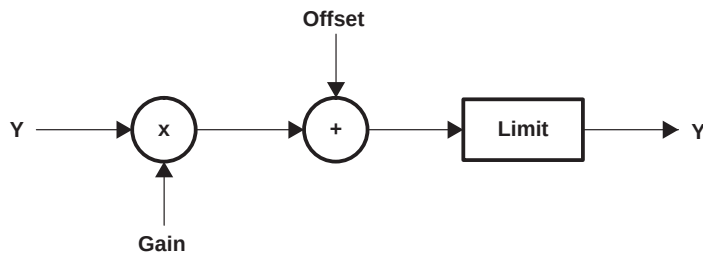


Figure 2–16. Y Component Gain, Offset, Limit



For CbCr components, a saturation (gain) factor is applied to the CbCr inputs in order to map them to the CbCr output code range and provide saturation control. Similarly, the limit block can limit CbCr outputs to a valid range:

$$Cb, Cr_{min} = 64 / Cb, Cr_{max} = 960$$

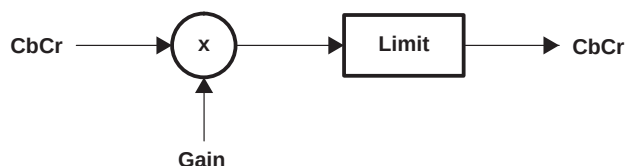


Figure 2–17. CbCr Component Gain, Offset, Limit

## 2.2.5 Color Space Conversion

The formulas for RGB to YCbCr conversion are given as:

$$Y = 0.299 \times R + 0.587 \times G + 0.114 \times B$$

$$Cb = -0.172 \times R - 0.339 \times G + 0.511 \times B + 512$$

$$Cr = 0.511 \times R - 0.428 \times G - 0.083 \times B + 512$$

## 2.3 Clock Circuits

An internal line-locked PLL generates the system and pixel clocks. A 14.31818-MHz clock is required to drive the PLL. This can be input to the TVP5146 decoder at the 1.8-V level on terminal 74 (XTAL1), or a crystal of 14.31818-MHz fundamental resonant frequency can be connected across terminals 74 and 75 (XTAL2). If a parallel resonant circuit is used as shown in Figure 2–18, then the external capacitors must have the following relationship:

$$C_{L1} = C_{L2} = 2C_L - C_{STRAY},$$

where  $C_{STRAY}$  is the terminal capacitance with respect to ground. Figure 2–18 shows the reference clock configurations. The TVP5146 decoder generates the DATACLK signal used for clocking data.

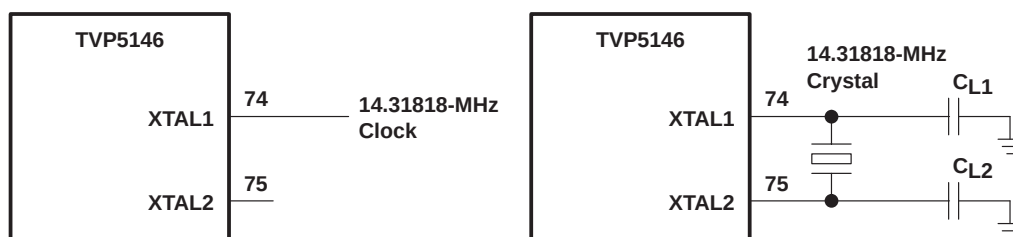



Figure 2–18. Reference Clock Configurations

## 2.4 Real-Time Control (RTC)

Although the TVP5146 decoder is a line-locked system, the color burst information is used to determine accurately the color subcarrier frequency and phase. This ensures proper operation with nonstandard video signals that do not follow exactly the required frequency multiple between color subcarrier frequency and video line frequency. The frequency control word of the internal color subcarrier PLL and the subcarrier reset bit are transmitted via terminal 37 (GLCO) for optional use in an end system (for example, by a video encoder). The frequency control word is a 23-bit binary number. The instantaneous frequency of the color subcarrier can be calculated from the following equation:

$$F_{PLL} = \frac{F_{ctrl}}{2^{23}} \times F_{sclk}$$

where  $F_{PLL}$  is the frequency of the subcarrier PLL,  $F_{ctrl}$  is the 23-bit PLL frequency control word, and  $F_{sclk}$  is two times the pixel frequency. Figure 2–19 shows the detailed timing diagram.

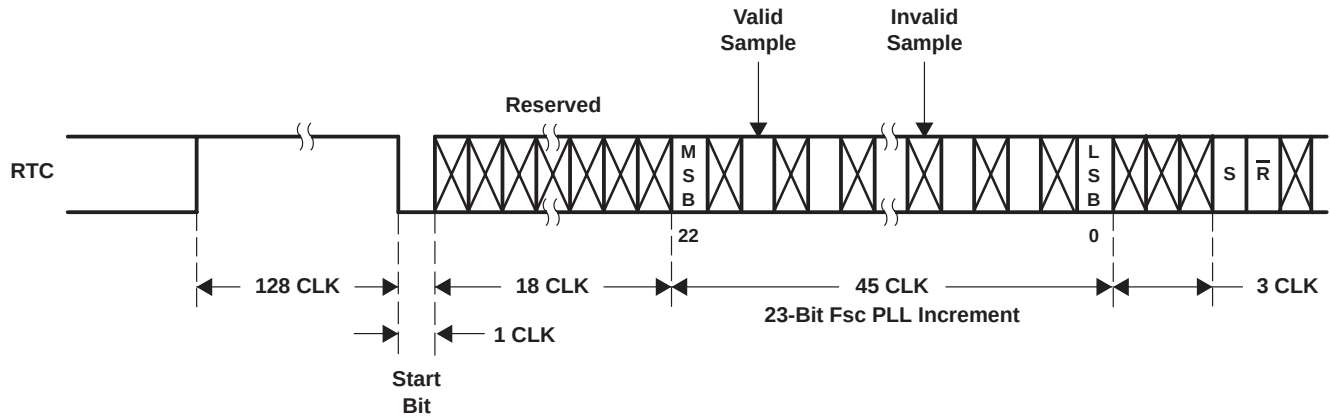

NOTE: RTC Reset bit (R) is active low, Sequence bit (S) PAL:1 = (R-Y) line normal, 0 = (R-Y) line inverted, NTSC: 1 = no change

Figure 2-19. RTC Timing

## 2.5 Output Formatter

The output formatter sets how the data is formatted for output on the TVP5146 output buses. Table 2-1 shows the available output modes.

Table 2-1. Output Format

| TERMINAL NAME | TERMINAL NUMBER | 10-Bit 4:2:2 YCbCr | 20-Bit 4:2:2 YCbCr |
|---------------|-----------------|--------------------|--------------------|
| Y_9           | 43              | Cb9, Y9, Cr9       | Y9                 |
| Y_8           | 44              | Cb8, Y8, Cr8       | Y8                 |
| Y_7           | 45              | Cb7, Y7, Cr7       | Y7                 |
| Y_6           | 46              | Cb6, Y6, Cr6       | Y6                 |
| Y_5           | 47              | Cb5, Y5, Cr5       | Y5                 |
| Y_4           | 50              | Cb4, Y4, Cr4       | Y4                 |
| Y_3           | 51              | Cb3, Y3, Cr3       | Y3                 |
| Y_2           | 52              | Cb2, Y2, Cr2       | Y2                 |
| Y_1           | 53              | Cb1, Y1, Cr1       | Y1                 |
| Y_0           | 54              | Cb0, Y0, Cr0       | Y0                 |
| C_9           | 57              |                    | Cb9, Cr9           |
| C_8           | 58              |                    | Cb8, Cr8           |
| C_7           | 59              |                    | Cb7, Cr7           |
| C_6           | 60              |                    | Cb6, Cr6           |
| C_5           | 63              |                    | Cb5, Cr5           |
| C_4           | 64              |                    | Cb4, Cr4           |
| C_3           | 65              |                    | Cb3, Cr3           |
| C_2           | 66              |                    | Cb2, Cr2           |
| C_1           | 69              |                    | Cb1, Cr1           |
| C_0           | 70              |                    | Cb0, Cr0           |

**Table 2–2. Summary of Line Frequencies, Data Rates, and Pixel/Line Counts**


| STANDARDS              | PIXELS PER LINE | ACTIVE PIXELS PER LINE | LINES PER FRAME | PIXEL FREQUENCY (MHz) | COLOR SUBCARRIER FREQUENCY (MHz) | HORIZONTAL LINE RATE (kHz) |
|------------------------|-----------------|------------------------|-----------------|-----------------------|----------------------------------|----------------------------|
| <b>601 sampling</b>    |                 |                        |                 |                       |                                  |                            |
| NTSC-J, M              | 858             | 720                    | 525             | 13.5                  | 3.579545                         | 15.73426                   |
| NTSC-4.43              | 858             | 720                    | 525             | 13.5                  | 4.43361875                       | 15.73426                   |
| PAL-M                  | 858             | 720                    | 525             | 13.5                  | 3.57561149                       | 15.73426                   |
| PAL-60                 | 858             | 720                    | 525             | 13.5                  | 4.43361875                       | 15.73426                   |
| PAL-B, D, G, H, I      | 864             | 720                    | 625             | 13.5                  | 4.43361875                       | 15.625                     |
| PAL-N                  | 864             | 720                    | 625             | 13.5                  | 4.43361875                       | 15.625                     |
| PAL-Nc                 | 864             | 720                    | 625             | 13.5                  | 3.58205625                       | 15.625                     |
| SECAM                  | 864             | 720                    | 625             | 13.5                  | Dr = 4.406250<br>Db = 4.250000   | 15.625                     |
| <b>Square sampling</b> |                 |                        |                 |                       |                                  |                            |
| NTSC-J, M              | 780             | 640                    | 525             | 12.2727               | 3.579545                         | 15.73426                   |
| NTSC-4.43              | 780             | 640                    | 525             | 12.2727               | 4.43361875                       | 15.73426                   |
| PAL-M                  | 780             | 640                    | 525             | 12.2727               | 3.57561149                       | 15.73426                   |
| PAL-60                 | 780             | 640                    | 525             | 12.2727               | 4.43361875                       | 15.73426                   |
| PAL-B, D, G, H, I      | 944             | 768                    | 625             | 14.75                 | 4.43361875                       | 15.625                     |
| PAL-N                  | 944             | 768                    | 625             | 14.75                 | 4.43361875                       | 15.625                     |
| PAL-Nc                 | 944             | 768                    | 625             | 14.75                 | 3.58205625                       | 15.625                     |
| SECAM                  | 944             | 768                    | 625             | 14.75                 | Dr = 4.406250<br>Db = 4.250000   | 15.625                     |

### 2.5.1 Fast Switches for SCART

The TVP5146 decoder supports the SCART interface used in European audio/video end equipment to carry composite video, S-video, and RGB video on the same cable. In the event that composite video and RGB video are present simultaneously on the video terminals assigned to a SCART interface, the TVP5146 decoder assumes they are pixel synchronous to each other. The timing for both composite video and RGB video is obtained from the composite source, and its derived clock is used to sample RGB video as well. The fast-switch input terminal allows switching between these two input video sources on a pixel-by-pixel basis. The fast switch is a hard switch; there is no alpha blending between both sources.


### 2.5.2 Separate Syncs

VS, HS, and VBLK are independently software programmable to a 1× pixel count. This allows any possible alignment to the internal pixel count and line count. The default settings for 525-line and 625-line video outputs are given as examples below. FID changes at the same transient time when the trailing edge of vertical sync occurs. The polarity of FID is programmable by an I<sup>2</sup>C interface.

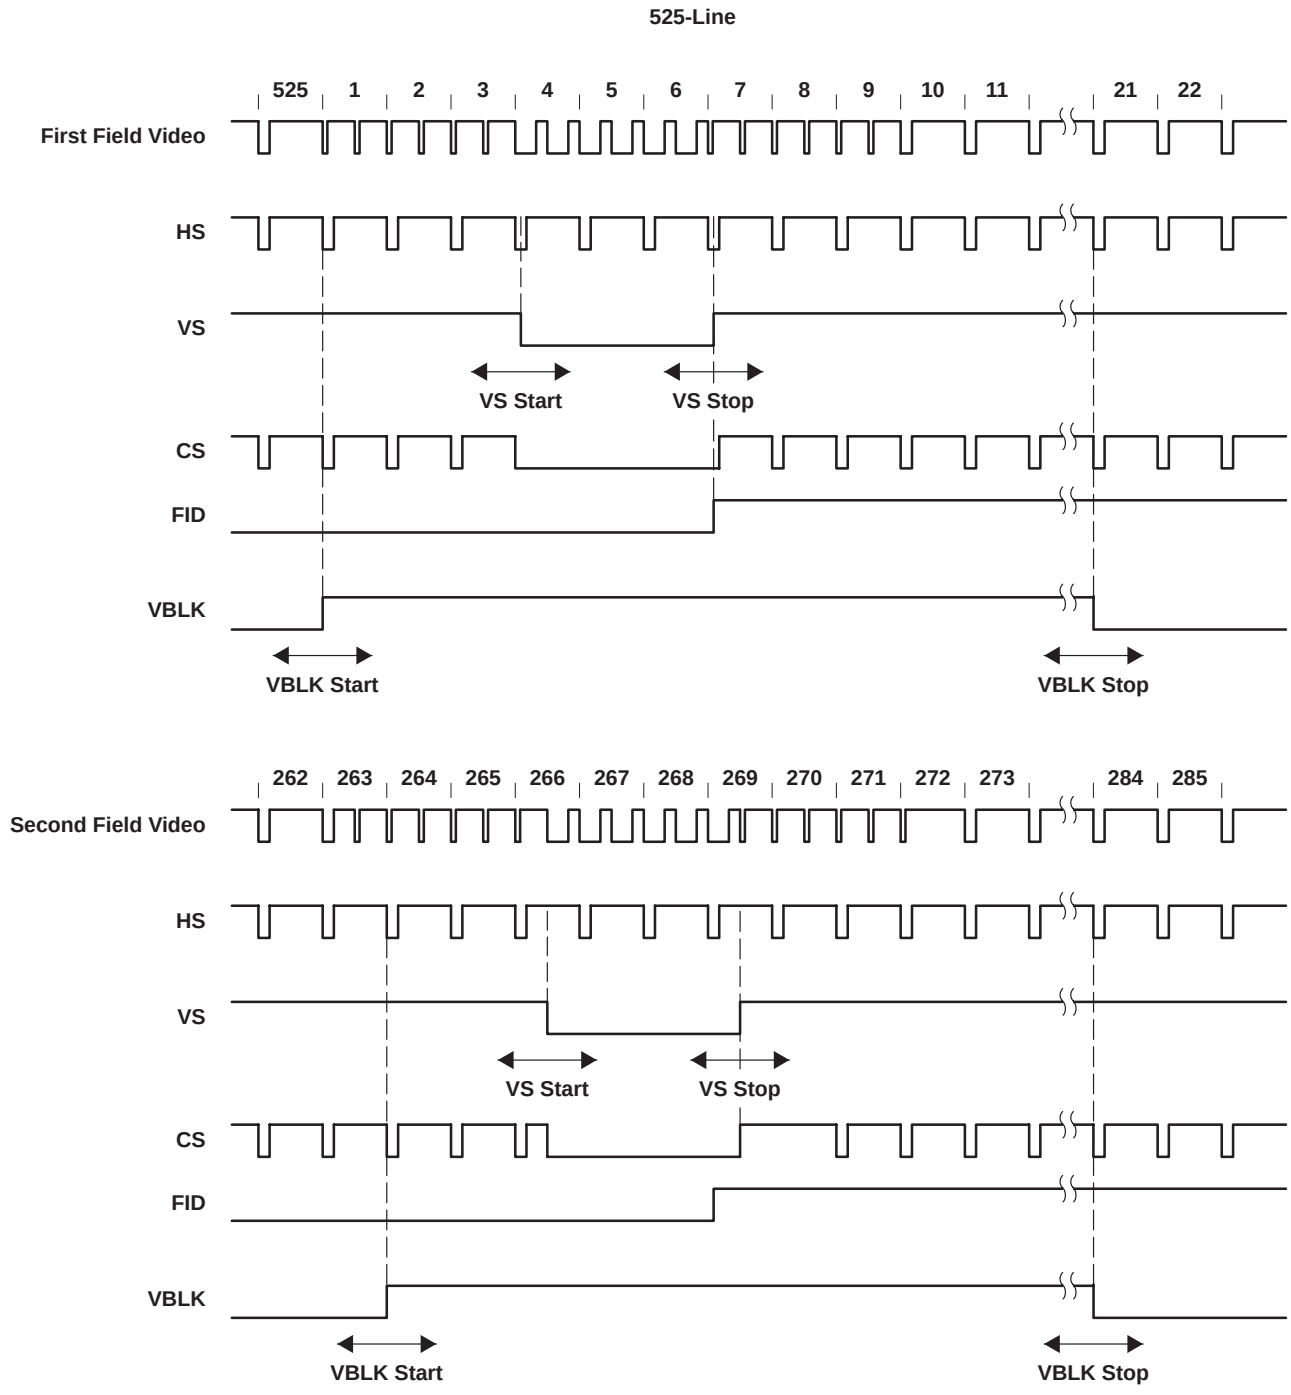


NOTE: Line numbering conforms to ITU-R BT.470

**Figure 2-20. Vertical Synchronization Signals for 525-Line System**

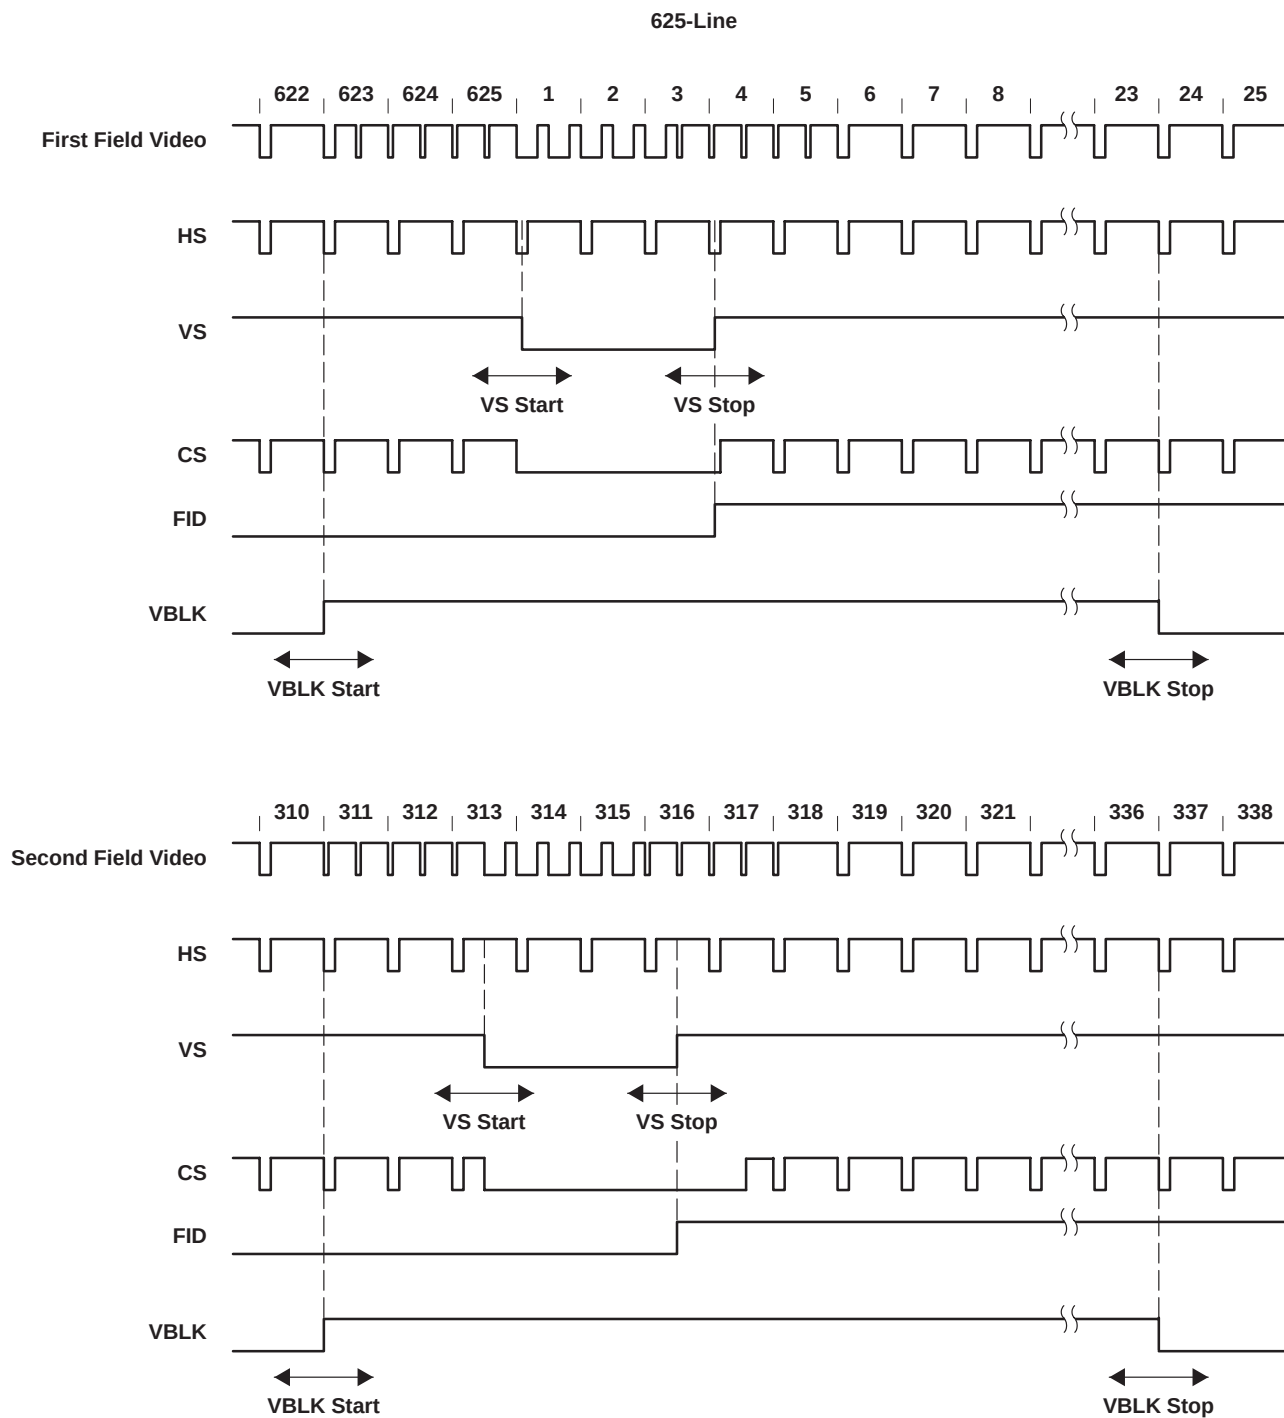

NOTE: Line numbering conforms to ITU-R BT.470

**Figure 2-21. Vertical Synchronization Signals for 625-Line System**

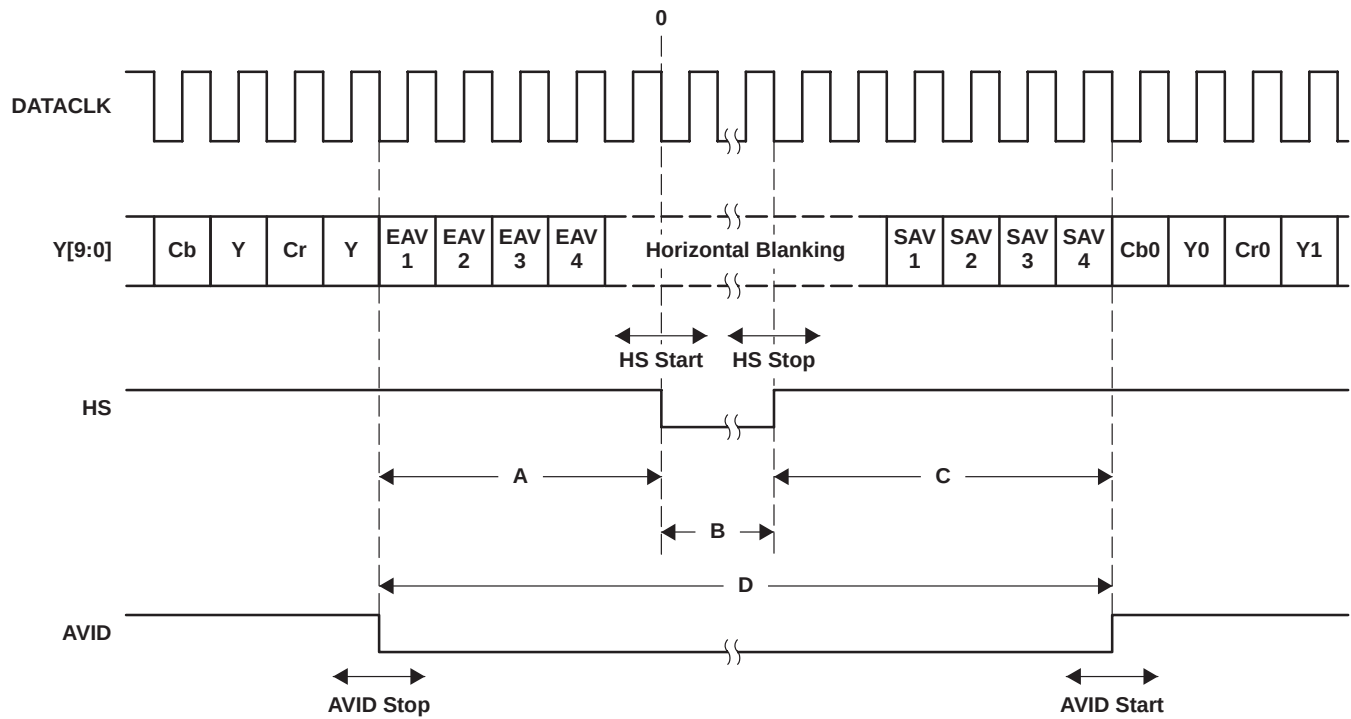


DATACLK = 2 × Pixel Clock

| Mode     | A   | B   | C  | D   |
|----------|-----|-----|----|-----|
| NTSC 601 | 106 | 128 | 42 | 276 |
| PAL 601  | 112 | 128 | 48 | 288 |
| NTSC Sqp | 108 | 128 | 44 | 280 |
| PAL Sqp  | 144 | 128 | 80 | 352 |

NOTE: ITU-R BT.656 10-bit 4:2:2 timing with 2× pixel clock reference

**Figure 2–22. Horizontal Synchronization Signals for 10-Bit 4:2:2 Mode**

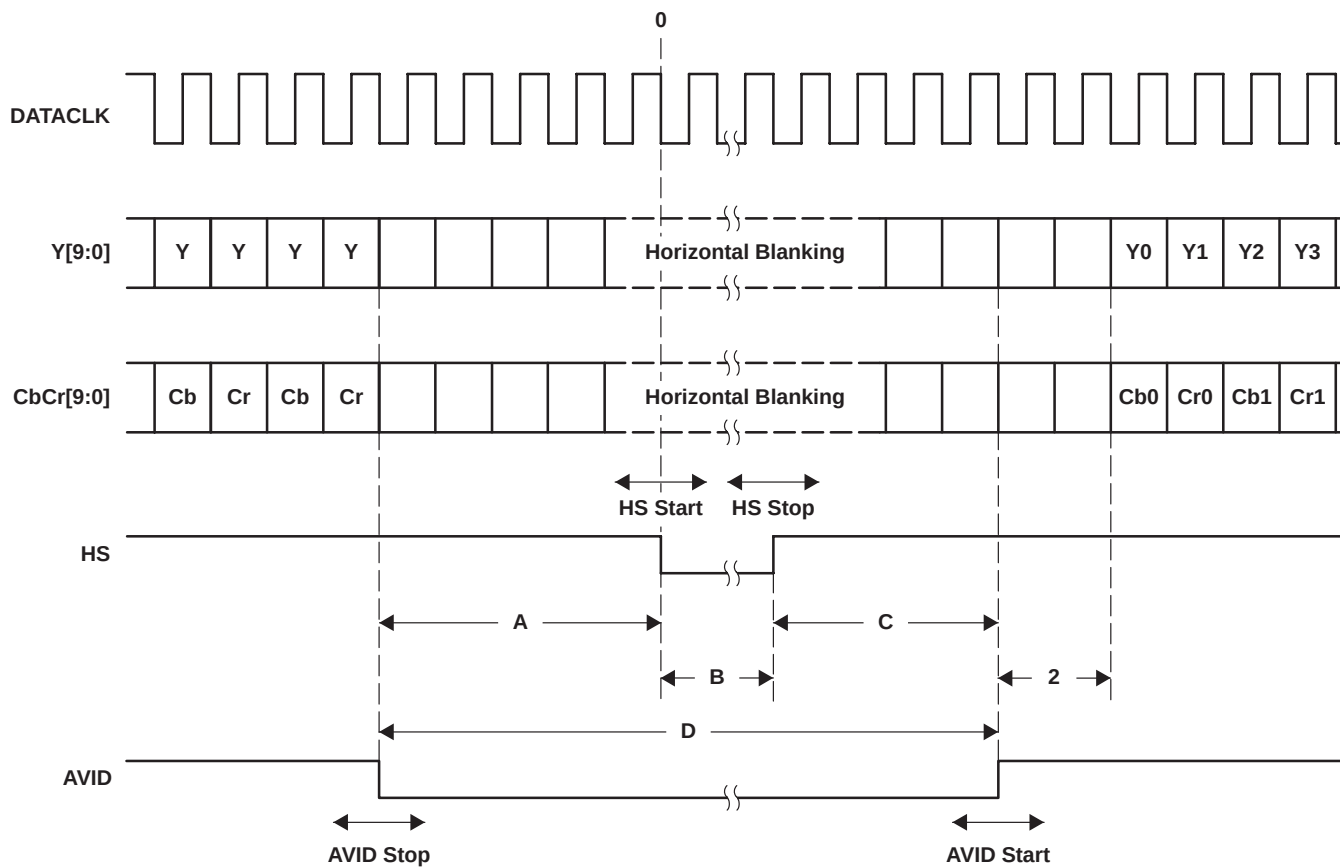


NOTE: AVID rising edge occurs 2 clock cycles early.

DATACLK = 1 × Pixel Clock

| Mode     | A  | B  | C  | D   |
|----------|----|----|----|-----|
| NTSC 601 | 53 | 64 | 19 | 136 |
| PAL 601  | 56 | 64 | 22 | 142 |
| NTSC Sqp | 54 | 64 | 20 | 138 |
| PAL Sqp  | 72 | 64 | 38 | 174 |

NOTE: 20-bit 4:2:2 timing with 1× pixel clock reference

**Figure 2–23. Horizontal Synchronization Signals for 20-Bit 4:2:2 Mode**

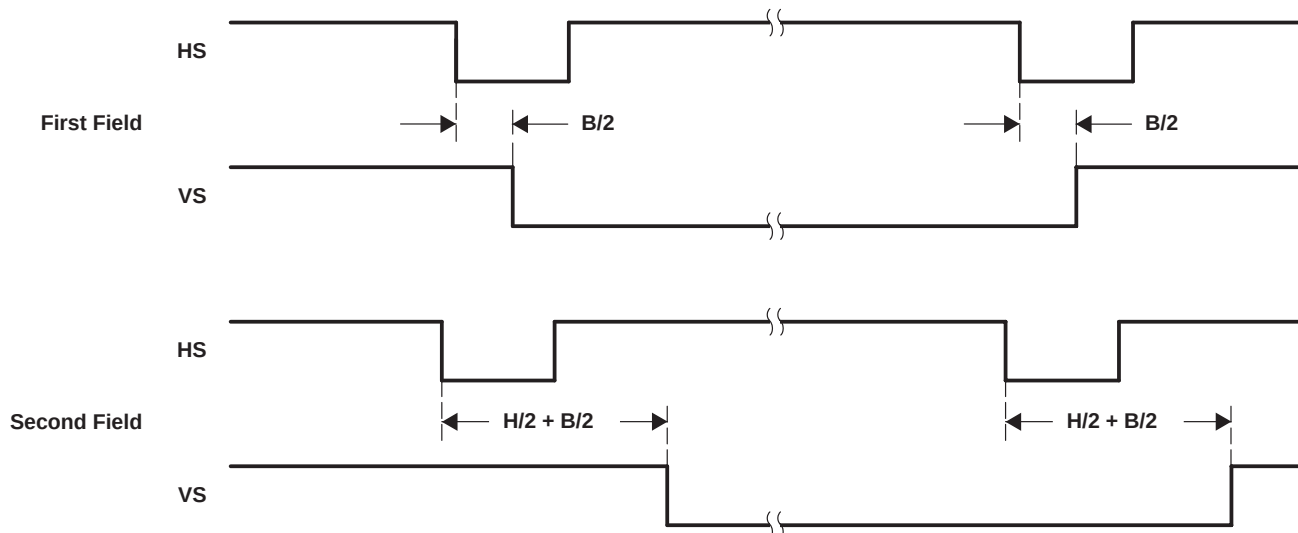

| Mode     | 10-Bit (PCLK = 2 × Pixel Clock) |     | 20-Bit (PCLK = 1 × Pixel Clock) |     |
|----------|---------------------------------|-----|---------------------------------|-----|
|          | B/2                             | H/2 | B/2                             | H/2 |
| NTSC 601 | 64                              | 858 | 32                              | 429 |
| PAL 601  | 64                              | 864 | 32                              | 432 |
| NTSC Sqp | 64                              | 780 | 32                              | 390 |
| PAL Sqp  | 64                              | 944 | 32                              | 472 |

**Figure 2–24. VSYNC Position With Respect to HSYNC**

### 2.5.3 Embedded Syncs

Standards with embedded syncs insert the SAV and EAV codes into the data stream on the rising and falling edges of AVID. These codes contain the V and F bits which also define vertical timing. Table 2–3 gives the format of the SAV and EAV codes.

H equals 1 always indicates EAV. H equals 0 always indicates SAV. The alignment of V and F to the line and field counter varies depending on the standard.

The P bits are protection bits:

$$P3 = V \text{ xor } H; P2 = F \text{ xor } H; P1 = F \text{ xor } V; P0 = F \text{ xor } V \text{ xor } H$$

**Table 2–3. EAV and SAV Sequence**

|             | D9 (MSB) | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-------------|----------|----|----|----|----|----|----|----|----|----|
| Preamble    | 1        | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  |
| Preamble    | 0        | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Preamble    | 0        | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  |
| Status word | 1        | F  | V  | H  | P3 | P2 | P1 | P0 | 0  | 0  |

## 2.6 I<sup>2</sup>C Host Interface

Communication with the TVP5146 decoder is via an I<sup>2</sup>C host interface. The I<sup>2</sup>C standard consists of two signals, the serial input/output data (SDA) line and the serial input clock line (SCL), which carry information between the devices connected to the bus. A third signal (I<sup>2</sup>CA) is used for slave address selection. Although an I<sup>2</sup>C system can be multimastered, the TVP5146 decoder functions as a slave device only.



Because SDA and SCL are kept open-drain at a logic-high output level or when the bus is not driven, the user must connect SDA and SCL to a positive supply voltage via a pullup resistor on the board. The slave-address select signal, terminal 37 (I<sup>2</sup>CA), enables the use of two TVP5146 decoders tied to the same I<sup>2</sup>C bus by controlling the least significant bit of the I<sup>2</sup>C device address.

**Table 2–4. I<sup>2</sup>C Host Interface Terminal Description**

| SIGNAL            | TYPE | DESCRIPTION             |
|-------------------|------|-------------------------|
| I <sup>2</sup> CA | I    | Slave address selection |
| SCL               | I    | Input clock line        |
| SDA               | I/O  | Input/output data line  |

### 2.6.1 Reset and I<sup>2</sup>C Bus Address Selection

The TVP5146 decoder can respond to two possible chip addresses. The address selection is made at reset by an externally supplied level on the I<sup>2</sup>CA terminal. The TVP5146 decoder samples the level of terminal 37 at power up or at the trailing edge of RESETB and configures the I<sup>2</sup>C bus address bit A0. The I<sup>2</sup>CA terminal has an internal pulldown resistor to pull the terminal low to set a zero.

**Table 2–5. I<sup>2</sup>C Address Selection**

| A6 | A5 | A4 | A3 | A2 | A1 | A0 (I <sup>2</sup> CA) | R/W | HEX   |
|----|----|----|----|----|----|------------------------|-----|-------|
| 1  | 0  | 1  | 1  | 1  | 0  | 0 (default)            | 1/0 | B9/B8 |
| 1  | 0  | 1  | 1  | 1  | 0  | 1 <sup>†</sup>         | 1/0 | BB/BA |

<sup>†</sup> If terminal 37 is strapped to DVDD via a 2.2-kΩ resistor, I<sup>2</sup>C device address A0 is set to 1.

### 2.6.2 I<sup>2</sup>C Operation

|   |           |     |            |     |           |     |   |
|---|-----------|-----|------------|-----|-----------|-----|---|
| S | 1011 1000 | ACK | Subaddress | ACK | Send data | ACK | P |
|---|-----------|-----|------------|-----|-----------|-----|---|

Data transfers occur using the following illustrated formats.

Read from I<sup>2</sup>C control registers

|   |           |     |            |     |   |           |     |              |     |   |
|---|-----------|-----|------------|-----|---|-----------|-----|--------------|-----|---|
| S | 1011 1000 | ACK | Subaddress | ACK | S | 1011 1001 | ACK | Receive data | NAK | P |
|---|-----------|-----|------------|-----|---|-----------|-----|--------------|-----|---|

S = I<sup>2</sup>C bus start condition

P = I<sup>2</sup>C bus stop condition

ACK = Acknowledge generated by the slave

NAK = Acknowledge generated by the master, for multiple-byte read master with ACK for each byte except last byte


Subaddress = Subaddress byte

Data = Data byte, if more than one byte of data is transmitted (read and write), the subaddress pointer is automatically incremented.

I<sup>2</sup>C bus address = Example showing that I<sup>2</sup>CA is in default mode. Write (B8h), read (B9h)


### 2.6.3 VBUS Access

The TVP5146 decoder has additional internal registers accessible through an indirect access to an internal 24-bit address wide VBUS. Figure 2–25 shows the VBUS registers access.

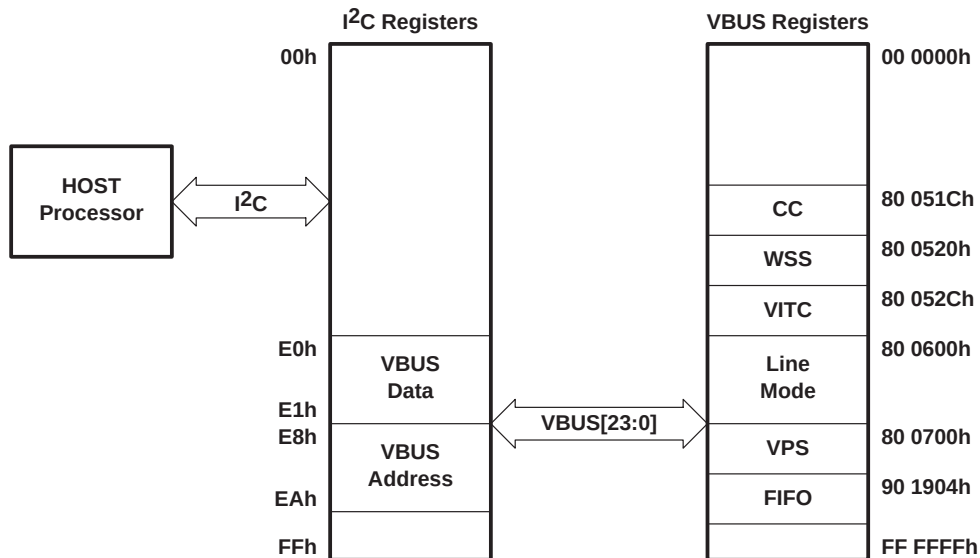


#### VBUS Write

##### Single Byte





##### Multiple Bytes





#### VBUS Read

##### Single Byte



##### Multiple Bytes



NOTE: Examples use default I2C address.

ACK = Acknowledge generated by the slave

NAK = No Acknowledge generated by the master

**Figure 2-25. VBUS Access**

## 2.6.4 I<sup>2</sup>C Timing Requirements

The TVP5146 decoder requires delays in the I<sup>2</sup>C accesses to accommodate the internal processor timing. In accordance with I<sup>2</sup>C specifications, the TVP5146 decoder holds the I<sup>2</sup>C clock line (SCL) low to indicate the wait period to the I<sup>2</sup>C master. If the I<sup>2</sup>C master is not designed to check for the I<sup>2</sup>C clock line held-low condition, then the maximum delays must always be inserted where required. These delays are of variable length; maximum delays are indicated in the following diagram:

Normal register



## 2.7 VBI Data Processor

The TVP5146 VBI data processor (VDP) slices various data services like teletext (WST, NABTS), closed caption (CC), wide screen signaling (WSS), program delivery control (PDC), vertical interval time code (VITC), video program system (VPS), copy generation management system (CGMS) data, and electronic program guide (Gemstar) 1x/2x. Table 2–6 shows the supported VBI system.

These services are acquired by programming the VDP to enable the reception of one or more VBI data standard(s) in the VBI. The VDP can be programmed on a line-per-line basis to enable simultaneous reception of different VBI formats, one per line. The results are stored in a FIFO and/or registers. Because of its high data bandwidth, the teletext results are stored in FIFO only. The TVP5146 decoder provides fully decoded V-CHIP data to the dedicated registers at subaddresses 800540h–800543h (see Sections 2.12.4 through 2.12.7).

**Table 2–6. Supported VBI Systems**

| VBI SYSTEM       | STANDARD | LINE NUMBER            | NUMBER OF BYTES   |
|------------------|----------|------------------------|-------------------|
| Teletext WST A   | SECAM    | 6–23 (Fields 1 and 2)  | 38                |
| Teletext WST B   | PAL      | 6–22 (Fields 1 and 2)  | 43                |
| Teletext NABTS C | NTSC     | 10–21 (Fields 1 and 2) | 34                |
| Teletext NABTS D | NTSC-J   | 10–21 (Fields 1 and 2) | 35                |
| Closed caption   | PAL      | 22 (Fields 1 and 2)    | 2                 |
| Closed caption   | NTSC     | 21 (Fields 1 and 2)    | 2                 |
| WSS              | PAL      | 23 (Fields 1 and 2)    | 14 bits           |
| WSS-CGMS         | NTSC     | 20 (Fields 1 and 2)    | 20 bits           |
| VITC             | PAL      | 6–22                   | 9                 |
| VITC             | NTSC     | 10–20                  | 9                 |
| VPS (PDC)        | PAL      | 16                     | 13                |
| V-CHIP (decoded) | NTSC     | 21 (Field 2)           | 2                 |
| Gemstar 1x       | NTSC     |                        | 2                 |
| Gemstar 2x       | NTSC     |                        | 5 with frame byte |
| User             | Any      | Programmable           | Programmable      |

## 2.7.1 VBI FIFO and Ancillary Data in Video Stream

Sliced VBI data can be output as ancillary data in the video stream in ITU-R BT.656 mode. VBI data is output on the Y[9:2] terminals during the horizontal blanking period. Table 2–7 shows the header format and sequence of the ancillary data inserted into the video stream. This format is also used to store any VBI data into the FIFO. The size of the FIFO is 512 bytes. Therefore, the FIFO can store up to 11 lines of teletext data with the NTSC NABTS standard.

**Table 2–7. Ancillary Data Format and Sequence**

| BYTE NO. | D7 (MSB)           | D6 | D5 | D4         | D3       | D2       | D1                 | D0 (LSB) | DESCRIPTION                |                      |  |
|----------|--------------------|----|----|------------|----------|----------|--------------------|----------|----------------------------|----------------------|--|
| 0        | 0                  | 0  | 0  | 0          | 0        | 0        | 0                  | 0        | Ancillary data preamble    |                      |  |
| 1        | 1                  | 1  | 1  | 1          | 1        | 1        | 1                  | 1        |                            |                      |  |
| 2        | 1                  | 1  | 1  | 1          | 1        | 1        | 1                  | 1        |                            |                      |  |
| 3        | NEP                | EP | 0  | 1          | 0        | DID2     | DID1               | DID0     | Data ID (DID)              |                      |  |
| 4        | NEP                | EP | F5 | F4         | F3       | F2       | F1                 | F0       | Secondary data ID (SDID)   |                      |  |
| 5        | NEP                | EP | N5 | N4         | N3       | N2       | N1                 | N0       | Number of 32-bit data (NN) |                      |  |
| 6        | Video line # [7:0] |    |    |            |          |          |                    |          | Internal data ID0 (IDID0)  |                      |  |
| 7        | 0                  | 0  | 0  | Data error | Match #1 | Match #2 | Video line # [9:8] |          | Internal data ID1 (IDID1)  |                      |  |
| 8        | 1. Data            |    |    |            |          |          |                    |          | Data byte                  | 1 <sup>st</sup> word |  |
| 9        | 2. Data            |    |    |            |          |          |                    |          | Data byte                  |                      |  |
| 10       | 3. Data            |    |    |            |          |          |                    |          | Data byte                  |                      |  |
| 11       | 4. Data            |    |    |            |          |          |                    |          | Data byte                  |                      |  |
| :        | :                  |    |    |            |          |          |                    |          | :                          |                      |  |
|          | m. Data            |    |    |            |          |          |                    |          | Data byte                  | N <sup>th</sup> word |  |
|          | CS[7:0]            |    |    |            |          |          |                    |          | Check sum                  |                      |  |
| 4N+7     | 0                  | 0  | 0  | 0          | 0        | 0        | 0                  | 0        | Fill byte                  |                      |  |

EP: Even parity for D0–D5      NEP: Negated even parity

DID: 91h: Sliced data of VBI lines of first field  
53h: Sliced data of line 24 to end of first field  
55h: Sliced data of VBI lines of second field  
97h: Sliced data of line 24 to end of second field

SDID: This field holds the data format taken from the line mode register bits [2:0] of the corresponding line.

NN: Number of Dwords beginning with byte 8 through 4N+7. Note this value is the number of Dwords where each Dword is 4 bytes.

IDID0: Transaction video line number [7:0]

IDID1: Bit 0/1 = Transaction video line number [9:8]  
Bit 2 = Match 2 flag  
Bit 3 = Match 1 flag  
Bit 4 = 1 if an error was detected in the EDC block. 0 if no error was detected.

CS: Sum of D0–D7 of first data through last data byte.

Fill byte: Fill bytes make a multiple of 4 bytes from byte 0 to last fill byte. For teletext modes, byte 8 is the sync pattern byte. Byte 9 is the first data byte.

## 2.7.2 VBI Raw Data Output

The TVP5146 decoder can output raw A/D video data at twice the sampling rate for external VBI slicing. This is transmitted as an ancillary data block, although somewhat differently from the way the sliced VBI data is transmitted in the FIFO format as described in Section 2.7.1. The samples are transmitted during the active portion of the line. VBI raw data uses ITU-R BT.656 format having only luma data. The chroma samples are replaced by luma samples. The TVP5146 decoder inserts a four-byte preamble 000h 3FFh 3FFh 180h before data start. There are no checksum bytes and fill bytes in this mode.

**Table 2–8. VBI Raw Data Output Format**


| BYTE NO. | D9 (MSB)  | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 (LSB) | DESCRIPTION                                           |
|----------|-----------|----|----|----|----|----|----|----|----|----------|-------------------------------------------------------|
| 0        | 0         | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0  | 0        | VBI raw data preamble                                 |
| 1        | 1         | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1        |                                                       |
| 2        | 1         | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1        |                                                       |
| 3        | 0         | 1  | 1  | 0  | 0  | 0  | 0  | 0  | 0  | 0        |                                                       |
| 4        | 1. Data   |    |    |    |    |    |    |    |    |          | 2× pixel rate luma data<br>(i.e., NTSC 601: n = 1707) |
| 5        | 2. Data   |    |    |    |    |    |    |    |    |          |                                                       |
| :        | :         |    |    |    |    |    |    |    |    |          |                                                       |
| n-1      | n-5. Data |    |    |    |    |    |    |    |    |          |                                                       |
| n        | n-4. Data |    |    |    |    |    |    |    |    |          |                                                       |

## 2.8 Reset and Initialization

Reset is initiated at power up or any time terminal 34 (RESETB) is brought low. Table 2–9 describes the status of the TVP5146 terminals during and immediately after reset.

**Table 2–9. Reset Sequence**

| SIGNAL NAME                                          | DURING RESET | RESET COMPLETED |
|------------------------------------------------------|--------------|-----------------|
| Y[9:0], C[9:0], DATACLK                              | Input        | High-impedance  |
| RESETB, PWDN, SDA, SCL, FSS, AVID, GLCO, HS, VS, FID | Input        | Input           |
| INTREQ                                               | Input        | Output          |
| DATACLK                                              | Output       | High-impedance  |

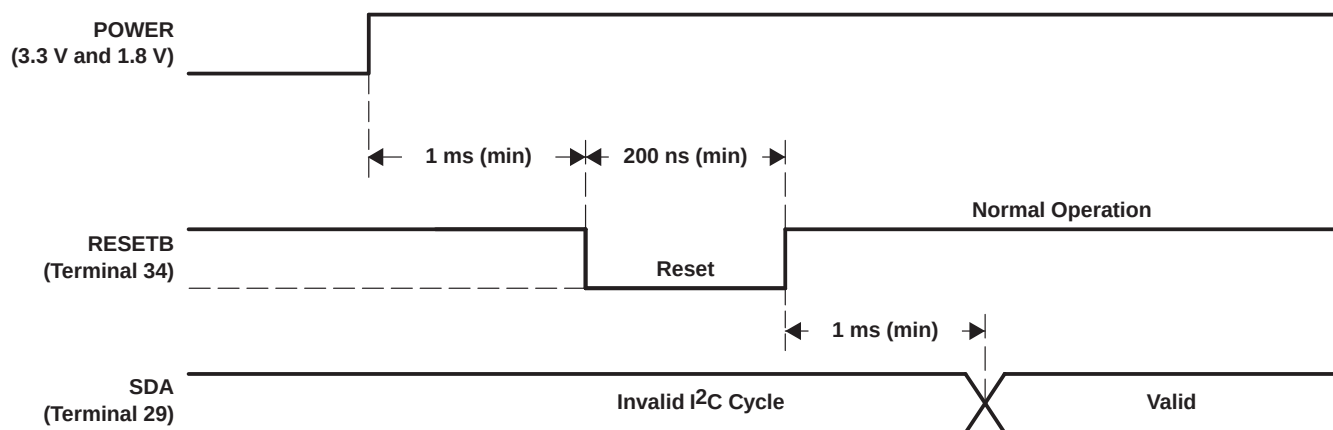

**Figure 2–26. Reset Timing**

The TVP5146 requires that terminal 69 (C\_1/GPIO) be held LOW. If using the 20-/16-bit mode or using this terminal as GPIO, then this terminal must be pulled low through a 2.2-k $\Omega$  pulldown resistor (see Figure 5–1). If unused, this terminal can be shorted to ground. (Note: If using the 20-/16-bit mode and only using the 16 MSBs, it is possible to short terminal 69 to GND, but the current for IOVDD will increase by 2 or 3 mA.)

After reset, the user must write the following I<sup>2</sup>C commands to the TVP5146:

| STEP | I <sup>2</sup> C SUBADDRESS | I <sup>2</sup> C DATA |
|------|-----------------------------|-----------------------|
| 1    | 0xE8                        | 0x02                  |
| 2    | 0xE9                        | 0x00                  |
| 3    | 0xEA                        | 0x80                  |
| 4    | 0xE0                        | 0x01                  |
| 5    | 0xE8                        | 0x60                  |
| 6    | 0xE9                        | 0x00                  |
| 7    | 0xEA                        | 0xB0                  |
| 8    | 0xE0                        | 0x01                  |
| 9    | 0xE0                        | 0x00                  |

Afterward, the user programs the device as usual.

## 2.9 Adjusting External Syncs

The proper sequence to program the following external syncs is:

- To set NTSC, PAL-M, NTSC 443, PAL60 (525-line modes):
  - Set the video standard to NTSC (register 02h)
  - Set HSYNC, VSYNC, VBLK, and AVID external syncs (registers 16h through 24h)
- To set PAL, PAL-N, SECAM (625-line modes):
  - Set the video standard to PAL (register 02h)
  - Set HSYNC, VSYNC, VBLK, and AVID external syncs (registers 16h through 24h)
- For autoswitch, set the video standard to autoswitch (register 02h)

## 2.10 Internal Control Registers

The TVP5146 decoder is initialized and controlled by a set of internal registers that define the operating parameters of the entire decoder. Communication between the external controller and the TVP5146 decoder is through a standard I<sup>2</sup>C host port interface, as described earlier. Table 2–10 shows the summary of these registers. Detailed programming information for each register is described in the following sections. Additional registers are accessible through an indirect procedure involving access to an internal 24-bit address wide VBUS. Table 2–11 shows the summary of the VBUS registers.

**NOTE:** Do not write to reserved registers. Reserved bits in any defined register must be written with 0s, unless otherwise noted.

**Table 2–10. Register Summary**

| REGISTER NAME                    | I <sup>2</sup> C SUBADDRESS | DEFAULT | R/W |
|----------------------------------|-----------------------------|---------|-----|
| Input select                     | 00h                         | 00h     | R/W |
| AFE gain control                 | 01h                         | 0Fh     | R/W |
| Video standard                   | 02h                         | 00h     | R/W |
| Operation mode                   | 03h                         | 00h     | R/W |
| Autoswitch mask                  | 04h                         | 23h     | R/W |
| Color killer                     | 05h                         | 10h     | R/W |
| Luminance processing control 1   | 06h                         | 00h     | R/W |
| Luminance processing control 2   | 07h                         | 00h     | R/W |
| Luminance processing control 3   | 08h                         | 02h     | R/W |
| Luminance brightness             | 09h                         | 80h     | R/W |
| Luminance contrast               | 0Ah                         | 80h     | R/W |
| Chrominance saturation           | 0Bh                         | 80h     | R/W |
| Chroma hue                       | 0Ch                         | 00h     | R/W |
| Chrominance processing control 1 | 0Dh                         | 00h     | R/W |
| Chrominance processing control 2 | 0Eh                         | 0Eh     | R/W |
| Reserved                         | 0Fh                         |         |     |
| Component Pr saturation          | 10h                         | 80h     | R/W |
| Component Y contrast             | 11h                         | 80h     | R/W |
| Component Pb saturation          | 12h                         | 80h     | R/W |
| Reserved                         | 13h                         |         |     |
| Component Y brightness           | 14h                         | 80h     | R/W |
| Reserved                         | 15h                         |         |     |
| AVID start pixel                 | 16h–17h                     | 055h    | R/W |
| AVID stop pixel                  | 18h–19h                     | 325h    | R/W |
| HSYNC start pixel                | 1Ah–1Bh                     | 000h    | R/W |
| HSYNC stop pixel                 | 1Ch–1Dh                     | 040h    | R/W |
| VSYNC start line                 | 1Eh–1Fh                     | 004h    | R/W |
| VSYNC stop line                  | 20h–21h                     | 007h    | R/W |
| VBLK start line                  | 22h–23h                     | 001h    | R/W |
| VBLK stop line                   | 24h–25h                     | 015h    | R/W |

NOTE: R = Read only  
W = Write only  
R/W = Read and write  
Reserved register addresses must not be written to.

**Table 2–10. Registers Summary (Continued)**

| REGISTER NAME                | I <sup>2</sup> C SUBADDRESS | DEFAULT | R/W |
|------------------------------|-----------------------------|---------|-----|
| Reserved                     | 26h–27h                     |         |     |
| Fast-switch control          | 28h                         | CCh     | R/W |
| Reserved                     | 29h                         |         |     |
| Fast-switch SCART delay      | 2Ah                         | 00h     | R/W |
| Reserved                     | 2Bh                         |         |     |
| SCART delay                  | 2Ch                         | 00h     | R/W |
| CTI delay                    | 2Dh                         | 00h     | R/W |
| CTI control                  | 2Eh                         | 00h     | R/W |
| Reserved                     | 2Fh–30h                     |         |     |
| RTC                          | 31h                         | 05h     | R/W |
| Sync control                 | 32h                         | 00h     | R/W |
| Output formatter 1           | 33h                         | 40h     | R/W |
| Output formatter 2           | 34h                         | 00h     | R/W |
| Output formatter 3           | 35h                         | FFh     | R/W |
| Output formatter 4           | 36h                         | FFh     | R/W |
| Output formatter 5           | 37h                         | FFh     | R/W |
| Output formatter 6           | 38h                         | FFh     | R/W |
| Clear lost lock detect       | 39h                         | 00h     | R/W |
| Status 1                     | 3Ah                         |         | R   |
| Status 2                     | 3Bh                         |         | R   |
| AGC gain status              | 3Ch–3Dh                     |         | R   |
| Reserved                     | 3Eh                         |         |     |
| Video standard status        | 3Fh                         |         | R   |
| GPIO input 1                 | 40h                         |         | R   |
| GPIO input 2                 | 41h                         |         | R   |
| Vertical line count          | 42h–43h                     |         | R   |
| Reserved                     | 44h–45h                     |         | R   |
| AFE coarse gain for CH1      | 46h                         | 20h     | R/W |
| AFE coarse gain for CH2      | 47h                         | 20h     | R/W |
| AFE coarse gain for CH3      | 48h                         | 20h     | R/W |
| AFE coarse gain for CH4      | 49h                         | 20h     | R/W |
| AFE fine gain for Pb_B       | 4Ah–4Bh                     | 900h    | R/W |
| AFE fine gain for Y_G_Chroma | 4Ch–4Dh                     | 900h    | R/W |
| AFE fine gain for Pr_R       | 4Eh–4Fh                     | 900h    | R/W |
| AFE fine gain for CVBS_Luma  | 50h–51h                     | 900h    | R/W |
| Reserved                     | 52h–6Fh                     |         |     |
| ROM version                  | 70h                         |         | R   |
| Reserved                     | 71h–73h                     |         |     |
| AGC white peak processing    | 74h                         | 00h     | R/W |
| Reserved                     | 75h–77h                     |         |     |

NOTE: R = Read only  
W = Write only  
R/W = Read and write  
Reserved register addresses must not be written to.



**Table 2–10. Registers Summary (Continued)**

| REGISTER NAME                                   | I <sup>2</sup> C SUBADDRESS | DEFAULT  | R/W |
|-------------------------------------------------|-----------------------------|----------|-----|
| AGC increment speed                             | 78h                         | 05h      | R/W |
| AGC increment delay                             | 79h                         | 1Eh      | R/W |
| Reserved                                        | 7Ah–7Fh                     |          |     |
| Chip ID MSB                                     | 80h                         |          | R   |
| Chip ID LSB                                     | 81h                         |          | R   |
| Reserved                                        | 82h–B0h                     |          |     |
| VDP TTX filter 1 mask 1                         | B1h                         | 00h      | R/W |
| VDP TTX filter 1 mask 2                         | B2h                         | 00h      | R/W |
| VDP TTX filter 1 mask 3                         | B3h                         | 00h      | R/W |
| VDP TTX filter 1 mask 4                         | B4h                         | 00h      | R/W |
| VDP TTX filter 1 mask 5                         | B5h                         | 00h      | R/W |
| VDP TTX filter 2 mask 1                         | B6h                         | 00h      | R/W |
| VDP TTX filter 2 mask 2                         | B7h                         | 00h      | R/W |
| VDP TTX filter 2 mask 3                         | B8h                         | 00h      | R/W |
| VDP TTX filter 2 mask 4                         | B9h                         | 00h      | R/W |
| VDP TTX filter 2 mask 5                         | BAh                         | 00h      | R/W |
| VDP TTX filter control                          | BBh                         | 00h      | R/W |
| VDP FIFO word count                             | BCh                         |          | R   |
| VDP FIFO interrupt threshold                    | BDh                         | 80h      | R/W |
| Reserved                                        | BEh                         |          |     |
| VDP FIFO reset                                  | BFh                         | 00h      | R/W |
| VDP FIFO output control                         | C0h                         | 00h      | R/W |
| VDP line number interrupt                       | C1h                         | 00h      | R/W |
| VDP pixel alignment                             | C2h–C3h                     | 01Eh     | R/W |
| Reserved                                        | C4h–D5h                     |          |     |
| VDP line start                                  | D6h                         | 06h      | R/W |
| VDP line stop                                   | D7h                         | 1Bh      | R/W |
| VDP global line mode                            | D8h                         | FFh      | R/W |
| VDP full field enable                           | D9h                         | 00h      | R/W |
| VDP full field mode                             | DAh                         | FFh      | R/W |
| Reserved                                        | DBh–DFh                     |          |     |
| VBUS data access with no VBUS address increment | E0h                         | 00h      | R/W |
| VBUS data access with VBUS address increment    | E1h                         | 00h      | R/W |
| FIFO read data                                  | E2h                         |          | R   |
| Reserved                                        | E3h–E7h                     |          |     |
| VBUS address access                             | E8h–E9h                     | 00 0000h | R/W |
| Reserved                                        | EBh–EFh                     |          |     |
| Interrupt raw status 0                          | F0h                         |          |     |
| Interrupt raw status 1                          | F1h                         |          |     |

NOTE: R = Read only  
W = Write only  
R/W = Read and write  
Reserved register addresses must not be written to.

**Table 2–10. Registers Summary (Continued)**

| REGISTER NAME      | I <sup>2</sup> C SUBADDRESS | DEFAULT | R/W |
|--------------------|-----------------------------|---------|-----|
| Interrupt status 0 | F2h                         |         | R/W |
| Interrupt status 1 | F3h                         |         | R/W |
| Interrupt mask 0   | F4h                         | 00h     | R/W |
| Interrupt mask 1   | F5h                         | 00h     | R/W |
| Interrupt clear 0  | F6h                         | 00h     | R/W |
| Interrupt clear 1  | F7h                         | 00h     | R/W |
| Reserved           | F8h–FFh                     |         |     |

NOTE: R = Read only  
W = Write only  
R/W = Read and write  
Reserved register addresses must not be written to.

**Table 2–11. VBUS Register Summary**

| REGISTER NAME                          | I <sup>2</sup> C SUBADDRESS | DEFAULT  | R/W |
|----------------------------------------|-----------------------------|----------|-----|
| Reserved                               | 00 0000h–80 051Bh           |          |     |
| VDP closed caption data                | 80 051Ch–80 051Fh           |          | R   |
| VDP WSS data                           | 80 0520h–80 0526h           |          | R   |
| Reserved                               | 80 0527h–80 052Bh           |          |     |
| VDP VITC data                          | 80 052Ch–80 0534h           |          | R   |
| Reserved                               | 80 0535h–80 053Fh           |          |     |
| VDP V-Chip data                        | 80 0540h–80 0543h           |          | R   |
| Reserved                               | 80 0544h–80 05FFh           |          |     |
| VDP general line mode and line address | 80 0600h–80 0611h           | 00h, FFh | R/W |
| Reserved                               | 80 0612h–80 06FFh           |          |     |
| VDP VPS/Gemstar data                   | 80 0700h–80 070Ch           |          | R   |
| Reserved                               | 80 070Dh–90 1903h           |          |     |
| VDP FIFO read                          | 90 1904h                    |          | R   |
| Reserved                               | 90 1905h–B0 005Fh           |          |     |
| Interrupt configuration                | B0 0060h                    | 00h      | R/W |
| Reserved                               | B0 0061h–FF FFFFh           |          |     |

NOTE: Writing any value to a reserved register may cause erroneous operation of the TVP5146 decoder.  
It is recommended not to access any data to/from reserved registers.

## 2.11 Register Definitions

### 2.11.1 Input Select Register

|            |     |
|------------|-----|
| Subaddress | 00h |
| Default    | 00h |

| 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------------|---|---|---|---|---|---|---|
| Input select [7:0] |   |   |   |   |   |   |   |

**Table 2–12. Analog Channel and Video Mode Selection**

| MODE    | INPUT(S) SELECTED                               | INPUT SELECT [7:0] |   |   |   |   |   |   |   | HEX |
|---------|-------------------------------------------------|--------------------|---|---|---|---|---|---|---|-----|
|         |                                                 | 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |     |
| CVBS    | VI_1_A (default)                                | 0                  | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 00  |
|         | VI_1_B                                          | 0                  | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01  |
|         | VI_1_C                                          | 0                  | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 02  |
|         | VI_2_A                                          | 0                  | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 04  |
|         | VI_2_B                                          | 0                  | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 05  |
|         | VI_2_C                                          | 0                  | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 06  |
|         | VI_3_A                                          | 0                  | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 08  |
|         | VI_3_B                                          | 0                  | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 09  |
|         | VI_3_C                                          | 0                  | 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0A  |
|         | VI_4_A                                          | 0                  | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0C  |
| S-video | VI_2_A(Y), VI_1_A(C)                            | 0                  | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 44  |
|         | VI_2_B(Y), VI_1_B(C)                            | 0                  | 1 | 0 | 0 | 0 | 1 | 0 | 1 | 45  |
|         | VI_2_C(Y), VI_1_C(C)                            | 0                  | 1 | 0 | 0 | 0 | 1 | 1 | 0 | 46  |
|         | VI_2_A(Y), VI_3_A(C)                            | 0                  | 1 | 0 | 1 | 0 | 1 | 0 | 0 | 54  |
|         | VI_2_B(Y), VI_3_B(C)                            | 0                  | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 55  |
|         | VI_2_C(Y), VI_3_C(C)                            | 0                  | 1 | 0 | 1 | 0 | 1 | 1 | 0 | 56  |
|         | VI_4_A(Y), VI_1_A(C)                            | 0                  | 1 | 0 | 0 | 1 | 1 | 0 | 0 | 4C  |
|         | VI_4_A(Y), VI_1_B(C)                            | 0                  | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 4D  |
|         | VI_4_A(Y), VI_1_C(C)                            | 0                  | 1 | 0 | 0 | 1 | 1 | 1 | 0 | 4E  |
|         | VI_4_A(Y), VI_3_A(C)                            | 0                  | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 5C  |
|         | VI_4_A(Y), VI_3_B(C)                            | 0                  | 1 | 0 | 1 | 1 | 1 | 0 | 1 | 5D  |
|         | VI_4_A(Y), VI_3_C(C)                            | 0                  | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 5E  |
| RGB     | VI_1_A(B), VI_2_A(G), VI_3_A(R)                 | 1                  | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 84  |
|         | VI_1_B(B), VI_2_B(G), VI_3_B(R)                 | 1                  | 0 | 0 | 0 | 0 | 1 | 0 | 1 | 85  |
|         | VI_1_C(B), VI_2_C(G), VI_3_C(R)                 | 1                  | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 86  |
| YPbPr   | VI_1_A(Pb), VI_2_A(Y), VI_3_A(Pr)               | 1                  | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 94  |
|         | VI_1_B(Pb), VI_2_B(Y), VI_3_B(Pr)               | 1                  | 0 | 0 | 1 | 0 | 1 | 0 | 1 | 95  |
|         | VI_1_C(Pb), VI_2_C(Y), VI_3_C(Pr)               | 1                  | 0 | 0 | 1 | 0 | 1 | 1 | 0 | 96  |
| SCART   | VI_1_A(B), VI_2_A(G), VI_3_A(R), VI_4_A(CVBS)   | 1                  | 1 | 0 | 0 | 1 | 1 | 0 | 0 | CC  |
|         | VI_1_B(B), VI_2_B(G), VI_3_B(R), VI_4_A(CVBS)   | 1                  | 1 | 0 | 0 | 1 | 1 | 0 | 1 | CD  |
|         | VI_1_C(B), VI_2_C(G), VI_3_C(R), VI_4_A(CVBS)   | 1                  | 1 | 0 | 0 | 1 | 1 | 1 | 0 | CE  |
|         | VI_1_A(Pb), VI_2_A(Y), VI_3_A(Pr), VI_4_A(CVBS) | 1                  | 1 | 0 | 1 | 1 | 1 | 0 | 0 | DC  |
|         | VI_1_B(Pb), VI_2_B(Y), VI_3_B(Pr), VI_4_A(CVBS) | 1                  | 1 | 0 | 1 | 1 | 1 | 0 | 1 | DD  |
|         | VI_1_C(Pb), VI_2_C(Y), VI_3_C(Pr), VI_4_A(CVBS) | 1                  | 1 | 0 | 1 | 1 | 1 | 1 | 0 | DE  |

Ten input terminals can be configured to support composite, S-video, and component YPbPr/RGB or SCART as listed in Table 2–12. Users must follow this table properly for S-video and component applications because only the terminal configurations listed in Table 2–12 are supported.

## 2.11.2 AFE Gain Control Register

|            |     |
|------------|-----|
| Subaddress | 01h |
| Default    | 0Fh |

|          |   |   |   |   |   |            |          |
|----------|---|---|---|---|---|------------|----------|
| 7        | 6 | 5 | 4 | 3 | 2 | 1          | 0        |
| Reserved |   |   |   | 1 | 1 | AGC chroma | AGC luma |

Bit 3: 1 must be written to this bit.

Bit 2: 1 must be written to this bit.

AGC chroma: Controls automatic gain in the chroma/B/R/PbPr channel:

- 0 = Manual (if AGC luma is set to manual, AGC chroma is forced to be in manual)
- 1 = Enabled auto gain, applies a gain value acquired from the sync channel for S-video and component mode. When AGC luma is set, this state is valid. (default)

AGC luma: Controls automatic gain in the embedded sync channel of CVBS, S-video, component video:

- 0 = Manual gain, AFE coarse and fine gain frozen to the previous gain value set by a AGC when this bit is set to 0.
- 1 = Enabled auto gain applies only to the embedded sync channel (default)

These settings only affect the analog front-end (AFE). The brightness and contrast of component, CVBS are not affected by these settings.

## 2.11.3 Video Standard Register

|            |     |
|------------|-----|
| Subaddress | 02h |
| Default    | 00h |

|          |   |   |   |   |                      |   |   |
|----------|---|---|---|---|----------------------|---|---|
| 7        | 6 | 5 | 4 | 3 | 2                    | 1 | 0 |
| Reserved |   |   |   |   | Video standard [2:0] |   |   |

Video standard [2:0]:

| <u>CVBS and S-Video</u>         | <u>Component Video</u>    |
|---------------------------------|---------------------------|
| 000 = Autoswitch mode (default) | Autoswitch mode (default) |
| 001 = (M, J) NTSC               | Component 525             |
| 010 = (B, D, G, H, I, N) PAL    | Component 625             |
| 011 = (M) PAL                   | Reserved                  |
| 100 = (Combination-N) PAL       | Reserved                  |
| 101 = NTSC 4.43                 | Reserved                  |
| 110 = SECAM                     | Reserved                  |
| 111 = PAL 60                    | Reserved                  |

**NOTE:** PAL60 is not included in autoswitch mode.

With the autoswitch code running, the user can force the decoder to operate in a particular video standard mode by writing the appropriate value into this register. Changing these bits causes the register settings to be reinitialized.

**NOTE:** Sampling rate (either square pixel or ITU-R BT.601) can be set by bit 7 (sampling rate) in the output formatter 1 register at I<sup>2</sup>C subaddress 33h (see Section 2.11.35).

### 2.11.4 Operation Mode Register

|            |     |
|------------|-----|
| Subaddress | 03h |
| Default    | 00h |

|          |   |   |   |   |   |   |            |
|----------|---|---|---|---|---|---|------------|
| 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0          |
| Reserved |   |   |   |   |   |   | Power save |

Power save:

- 0 = Normal operation (default)
- 1 = Power-save mode. Reduces the clock speed of the internal processor and switches off the ADCs. I<sup>2</sup>C interface is active and all current operating settings are preserved.

### 2.11.5 Autoswitch Mask Register

|            |     |
|------------|-----|
| Subaddress | 04h |
| Default    | 23h |

|          |   |       |           |          |         |     |             |
|----------|---|-------|-----------|----------|---------|-----|-------------|
| 7        | 6 | 5     | 4         | 3        | 2       | 1   | 0           |
| Reserved |   | SECAM | NTSC 4.43 | (Nc) PAL | (M) PAL | PAL | (M, J) NTSC |

Autoswitch mode mask: Limits the video formats between which autoswitch is possible.

SECAM:

- 0 = Autoswitch does not include SECAM
- 1 = Autoswitch includes SECAM (default)

NTSC 4.43:

- 0 = Autoswitch does not include NTSC 4.43 (default)
- 1 = Autoswitch includes NTSC 4.43

(Nc) PAL:

- 0 = Autoswitch does not include (Nc) PAL (default)
- 1 = Autoswitch includes (Nc) PAL

(M) PAL:

- 0 = Autoswitch does not include (M) PAL (default)
- 1 = Autoswitch includes (M) PAL

PAL:

- 0 = Reserved
- 1 = Autoswitch includes (B, D, G, H, I, N) PAL (default)

(M, J) NTSC:

- 0 = Reserved
- 1 = Autoswitch includes (M, J) NTSC (default)

**NOTE:** Bits 1 and 0 must always be 1.

### 2.11.6 Color Killer Register

|            |     |
|------------|-----|
| Subaddress | 05h |
| Default    | 10h |

| 7        | 6                      | 5 | 4                            | 3 | 2 | 1 | 0 |
|----------|------------------------|---|------------------------------|---|---|---|---|
| Reserved | Automatic color killer |   | Color killer threshold [4:0] |   |   |   |   |

Automatic color killer:

- 00 = Automatic mode (default)
- 01 = Reserved
- 10 = Color killer enabled, the C terminals are forced to a zero color state.
- 11 = Color killer disabled

Color killer threshold [4:0]:

- 1 1111 = 31 (maximum)
- 1 0000 = 16 (default)
- 0 0000 = 0 (minimum)

### 2.11.7 Luminance Processing Control 1 Register

|            |     |
|------------|-----|
| Subaddress | 06h |
| Default    | 00h |

| 7        | 6                    | 5        | 4       | 3                            | 2 | 1 | 0 |
|----------|----------------------|----------|---------|------------------------------|---|---|---|
| Reserved | Pedestal not present | Reserved | VBI raw | Luminance signal delay [3:0] |   |   |   |

Pedestal not present:

- 0 = 7.5 IRE pedestal is present on the analog video input signal (default)
- 1 = Pedestal is not present on the analog video input signal

VBI raw:

- 0 = Disabled (default)
- 1 = Enabled

During the duration of the vertical blanking as defined by the VBLK start and stop line registers at subaddresses 22h through 25h (see Sections 2.11.26 and 2.11.27), the chroma samples are replaced by luma samples. This feature can be used to support VBI processing performed by an external device during the VBI. In order to use this bit, the output format must be 10-bit ITU-R BT.656 mode.

Luminance signal delay [3:0]: Luminance signal delays with respect to the chroma signal in 1× pixel clock increments.

- 0111 = Reserved
- 0110 = 6-pixel delay
- 0001 = 1-pixel delay
- 0000 = 0 delay (default)
- 1111 = -1-pixel delay
- 1000 = -8-pixel delay

### 2.11.8 Luminance Processing Control 2 Register

|            |     |
|------------|-----|
| Subaddress | 07h |
| Default    | 00h |

|                          |   |          |   |                                |   |          |   |
|--------------------------|---|----------|---|--------------------------------|---|----------|---|
| 7                        | 6 | 5        | 4 | 3                              | 2 | 1        | 0 |
| Luma filter select [1:0] |   | Reserved |   | Peaking gain (sharpness) [1:0] |   | Reserved |   |

Luma filter selected [1:0]:

- 00 = Luminance adaptive comb enabled (default on CVBS)
- 01 = Luminance adaptive comb disabled (trap filter selected)
- 10 = Luma comb/trap filter bypassed (default on S-video, component mode, and SECAM)
- 11 = Reserved

Peaking gain (sharpness) [1:0]:

- 00 = 0 (default)
- 01 = 0.5
- 10 = 1
- 11 = 2

### 2.11.9 Luminance Processing Control 3 Register

|            |     |
|------------|-----|
| Subaddress | 08h |
| Default    | 02h |

|          |   |   |   |   |   |                          |   |
|----------|---|---|---|---|---|--------------------------|---|
| 7        | 6 | 5 | 4 | 3 | 2 | 1                        | 0 |
| Reserved |   |   |   |   |   | Trap filter select [1:0] |   |

Trap filter select [1:0] selects one of the four trap filters to produce the luminance signal by removing the chrominance signal from the composite video signal. The stopband of the chroma trap filter is centered at the chroma subcarrier frequency with the stopband bandwidth controlled by the two control bits.

Trap filter stopband bandwidth (MHz):

| Filter select [1:0] | NTSC ITU-R BT.601 | NTSC Square pixel | PAL ITU-R BT.601 | PAL Square pixel |
|---------------------|-------------------|-------------------|------------------|------------------|
| 00 =                | 1.2129            | 1.1026            | 1.2129           | 1.3252           |
| 01 =                | 0.8701            | 0.7910            | 0.8701           | 0.9507           |
| 10 = (default)      | 0.7183            | 0.6712            | 0.7383           | 0.8066           |
| 11 =                | 0.5010            | 0.4554            | 0.5010           | 0.5474           |

### 2.11.10 Luminance Brightness Register

|            |     |
|------------|-----|
| Subaddress | 09h |
| Default    | 80h |

|                  |   |   |   |   |   |   |   |
|------------------|---|---|---|---|---|---|---|
| 7                | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Brightness [7:0] |   |   |   |   |   |   |   |

Brightness [7:0]: This register works for CVBS and S-video luminance.

- 1111 1111 = 255 (bright)
- 1000 0000 = 128 (default)
- 0000 0000 = 0 (dark)

### 2.11.11 Luminance Contrast Register

|            |     |
|------------|-----|
| Subaddress | 0Ah |
| Default    | 80h |

|                |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|
| 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Contrast [7:0] |   |   |   |   |   |   |   |

Contrast [7:0]: This register works for CVBS and S-video luminance.

1111 1111 = 255 (maximum contrast)

1000 0000 = 128 (default)

0000 0000 = 0 (minimum contrast)

### 2.11.12 Chrominance Saturation Register

|            |     |
|------------|-----|
| Subaddress | 0Bh |
| Default    | 80h |

|                  |   |   |   |   |   |   |   |
|------------------|---|---|---|---|---|---|---|
| 7                | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Saturation [7:0] |   |   |   |   |   |   |   |

Saturation [7:0]: This register works for CVBS and S-video chrominance.

1111 1111 = 255 (maximum)

1000 0000 = 128 (default)

0000 0000 = 0 (no color)

### 2.11.13 Chroma Hue Register

|            |     |
|------------|-----|
| Subaddress | 0Ch |
| Default    | 00h |

|           |   |   |   |   |   |   |   |
|-----------|---|---|---|---|---|---|---|
| 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Hue [7:0] |   |   |   |   |   |   |   |

Hue [7:0] (does not apply to a component video): This register works for CVBS and S-video chrominance.

0111 1111 = +180 degrees

0000 0000 = 0 degrees (default)

1000 0000 = -180 degrees



### 2.11.14 Chrominance Processing Control 1 Register

|            |     |
|------------|-----|
| Subaddress | 0Dh |
| Default    | 00h |

| 7        | 6 | 5 | 4               | 3                                | 2        | 1                                  | 0 |
|----------|---|---|-----------------|----------------------------------|----------|------------------------------------|---|
| Reserved |   |   | Color PLL reset | Chrominance adaptive comb enable | Reserved | Automatic color gain control [1:0] |   |

Color PLL reset:

- 0 = Color subcarrier PLL not reset (default)
- 1 = Color subcarrier PLL reset

Chrominance adaptive comb enable: This bit is effective on composite video only.

- 0 = Enabled (default)
- 1 = Disabled

Automatic color gain control (ACGC) [1:0]:

- 00 = ACGC enabled (default)
- 01 = Reserved
- 10 = ACGC disabled, ACGC set to the nominal value
- 11 = ACGC frozen to the previous set value

### 2.11.15 Chrominance Processing Control 2 Register

|            |     |
|------------|-----|
| Subaddress | 0Eh |
| Default    | 0Eh |

| 7        | 6 | 5 | 4 | 3                | 2   | 1                               | 0 |
|----------|---|---|---|------------------|-----|---------------------------------|---|
| Reserved |   |   |   | PAL compensation | WCF | Chrominance filter select [1:0] |   |

PAL compensation:

- 0 = Disabled
- 1 = Enabled (default)

WCF: Wideband chroma LPF filter

- 0 = Disabled
- 1 = Enabled (default)

Chrominance filter select [1:0]:

- 00 = Disabled
- 01 = Notch 1
- 10 = Notch 2 (default)
- 11 = Notch 3

See Figure 2–8 through Figure 2–11 for characteristics.

### 2.11.16 Component Pr Saturation Register

|            |     |
|------------|-----|
| Subaddress | 10h |
| Default    | 80h |

| 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|---|---|---|---|---|---|---|
| Pr saturation [7:0] |   |   |   |   |   |   |   |

Pr saturation [7:0]: This register works only with YPbPr component video. For RGB video, user must use the AFE gain registers.

- 1111 1111 = 255 (maximum)
- 1000 0000 = 128 (default)
- 0000 0000 = 0 (minimum)

### 2.11.17 Component Y Contrast Register

|            |     |
|------------|-----|
| Subaddress | 11h |
| Default    | 80h |

|                  |   |   |   |   |   |   |   |
|------------------|---|---|---|---|---|---|---|
| 7                | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Y contrast [7:0] |   |   |   |   |   |   |   |

Y contrast [7:0]: This register works only with YPbPr component video. For RGB video, user must use the AFE gain registers.

1111 1111 = 255 (maximum)

1000 0000 = 128 (default)

0000 0000 = 0 (minimum)

### 2.11.18 Component Pb Saturation Register

|            |     |
|------------|-----|
| Subaddress | 12h |
| Default    | 80h |

|                     |   |   |   |   |   |   |   |
|---------------------|---|---|---|---|---|---|---|
| 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Pb saturation [7:0] |   |   |   |   |   |   |   |

Pb saturation [7:0]: This register works only with YPbPr component video. For RGB video, user must use the AFE gain registers.

1111 1111 = 255 (maximum)

1000 0000 = 128 (default)

0000 0000 = 0 (minimum)

### 2.11.19 Component Y Brightness Register

|            |     |
|------------|-----|
| Subaddress | 14h |
| Default    | 80h |

|                    |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|
| 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Y brightness [7:0] |   |   |   |   |   |   |   |

Y brightness [7:0]: This register works only with YPbPr component video.

1111 1111 = 255 (maximum)

1000 0000 = 128 (default)

0000 0000 = 0 (minimum)

### 2.11.20 AVID Start Pixel Register

|            |         |
|------------|---------|
| Subaddress | 16h–17h |
| Default    | 055h    |

| Subaddress | 7                | 6 | 5 | 4           | 3        | 2 | 1                | 0 |
|------------|------------------|---|---|-------------|----------|---|------------------|---|
| 16h        | AVID start [7:0] |   |   |             |          |   |                  |   |
| 17h        | Reserved         |   |   | AVID active | Reserved |   | AVID start [9:8] |   |

AVID active:

0 = AVID out active in VBLK (default)

1 = AVID out inactive in VBLK

AVID start [9:0]: AVID start pixel number, this is a absolute pixel location from HSYNC start pixel 0.

|         |                 |                 |                |                |
|---------|-----------------|-----------------|----------------|----------------|
|         | <u>NTSC 601</u> | <u>NTSC Sqp</u> | <u>PAL 601</u> | <u>PAL Sqp</u> |
| default | 85 (55h)        | 86 (56h)        | 88 (58h)       | 103 (67h)      |

The TVP5146 decoder updates the AVID start only when the AVID start MSB byte is written to. If the user changes these registers, then the TVP5146 decoder retains values in different modes until this decoder resets. The AVID start pixel register also controls the position of the SAV code.

### 2.11.21 AVID Stop Pixel Register

|            |         |
|------------|---------|
| Subaddress | 18h–19h |
| Default    | 325h    |

| Subaddress | 7               | 6 | 5 | 4 | 3 | 2 | 1               | 0 |
|------------|-----------------|---|---|---|---|---|-----------------|---|
| 18h        | AVID stop [7:0] |   |   |   |   |   |                 |   |
| 19h        | Reserved        |   |   |   |   |   | AVID stop [9:8] |   |

AVID stop [9:0]: AVID stop pixel number. The number of pixels of active video must be an even number. This is an absolute pixel location from HSYNC start pixel 0.

|         |                 |                 |                |                |
|---------|-----------------|-----------------|----------------|----------------|
|         | <u>NTSC 601</u> | <u>NTSC Sqp</u> | <u>PAL 601</u> | <u>PAL Sqp</u> |
| default | 805 (325h)      | 726 (2D6h)      | 808 (328h)     | 696 (2B8h)     |

The TVP5146 decoder updates the AVID stop only when the AVID stop MSB byte is written to. If the user changes these registers, then the TVP5146 decoder retains values in different modes until this decoder resets. The AVID start pixel register also controls the position of the EAV code.

### 2.11.22 HSYNC Start Pixel Register

|            |         |
|------------|---------|
| Subaddress | 1Ah–1Bh |
| Default    | 000h    |

Default (000h)

| Subaddress | 7                 | 6 | 5 | 4 | 3 | 2 | 1                 | 0 |
|------------|-------------------|---|---|---|---|---|-------------------|---|
| 1Ah        | HSYNC start [7:0] |   |   |   |   |   |                   |   |
| 1Bh        | Reserved          |   |   |   |   |   | HSYNC start [9:8] |   |

HSYNC start pixel [9:0]: This is an absolute pixel location from HSYNC start pixel 0.

The TVP5146 decoder updates the HSYNC start only when the HSYNC start MSB byte is written to. If the user changes these registers, then the TVP5146 decoder retains values in different modes until this decoder resets.

### 2.11.23 HSYNC Stop Pixel Register

|            |         |
|------------|---------|
| Subaddress | 1Ch–1Dh |
| Default    | 040h    |

| Subaddress | 7                | 6 | 5 | 4 | 3 | 2 | 1                | 0 |
|------------|------------------|---|---|---|---|---|------------------|---|
| 1Ch        | HSYNC stop [7:0] |   |   |   |   |   |                  |   |
| 1Dh        | Reserved         |   |   |   |   |   | HSYNC stop [9:8] |   |

HSYNC stop [9:0]: This is an absolute pixel location from HSYNC start pixel 0.

The TVP5146 decoder updates the HSYNC stop only when the HSYNC Stop MSB byte is written to. If the user changes these registers, then the TVP5146 decoder retains values in different modes until this decoder resets.

### 2.11.24 VSYNC Start Line Register

|            |         |
|------------|---------|
| Subaddress | 1Eh–1Fh |
| Default    | 004h    |

| Subaddress | 7                 | 6 | 5 | 4 | 3 | 2 | 1                 | 0 |
|------------|-------------------|---|---|---|---|---|-------------------|---|
| 1Eh        | VSYNC start [7:0] |   |   |   |   |   |                   |   |
| 1Fh        | Reserved          |   |   |   |   |   | VSYNC start [9:8] |   |

VSYNC start [9:0]: This is an absolute line number. The TVP5146 decoder updates the VSYNC start only when the VSYNC start MSB byte is written to. If the user changes these registers, then the TVP5146 decoder retains values in different modes until this decoder resets.

NTSC: default 004h, PAL: default 001h

### 2.11.25 VSYNC Stop Line Register

|            |         |
|------------|---------|
| Subaddress | 20h–21h |
| Default    | 007h    |

| Subaddress | 7                | 6 | 5 | 4 | 3 | 2 | 1                | 0 |
|------------|------------------|---|---|---|---|---|------------------|---|
| 20h        | VSYNC stop [7:0] |   |   |   |   |   |                  |   |
| 21h        | Reserved         |   |   |   |   |   | VSYNC stop [9:8] |   |

VSYNC stop [9:0]: This is an absolute line number. The TVP5146 decoder updates the VSYNC stop only when the VSYNC stop MSB byte is written to. If the user changes these registers, the TVP5146 decoder retains values in different modes until this decoder resets.

NTSC: default 007h, PAL: default 004h

### 2.11.26 VBLK Start Line Register

|            |         |
|------------|---------|
| Subaddress | 22h–23h |
| Default    | 001h    |

| Subaddress | 7                | 6 | 5 | 4 | 3 | 2 | 1                | 0 |
|------------|------------------|---|---|---|---|---|------------------|---|
| 22h        | VBLK start [7:0] |   |   |   |   |   |                  |   |
| 23h        | Reserved         |   |   |   |   |   | VBLK start [9:8] |   |

VBLK start [9:0]: This is an absolute line number. The TVP5146 decoder updates the VBLK start line only when the VBLK start MSB byte is written to. If the user changes these registers, the TVP5146 decoder retains values in different modes until this decoder resets.

NTSC: default 001h, PAL: default 623 (26Fh)

### 2.11.27 VBLK Stop Line Register

|            |         |
|------------|---------|
| Subaddress | 24h–25h |
| Default    | 015h    |

| Subaddress | 7               | 6 | 5 | 4 | 3 | 2 | 1               | 0 |
|------------|-----------------|---|---|---|---|---|-----------------|---|
| 24h        | VBLK stop [7:0] |   |   |   |   |   |                 |   |
| 25h        | Reserved        |   |   |   |   |   | VBLK stop [9:8] |   |

VBLK stop [9:0]: This is an absolute line number. The TVP5146 decoder updates the VBLK stop only when the VBLK stop MSB byte is written to. If the user changes these registers, then the TVP5146 decoder retains values in different modes until this decoder resets.

NTSC: default 21 (15h), PAL: default 23 (17h)

### 2.11.28 Fast-Switch Control Register

|            |     |
|------------|-----|
| Subaddress | 28h |
| Default    | CCh |

| 7          | 6 | 5 | 4        | 3        | 2        | 1        | 0            |
|------------|---|---|----------|----------|----------|----------|--------------|
| Mode [2:0] |   |   | Reserved | Reserved | FSS edge | Reserved | Polarity FSS |

Mode [2:0]: Select fast-switch modes

000 = CVBS ↔ SCART  
 001 = Reserved  
 010 = Reserved  
 011 = Reserved  
 100 = Reserved  
 101 = Reserved  
 110 = Composite only (default)  
 111 = Component only

FSS edge: FSS is sampled at the rising or falling edge of the sampling clock

0 = Rising edge  
 1 = Falling edge (default)

Polarity FSS:

0 = 0: YCbCr/RGB      1: CVBS (4A) (default)  
 1 = 0: CVBS (4A)      1: YCbCr/RGB

### 2.11.29 Fast-Switch SCART Delay Register

|            |     |
|------------|-----|
| Subaddress | 2Ah |
| Default    | 00h |

| 7        | 6 | 5 | 4               | 3 | 2 | 1 | 0 |
|----------|---|---|-----------------|---|---|---|---|
| Reserved |   |   | FSS delay [4:0] |   |   |   |   |

FSS delay [4:0]: Adjusts the delay between the FSS and component RGB/YPbPr

0 1111 = 15 pixel delay  
 0 0001 = 1 pixel delay  
 0 0000 = 0 delay (default)  
 1 1111 = –1 pixel delay  
 1 0000 = –16 pixel delay

### 2.11.30 SCART Delay Register

|            |     |
|------------|-----|
| Subaddress | 2Ch |
| Default    | 00h |

|          |   |   |   |                   |   |   |   |
|----------|---|---|---|-------------------|---|---|---|
| 7        | 6 | 5 | 4 | 3                 | 2 | 1 | 0 |
| Reserved |   |   |   | SCART delay [4:0] |   |   |   |

SCART delay [4:0]: Adjusts delay between the CVBS and component (RGB) video

0 1111 = 15 pixel delay  
0 0001 = 1 pixel delay  
0 0000 = 0 delay (default)  
1 1111 = -1 pixel delay  
1 0000 = -16 pixel delay

### 2.11.31 CTI Delay Register

|            |     |
|------------|-----|
| Subaddress | 2Dh |
| Default    | 00h |

|          |   |   |   |   |                 |   |   |
|----------|---|---|---|---|-----------------|---|---|
| 7        | 6 | 5 | 4 | 3 | 2               | 1 | 0 |
| Reserved |   |   |   |   | CTI delay [2:0] |   |   |

CTI delay [2:0]: Sets the delay of the Y channel with respect to Cb/Cr in the CTI block

011 = 3 pixel delay  
001 = 1 pixel delay  
000 = 0 delay (default)  
111 = -1 pixel delay  
100 = -4 pixel delay

### 2.11.32 CTI Control Register

|            |     |
|------------|-----|
| Subaddress | 2Eh |
| Default    | 00h |

|                  |   |   |   |                |   |   |   |
|------------------|---|---|---|----------------|---|---|---|
| 7                | 6 | 5 | 4 | 3              | 2 | 1 | 0 |
| CTI coring [3:0] |   |   |   | CTI gain [3:0] |   |   |   |

CTI coring [3:0]: 4-bit CTI coring limit control value, unsigned linear control range from 0 to  $\pm 60$ , step size = 4

1111 =  $\pm 60$   
0001 =  $\pm 4$   
0000 = 0 (default)

CTI gain [3:0]: 4-bit CTI gain control values, unsigned linear control range from 0 to  $15/16$ , step size =  $1/16$

1111 =  $15/16$   
0001 =  $1/16$   
0000 = 0 disabled (default)

### 2.11.33 RTC Register

|            |     |
|------------|-----|
| Subaddress | 31h |
| Default    | 05h |

|          |   |   |   |   |               |   |   |
|----------|---|---|---|---|---------------|---|---|
| 7        | 6 | 5 | 4 | 3 | 2             | 1 | 0 |
| Reserved |   |   |   |   | Genlock [2:0] |   |   |

Genlock [2:0]:

000 = Reserved  
001 = Reserved  
010 = Reserved  
011 = Reserved  
100 = Reserved  
101 = RTC mode  
110 = Reserved  
111 = Reserved

### 2.11.34 Sync Control Register

|            |     |
|------------|-----|
| Subaddress | 32h |
| Default    | 00h |

|          |   |   |              |             |             |         |       |
|----------|---|---|--------------|-------------|-------------|---------|-------|
| 7        | 6 | 5 | 4            | 3           | 2           | 1       | 0     |
| Reserved |   |   | Polarity FID | Polarity VS | Polarity HS | VS/VBLK | HS/CS |

Polarity FID: determines polarity of FID terminal

0 = First field high, second field low (default)  
1 = First field low, second field high

Polarity VS: determines polarity of VS terminal

0 = Active low (default)  
1 = Active high

Polarity HS: determines polarity of HS terminal

0 = Active low (default)  
1 = Active high

VS/VBLK:

0 = VS terminal outputs vertical sync (default)  
1 = VS terminal outputs vertical blank

HS/CS:

0 = HS terminal outputs horizontal sync (default)  
1 = HS terminal outputs composite sync

### 2.11.35 Output Formatter 1 Register

|            |     |
|------------|-----|
| Subaddress | 33h |
| Default    | 40h |

| 7             | 6                | 5         | 4        | 3 | 2                   | 1 | 0 |
|---------------|------------------|-----------|----------|---|---------------------|---|---|
| Sampling rate | YCbCr code range | CbCr code | Reserved |   | Output format [2:0] |   |   |

Sampling rate (changing this bit causes the register settings to be reinitialized):

0 = ITU-R BT.601 sampling rate (default)

1 = Square pixel sampling rate

YCbCr code range:

0 = ITU-R BT.601 coding range (Y ranges from 64 to 940. Cb and Cr range from 64 to 960.)

1 = Extended coding range (Y, Cb, and Cr range from 4 to 1016) (default)

CbCr code:

0 = Offset binary code (2s complement + 512) (default)

1 = Straight binary code (2s complement)

Output format [2:0]:

000 = 10-bit 4:2:2 (2× pixel rate) with embedded syncs (ITU-R BT.656) (default)

001 = 20-bit 4:2:2 (pixel rate) with separate syncs

010 = Reserved

011 = 10-bit 4:2:2 with separate syncs

100–111 = Reserved

**NOTE:** 10-bit mode is also used for the raw VBI output mode when bit 4 (VBI raw) in the luminance processing control 1 register at subaddress 06h is set (see Section 2.11.7).

### 2.11.36 Output Formatter 2 Register

|            |     |
|------------|-----|
| Subaddress | 34h |
| Default    | 00h |

| 7        | 6 | 5 | 4             | 3        | 2 | 1            | 0            |
|----------|---|---|---------------|----------|---|--------------|--------------|
| Reserved |   |   | Y[9:0] enable | Reserved |   | CLK polarity | Clock enable |

Y[9:0] enable: Y[9:0] and C[9:0] output enable

0 = Y[9:0] and C[9:0] high impedance (default)

1 = Y [9:0] and C[9:0] active

CLK polarity:

0 = Data clocked out on the falling edge of DATACLK (default)

1 = Data clocked out on the rising edge of DATACLK

Clock enable:

0 = DATACLK outputs are high-impedance (default).

1 = DATACLK outputs are enabled.



### 2.11.37 Output Formatter 3 Register

|            |     |
|------------|-----|
| Subaddress | 35h |
| Default    | FFh |

|           |   |            |   |            |   |           |   |
|-----------|---|------------|---|------------|---|-----------|---|
| 7         | 6 | 5          | 4 | 3          | 2 | 1         | 0 |
| FSS [1:0] |   | AVID [1:0] |   | GLCO [1:0] |   | FID [1:0] |   |

FSS [1:0]: FSS terminal function select

- 00 = FSS is logic 0 output.
- 01 = FSS is logic 1 output.
- 10 = FSS is fast-switch input for SCART support.
- 11 = FSS is logic input (default).

AVID [1:0]: AVID terminal function select

- 00 = AVID is logic 0 output.
- 01 = AVID is logic 1 output.
- 10 = AVID is active video indicator output.
- 11 = AVID is logic input (default).

GLCO [1:0]: GLCO terminal function select

- 00 = GLCO is logic 0 output.
- 01 = GLCO is logic 1 output.
- 10 = GCLO is genlock output.
- 11 = GCLO is logic input (default).

FID [1:0]: FID terminal function select

- 00 = FID is logic 0 output.
- 01 = FID is logic 1 output.
- 10 = FID is FID output.
- 11 = FID is logic input (default).

### 2.11.38 Output Formatter 4 Register

|            |     |
|------------|-----|
| Subaddress | 36h |
| Default    | FFh |

|               |   |             |   |           |   |           |   |
|---------------|---|-------------|---|-----------|---|-----------|---|
| 7             | 6 | 5           | 4 | 3         | 2 | 1         | 0 |
| VS/VBLK [1:0] |   | HS/CS [1:0] |   | C_1 [1:0] |   | C_0 [1:0] |   |

VS/VBLK [1:0]: VS terminal function select

00 = VS is logic 0 output.

01 = VS is logic 1 output.

10 = VS/VBLK is vertical sync or vertical blank output corresponding to bit 1 (VS/VBLK) in the sync control register at subaddress 32h (see Section 2.11.34).

11 = VS is logic input (default).

HS/CS [1:0]: HS terminal function select

00 = HS is logic 0 output.

01 = HS is logic 1 output.

10 = HS/CS is horizontal sync or composite sync output corresponding to bit 0 (HS/CS) in the sync control register at subaddress 32h (see Section 2.11.34).

11 = HS is logic input (default).

C\_1 [1:0]: C\_1 terminal function select

00 = C\_1 is logic 0 output.

01 = C\_1 is logic 1 output.

10 = Reserved

11 = C\_1 is logic input (default).

C\_0 [1:0]: C\_0 terminal function select

00 = C\_0 is logic 0 output.

01 = C\_0 is logic 1 output.

10 = Reserved

11 = C\_0 is logic input (default).

C\_x functions are only available in the 10-bit output mode.

### 2.11.39 Output Formatter 5 Register

|            |     |
|------------|-----|
| Subaddress | 37h |
| Default    | FFh |

|           |   |           |   |           |   |           |   |
|-----------|---|-----------|---|-----------|---|-----------|---|
| 7         | 6 | 5         | 4 | 3         | 2 | 1         | 0 |
| C_5 [1:0] |   | C_4 [1:0] |   | C_3 [1:0] |   | C_2 [1:0] |   |

C\_5 [1:0]: C\_5 terminal function select

- 00 = C\_5 is logic 0 output.
- 01 = C\_5 is logic 1 output.
- 10 = Reserved
- 11 = C\_5 is logic input (default).

C\_4 [1:0]: C\_4 terminal function select

- 00 = C\_4 is logic 0 output.
- 01 = C\_4 is logic 1 output.
- 10 = Reserved
- 11 = C\_4 is logic input (default).

C\_3 [1:0]: C\_3 terminal function select

- 00 = C\_3 is logic 0 output.
- 01 = C\_3 is logic 1 output.
- 10 = Reserved
- 11 = C\_3 is logic input (default)

C\_2 [1:0]: C\_2 terminal function select

- 00 = C\_2 is logic 0 output.
- 01 = C\_2 is logic 1 output.
- 10 = Reserved
- 11 = C\_2 is logic input (default).

C\_x functions are only available in the 10-bit output mode.

### 2.11.40 Output Formatter 6 Register

|            |     |
|------------|-----|
| Subaddress | 38h |
| Default    | FFh |

|           |   |           |   |           |   |           |   |
|-----------|---|-----------|---|-----------|---|-----------|---|
| 7         | 6 | 5         | 4 | 3         | 2 | 1         | 0 |
| C_9 [1:0] |   | C_8 [1:0] |   | C_7 [1:0] |   | C_6 [1:0] |   |

C\_9 [1:0]: C\_9 terminal function select

- 00 = C\_9 is logic 0 output.
- 01 = C\_9 is logic 1 output.
- 10 = Reserved
- 11 = C\_9 is logic input (default).

C\_8 [1:0]: C\_8 terminal function select

- 00 = C\_8 is logic 0 output.
- 01 = C\_8 is logic 1 output.
- 10 = Reserved
- 11 = C\_8 is logic input (default).

C\_7 [1:0]: C\_7 terminal function select

- 00 = C\_7 is logic 0 output.
- 01 = C\_7 is logic 1 output.
- 10 = Reserved
- 11 = C\_7 is logic input (default).

C\_6 [1:0]: C\_6 terminal function select

- 00 = C\_6 is logic 0 output.
- 01 = C\_6 is logic 1 output.
- 10 = Reserved
- 11 = C\_6 is logic input (default).

C\_x functions are only available in the 10-bit output mode.

### 2.11.41 Clear Lost Lock Detect Register

|            |     |
|------------|-----|
| Subaddress | 39h |
| Default    | 00h |

|          |   |   |   |   |   |   |                        |
|----------|---|---|---|---|---|---|------------------------|
| 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0                      |
| Reserved |   |   |   |   |   |   | Clear lost lock detect |

Clear lost lock detect: Clear bit 4 (lost lock detect) in the status 1 register at subaddress 3Ah (see Section 2.11.42).

- 0 = No effect (default)
- 1 = Clears bit 4 in the status 1 register

## 2.11.42 Status 1 Register

|            |     |
|------------|-----|
| Subaddress | 3Ah |
|------------|-----|

Read only

| 7                        | 6                       | 5                 | 4                | 3                            | 2                         | 1                           | 0             |
|--------------------------|-------------------------|-------------------|------------------|------------------------------|---------------------------|-----------------------------|---------------|
| Peak white detect status | Line-alternating status | Field rate status | Lost lock detect | Color subcarrier lock status | Vertical sync lock status | Horizontal sync lock status | TV/VCR status |

Peak white detect status:

- 0 = Peak white is not detected.
- 1 = Peak white is detected.

Line-alternating status:

- 0 = Nonline-alternating
- 1 = Line-alternating

Field rate status:

- 0 = 60 Hz
- 1 = 50 Hz

Lost lock detect:

- 0 = No lost lock since this bit was cleared
- 1 = Lost lock since this bit was cleared.

Color subcarrier lock status:

- 0 = Color subcarrier is not locked.
- 1 = Color subcarrier is locked.

Vertical sync lock status:

- 0 = Vertical sync is not locked.
- 1 = Vertical sync is locked.

Horizontal sync lock status:

- 0 = Horizontal sync is not locked.
- 1 = Horizontal sync is locked.

TV/VCR status:

- 0 = TV
- 1 = VCR

### 2.11.43 Status 2 Register

|            |     |
|------------|-----|
| Subaddress | 3Bh |
|------------|-----|

Read only

| 7        | 6                     | 5                   | 4                     | 3        | 2                           | 1 | 0 |
|----------|-----------------------|---------------------|-----------------------|----------|-----------------------------|---|---|
| Reserved | Weak signal detection | PAL switch polarity | Field sequence status | Reserved | Macrovision detection [2:0] |   |   |

Weak signal detection:

- 0 = No weak signal
- 1 = Weak signal mode

PAL switch polarity of first line of odd field:

- 0 = PAL switch is zero.
- 1 = PAL switch is one.

Field sequence status:

- 0 = Even field
- 1 = Odd field

Macrovision detection [2:0]:

- 000 = No copy protection
- 001 = AGC pulses/pseudo syncs present (type 1)
- 010 = 2-line colorstripe only present
- 011 = AGC pulses/pseudo syncs and 2-line colorstripe present (type 2)
- 100 = Reserved
- 101 = Reserved
- 110 = 4-line colorstripe only present
- 111 = AGC pulses/pseudo syncs and 4-line colorstripe present (type 3)

### 2.11.44 AGC Gain Status Register

|            |         |
|------------|---------|
| Subaddress | 3Ch–3Dh |
|------------|---------|

Read only

| Subaddress | 7                 | 6 | 5 | 4 | 3                | 2 | 1 | 0 |
|------------|-------------------|---|---|---|------------------|---|---|---|
| 3Ch        | Fine gain [7:0]   |   |   |   |                  |   |   |   |
| 3Dh        | Coarse gain [3:0] |   |   |   | Fine gain [11:8] |   |   |   |

Fine gain [11:0]: This register provides the fine gain value of sync channel. See FGAIN 1 [11:0] in the AFE fine gain for Pb\_B register at subaddress 4Ah–4Bh (see Section 2.11.53).

- 1111 1111 1111 = 1.9995
- 1000 0000 0000 = 1
- 0010 0000 0000 = 0.5

Coarse gain [3:0]: This register provides the coarse gain value of sync channel. See CGAIN 1 [3:0] in the AFE coarse gain for CH1 register at subaddress 46h (see Section 2.11.49).

- 1111 = 2
- 0101 = 1
- 0000 = 0.5

These AGC gain status registers are updated automatically by the TVP5146 decoder with AGC on. In manual gain control mode these register values are not updated by the TVP5146 decoder.

### 2.11.45 Video Standard Status Register

|            |     |
|------------|-----|
| Subaddress | 3Fh |
|------------|-----|

Read only

| 7          | 6        | 5 | 4 | 3 | 2                    | 1 | 0 |
|------------|----------|---|---|---|----------------------|---|---|
| Autoswitch | Reserved |   |   |   | Video standard [2:0] |   |   |

Autoswitch mode:

- 0 = Stand-alone (forced video standard) mode
- 1 = Autoswitch mode

Video standard [2:0]:

| <u>CVBS and S-video</u>      | <u>Component video</u> |
|------------------------------|------------------------|
| 000 = Reserved               | Reserved               |
| 001 = (M, J) NTSC            | Component 525          |
| 010 = (B, D, G, H, I, N) PAL | Component 625          |
| 011 = (M) PAL                | Reserved               |
| 100 = (Combination-N) PAL    | Reserved               |
| 101 = NTSC 4.43              | Reserved               |
| 110 = SECAM                  | Reserved               |
| 111 = PAL 60                 | Reserved               |

This register contains information about the detected video standard that the decoder is currently operating. When autoswitch code is running, this register must be tested to determine which video standard has been detected.

### 2.11.46 GPIO Input 1 Register

|            |     |
|------------|-----|
| Subaddress | 40h |
|------------|-----|

Read only

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| C_7 | C_6 | C_5 | C_4 | C_3 | C_2 | C_1 | C_0 |

C\_x input status:

- 0 = Input is a low.
- 1 = Input is a high.

These status bits are only valid when terminals are used as inputs and their states updated at every line.

### 2.11.47 GPIO Input 2 Register

|            |     |
|------------|-----|
| Subaddress | 41h |
|------------|-----|

Read only

|     |      |      |    |    |     |     |     |
|-----|------|------|----|----|-----|-----|-----|
| 7   | 6    | 5    | 4  | 3  | 2   | 1   | 0   |
| FSS | AVID | GLCO | VS | HS | FID | C_9 | C_8 |

FSS input terminal status:

- 0 = Input is a low.
- 1 = Input is a high.

AVID input terminal status:

- 0 = Input is a low.
- 1 = Input is a high.

GLCO input terminal status:

- 0 = Input is a low
- 1 = Input is a high.

VS input terminal status:

- 0 = Input is a low.
- 1 = Input is a high.

HS input status:

- 0 = Input is a low.
- 1 = Input is a high.

FID input status:

- 0 = Input is a low.
- 1 = Input is a high.

C\_x input status:

- 0 = Input is a low.
- 1 = Input is a high.

These status bits are only valid when terminals are used as inputs and their states updated at every line.

### 2.11.48 Vertical Line Count Register

|            |         |
|------------|---------|
| Subaddress | 42h–43h |
|------------|---------|

Read only

|            |            |   |   |   |   |   |            |   |
|------------|------------|---|---|---|---|---|------------|---|
| Subaddress | 7          | 6 | 5 | 4 | 3 | 2 | 1          | 0 |
| 42h        | V_CNT[7:0] |   |   |   |   |   |            |   |
| 43h        | Reserved   |   |   |   |   |   | V_CNT[9:8] |   |

V\_CNT[9:0] represents the detected total number of lines from the previous frame.



### 2.11.49 AFE Coarse Gain for CH 1 Register

|            |     |
|------------|-----|
| Subaddress | 46h |
| Default    | 20h |

|               |   |   |   |          |   |   |   |
|---------------|---|---|---|----------|---|---|---|
| 7             | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
| CGAIN 1 [3:0] |   |   |   | Reserved |   |   |   |

CGAIN 1 [3:0]: Coarse\_Gain =  $0.5 + (\text{CGAIN } 1)/10$ , where  $0 \leq \text{CGAIN } 1 \leq 15$

This register works only in manual gain control mode. When AGC is active, writing to any value is ignored.

1111 = 2  
 1110 = 1.9  
 1101 = 1.8  
 1100 = 1.7  
 1011 = 1.6  
 1010 = 1.5  
 1001 = 1.4  
 1000 = 1.3  
 0111 = 1.2  
 0110 = 1.1  
 0101 = 1  
 0100 = 0.9  
 0011 = 0.8  
 0010 = 0.7 (default)  
 0001 = 0.6  
 0000 = 0.5

### 2.11.50 AFE Coarse Gain for CH 2 Register

|            |     |
|------------|-----|
| Subaddress | 47h |
| Default    | 20h |

|               |   |   |   |          |   |   |   |
|---------------|---|---|---|----------|---|---|---|
| 7             | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
| CGAIN 2 [3:0] |   |   |   | Reserved |   |   |   |

CGAIN 2 [3:0]: Coarse\_Gain =  $0.5 + (\text{CGAIN } 2)/10$ , where  $0 \leq \text{CGAIN } 2 \leq 15$

This register works only in manual gain control mode. When AGC is active, writing to any value is ignored.

1111 = 2  
 1110 = 1.9  
 1101 = 1.8  
 1100 = 1.7  
 1011 = 1.6  
 1010 = 1.5  
 1001 = 1.4  
 1000 = 1.3  
 0111 = 1.2  
 0110 = 1.1  
 0101 = 1  
 0100 = 0.9  
 0011 = 0.8  
 0010 = 0.7 (default)  
 0001 = 0.6  
 0000 = 0.5

### 2.11.51 AFE Coarse Gain for CH 3 Register

|            |     |
|------------|-----|
| Subaddress | 48h |
| Default    | 20h |

|               |   |   |   |          |   |   |   |
|---------------|---|---|---|----------|---|---|---|
| 7             | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
| CGAIN 3 [3:0] |   |   |   | Reserved |   |   |   |

CGAIN 3 [3:0]: Coarse\_Gain =  $0.5 + (\text{CGAIN } 3)/10$ , where  $0 \leq \text{CGAIN } 3 \leq 15$

This register works only in the manual gain control mode. When AGC is active, writing to any value is ignored.

1111 = 2  
 1110 = 1.9  
 1101 = 1.8  
 1100 = 1.7  
 1011 = 1.6  
 1010 = 1.5  
 1001 = 1.4  
 1000 = 1.3  
 0111 = 1.2  
 0110 = 1.1  
 0101 = 1  
 0100 = 0.9  
 0011 = 0.8  
 0010 = 0.7 (default)  
 0001 = 0.6  
 0000 = 0.5

### 2.11.52 AFE Coarse Gain for CH 4 Register

|            |     |
|------------|-----|
| Subaddress | 49h |
| Default    | 20h |

|               |   |   |   |          |   |   |   |
|---------------|---|---|---|----------|---|---|---|
| 7             | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
| CGAIN 4 [3:0] |   |   |   | Reserved |   |   |   |

CGAIN 4 [3:0]: Coarse\_Gain =  $0.5 + (\text{CGAIN } 4)/10$ , where  $0 \leq \text{CGAIN } 4 \leq 15$

This register works only in the manual gain control mode. When AGC is active, writing to any value is ignored.

1111 = 2  
 1110 = 1.9  
 1101 = 1.8  
 1100 = 1.7  
 1011 = 1.6  
 1010 = 1.5  
 1001 = 1.4  
 1000 = 1.3  
 0111 = 1.2  
 0110 = 1.1  
 0101 = 1  
 0100 = 0.9  
 0011 = 0.8  
 0010 = 0.7 (default)  
 0001 = 0.6  
 0000 = 0.5

### 2.11.53 AFE Fine Gain for Pb\_B Register

|            |         |
|------------|---------|
| Subaddress | 4Ah–4Bh |
| Default    | 900h    |

| Subaddress | 7             | 6 | 5 | 4 | 3              | 2 | 1 | 0 |
|------------|---------------|---|---|---|----------------|---|---|---|
| 4Ah        | FGAIN 1 [7:0] |   |   |   |                |   |   |   |
| 4Bh        | Reserved      |   |   |   | FGAIN 1 [11:8] |   |   |   |

FGAIN 1 [11:0]: This fine gain applies to component Pb/B.

$$\text{Fine\_Gain} = (1/2048) * \text{FGAIN 1}, \text{ where } 0 \leq \text{FGAIN 1} \leq 4095$$

This register works only in manual gain control mode. When AGC is active, writing to any value is ignored.

1111 1111 1111 = 1.9995  
 1100 0000 0000 = 1.5  
 1001 0000 0000 = 1.125 (default)  
 1000 0000 0000 = 1  
 0100 0000 0000 = 0.5  
 0011 1111 1111 to 0000 0000 0000 = Reserved

### 2.11.54 AFE Fine Gain for Y\_G\_Chroma Register

|            |         |
|------------|---------|
| Subaddress | 4Ch–4Dh |
| Default    | 900h    |

| Subaddress | 7             | 6 | 5 | 4 | 3              | 2 | 1 | 0 |
|------------|---------------|---|---|---|----------------|---|---|---|
| 4Ch        | FGAIN 2 [7:0] |   |   |   |                |   |   |   |
| 4Dh        | Reserved      |   |   |   | FGAIN 2 [11:8] |   |   |   |

FGAIN 2 [11:0]: This gain applies to component Y/G channel or S-video chroma.

$$\text{Fine\_Gain} = (1/2048) * \text{FGAIN 2}, \text{ where } 0 \leq \text{FGAIN 2} \leq 4095$$

This register works only in manual gain control mode. When AGC is active, writing to any value is ignored.

1111 1111 1111 = 1.9995  
 1100 0000 0000 = 1.5  
 1001 0000 0000 = 1.125 (default)  
 1000 0000 0000 = 1  
 0100 0000 0000 = 0.5  
 0011 1111 1111 to 0000 0000 0000 = Reserved

### 2.11.55 AFE Fine Gain for R\_Pr Register

|            |         |
|------------|---------|
| Subaddress | 4Eh–4Fh |
| Default    | 900h    |

| Subaddress | 7             | 6 | 5 | 4 | 3              | 2 | 1 | 0 |
|------------|---------------|---|---|---|----------------|---|---|---|
| 4Eh        | FGAIN 3 [7:0] |   |   |   |                |   |   |   |
| 4Fh        | Reserved      |   |   |   | FGAIN 3 [11:8] |   |   |   |

FGAIN 3 [11:0]: This fine gain applies to component Pb/B.

$$\text{Fine\_Gain} = (1/2048) * \text{FGAIN 3}, \text{ where } 0 \leq \text{FGAIN 3} \leq 4095$$

This register works only in manual gain control mode. When AGC is active, writing to any value is ignored.

1111 1111 1111 = 1.9995  
 1100 0000 0000 = 1.5  
 1001 0000 0000 = 1.125 (default)  
 1000 0000 0000 = 1  
 0100 0000 0000 = 0.5  
 0011 1111 1111 to 0000 0000 0000 = Reserved

### 2.11.56 AFE Fine Gain for CVBS\_Luma Register

|            |         |
|------------|---------|
| Subaddress | 50h–51h |
| Default    | 900h    |

| Subaddress | 7             | 6 | 5 | 4 | 3              | 2 | 1 | 0 |
|------------|---------------|---|---|---|----------------|---|---|---|
| 50h        | FGAIN 4 [7:0] |   |   |   |                |   |   |   |
| 51h        | Reserved      |   |   |   | FGAIN 4 [11:8] |   |   |   |

FGAIN 4 [11:0]: This fine gain applies to CVBS or S-video luma.

$$\text{Fine\_Gain} = (1/2048) * \text{FGAIN 4}, \text{ where } 0 \leq \text{FGAIN 4} \leq 4095$$

This register works only in manual gain control mode. When AGC is active, writing to any value is ignored.

1111 1111 1111 = 1.9995  
 1100 0000 0000 = 1.5  
 1001 0000 0000 = 1.125 (default)  
 1000 0000 0000 = 1  
 0100 0000 0000 = 0.5  
 0011 1111 1111 to 0000 0000 0000 = Reserved

### 2.11.57 ROM Version Register

|            |     |
|------------|-----|
| Subaddress | 70h |
|------------|-----|

Read only

| 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------|---|---|---|---|---|---|---|
| ROM version [7:0] |   |   |   |   |   |   |   |

ROM Version [7:0]: ROM revision number

## 2.11.58 AGC White Peak Processing Register

|            |     |
|------------|-----|
| Subaddress | 74h |
| Default    | 00h |

| 7           | 6        | 5             | 4             | 3           | 2              | 1             | 0             |
|-------------|----------|---------------|---------------|-------------|----------------|---------------|---------------|
| Luma peak A | Reserved | Color burst A | Sync height A | Luma peak B | Composite peak | Color burst B | Sync height B |

Luma peak A: Use of the luma peak as a video amplitude reference for the back-end feed-forward type AGC algorithm.

- 0 = Enabled (default)
- 1 = Disabled

Color burst A: Use of the color burst amplitude as a video amplitude reference for the back-end.

**NOTE:** Not available for SECAM, component, and B/W video sources.

- 0 = Enabled (default)
- 1 = Disabled

Sync height A: Use of the sync height as a video amplitude reference for the back-end feed-forward type AGC algorithm.

- 0 = Enabled (default)
- 1 = Disabled

Luma peak B: Use of the luma peak as a video amplitude reference for the front-end feedback type AGC algorithm.

- 0 = Enabled (default)
- 1 = Disabled

Composite peak: Use of the composite peak as a video amplitude reference for the front-end feedback type AGC algorithm.

**NOTE:** Required for CVBS and SCART (with color burst) video sources.

- 0 = Enabled (default)
- 1 = Disabled

Color burst B: Use of the color burst amplitude as a video amplitude reference for the front-end feedback type AGC algorithm.

**NOTE:** Not available for SECAM, component, and B/W video sources.

- 0 = Enabled (default)
- 1 = Disabled

Sync height B: Use of the sync height as a video amplitude reference for the front-end feedback type AGC algorithm.

- 0 = Enabled (default)
- 1 = Disabled

**NOTE:** If all 4 bits of the lower nibble are set to logic 1 (that is, no amplitude reference selected), then the front-end analog and digital gains are automatically set to nominal values of 2 and 2304, respectively.

If all 4 bits of the upper nibble are set to logic 1 (that is, no amplitude reference selected), then the back-end gain is set automatically to unity.

If the input sync height is greater than 100% and the AGC-adjusted output video amplitude becomes less than 100%, then the back-end scale factor attempts to increase the contrast in the back end to restore the video amplitude to 100%.

### 2.11.59 AGC Increment Speed Register

|            |     |
|------------|-----|
| Subaddress | 78h |
| Default    | 06h |

|          |   |   |   |   |                           |   |   |
|----------|---|---|---|---|---------------------------|---|---|
| 7        | 6 | 5 | 4 | 3 | 2                         | 1 | 0 |
| Reserved |   |   |   |   | AGC increment speed [3:0] |   |   |

AGC increment speed: Adjusts gain increment speed.

111 = 7 (slowest)

110 = 6 (default)

⋮

000 = 0 (fastest)

### 2.11.60 AGC Increment Delay Register

|            |     |
|------------|-----|
| Subaddress | 79h |
| Default    | 1Eh |

|                           |   |   |   |   |   |   |   |
|---------------------------|---|---|---|---|---|---|---|
| 7                         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| AGC increment delay [7:0] |   |   |   |   |   |   |   |

AGC increment delay: Number of frames to delay gain increments

1111 1111 = 255

⋮

0001 1110 = 30 (default)

⋮

0000 0000 = 0

### 2.11.61 Chip ID MSB Register

|            |     |
|------------|-----|
| Subaddress | 80h |
|------------|-----|

Read only

|                   |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|
| 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Chip ID MSB [7:0] |   |   |   |   |   |   |   |

Chip ID MSB [7:0]: This register identifies the MSB of the device ID. Value = 51h

### 2.11.62 Chip ID LSB Register

|            |     |
|------------|-----|
| Subaddress | 81h |
|------------|-----|

Read only

|                   |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|
| 7                 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Chip ID LSB [7:0] |   |   |   |   |   |   |   |

Chip ID LSB [7:0]: This register identifies the LSB of the device ID. Value = 46h

## 2.11.63 VDP TTX Filter And Mask Registers

| Subaddress | B1h | B2h | B3h | B4h | B5h | B6h | B7h | B8h | B9h | BAh |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Default    | 00h | 00h | 00h | 00h | 00h | 00h | 00h | 00h | 00h | 00h |

| Subaddress | 7               | 6 | 5 | 4 | 3                  | 2 | 1 | 0 |
|------------|-----------------|---|---|---|--------------------|---|---|---|
| B1h        | Filter 1 mask 1 |   |   |   | Filter 1 pattern 1 |   |   |   |
| B2h        | Filter 1 mask 2 |   |   |   | Filter 1 pattern 2 |   |   |   |
| B3h        | Filter 1 mask 3 |   |   |   | Filter 1 pattern 3 |   |   |   |
| B4h        | Filter 1 mask 4 |   |   |   | Filter 1 pattern 4 |   |   |   |
| B5h        | Filter 1 mask 5 |   |   |   | Filter 1 pattern 5 |   |   |   |
| B6h        | Filter 2 mask 1 |   |   |   | Filter 2 pattern 1 |   |   |   |
| B7h        | Filter 2 mask 2 |   |   |   | Filter 2 pattern 2 |   |   |   |
| B8h        | Filter 2 mask 3 |   |   |   | Filter 2 pattern 3 |   |   |   |
| B9h        | Filter 2 mask 4 |   |   |   | Filter 2 pattern 4 |   |   |   |
| BAh        | Filter 2 mask 5 |   |   |   | Filter 2 pattern 5 |   |   |   |

For an NABTS system, the packet prefix consists of five bytes. Each byte contains 4 data bits (D[3:0]) interlaced with 4 Hamming protection bits (H[3:0]):

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-------|-------|-------|-------|-------|
| D3    | H3    | D2    | H2    | D1    | H1    | D0    | H0    |

Only data portion D[3:0] from each byte is applied to a teletext filter function with corresponding pattern bits P[3:0] and mask bits M[3:0] (see Figure 2–27). The filter ignores the Hamming protection bits.

For WST system (PAL or NTSC), the packet prefix consists of two bytes. The two bytes contain three bits of magazine number (M[2:0]) and five bits of row address (R[4:0]), interlaced with eight Hamming protection bits H[7:0]:

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-------|-------|-------|-------|-------|
| R0    | H3    | M2    | H2    | M1    | H1    | M0    | H0    |
| R4    | H7    | R3    | H6    | R2    | H5    | R1    | H4    |

The mask bits enable filtering using the corresponding bit in the pattern register. For example, a 1 in the LSB of mask 1 means that the filter module must compare the LSB of nibble 1 in the pattern register to the first data bit on the transaction. If these match, then a true result is returned. A 0 in a mask bit means that the filter module must ignore that data bit of the transaction. If all 0s are programmed in the mask bits, then the filter matches all patterns returning a true result (default 00h).

### 2.11.64 VDP TTX Filter Control Register

|            |     |
|------------|-----|
| Subaddress | BBh |
| Default    | 00h |

| 7        | 6 | 5 | 4                  | 3 | 2    | 1                   | 0                   |
|----------|---|---|--------------------|---|------|---------------------|---------------------|
| Reserved |   |   | Filter logic [1:0] |   | Mode | TTX filter 2 enable | TTX filter 1 enable |

Filter logic [1:0]: Allows different logic to be applied when combining the decision of filter 1 and filter 2 as follows:

- 00 = NOR (default)
- 01 = NAND
- 10 = OR
- 11 = AND

Mode: Indicates which teletext mode is in use.

- 0 = Teletext filter applies to 2 header bytes (default)
- 1 = Teletext filter applies to 5 header bytes

TTX filter 2 enable: Provides for enabling the teletext filter function within the VDP.

- 0 = Disabled (default)
- 1 = Enabled

TTX filter 1 enable: Provides for enabling the teletext filter function within the VDP.

- 0 = Disabled (default)
- 1 = Enabled

If the filter matches or if the filter mask is all 0s, then a true result is returned.



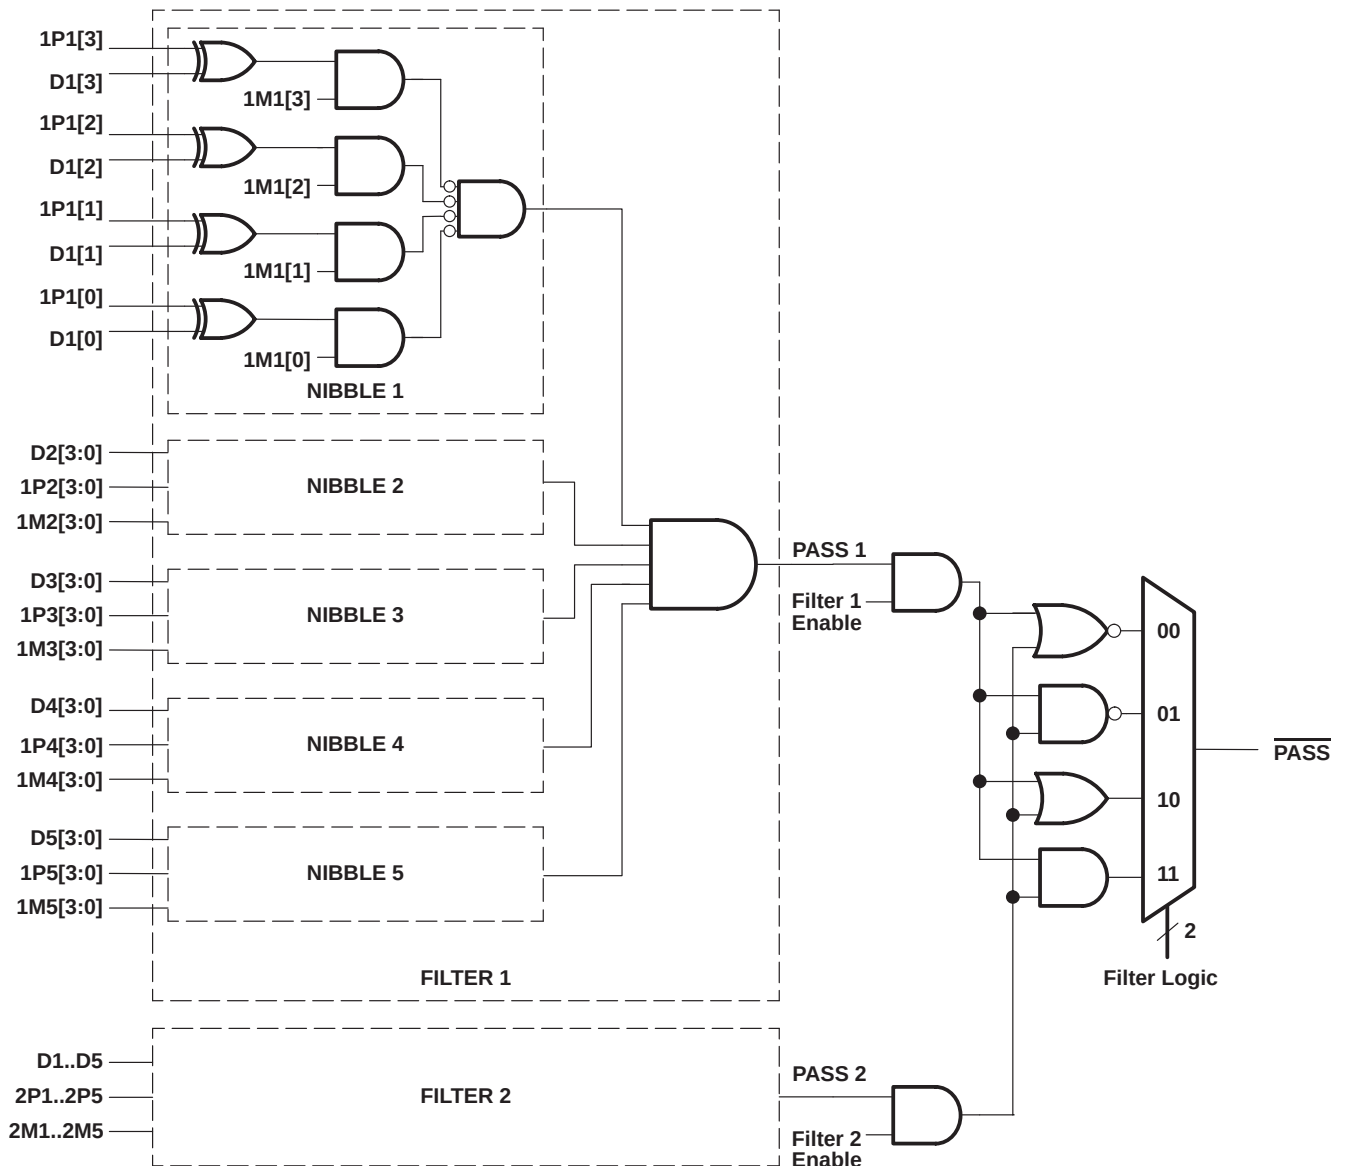


Figure 2-27. Teletext Filter Function

### 2.11.65 VDP FIFO Word Count Register

|            |     |
|------------|-----|
| Subaddress | BCh |
|------------|-----|

Read only

|                       |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|
| 7                     | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| FIFO word count [7:0] |   |   |   |   |   |   |   |

FIFO word count [7:0]: This register provides the number of words in the FIFO.

**NOTE:** 1 word equals 2 bytes.

### 2.11.66 VDP FIFO Interrupt Threshold Register

|            |     |
|------------|-----|
| Subaddress | BDh |
| Default    | 80h |

|                 |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|
| 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Threshold [7:0] |   |   |   |   |   |   |   |

Threshold [7:0]: This register is programmed to trigger an interrupt when the number of words in the FIFO exceeds this value.

**NOTE:** 1 word equals 2 bytes.

### 2.11.67 VDP FIFO Reset Register

|            |     |
|------------|-----|
| Subaddress | BFh |
| Default    | 00h |

|          |   |   |   |   |   |   |            |
|----------|---|---|---|---|---|---|------------|
| 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0          |
| Reserved |   |   |   |   |   |   | FIFO reset |

FIFO reset: Writing any data to this register clears the FIFO and VDP data registers (CC, WSS, VITC and VPS). After clearing them, this register is automatically cleared.

### 2.11.68 VDP FIFO Output Control Register

|            |     |
|------------|-----|
| Subaddress | C0h |
| Default    | 00h |

|          |   |   |   |   |   |   |                    |
|----------|---|---|---|---|---|---|--------------------|
| 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0                  |
| Reserved |   |   |   |   |   |   | Host access enable |

Host access enable: This register is programmed to allow the host port access to the FIFO or to allow all VDP data to go out the video output.

0 = Output FIFO data to the video output Y[9:2] (default)

1 = Allow host port access to the FIFO data

### 2.11.69 VDP Line Number Interrupt Register

|            |     |
|------------|-----|
| Subaddress | C1h |
| Default    | 00h |

|                |                |                   |   |   |   |   |   |
|----------------|----------------|-------------------|---|---|---|---|---|
| 7              | 6              | 5                 | 4 | 3 | 2 | 1 | 0 |
| Field 1 enable | Field 2 enable | Line number [5:0] |   |   |   |   |   |

Field 1 enable:

0 = Interrupt disabled (default)

1 = Interrupt enabled

Field 2 enable:

0 = Interrupt disabled (default)

1 = Interrupt enabled

Line number [5:0]: Interrupt line number (default 00h)

This register is programmed to trigger an interrupt when the video line number exceeds this value in bits [5:0]. This interrupt must be enabled at address F4h.

**NOTE:** The line number value of 0 or 1 is invalid and does not generate an interrupt.

### 2.11.70 VDP Pixel Alignment Register

|            |         |
|------------|---------|
| Subaddress | C2h–C3h |
| Default    | 01Eh    |

| Subaddress | 7                     | 6 | 5 | 4 | 3 | 2 | 1                     | 0 |
|------------|-----------------------|---|---|---|---|---|-----------------------|---|
| C2h        | Pixel alignment [7:0] |   |   |   |   |   |                       |   |
| C3h        | Reserved              |   |   |   |   |   | Pixel alignment [9:8] |   |

Pixel alignment [9:0]: These registers form a 10-bit horizontal pixel position from the falling edge of horizontal sync, where the VDP controller initiates the program from one line standard to the next line standard. For example, the previous line of teletext to the next line of closed caption. This value must be set so that the switch occurs after the previous transaction has cleared the delay in the VDP, but early enough to allow the new values to be programmed before the current settings are required.

The default value is 0x1E and has been tested with every standard supported here. A new value is needed only if a custom standard is in use.

### 2.11.71 VDP Line Start Register

|            |     |
|------------|-----|
| Subaddress | D6h |
| Default    | 06h |

| 7                    | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------------------|---|---|---|---|---|---|---|
| VDP line start [7:0] |   |   |   |   |   |   |   |

VDP line start [7:0]: Sets the VDP line starting address

This register must be set properly before enabling the line mode registers. VDP processor works only in the VBI region set by this register and the VDP line stop register at subaddress D7h (see Section 2.11.72).

### 2.11.72 VDP Line Stop Register

|            |     |
|------------|-----|
| Subaddress | D7h |
| Default    | 1Bh |

| 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|---|---|---|---|---|---|---|
| VDP line stop [7:0] |   |   |   |   |   |   |   |

VDP line stop [7:0]: Sets the VDP stop line address

### 2.11.73 VDP Global Line Mode Register

|            |     |
|------------|-----|
| Subaddress | D8h |
| Default    | FFh |

| 7                      | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------------------|---|---|---|---|---|---|---|
| Global line mode [7:0] |   |   |   |   |   |   |   |

Global line mode [7:0]: VDP processing for multiple lines set by the VDP start line register at subaddress D6h and the VDP stop line register at subaddress D7h.

Global line mode register has the same bit definition as the general line mode registers.

General line mode has priority over the global line mode.

### 2.11.74 VDP Full Field Enable Register

|            |     |
|------------|-----|
| Subaddress | D9h |
| Default    | 00h |

|          |   |   |   |   |   |   |                   |
|----------|---|---|---|---|---|---|-------------------|
| 7        | 6 | 5 | 4 | 3 | 2 | 1 | 0                 |
| Reserved |   |   |   |   |   |   | Full field enable |

Full field enable:

0 = Disabled full field mode (default)

1 = Enabled full field mode

This register enables the full field mode. In this mode, all lines outside the vertical blank area and all lines in the line mode register programmed with FFh are sliced with the definition of the VDP full field mode register at subaddress DAh. Values other than FFh in the line mode registers allow a different slice mode for that particular line.

### 2.11.75 VDP Full Field Mode Register

|            |     |
|------------|-----|
| Subaddress | DAh |
| Default    | FFh |

|                       |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|
| 7                     | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Full field mode [7:0] |   |   |   |   |   |   |   |

Full field mode [7:0]:

This register programs the specific VBI standard for full field mode. It can be any VBI standard. Individual line settings take priority over the full field register. This allows each VBI line to be programmed independently but have the remaining lines in full field mode. The full field mode register has the same bit definition as line mode registers (default FFh).

Global line mode has priority over the full field mode.

### 2.11.76 VBUS Data Access With No VBUS Address Increment Register

|            |     |
|------------|-----|
| Subaddress | E0h |
| Default    | 00h |

|                 |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|
| 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VBUS data [7:0] |   |   |   |   |   |   |   |

VBUS data [7:0]: VBUS data register for VBUS single byte read/write transaction.

### 2.11.77 VBUS Data Access With VBUS Address Increment Register

|            |     |
|------------|-----|
| Subaddress | E1h |
| Default    | 00h |

|                 |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|
| 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VBUS data [7:0] |   |   |   |   |   |   |   |

VBUS data [7:0]: VBUS data register for VBUS multibyte read/write transaction. VBUS address is autoincremented after each data byte read/write.

### 2.11.78 FIFO Read Data Register

|            |     |
|------------|-----|
| Subaddress | E2h |
|------------|-----|

Read only

|                      |   |   |   |   |   |   |   |
|----------------------|---|---|---|---|---|---|---|
| 7                    | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| FIFO read data [7:0] |   |   |   |   |   |   |   |

FIFO read data [7:0]: This register is provided to access VBI FIFO data through the host port. All forms of teletext data come directly from the FIFO, while all other forms of VBI data can be programmed to come from registers or from the FIFO. If the host port is to be used to read data from the FIFO, then bit 0 (host access enable) in the VDP FIFO output control register at subaddress C0h must be set to 1 (see Section 2.11.68).

### 2.11.79 VBUS Address Access Register

|            |     |     |     |
|------------|-----|-----|-----|
| Subaddress | E8h | E9h | EAh |
| Default    | 00h | 00h | 00h |

|            |                      |   |   |   |   |   |   |   |
|------------|----------------------|---|---|---|---|---|---|---|
| Subaddress | 7                    | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| E8h        | VBUS address [7:0]   |   |   |   |   |   |   |   |
| E9h        | VBUS address [15:8]  |   |   |   |   |   |   |   |
| EAh        | VBUS address [23:16] |   |   |   |   |   |   |   |

VBUS address [23:0]: VBUS is a 24-bit wide internal bus. The user must program in these registers the 24-bit address of the internal register to be accessed via host port indirect access mode.

### 2.11.80 Interrupt Raw Status 0 Register

|            |     |
|------------|-----|
| Subaddress | F0h |
|------------|-----|

Read only

| 7         | 6   | 5   | 4   | 3    | 2     | 1     | 0    |
|-----------|-----|-----|-----|------|-------|-------|------|
| FIFO THRS | TTX | WSS | VPS | VITC | CC F2 | CC F1 | Line |

FIFO THRS: FIFO threshold passed, unmasked

- 0 = Not passed
- 1 = Passed

TTX: Teletext data available unmasked

- 0 = Not available
- 1 = Available

WSS: WSS data available unmasked

- 0 = Not available
- 1 = Available

VPS: VPS data available unmasked

- 0 = Not available
- 1 = Available

VITC: VITC data available unmasked

- 0 = Not available
- 1 = Available

CC F2: CC field 2 data available unmasked

- 0 = Not available
- 1 = Available

CC F1: CC field 1 data available unmasked

- 0 = Not available
- 1 = Available

Line: Line number interrupt unmasked

- 0 = Not available
- 1 = Available

See also the interrupt raw status 1 register at subaddress F1h (see Section 2.11.81).

The host interrupt raw status 0 and 1 registers represent the interrupt status without applying mask bits.

### 2.11.81 Interrupt Raw Status 1 Register

|            |     |
|------------|-----|
| Subaddress | F1h |
|------------|-----|

Read only

| 7        | 6 | 5 | 4 | 3 | 2                          | 1                | 0         |
|----------|---|---|---|---|----------------------------|------------------|-----------|
| Reserved |   |   |   |   | Macrovision status changed | Standard changed | FIFO full |

Macrovision status changed: unmasked

0 = Macrovision status unchanged

1 = Macrovision status changed

Standard changed: unmasked

0 = Video standard unchanged

1 = Video standard changed

FIFO full: unmasked

0 = FIFO not full

1 = FIFO was full during write to FIFO

The FIFO full error flag is set when the current line of VBI data cannot enter the FIFO. For example, if the FIFO has only 10 bytes left and teletext is the current VBI line, then the FIFO full error flag is set, but no data is written because the entire teletext line does not fit. However, if the next VBI line is closed caption requiring only 2 bytes of data plus the header, then this goes into the FIFO even if the full error flag is set.

### 2.11.82 Interrupt Status 0 Register

|            |     |
|------------|-----|
| Subaddress | F2h |
|------------|-----|

Read only

| 7         | 6   | 5   | 4   | 3    | 2     | 1     | 0    |
|-----------|-----|-----|-----|------|-------|-------|------|
| FIFO THRS | TTX | WSS | VPS | VITC | CC F2 | CC F1 | Line |

FIFO THRS: FIFO threshold passed, masked

- 0 = Not passed
- 1 = Passed

TTX: Teletext data available masked

- 0 = Not available
- 1 = Available

WSS: WSS data available masked

- 0 = Not available
- 1 = Available

VPS: VPS data available masked

- 0 = Not available
- 1 = Available

VITC: VITC data available masked

- 0 = Not available
- 1 = Available

CC F2: CC field 2 data available masked

- 0 = Not available
- 1 = Available

CC F1: CC field 1 data available masked

- 0 = Not available
- 1 = Available

Line: Line number interrupt masked

- 0 = Not available
- 1 = Available

See also the interrupt status 1 register at subaddress F3h (see Section 2.11.83).

The interrupt status 0 and 1 registers represent the interrupt status after applying mask bits. Therefore, the status bits are the result of a logical AND between the raw status and mask bits. The external interrupt terminal is derived from this register as an OR function of all nonmasked interrupts in this register.

Reading data from the corresponding register does not clear the status flags automatically. These flags are reset using the corresponding bits in interrupt clear 0 and 1 registers.



### 2.11.83 Interrupt Status 1 Register

|            |     |
|------------|-----|
| Subaddress | F3h |
|------------|-----|

Read only

| 7        | 6 | 5 | 4 | 3 | 2                          | 1                | 0         |
|----------|---|---|---|---|----------------------------|------------------|-----------|
| Reserved |   |   |   |   | Macrovision status changed | Standard changed | FIFO full |

Macrovision status changed: Macrovision status changed masked

0 = Macrovision status not changed

1 = Macrovision status changed

Standard changed: Standard changed masked

0 = Video standard not changed

1 = Video standard changed

FIFO full: Full status of FIFO masked

0 = FIFO not full

1 = FIFO was full during write to FIFO, see the interrupt mask 1 register at subaddress F5h for details (see Section 2.11.85)

### 2.11.84 Interrupt Mask 0 Register

|            |     |
|------------|-----|
| Subaddress | F4h |
| Default    | 00h |

| 7         | 6   | 5   | 4   | 3    | 2     | 1     | 0    |
|-----------|-----|-----|-----|------|-------|-------|------|
| FIFO THRS | TTX | WSS | VPS | VITC | CC F2 | CC F1 | Line |

FIFO THRS: FIFO threshold passed mask

- 0 = Disabled (default)
- 1 = Enabled FIFO\_THRES interrupt

TTX: Teletext data available mask

- 0 = Disabled (default)
- 1 = Enabled TTX available interrupt

WSS: WSS data available mask

- 0 = Disabled (default)
- 1 = Enabled WSS available interrupt

VPS: VPS data available mask

- 0 = Disabled (default)
- 1 = Enabled VPS available interrupt

VITC: VITC data available mask

- 0 = Disabled (default)
- 1 = Enabled VITC available interrupt

CC F2: CC field 2 data available mask

- 0 = Disabled (default)
- 1 = Enabled CC\_field 2 available interrupt

CC F1: CC field 1 data available mask

- 0 = Disabled (default)
- 1 = Enabled CC\_field 1 available interrupt

Line: Line number interrupt mask

- 0 = Disabled (default)
- 1 = Enabled Line\_INT interrupt

See also the interrupt mask 1 register at subaddress F5h (see Section 2.11.85).

The host interrupt mask 0 and 1 registers can be used by the external processor to mask unnecessary interrupt sources for the interrupt status 0 and 1 register bits, and for the external interrupt terminal. The external interrupt is generated from all nonmasked interrupt flags.

### 2.11.85 Interrupt Mask 1 Register

|            |     |
|------------|-----|
| Subaddress | F5h |
| Default    | 00h |

| 7        | 6 | 5 | 4 | 3 | 2                          | 1                | 0         |
|----------|---|---|---|---|----------------------------|------------------|-----------|
| Reserved |   |   |   |   | Macrovision status changed | Standard changed | FIFO full |

Macrovision status changed: Macrovision status changed mask

0 = Macrovision status unchanged

1 = Macrovision status changed

Standard changed: Standard changed mask

0 = Disabled (default)

1 = Enabled video standard changed

FIFO full: FIFO full mask

0 = Disabled (default)

1 = Enabled FIFO full interrupt

### 2.11.86 Interrupt Clear 0 Register

|            |     |
|------------|-----|
| Subaddress | F6h |
| Default    | 00h |

| 7         | 6   | 5   | 4   | 3    | 2     | 1     | 0    |
|-----------|-----|-----|-----|------|-------|-------|------|
| FIFO THRS | TTX | WSS | VPS | VITC | CC F2 | CC F1 | Line |

FIFO THRS: FIFO threshold passed clear

0 = No effect (default)

1 = Clear bit 7 (FIFO\_THRS) in the interrupt status 0 register at subaddress F2h

TTX: Teletext data available clear

0 = No effect (default)

1 = Clear bit 6 (TTX available) in the interrupt status 0 register at subaddress F2h

WSS: WSS data available clear

0 = No effect (default)

1 = Clear bit 5 (WSS available) in the interrupt status 0 register at subaddress F2h

VPS: VPS data available clear

0 = No effect (default)

1 = Clear bit 4 (VPS available) in the interrupt status 0 register at subaddress F2h

VITC: VITC data available clear

0 = Disabled (default)

1 = Clear bit 3 (VITC available) in the interrupt status 0 register at subaddress F2h

CC F2: CC field 2 data available clear

0 = Disabled (default)

1 = Clear bit 2 (CC field 2 available) in the interrupt status 0 register at subaddress F2h

CC F1: CC field 1 data available clear

0 = Disabled (default)

1 = Clear bit 1 (CC field 1 available) in the interrupt status 0 register at subaddress F2h

Line: Line number interrupt clear

0 = Disabled (default)

1 = Clear bit 0 (line interrupt available) in the interrupt status 0 register at subaddress F2h

See also the interrupt clear 1 register at subaddress F7h (see Section 2.11.87).

The host interrupt clear 0 and 1 registers are used by the external processor to clear the interrupt status bits in the host interrupt status 0 and 1 registers. When no nonmasked interrupts remain set in the registers, the external interrupt terminal also becomes inactive.

### 2.11.87 Interrupt Clear 1 Register

|            |     |
|------------|-----|
| Subaddress | F7h |
| Default    | 00h |

|          |   |   |   |   |                            |                  |           |
|----------|---|---|---|---|----------------------------|------------------|-----------|
| 7        | 6 | 5 | 4 | 3 | 2                          | 1                | 0         |
| Reserved |   |   |   |   | Macrovision status changed | Standard changed | FIFO full |

Macrovision status changed: Clear Macrovision status changed flag

0 = No effect (default)

1 = Clear bit 2 (Macrovision status changed) in the interrupt status 1 register at subaddress F3h and the interrupt raw status 1 register at subaddress F1h

Standard changed: Clear standard changed flag

0 = No effect (default)

1 = Clear bit 1 (video standard changed) in the interrupt status 1 register at subaddress F3h and the interrupt raw status 1 register at subaddress F1h

FIFO full: Clear FIFO full flag

0 = No effect (default)

1 = Clear bit 0 (FIFO full flag) in the interrupt status 1 register at subaddress F3h and the interrupt raw status 1 register at subaddress F1h

## 2.12 VBUS Register Definitions

### 2.12.1 VDP Closed Caption Data Register

|            |                   |
|------------|-------------------|
| Subaddress | 80 051Ch–80 051Fh |
|------------|-------------------|

Read only

| Subaddress | 7                             | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------|-------------------------------|---|---|---|---|---|---|---|
| 80 051Ch   | Closed caption field 1 byte 1 |   |   |   |   |   |   |   |
| 80 051Dh   | Closed caption field 1 byte 2 |   |   |   |   |   |   |   |
| 80 051Eh   | Closed caption field 2 byte 1 |   |   |   |   |   |   |   |
| 80 051Fh   | Closed caption field 2 byte 2 |   |   |   |   |   |   |   |

These registers contain the closed caption data arranged in bytes per field.

### 2.12.2 VDP WSS Data Register

|            |                   |
|------------|-------------------|
| Subaddress | 80 0520h–80 0526h |
|------------|-------------------|

WSS NTSC (CGMS):

Read only

| Subaddress | 7        | 6   | 5   | 4   | 3   | 2   | 1   | 0   | Byte               |
|------------|----------|-----|-----|-----|-----|-----|-----|-----|--------------------|
| 80 0520h   |          |     | b5  | b4  | b3  | b2  | b1  | b0  | WSS field 1 byte 1 |
| 80 0521h   | b13      | b12 | b11 | b10 | b9  | b8  | b7  | b6  | WSS field 1 byte 2 |
| 80 0522h   |          |     | b19 | b18 | b17 | b16 | b15 | b14 | WSS field 1 byte 3 |
| 80 0523h   | Reserved |     |     |     |     |     |     |     |                    |
| 80 0524h   |          |     | b5  | b4  | b3  | b2  | b1  | b0  | WSS field 2 byte 1 |
| 80 0525h   | b13      | b12 | b11 | b10 | b9  | b8  | b7  | b6  | WSS field 2 byte 2 |
| 80 0526h   |          |     | b19 | b18 | b17 | b16 | b15 | b14 | WSS field 2 byte 3 |

These registers contain the wide screen signaling data for NTSC.

Bits 0–1 represent word 0, aspect ratio.

Bits 2–5 represent word 1, header code for word 2.

Bits 6–13 represent word 2, copy control.

Bits 14–19 represent word 3, CRC.

PAL/SECAM:

Read only

| Subaddress | 7        | 6  | 5   | 4   | 3   | 2   | 1  | 0  | Byte               |
|------------|----------|----|-----|-----|-----|-----|----|----|--------------------|
| 80 0520h   | b7       | b6 | b5  | b4  | b3  | b2  | b1 | b0 | WSS field 1 byte 1 |
| 80 0521h   |          |    | b13 | b12 | b11 | b10 | b9 | b8 | WSS field 1 byte 2 |
| 80 0522h   | Reserved |    |     |     |     |     |    |    |                    |
| 80 0523h   | Reserved |    |     |     |     |     |    |    |                    |
| 80 0524h   | b7       | b6 | b5  | b4  | b3  | b2  | b1 | b0 | WSS field 2 byte 1 |
| 80 0525h   |          |    | b13 | b12 | b11 | b10 | b9 | b8 | WSS field 2 byte 2 |
| 80 0526h   | Reserved |    |     |     |     |     |    |    |                    |

PAL/SECAM:

Bits 0–3 represent group 1, aspect ratio.

Bits 4–7 represent group 2, enhanced services.

Bits 8–10 represent group 3, subtitles.

Bits 11–13 represent group 4, others.

### 2.12.3 VDP VITC Data Register

|            |                   |
|------------|-------------------|
| Subaddress | 80 052Ch–80 0534h |
|------------|-------------------|

Read only

| Subaddress | 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------|---------------------|---|---|---|---|---|---|---|
| 80 052Ch   | VITC frame byte 1   |   |   |   |   |   |   |   |
| 80 052Dh   | VITC frame byte 2   |   |   |   |   |   |   |   |
| 80 052Eh   | VITC seconds byte 1 |   |   |   |   |   |   |   |
| 80 052Fh   | VITC seconds byte 2 |   |   |   |   |   |   |   |
| 80 0530h   | VITC minutes byte 1 |   |   |   |   |   |   |   |
| 80 0531h   | VITC minutes byte 2 |   |   |   |   |   |   |   |
| 80 0532h   | VITC hours byte 1   |   |   |   |   |   |   |   |
| 80 0533h   | VITC hours byte 2   |   |   |   |   |   |   |   |
| 80 0534h   | VITC CRC byte       |   |   |   |   |   |   |   |

These registers contain the VITC data.

### 2.12.4 VDP V-Chip TV Rating Block 1 Register

|            |          |
|------------|----------|
| Subaddress | 80 0540h |
|------------|----------|

Read only

| 7        | 6    | 5    | 4        | 3    | 2    | 1    | 0        |
|----------|------|------|----------|------|------|------|----------|
| Reserved | 14-D | PG-D | Reserved | MA-L | 14-L | PG-L | Reserved |

TV parental guidelines rating block 1:

14-D: When incoming video program is TV-14-D rated, then this bit is set high

PG-D: When incoming video program is TV-PG-D rated, then this bit is set high

MA-L: When incoming video program is TV-MA-L rated, then this bit is set high

14-L: When incoming video program is TV-14-L rated, then this bit is set high

PG-L: When incoming video program is TV-PG-L rated, then this bit is set high

### 2.12.5 VDP V-Chip TV Rating Block 2 Register

|            |          |
|------------|----------|
| Subaddress | 80 0541h |
|------------|----------|

Read only

| 7    | 6    | 5    | 4        | 3    | 2    | 1    | 0     |
|------|------|------|----------|------|------|------|-------|
| MA-S | 14-S | PG-S | Reserved | MA-V | 14-V | PG-V | Y7-FV |

TV parental guidelines rating block 2:

MA-S: When incoming video program is TV-MA-S rated, then this bit is set high

14-S: When incoming video program is TV-14-S rated, then this bit is set high

PG-S: When incoming video program is TV-PG-S rated, then this bit is set high

MA-V: When incoming video program is TV-MA-V rated, then this bit is set high

14-V: When incoming video program is TV-14-V rated, then this bit is set high

PG-V: When incoming video program is TV-PG-S rated, then this bit is set high

Y7-FV: When incoming video program is TV-Y7-FV rated, then this bit is set high

## 2.12.6 VDP V-Chip TV Rating Block 3 Register

|            |          |
|------------|----------|
| Subaddress | 80 0542h |
|------------|----------|

Read only

| 7    | 6     | 5     | 4     | 3    | 2     | 1    | 0    |
|------|-------|-------|-------|------|-------|------|------|
| None | TV-MA | TV-14 | TV-PG | TV-G | TV-Y7 | TV-Y | None |

TV parental guidelines rating block 3:

None: No block intended

TV-MA: When incoming video program is TV-MA rated in TV Parental Guidelines Rating, then this bit is set high

TV-14: When incoming video program is TV-14 rated in TV Parental Guidelines Rating, then this bit is set high

TV-PG: When incoming video program is TV-PG rated in TV Parental Guidelines Rating, then this bit is set high

TV-G: When incoming video program is TV-G rated in TV Parental Guidelines Rating, then this bit is set high

TV-Y7: When incoming video program is TV-Y7 rated in TV Parental Guidelines Rating, then this bit is set high

TV-Y: When incoming video program is TV-G rated in TV Parental Guidelines Rating, then this bit is set high

None: No block intended

## 2.12.7 VDP V-Chip MPAA Rating Data Register

|            |          |
|------------|----------|
| Subaddress | 80 0543h |
|------------|----------|

Read only

| 7         | 6 | 5     | 4 | 3     | 2  | 1 | 0   |
|-----------|---|-------|---|-------|----|---|-----|
| Not Rated | X | NC-17 | R | PG-13 | PG | G | N/A |

MPAA rating block (E5h):

Not Rated: When incoming video program is Not Rated rated in MPAA Rating, then this bit is set high

X: When incoming video program is X rated in MPAA Rating, then this bit is set high

NC-17: When incoming video program is NC-17 rated in MPAA Rating, then this bit is set high

R: When incoming video program is R rated in MPAA Rating, then this bit is set high

PG-13: When incoming video program is PG-13 rated in MPAA Rating, then this bit is set high

PG: When incoming video program is PG rated in MPAA Rating, then this bit is set high

G: When incoming video program is G rated in MPAA Rating, then this bit is set high

N/A: When incoming video program is N/A rated in MPAA Rating, then this bit is set high



## 2.12.8 VDP General Line Mode and Line Address Register

|            |                   |
|------------|-------------------|
| Subaddress | 80 0600h–80 0611h |
|------------|-------------------|

(default line mode = FFh, address = 00h)

| Subaddress | 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------|----------------|---|---|---|---|---|---|---|
| 80 0600h   | Line address 1 |   |   |   |   |   |   |   |
| 80 0601h   | Line mode 1    |   |   |   |   |   |   |   |
| 80 0602h   | Line address 2 |   |   |   |   |   |   |   |
| 80 0603h   | Line mode 2    |   |   |   |   |   |   |   |
| 80 0604h   | Line address 3 |   |   |   |   |   |   |   |
| 80 0605h   | Line mode 3    |   |   |   |   |   |   |   |
| 80 0606h   | Line address 4 |   |   |   |   |   |   |   |
| 80 0607h   | Line mode 4    |   |   |   |   |   |   |   |
| 80 0608h   | Line address 5 |   |   |   |   |   |   |   |
| 80 0609h   | Line mode 5    |   |   |   |   |   |   |   |
| 80 060Ah   | Line address 6 |   |   |   |   |   |   |   |
| 80 060Bh   | Line mode 6    |   |   |   |   |   |   |   |
| 80 060Ch   | Line address 7 |   |   |   |   |   |   |   |
| 80 060Dh   | Line mode 7    |   |   |   |   |   |   |   |
| 80 060Eh   | Line address 8 |   |   |   |   |   |   |   |
| 80 060Fh   | Line mode 8    |   |   |   |   |   |   |   |
| 80 0610h   | Line address 9 |   |   |   |   |   |   |   |
| 80 0611h   | Line mode 9    |   |   |   |   |   |   |   |

Line address x [7:0]: Line number to be processed by a VDP set by a line mode register (default 00h)

Line mode x [7:0]:

- Bit 7:        0 = Disabled filters  
               1 = Enabled filters for teletext and CC (Null byte filter) (default)
- Bit 6:        0 = Send sliced VBI data to registers only (default)  
               1 = Send sliced VBI data to FIFO and registers, teletext data only goes to FIFO (default)
- Bit 5:        0 = Allow VBI data with errors in the FIFO  
               1 = Do not allow VBI data with errors in the FIFO (default)
- Bit 4:        0 = Disabled error detection and correction  
               1 = Enabled error detection and correction (teletext only) (default)
- Bit 3:        0 = Field 1  
               1 = Field 2 (default)
- Bits [2:0]:   000 = Teletext (WST625, Chinese teletext, NABTS 525)  
               001 = CC (US, Europe, Japan, China)  
               010 = WSS (525, 625)  
               011 = VITC  
               100 = VPS (PAL only), EPG (NTSC only)  
               101 = USER 1  
               110 = USER 2  
               111 = Reserved (active video) (default)

## 2.12.9 VDP VPS/Gemstar Data Register

|            |                   |
|------------|-------------------|
| Subaddress | 80 0700h–80 070Ch |
|------------|-------------------|

VPS: Read only

| Subaddress | 7           | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------|-------------|---|---|---|---|---|---|---|
| 80 0700h   | VPS byte 1  |   |   |   |   |   |   |   |
| 80 0701h   | VPS byte 2  |   |   |   |   |   |   |   |
| 80 0702h   | VPS byte 3  |   |   |   |   |   |   |   |
| 80 0703h   | VPS byte 4  |   |   |   |   |   |   |   |
| 80 0704h   | VPS byte 5  |   |   |   |   |   |   |   |
| 80 0705h   | VPS byte 6  |   |   |   |   |   |   |   |
| 80 0706h   | VPS byte 7  |   |   |   |   |   |   |   |
| 80 0707h   | VPS byte 8  |   |   |   |   |   |   |   |
| 80 0708h   | VPS byte 9  |   |   |   |   |   |   |   |
| 80 0709h   | VPS byte 10 |   |   |   |   |   |   |   |
| 80 070Ah   | VPS byte 11 |   |   |   |   |   |   |   |
| 80 070Bh   | VPS byte 12 |   |   |   |   |   |   |   |
| 80 070Ch   | VPS byte 13 |   |   |   |   |   |   |   |

These registers contain the entire VPS data line except the clock run-in code or the start code.

Gemstar: Read only

| Subaddress | 7                  | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------------|--------------------|---|---|---|---|---|---|---|
| 80 0700h   | Gemstar frame code |   |   |   |   |   |   |   |
| 80 0701h   | Gemstar byte 1     |   |   |   |   |   |   |   |
| 80 0702h   | Gemstar byte 2     |   |   |   |   |   |   |   |
| 80 0703h   | Gemstar byte 3     |   |   |   |   |   |   |   |
| 80 0704h   | Gemstar byte 4     |   |   |   |   |   |   |   |
| 80 0705h   | Reserved           |   |   |   |   |   |   |   |
| 80 0706h   | Reserved           |   |   |   |   |   |   |   |
| 80 0707h   | Reserved           |   |   |   |   |   |   |   |
| 80 0708h   | Reserved           |   |   |   |   |   |   |   |
| 80 0709h   | Reserved           |   |   |   |   |   |   |   |
| 80 070Ah   | Reserved           |   |   |   |   |   |   |   |
| 80 070Bh   | Reserved           |   |   |   |   |   |   |   |
| 80 070Ch   | Reserved           |   |   |   |   |   |   |   |

## 2.12.10 VDP FIFO Read Register

|            |          |
|------------|----------|
| Subaddress | 90 1904h |
|------------|----------|

Read only

| 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------|---|---|---|---|---|---|---|
| FIFO data [7:0] |   |   |   |   |   |   |   |

FIFO data [7:0]: This register is provided to access VBI FIFO data through the host port. All forms of teletext data come directly from the FIFO, while all other forms of VBI data can be programmed to come from registers or from the FIFO. If the host port is to be used to read data from the FIFO, then bit 0 (host access enable) in the FIFO output control register at subaddress C0h must be set to 1.

### 2.12.11 Interrupt Configuration Register

|            |          |
|------------|----------|
| Subaddress | B0 0060h |
| Default    | 00h      |

|          |   |   |   |   |          |          |   |
|----------|---|---|---|---|----------|----------|---|
| 7        | 6 | 5 | 4 | 3 | 2        | 1        | 0 |
| Reserved |   |   |   |   | Polarity | Reserved |   |

Polarity: Interrupt terminal polarity

0 = Active high (default)

1 = Active low



## 3 Electrical Specifications

### 3.1 Absolute Maximum Ratings<sup>†</sup>

|                                                    |                 |
|----------------------------------------------------|-----------------|
| Supply voltage range: IOV <sub>DD</sub> to I/O GND | 0.5 V to 4 V    |
| DV <sub>DD</sub> to DGND                           | –0.2 V to 2 V   |
| A33VDD (see Note 1) to A18GND (see Note 2)         | –0.3 V to 3.6 V |
| A18VDD (see Note 3) to A33GND (see Note 4)         | –0.2 V to 2 V   |
| Digital input voltage, V <sub>I</sub> to DGND      | –0.5 V to 4.5 V |
| Digital output voltage, V <sub>O</sub> to DGND     | –0.5 V to 4.5 V |
| Analog input voltage range AIN to AGND             | –0.2 V to 2 V   |
| Operating free-air temperature, T <sub>A</sub>     | 0°C to 70°C     |
| Storage temperature, T <sub>stg</sub>              | –65°C to 150°C  |

<sup>†</sup> Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. CH1\_A33VDD, CH2\_A33VDD, CH3\_A33VDD, CH4\_A33VDD  
2. CH1\_A33GND, CH2\_A33GND, CH3\_A33GND, CH4\_A33GND  
3. CH1\_A18VDD, CH2\_A18VDD, CH3\_A18VDD, CH4\_A18VDD, A18VDD\_REF, PLL\_A18VDD  
4. CH1\_A18GND, CH2\_A18GND, CH3\_A18GND, CH4\_A18GND

### 3.2 Recommended Operating Conditions

|                     |                                              | MIN                   | NOM | MAX  | UNIT |
|---------------------|----------------------------------------------|-----------------------|-----|------|------|
| IOV <sub>DD</sub>   | Digital supply voltage                       | 3                     | 3.3 | 3.6  | V    |
| DV <sub>DD</sub>    | Digital supply voltage                       | 1.65                  | 1.8 | 1.95 | V    |
| AV <sub>DD33</sub>  | Analog supply voltage                        | 3                     | 3.3 | 3.6  | V    |
| AV <sub>DD18</sub>  | Analog supply voltage                        | 1.65                  | 1.8 | 1.95 | V    |
| V <sub>I(P-P)</sub> | Analog input voltage (ac-coupling necessary) | 0.5                   | 1   | 2    | V    |
| V <sub>IH</sub>     | Digital input voltage high (Note 1)          | 0.7 IOV <sub>DD</sub> |     |      | V    |
| V <sub>IL</sub>     | Digital input voltage low (Note 2)           | 0.3 IOV <sub>DD</sub> |     |      | V    |
| I <sub>OH</sub>     | Output current, V <sub>out</sub> = 2.4 V     | –4                    | –8  |      | mA   |
| I <sub>OL</sub>     | Output current, V <sub>out</sub> = 0.4 V     | 6                     | 8   |      | mA   |
| T <sub>A</sub>      | Operating free-air temperature               | 0                     |     | 70   | °C   |

- NOTES: 1. Exception: 0.7 AV<sub>DD18</sub> for XTAL1 terminal  
2. Exception: 0.3 AV<sub>DD18</sub> for XTAL1 terminal

#### 3.2.1 Crystal Specifications

| CRYSTAL SPECIFICATIONS | MIN | NOM      | MAX | UNIT |
|------------------------|-----|----------|-----|------|
| Frequency              |     | 14.31818 |     | MHz  |
| Frequency tolerance    |     |          | ±50 | ppm  |

### 3.3 Electrical Characteristics

For minimum/maximum values: IOV<sub>DD</sub> = 3.0 V to 3.6 V, DV<sub>DD</sub> = 1.65 V to 1.95 V, AV<sub>DD33</sub> = 3.0 V to 3.6 V, AV<sub>DD18</sub> = 1.65 V to 1.95 V, T<sub>A</sub> = 0°C to 70°C

For typical values: IOV<sub>DD</sub> = 3.3 V, DV<sub>DD</sub> = 1.8 V, AV<sub>DD33</sub> = 3.3 V, AV<sub>DD18</sub> = 1.8 V, T<sub>A</sub> = 25°C

#### 3.3.1 DC Electrical Characteristics

| PARAMETER                                                   | TEST CONDITIONS | MIN                   | TYP                   | MAX | UNIT |
|-------------------------------------------------------------|-----------------|-----------------------|-----------------------|-----|------|
| I <sub>DDIO(D)</sub> 3.3-V IO digital supply current        | CVBS            |                       | 6                     |     | mA   |
|                                                             | RGB and CVBS    |                       | 6                     |     |      |
| I <sub>DD(D)</sub> 1.8-V digital supply current             | CVBS            |                       | 66.2                  |     | mA   |
|                                                             | RGB and CVBS    |                       | 67                    |     |      |
| I <sub>DD33(A)</sub> 3.3-V analog supply current            | CVBS            |                       | 16                    |     | mA   |
|                                                             | RGB and CVBS    |                       | 47.8                  |     |      |
| I <sub>DD18(A)</sub> 1.8-V analog supply current            | CVBS            |                       | 79.3                  |     | mA   |
|                                                             | RGB and CVBS    |                       | 240                   |     |      |
| P <sub>TOT</sub> Total power dissipation (normal operation) | CVBS            |                       | 334.5                 |     | mW   |
|                                                             | RGB and CVBS    |                       | 730                   |     |      |
| P <sub>SAVE</sub> Total power dissipation (power save)      |                 |                       | 100                   |     | mW   |
| P <sub>DOWN</sub> Total power dissipation (power down)      |                 |                       | 11                    |     | mW   |
| I <sub>lkg</sub> Input leakage current                      |                 |                       |                       | 10  | μA   |
| C <sub>i</sub> Input capacitance                            | By design       |                       |                       | 8   | pF   |
| V <sub>OH</sub> Output voltage high                         |                 | 0.8 IOV <sub>DD</sub> |                       |     | V    |
| V <sub>OL</sub> Output voltage low                          |                 |                       | 0.2 IOV <sub>DD</sub> |     | V    |

NOTE 1: Measured with a load of 10 kΩ in parallel to 15 pF.

#### 3.3.2 Analog Processing and A/D Converters

| PARAMETER                                             | TEST CONDITIONS                        | MIN  | TYP   | MAX  | UNIT |
|-------------------------------------------------------|----------------------------------------|------|-------|------|------|
| Z <sub>i</sub> Input impedance, analog video inputs   | By design                              | 200  |       |      | kΩ   |
| C <sub>i</sub> Input capacitance, analog video inputs | By design                              |      |       | 10   | pF   |
| V <sub>i(pp)</sub> Input voltage range                | C <sub>coupling</sub> = 47 nF          | 0.50 | 1     | 2    | V    |
| ΔG Gain control range                                 |                                        | -6   |       | 6    | dB   |
| DNL Differential nonlinearity                         | AFE only                               |      | 0.75  | 1.0  | LSB  |
| INL Integral nonlinearity                             | AFE only                               |      | 1     | 2.5  | LSB  |
| Fr Frequency response                                 | Multiburst (60 IRE)                    |      | -0.9  |      | dB   |
| XTALK Crosstalk                                       | 1 MHz                                  |      |       | -50  | dB   |
| SNR Signal-to-noise ratio, all channels               | 1 MHz, 1.0 V <sub>p-p</sub>            |      | 54    |      | dB   |
| GM Gain match (Note 1)                                | Full scale, 1 MHz                      |      | 1.1%  | 1.5% |      |
| NS Noise spectrum                                     | Luma ramp (100 kHz to full, tilt-null) |      | -58   |      | dB   |
| DP Differential phase                                 | Modulated ramp                         |      | 0.5   |      | °    |
| DG Differential gain                                  | Modulated ramp                         |      | ±1.5% |      |      |

NOTE 1: Component inputs only

### 3.3.3 Timing

#### 3.3.3.1 Clocks, Video Data, Sync Timing

| PARAMETER          |                    | TEST CONDITIONS<br>(see Note 1) | MIN | TYP  | MAX | UNIT |
|--------------------|--------------------|---------------------------------|-----|------|-----|------|
| Duty cycle DATACLK |                    |                                 | 45% | 50%  | 55% |      |
| $t_1$              | High time, DATACLK |                                 |     | 18.5 |     | ns   |
| $t_2$              | Low time, DATACLK  |                                 |     | 18.5 |     | ns   |
| $t_3$              | Fall time, DATACLK | 90% to 10%                      |     |      | 4   | ns   |
| $t_4$              | Rise time, DATACLK | 10% to 90%                      |     |      | 4   | ns   |
| $t_5$              | Output delay time  |                                 |     |      | 10  | ns   |

NOTE 1:  $C_L = 15\text{ pF}$

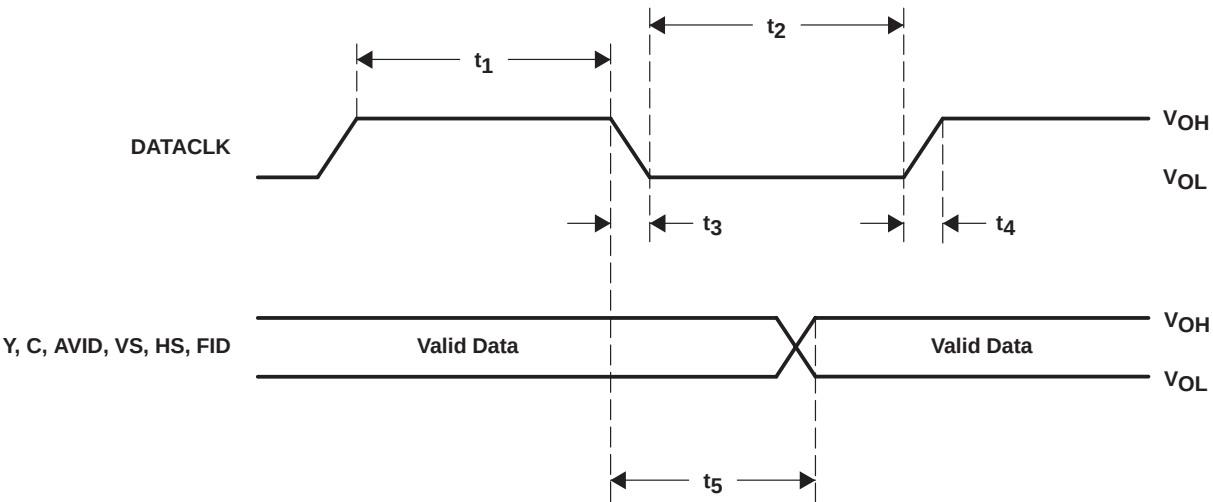


Figure 3–1. Clocks, Video Data, and Sync Timing

3.3.3.2 I<sup>2</sup>C Host Port Timing

| PARAMETER        |                                             | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------|---------------------------------------------|-----------------|-----|-----|-----|------|
| t <sub>1</sub>   | Bus free time between STOP and START        |                 | 1.3 |     |     | μs   |
| t <sub>2</sub>   | Data hold time                              |                 | 0   |     | 0.9 | μs   |
| t <sub>3</sub>   | Data setup time                             |                 | 100 |     |     | ns   |
| t <sub>4</sub>   | Setup time for a (repeated) START condition |                 | 0.6 |     |     | μs   |
| t <sub>5</sub>   | Setup time for a STOP condition             |                 | 0.6 |     |     | ns   |
| t <sub>6</sub>   | Hold time (repeated) START condition        |                 | 0.6 |     |     | μs   |
| t <sub>7</sub>   | Rise time VC1(SDA) and VC0(SCL) signal      |                 |     |     | 250 | ns   |
| t <sub>8</sub>   | Fall time VC1(SDA) and VC0(SCL) signal      |                 |     |     | 250 | ns   |
| C <sub>b</sub>   | Capacitive load for each bus line           |                 |     |     | 400 | pF   |
| f <sub>I2C</sub> | I <sup>2</sup> C clock frequency            |                 |     |     | 400 | kHz  |

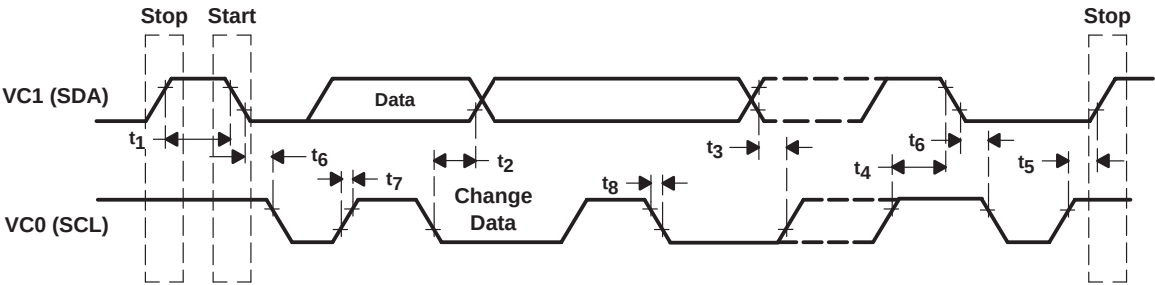


Figure 3-2. I<sup>2</sup>C Host Port Timing



## 4 Example Register Settings

The following example register settings are provided only as a reference. These settings, given the assumed input connector, video format, and output format, set up the TVP5146 decoder and provide video output. Example register settings for other features and the VBI data processor are not provided here.

### 4.1 Example 1

#### 4.1.1 Assumptions

Input connector: Composite (VI\_1\_A) (default)

Video format: NTSC (J, M), PAL (B, G, H, I, N) or SECAM (default)

**NOTE:** NTSC-443, PAL-Nc, and PAL-M are masked from the autoswitch process by default. See the autoswitch mask register at address 04h.

Output format: 10-bit ITU-R BT.656 with embedded syncs (default)

#### 4.1.2 Recommended Settings

Recommended I<sup>2</sup>C writes: For the given assumptions, only one write is required. All other registers are set up by default.

I<sup>2</sup>C register address 08h = Luminance processing control 3 register

I<sup>2</sup>C data 00h = Optimizes the trap filter selection for NTSC and PAL

I<sup>2</sup>C register address 0Eh = Chrominance processing control 3 register

I<sup>2</sup>C data 04h = Optimizes the chrominance filter selection for NTSC and PAL

I<sup>2</sup>C register address 34h = Output formatter 2 register

I<sup>2</sup>C data 11h = Enables YCbCr output and the clock output

**NOTE:** HS/CS, VS/VBLK, AVID, FID, and GLCO are logic inputs by default. See output formatter 3 and 4 registers at addresses 35h and 36h, respectively.

## 4.2 Example 2

### 4.2.1 Assumptions

Input connector: S-video [VI\_2\_C (luma), VI\_1\_C (chroma)]  
Video format: NTSC (J, M, 443), PAL (B, G, H, I, M, N, Nc) and SECAM  
Output format: 10-bit 4:2:2 YCbCr with discrete sync outputs

### 4.2.2 Recommended Settings

Recommended I<sup>2</sup>C writes: This setup requires additional writes to output the discrete sync 10-bit 4:2:2 data, HS, and VS, and to autoswitch between all video formats mentioned above.

I<sup>2</sup>C register address 00h = Input select register  
I<sup>2</sup>C data 46h = Sets luma to VI\_2\_C and chroma to VI\_1\_C

I<sup>2</sup>C register address 04h = Autoswitch mask register  
I<sup>2</sup>C data 3Fh = Includes NTSC 443 and PAL (M, Nc) in the autoswitch

I<sup>2</sup>C register address 08h = Luminance processing control 3 register  
I<sup>2</sup>C data 00h = Optimizes the trap filter selection for NTSC and PAL

I<sup>2</sup>C register address 0Eh = Chrominance processing control 2 register  
I<sup>2</sup>C data 04h = Optimizes the chrominance filter selection for NTSC and PAL

I<sup>2</sup>C register address 33h = Output formatter 1 register  
I<sup>2</sup>C data 43h = Selects the 10-bit 4:2:2 output format

I<sup>2</sup>C register address 34h = Output formatter 2 register  
I<sup>2</sup>C data 11h = Enables YCbCr output and the clock output

I<sup>2</sup>C register address 36h = Output formatter 4 register  
I<sup>2</sup>C data AFh = Enables HS and VS sync outputs

## 4.3 Example 3

### 4.3.1 Assumptions

Input connector: Component [VI\_1\_B (Pb), VI\_2\_B (Y), VI\_3\_B (Pr)]  
Video format: NTSC (J, M, 443), PAL (B, G, H, I, M, N, Nc) and SECAM  
Output format: 20-bit 4:2:2 YCbCr with discrete sync outputs

### 4.3.2 Recommended Settings

Recommended I<sup>2</sup>C writes: This setup requires additional writes to output the discrete sync 20-bit 4:2:2 data, HS, and VS, and to autoswitch between all video formats mentioned above.

I<sup>2</sup>C register address 00h = Input select register  
I<sup>2</sup>C data 95h = Sets Pb to VI\_1\_B, Y to VI\_2\_B, and Pr to VI\_3\_B

I<sup>2</sup>C register address 04h = Autoswitch mask register  
I<sup>2</sup>C data 3Fh = Includes NTSC 443 and PAL (M, Nc) in the autoswitch

I<sup>2</sup>C register address 08h = Luminance processing control 3 register  
I<sup>2</sup>C data 00h = Optimizes the trap filter selection for NTSC and PAL

I<sup>2</sup>C register address 0Eh = Chrominance processing control 2 register  
I<sup>2</sup>C data 04h = Optimizes the chrominance filter selection for NTSC and PAL

I<sup>2</sup>C register address 33h = Output formatter 1 register  
I<sup>2</sup>C data 41h = Selects the 20-bit 4:2:2 output format

I<sup>2</sup>C register address 34h = Output formatter 2 register  
I<sup>2</sup>C data 11h = Enables YCbCr output and the clock output

I<sup>2</sup>C register address 36h = Output formatter 4 register  
I<sup>2</sup>C data AFh = Enables HS and VS sync outputs



## 5 Application Information

### 5.1 Application Example

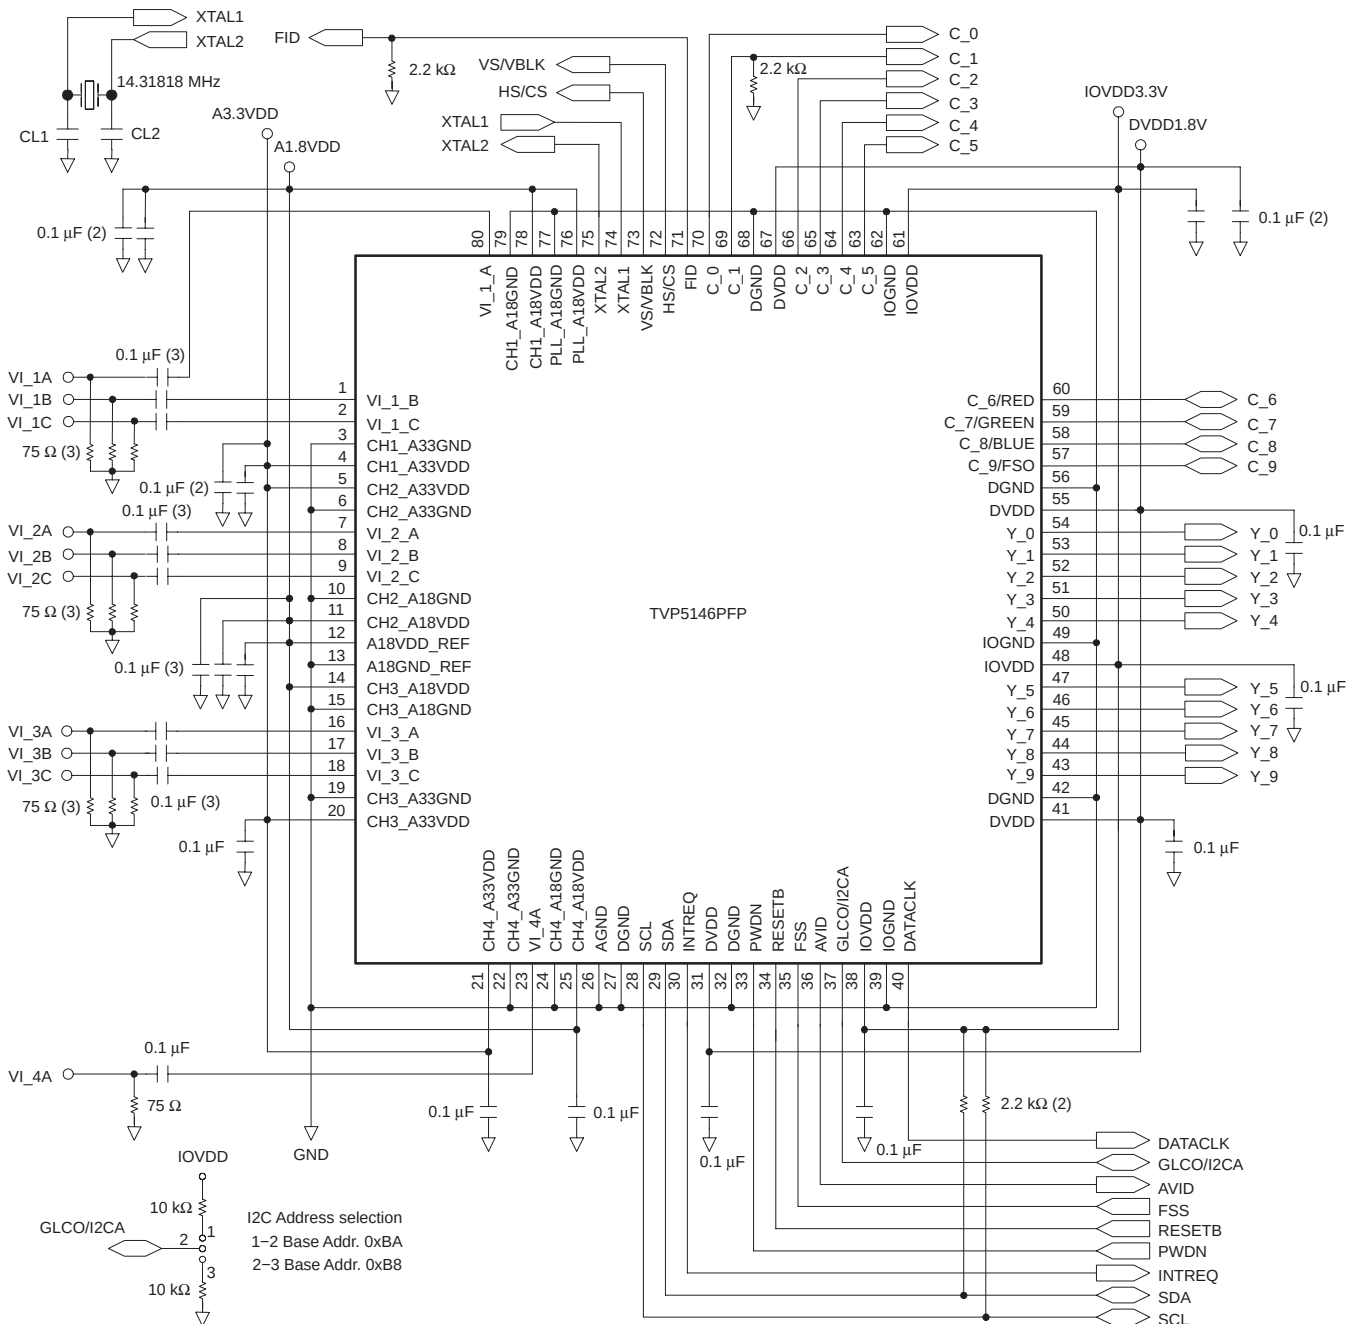


Figure 5–1. Application Example

## 5.2 Designing With PowerPAD™ Devices

The TVP5146 device is housed in a high-performance, thermally enhanced, 80-terminal PowerPAD package (TI package designator: 80PFP). Use of the PowerPAD package does not require any special considerations except to note that the thermal pad, which is an exposed die pad on the bottom of the device, is a metallic thermal and electrical conductor. Therefore, if not implementing the PowerPAD PCB features, the use of solder masks (or other assembly techniques) may be required to prevent any inadvertent shorting by the exposed thermal pad of connection etches or vias under the package. The recommended option, however, is not to run any etches or signal vias under the device, but to have only a grounded thermal land as explained in the following paragraphs. Although the actual size of the exposed die pad may vary, the minimum size required for the keep-out area for the 80-terminal PFP PowerPAD package is 8 mm × 8 mm.

It is recommended that there be a thermal land, which is an area of solder-tinned copper, underneath the PowerPAD package. The thermal land varies in size, depending on the PowerPAD package being used, the PCB construction, and the amount of heat that needs to be removed. In addition, the thermal land may or may not contain numerous thermal vias depending on PCB construction.

Other requirements for using thermal lands and thermal vias are detailed in the *PowerPAD™ Thermally Enhanced Package* technical brief, TI literature number SLMA002, available via the TI Web pages at URL <http://www.ti.com>.


For the TVP5146 device, this thermal land must be grounded to the low-impedance ground plane of the device. This improves not only thermal performance but also the electrical grounding of the device. It is also recommended that the device ground terminal landing pads be connected directly to the grounded thermal land. The land size must be as large as possible without shorting device signal terminals. The thermal land may be soldered to the exposed thermal pad using standard reflow soldering techniques.

While the thermal land may be electrically floated and configured to remove heat to an external heat sink, it is recommended that the thermal land be connected to the low impedance ground plane for the device. More information can be obtained from the TI *Recommendations for PHY Layout* application report, TI literature number SLLA020.

## 6 Mechanical Data

### PFP (S-PQFP-G80)

### PowerPAD™ PLASTIC QUAD FLATPACK

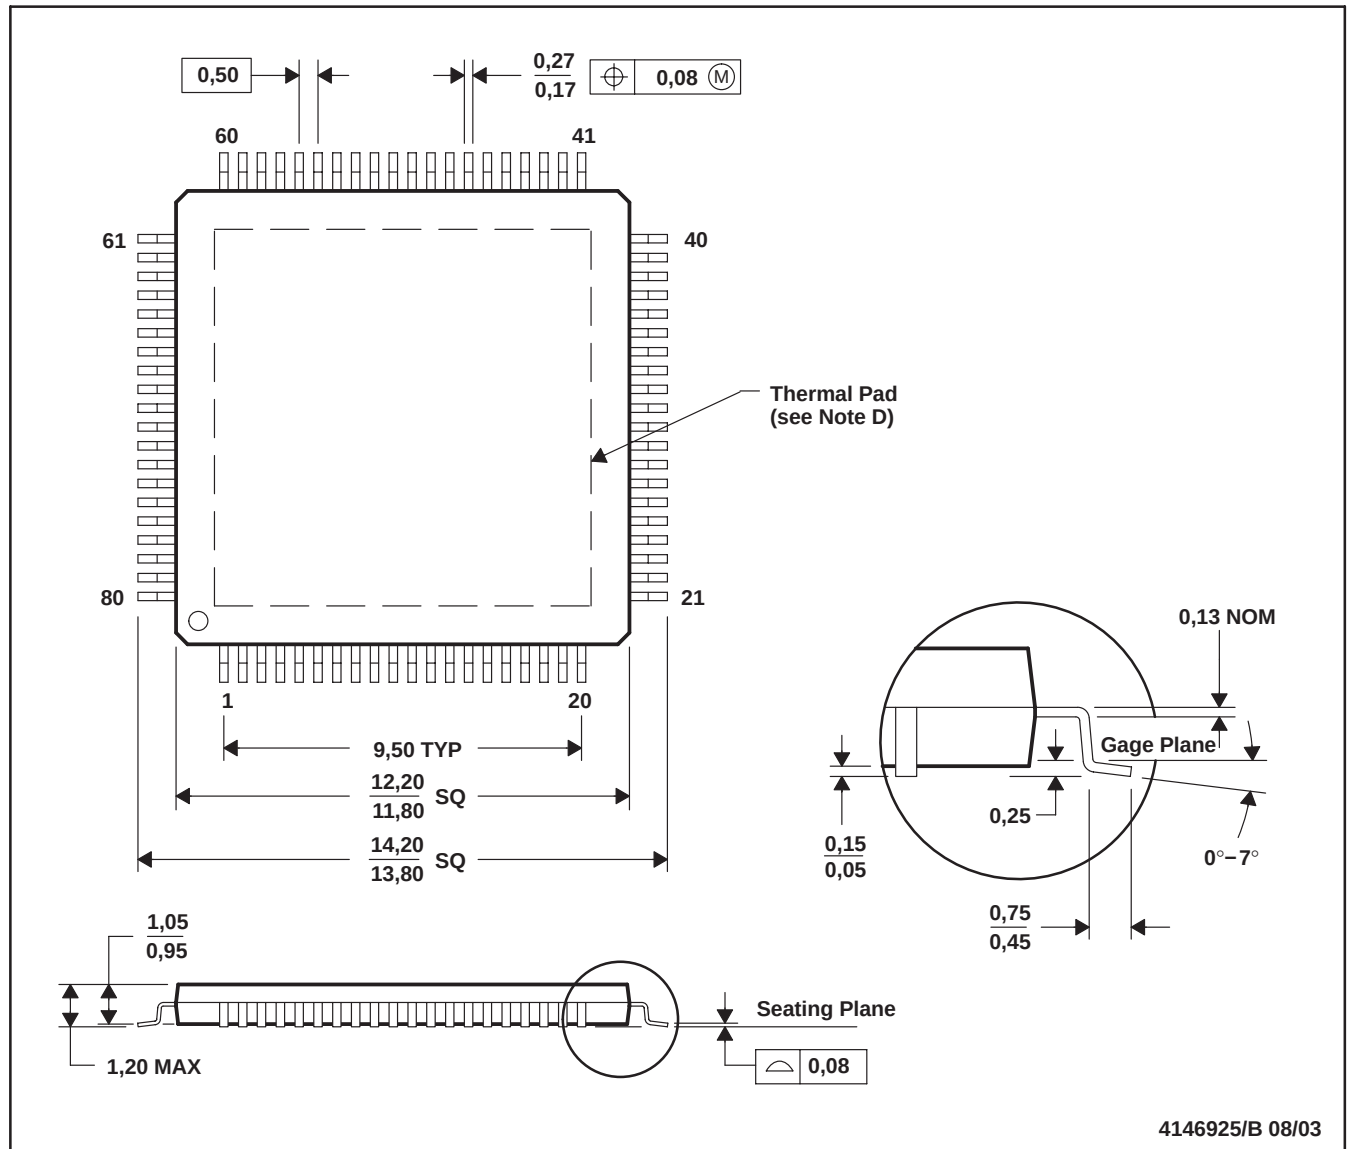

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion.
  - D. This package is designed to be soldered to a thermal pad on the board. Refer to Technical Brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 for information regarding recommended board layout. This document is available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
  - E. Falls within JEDEC MS-026

PowerPAD is a trademark of Texas Instruments.