


VKA60xS

60 Watt Single Output Half Brick DC/DC Converter



- 18-36 V & 33 - 75V Input Range
- High Efficiency: 87% Typical at 5V
- 100 μ S Transient Response 50-100% Load Step
- 420 kHz Fixed-Frequency Operation
- Remote Sense
- Operation to +100°C Baseplate Temperature
- Primary Remote On/Off, Choice of Pos/Neg Logic
- Adjustable Output Voltage
- Continuuout Short-Circuit Protection
- Thermal Shutdown
- Case Ground Pin

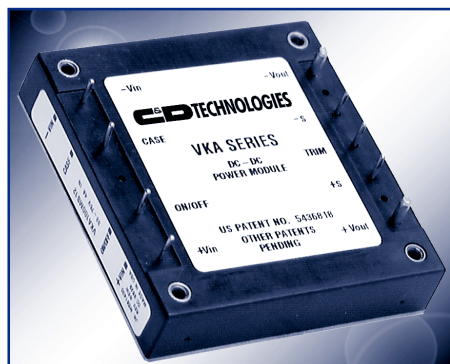

The VKA60xS Series DC/DC converters present an economical and practical solution for distributed power system architectures which require high power density and efficiency while maintaining system modularity and upgradeability. With the ability to operate over a wide input voltage range of 18 to 36 and 33 to 75 volts, these modules are

ideal for use in battery backup applications common in today's telecommunication and electronic data processing applications. The output is fully isolated from the input, allowing for a variety of polarity and grounding configurations.

The VKA60xS's proprietary control circuitry responds to 50-100%

load steps in 100 μ Seconds to within 1% nominal Vout.

The patented fixed frequency architecture combined with surface mount technology results in a compact, efficient and reliable solution to DC/DC conversion requirements. Safety per UL1950, EN 60950 and CSA 22.2 #234

PRODUCT SELECTION CHART

MODEL	INPUT VOLTAGE	VOUT (VDC)	IOUT (A)	EFFICIENCY	
				MIN	TYP
VKA60LS03	(18-36)	3.3V	12.0	80	81
VKA60LS05		5.0V	12.0	85	86
VKA60LS12		12.0V	5.0	87	88
VKA60LS15		15.0V	4.0	88	89
VKA60LS24		24.0V	2.5	89	90
VKA60MS03	(33-75)	3.3V	12.0	81	82
VKA60MS05		5.0V	12.0	86	87
VKA60MS12		12.0V	5.0	88	89
VKA60MS15		15.0V	4.0	89	90
VKA60MS24		24.0V	2.5	89	90








SPECIFICATIONS, ALL MODELS

Specifications are at $T_{CASE} = +40^{\circ}\text{C}$ nominal input voltage unless otherwise specified.


	INPUT					
	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	INPUT					
	Voltage Range					
	VKA60LS		18	24	36	VDC
	VKA60MS		33	48	75	VDC
	Maximum Input Current					
	VKA60LS	$V_{IN} = 16\text{VDC}$			4.4	A
	VKA60MS	$V_{IN} = 27\text{VDC}$			2.6	A
	Reflected Ripple Current	Peak - Peak		20		mA
	Input Ripple Rejection	DC to 1KHz	50	60		dB
	No Load Input Current LS/MS			50/100		mA
	Power Dissipation LS/MS					
	No Load			3.6/4.8		W
	Standby, Primary On/Off Disabled LS/MS			0.18/0.4		W
OUTPUT	Inrush Charge	$V_{IN} = V_{IN\text{ max.}}$				
	VKA60LS				0.520	mC
	VKA60MS				0.360	mC
	Quiescent Operating Current					
	Primary On/Off Disabled			8	12	mA
	OUTPUT					
	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
	OUTPUT					
	Rated Power		0		60	W
	Set point Accuracy				1	%
	Line Regulation	High Line to Low Line		0.02	0.05	%
	Load Regulation	No Load to Rated Load		0.02	0.05	%
	Output Temperature Drift			± 0.02		$^{\circ}\text{C}$
	Output Ripple, p-p	DC to 20MHz BW		1%		V_{OUT} , Nom
	Output Current Limit Inception				130%	I_{OUT} , Nom
	Output Short-Circuit Current (2)	test			110%	I_{OUT} , Nom
	Output Overvoltage Limit			125%	135%	V
GENERAL	Transient Response	50 to 100% Load Step				
	Peak Deviation	$di/dt = 1.0\text{A}/\mu\text{Sec}$		2%		V_{OUT} , Nom
	Settling Time	V_{OUT} , 1% of Nominal Output		100		μSec
	ISOLATION					
	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
	ISOLATION					
	Input to Output	Peak Test for 2 Seconds	1500			VDC
	Input to Baseplate		1500			VDC
	Output to Baseplate		500			VDC
	Resistance		10			M Ω
	Capacitance			2000		pF
	Leakage Current	$V_{ISO} = 240\text{VAC}, 60\text{Hz}$		180		μA , rms
	GENERAL					
	Efficiency, Line, Load, Temp. (3)					
	Switching Frequency		400	420	440	KHz
	Remote Sense Compensation				0.5	V
	Output Voltage Adjust Range	12V & higher(4)		-50% / +25%		V_{OUT} , Nom
	Remote On/Off Control Inputs					
	Primary	Open Collector/Drain				
	Sink Current-Logic Low				1.0	mA
	Vlow				0.4	V
	Vhigh				Open Collector	
	Turn-on Time	Within 1% of Rated Output		10.0	12.5	mSec
	Weight				85 (3.0)	g (oz.)
	TEMPERATURE					
	Operation/Specification	Case Temperature	-40	+25	+100	$^{\circ}\text{C}$
	Storage	Case Temperature	-55	+25	+125	$^{\circ}\text{C}$
	Shutdown Temperature	Case Temperature	+100		+115	$^{\circ}\text{C}$
	Thermal Impedance, case-ambient			7.1		$^{\circ}\text{C}/\text{W}$
	Lead Solder Temperature	10 Seconds max			+300	$^{\circ}\text{C}$

- NOTES:** (1) See Typical Performance Curves, page 3
 (2) Continuous Mode
 (3) See graphs for Efficiency vs. Output Load, V_{IN} , T_{CASE}
 (4) 3.3V Models Limited in Trim Down Range
 (5) Consult Factory for Details

TYPICAL PERFORMANCE CURVES T_{CASE} = +40°C nominal input voltage unless otherwise specified.

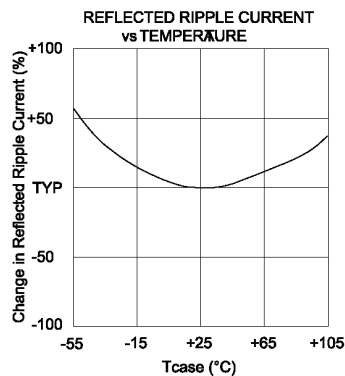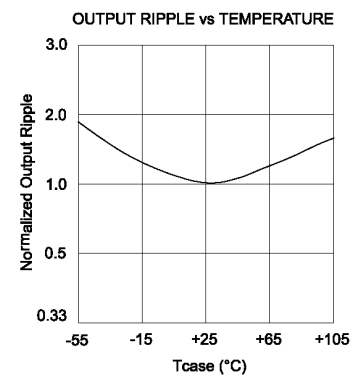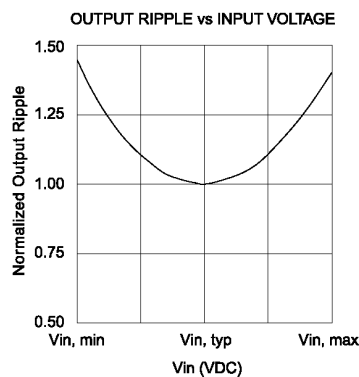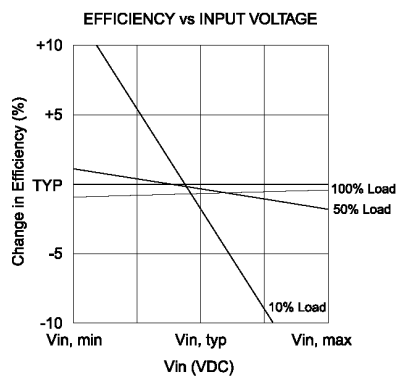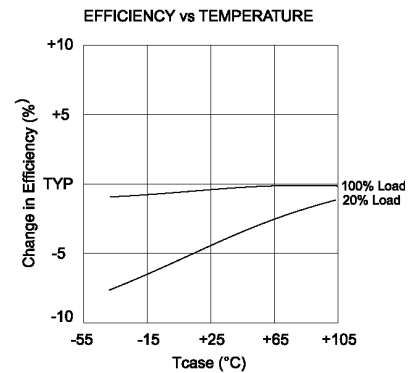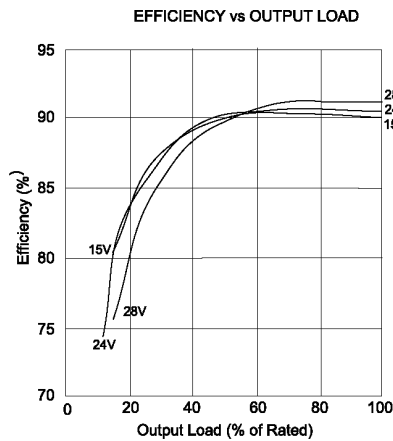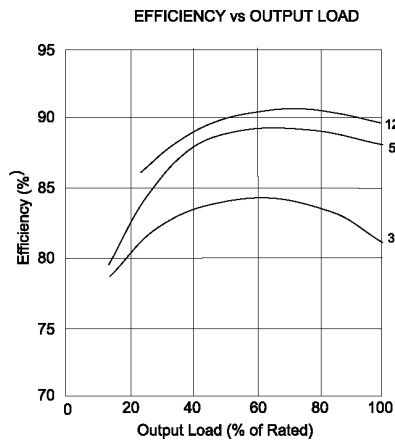

POWER DERATING WITH NO HEATSINK

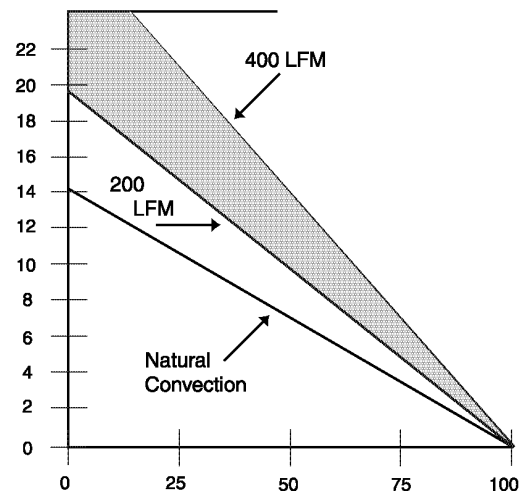

ORDERING INFORMATION

Device Family VKA60 xSzz -

Indicates 60 Watt Regulated Unit

Model Number _____

Selected from Table of Electrical Characteristics

Where:

x = Input Voltage (L = 24VDC; M = 48VDC)

zz = Output Voltage (03=3.3V, 05=5V, etc.)

Lead Length _____

0.200" - No Number

0.145" - (6)

0.110" - (8)


Remote On-Off Logic: _____

Positive - No Number

Negative - (1)

MECHANICAL

SIDE VIEW

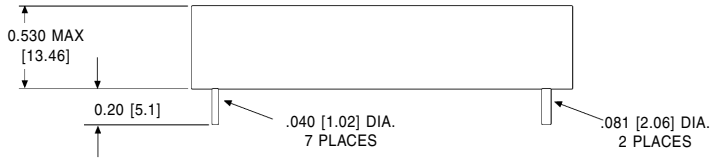

NOTES:


All dimensions are in inches (millimeters).

PIN PLACEMENT TOLERANCE: $\pm 0.005"$

MECHANICAL TOLERANCE: $\pm 0.015"$

Marked with: specific model, ordered, date code, job code.

MATERIAL: Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance and electrical properties in high humidity environments and over a wide operating temperature range. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is solder plated to allow ease of solderability.

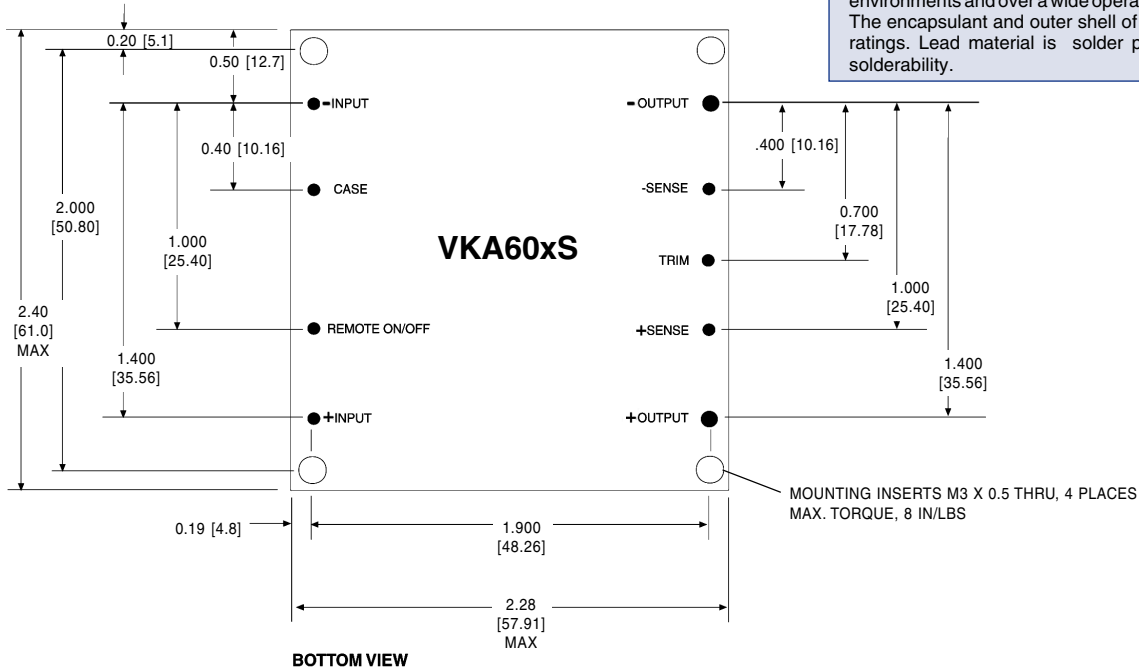

OUTPUT ADJUST VOLTAGE

This feature allows the user to accurately adjust the module's output voltage set point to a specified level. This is achieved by connecting a resistor or potentiometer from the TRIM terminal to either the +V_{out} terminal (for increased V_{out}) or the -V_{out} terminal (for decreased V_{out}). The formulae below describe the trim resistor value to obtain a V_{out} change of $\Delta\%$. V_o is output voltage prior to adjustment (3.3V, 5V, 12V, 15V, or 24V).

$$\text{Radj - up} = \left(\frac{V_o(100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) \text{ k}\Omega$$

$$\text{Radj - down} = \left(\frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

OVP NOTE

Special attention should be given to the peak voltage deviation during a dynamic load step when trimming the output above the original set point to avoid tripping the overvoltage protection circuit. Should an OVP condition occur, the converter will go into a latch condition and must be externally reset before it will return to normal operation.

C&D Technologies (Power Electronics) Ltd.
Shannon, Co. Clare, Ireland
Tel: +353.61.474.133 Fax: +353.61.474.141

Power Electronics Division, United States
3400 E Britannia Drive, Tucson, Arizona 85706
Tel: 800.547.2537 Fax: 520.770.9369

C&D Technologies, (NCL)
Milton Keynes MK14 5BU UK
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.