

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0532611771](#)
Status: **Active**
Overview: [picoblade](#)
Description: 1.25mm (.049") Pitch PicoBlade™ Header, Surface Mount, Right Angle, Lead-free, 17 Circuits

Documents:
[3D Model](#) [Product Specification PS-51021-024 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980


General

Product Family PCB Headers
Series [53261](#)
Application Wire-to-Board
Overview [picoblade](#)
Product Name PicoBlade™

Physical

Breakaway No
Circuits (Loaded) 17
Circuits (maximum) 17
Color - Resin Natural
Durability (mating cycles max) 30
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Compliant No
Guide to Mating Part Yes
Keying to Mating Part None
Lock to Mating Part Yes
Mated Height (in) 0.134 In
Mated Height (mm) 3.40 mm
Material - Metal Phosphor Bronze
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Number of Rows 1
Orientation Right Angle
PCB Locator No
PCB Retention Yes
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface (in) 0.049 In
Pitch - Mating Interface (mm) 1.25 mm
Plating min: Mating (µin) 40
Plating min: Mating (µm) 1
Plating min: Termination (µin) 40
Plating min: Termination (µm) 1
Polarized to PCB Yes
Shrouded Fully
Stackable No
Temperature Range - Operating -40°C to +85°C
Termination Interface: Style Surface Mount

Electrical

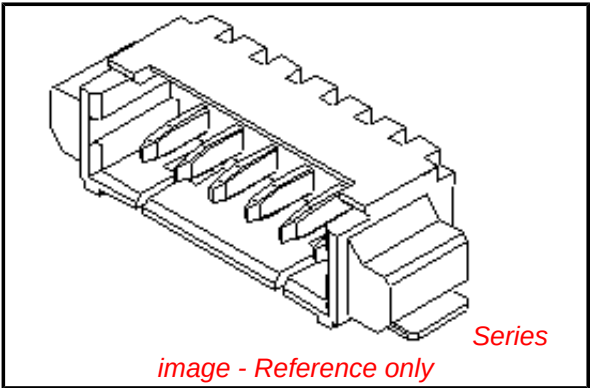

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[53261Series](#)

Mates With
[51021](#) PicoBlade™ Wire-to-Wire and Wire-to-Board Housing

Current - Maximum per Contact

1A

Voltage - Maximum

125V

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-53261-002

Product Specification


PS-51021-024, RPS-51021-058, RPS-51021-061,
RPS-51021-081, RPS-51021-097, RPS-51021-099,
RPS-51021-101

Sales Drawing

SD-51021-002, SD-53261-024, SD-53261-048

This document was generated on 05/25/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

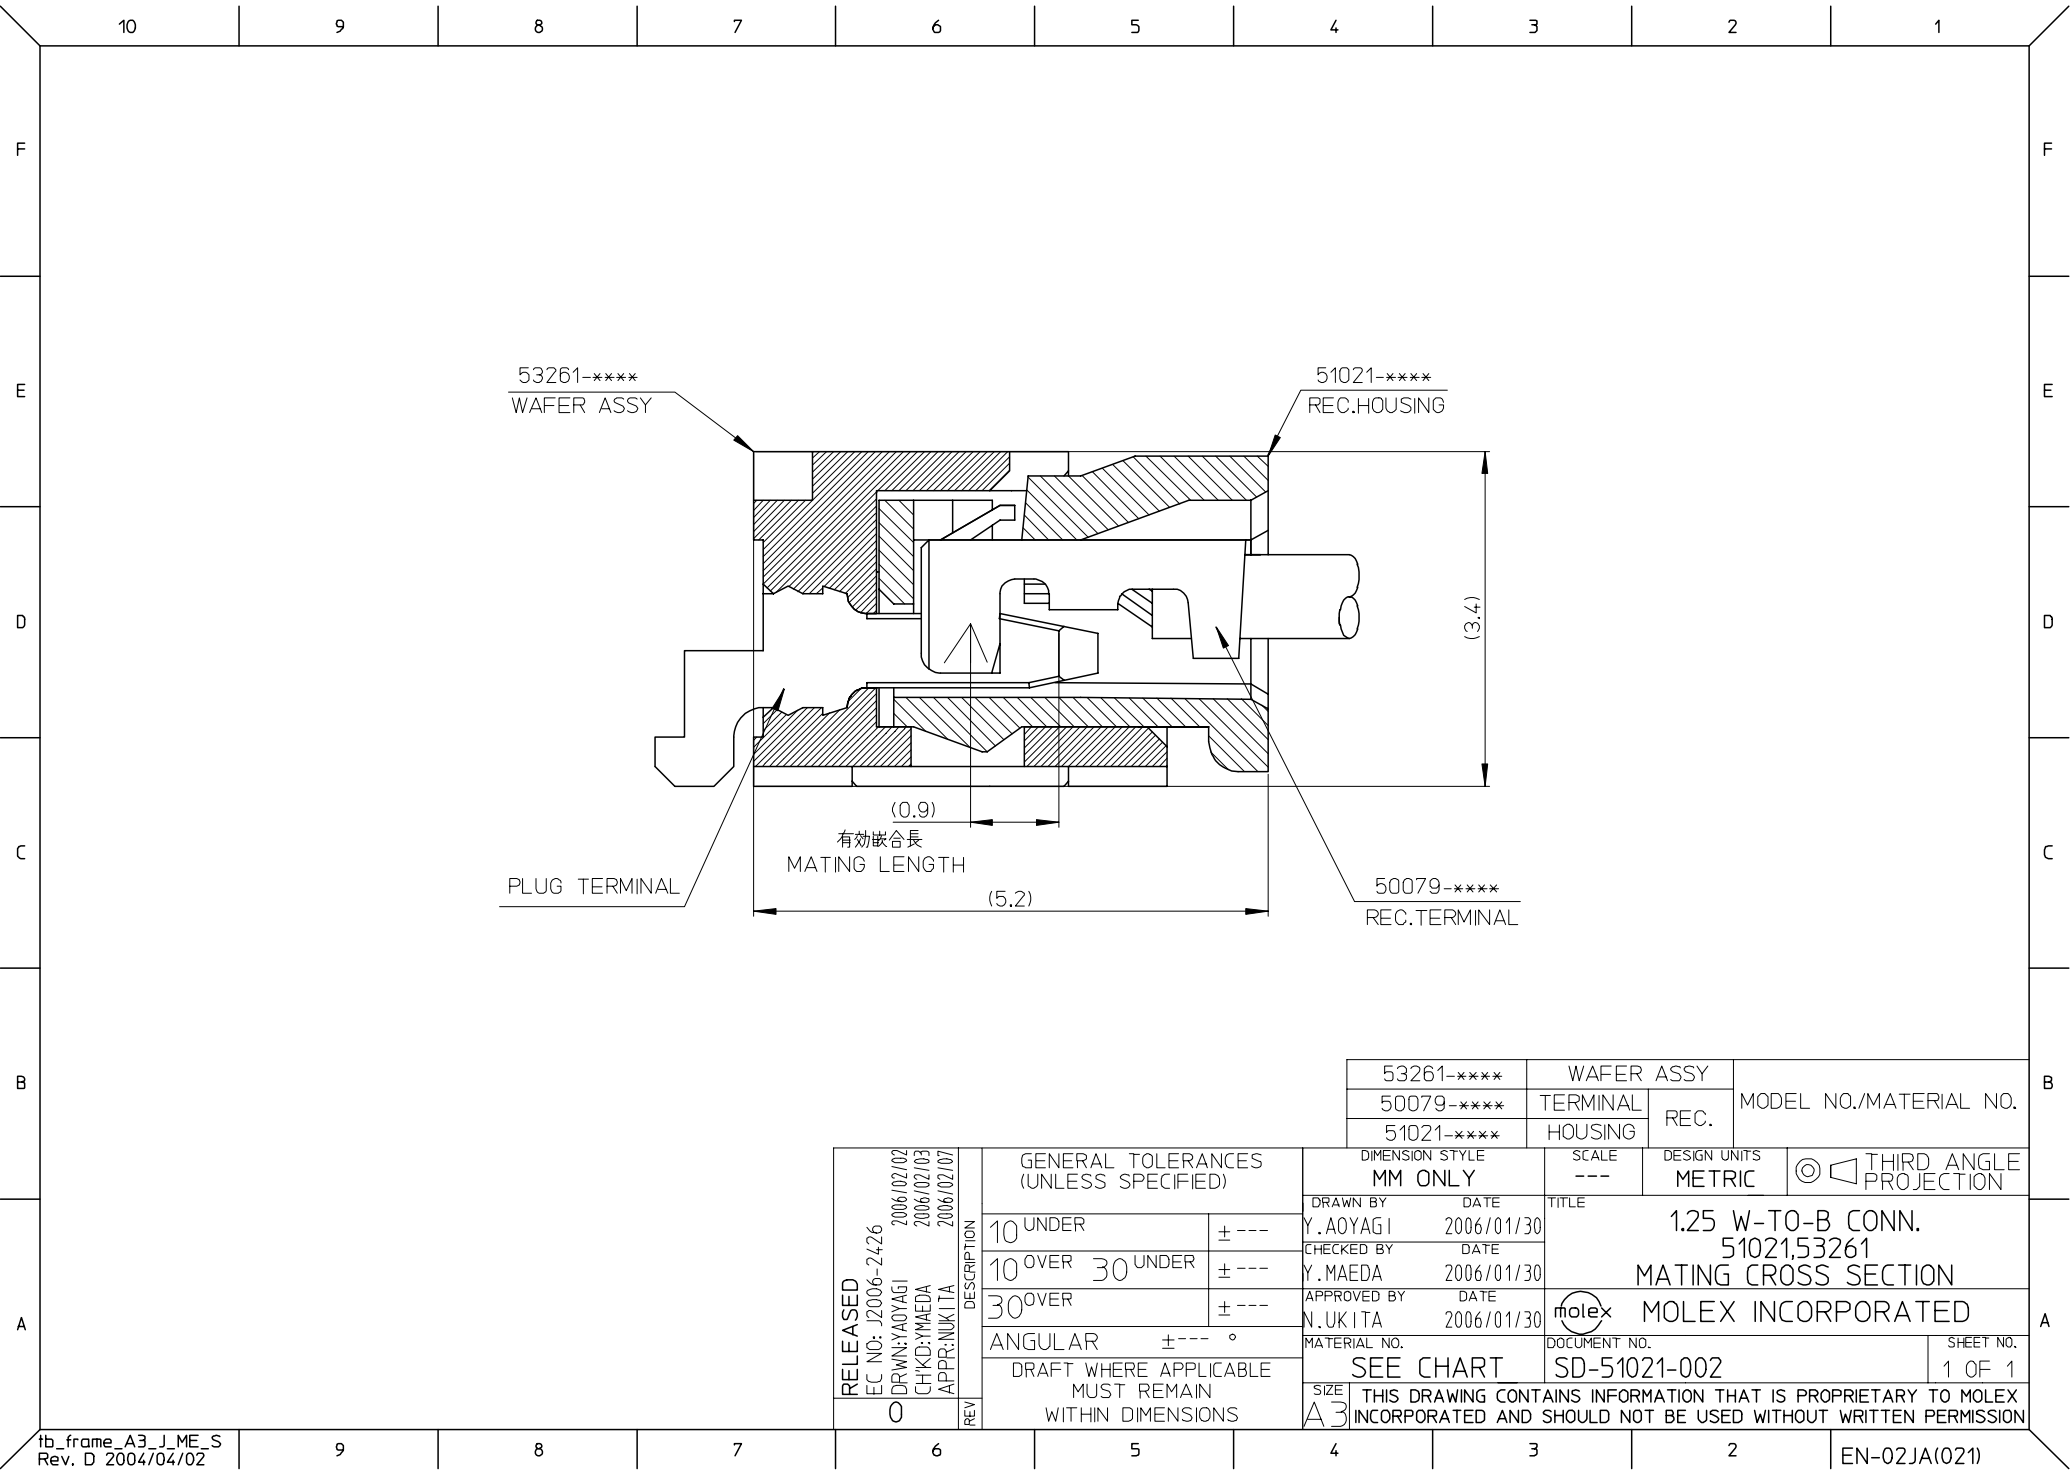

53261-****	WAFER ASSY	MODEL NO./MATERIAL NO.
50079-****	TERMINAL	
51021-****	HOUSING	

RELEASED EC NO: J2006-2426 DRWN: YAOYAGI 2006/02/02 CHKD: YMAEDA 2006/02/03 APPR: NUKITA 2006/02/07 REV 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY Y. AOYAGI	DATE 2006/01/30	TITLE 1.25 W-TO-B CONN. 51021,53261 MATING CROSS SECTION				
		10 OVER 30 UNDER	± ---	CHECKED BY Y. MAEDA	DATE 2006/01/30					
		30 OVER	± ---	APPROVED BY N. UKITA	DATE 2006/01/30	MOLEX INCORPORATED				
		ANGULAR ± --- °		MATERIAL NO.			DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-51021-002			1 OF 1
	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

