


# PT3100 Series 48V

**15 WATT 48V TO 5V/12V/15V  
 ISOLATED DC-DC CONVERTER**

**Revised 8/13/98**

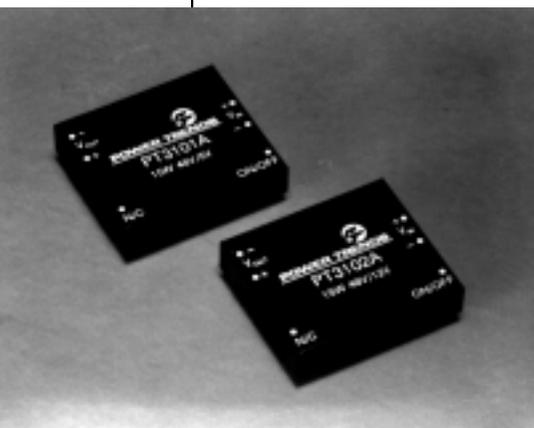

- Power Density 15 Watts/in<sup>3</sup>
- Wide Input Voltage Range 36V to 75V
- 80% Efficiency
- 500 VDC Isolation
- Industry's Smallest Footprint
- Fast Transient Response
- No External Components Required

Power Trends' PT3101A (5V), PT3102A (12V) and PT3103A (15V)


Isolated DC-DC Converters advance the state-of-the-art for board-mounted converters by employing high switching frequencies greater than 650 KHz and planar magnetics and surface-mount construction. They feature the industry's smallest footprint, a power density of 15 Watts/in<sup>3</sup>, and operate at 80% efficiency. They are designed for Telecom, Industrial, Computer, Medical, and other distributed power applications requiring input-to-output isolation.

## Specifications

Characteristics (T <sub>a</sub> =25°C unless noted)	Symbols	Conditions	PT3100 SERIES			Units
			Min	Typ	Max	
Output Current	I <sub>o</sub>	Over V <sub>in</sub> range	V <sub>o</sub> = 5V 0 V <sub>o</sub> = 12V 0 V <sub>o</sub> = 15V 0	— — —	3.0 1.25 1.0	A A A
Current Limit	I <sub>cl</sub>	V <sub>in</sub> = 36V	V <sub>o</sub> = 5V — V <sub>o</sub> = 12V — V <sub>o</sub> = 15V —	4.00 1.75 1.4	— — —	A A A
On/Off Standby Current	I <sub>in standby</sub>	V <sub>in</sub> = 48V, Pin 1 = -V <sub>in</sub>	—	7	10	mA
Short Circuit Current	I <sub>sc</sub>	V <sub>in</sub> = 48V	V <sub>o</sub> = 5V — V <sub>o</sub> = 12V — V <sub>o</sub> = 15V —	5.5 3.5 2.0	— — —	A A A
Inrush Current	I <sub>ir</sub> t <sub>ir</sub>	V <sub>in</sub> = 48V @ max I <sub>o</sub> On start-up	— —	0.6 1.0	1.0 5.0	A mSec
Input Voltage Range	V <sub>in</sub>	I <sub>o</sub> = 0.1 to max I <sub>o</sub>	36.0	48.0	75.0	V
Output Voltage Tolerance	ΔV <sub>o</sub>	Over V <sub>in</sub> Range T <sub>A</sub> = -20°C to 70°C	—	±1.0	±2.0	%V <sub>o</sub>
Ripple Rejection	RR	Over V <sub>in</sub> range @ 120 Hz	—	60	—	dB
Line Regulation	Reg <sub>line</sub>	Over V <sub>in</sub> range @ max I <sub>o</sub>	—	±0.2	±1.0	%V <sub>o</sub>
Load Regulation	Reg <sub>load</sub>	10% to 100% of I <sub>o</sub> max	—	±0.4	±1.0	%V <sub>o</sub>
V <sub>o</sub> Ripple/Noise	V <sub>n</sub>	V <sub>in</sub> =48V, I <sub>o</sub> =3.0A, V <sub>o</sub> =5V V <sub>in</sub> =48V, I <sub>o</sub> =1.25A, V <sub>o</sub> =12V V <sub>in</sub> =48V, I <sub>o</sub> =1.0A, V <sub>o</sub> =15V	— — —	75 120 100	100 150 200	mV <sub>pp</sub> mV <sub>pp</sub> mV <sub>pp</sub>
Transient Response	t <sub>tr</sub>	50% load change V <sub>o</sub> over/undershoot	— —	100 3.0	200 5.0	μSec %V <sub>o</sub>
Efficiency	η	V <sub>in</sub> =48V, I <sub>o</sub> =3.0A, V <sub>o</sub> =5V V <sub>in</sub> =48V, I <sub>o</sub> =1.25A, V <sub>o</sub> =12V V <sub>in</sub> =48V, I <sub>o</sub> =1A, V <sub>o</sub> =15V	— — —	79 80 80	— — —	% % %
Switching Frequency	f <sub>o</sub>	Over V <sub>in</sub> and I <sub>o</sub> , V <sub>o</sub> =5V V <sub>o</sub> =12V/15V	800 600	850 650	900 700	kHz kHz
Recommended Operating Temperature Range	T <sub>a</sub>	V <sub>in</sub> = 48V @ max I <sub>o</sub> Free air convection, (40-60LFM)	-20	—	+70*	°C
Thermal Resistance	θ <sub>in</sub>	Free Air Convection, (40-60LFM)	—	16	—	°C/W
Case Temperature	T <sub>c</sub>	@ Thermal shutdown	—	—	100	°C
Storage Temperature	T <sub>s</sub>	—	-40	—	110	°C
Mechanical Shock	—	Per Mil-STD-202F, Method 213B, 6mS, Half-sine, mounted to a PCB	—	50	—	G's
Mechanical Vibration	—	Per Mil-STD-202F, Method 204D, 10-500Hz, Soldered in a PCB	—	10	—	G's
Weight	—	—	—	28	—	grams
Isolation Capacitance	—	—	500	—	—	V
Resistance	—	—	10	—	—	pF MΩ
Flammability	—	Materials meet UL 94V-0	—	—	—	—
Remote On/Off	On Off	Open or 2.5 to 7.0 VDC above -V <sub>in</sub> Short or 0 to 0.8 VDC above -V <sub>in</sub>	—	—	—	—

\* See Thermal Derating Curves

## Standard Application



## Pin-Out Information

Pin	Function
1	Remote ON/OFF
2	-V <sub>in</sub>
3	+V <sub>in</sub>
4	-V <sub>out</sub>
5	+V <sub>out</sub>
6	Do not connect

## Ordering Information

### Through-Hole

**PT3101A** = 5 Volts  
**PT3102A** = 12 Volts  
**PT3103A** = 15 Volts

### Surface Mount

**PT3101C** = 5 Volts  
**PT3102C** = 12 Volts  
**PT3103C** = 15 Volts  
 (For dimensions and PC board layout, see Package Style 700.)


# PT3100 Series

# 48V


## CHARACTERISTIC DATA

**PT3101, 5.0 VDC** (See Note 1)


**Efficiency vs Output Current**

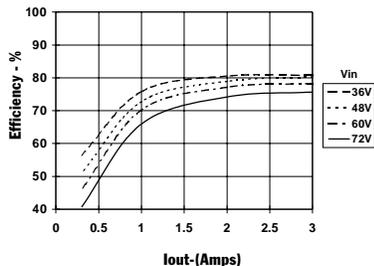


**Ripple vs Output Current**

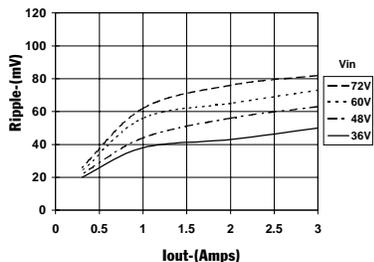

**Thermal Derating (T<sub>a</sub>)** (See Note 2)

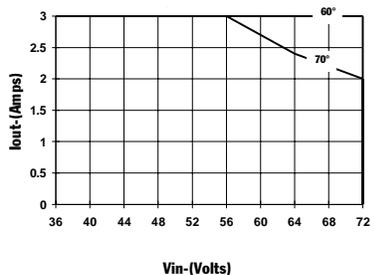


**Power Dissipation vs Output Current**

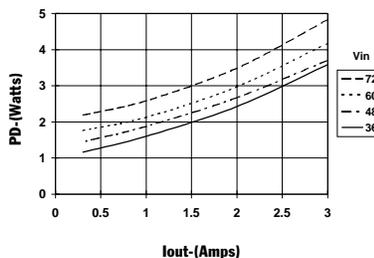


**PT3102, 12.0 VDC** (See Note 1)


**Efficiency vs Output Current**

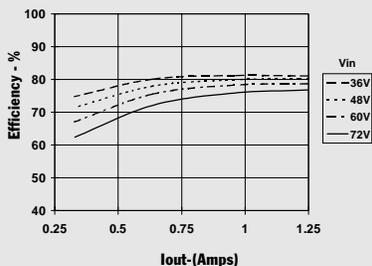


**Ripple vs Output Current**

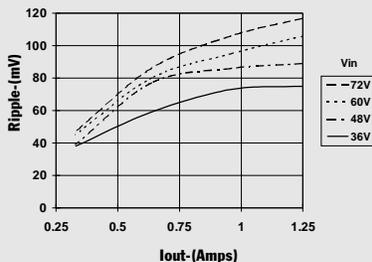

**Thermal Derating (T<sub>a</sub>)** (See Note 2)

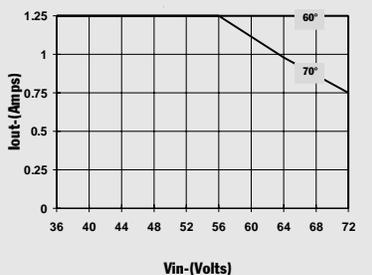


**Power Dissipation vs Output Current**

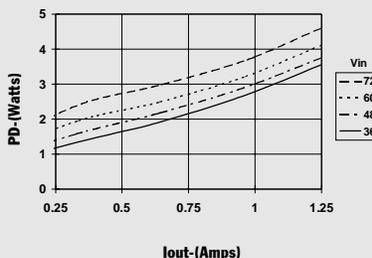


**PT3103, 15.0 VDC** (See Note 1)


**Efficiency vs Output Current**

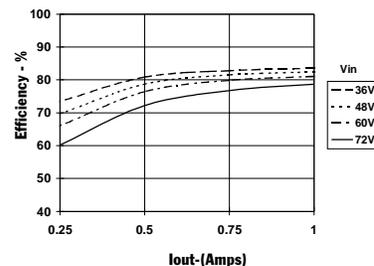


**Ripple vs Output Current**

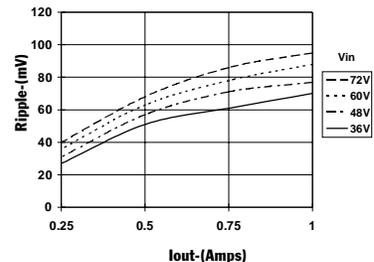

**Thermal Derating (T<sub>a</sub>)** (See Note 2)

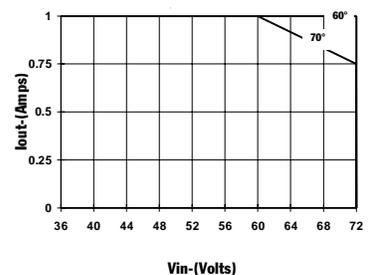

**Power Dissipation vs Output Current**

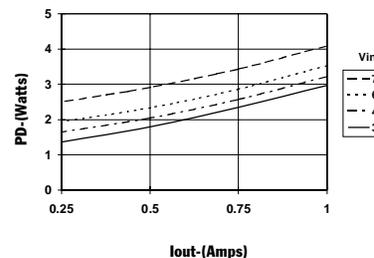

**Note 1:** All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the DC-DC Converter.  
**Note 2:** Thermal derating graphs are developed in free air convection cooling of 40-60 LFM.

## IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.