

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0522660211](#)
Status: **Active**
Overview: [splash_proof](#)
Description: 2.50mm (.098") Pitch Splash Proof Wire-to-Wire Plug Housing, 2 Circuit Version

Documents:
[3D Model](#) [Product Specification PS-52213-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

TUV R72090206
UL E29179

General

Product Family Crimp Housings
Series [52266](#)
MolexKits Yes
Overview [splash_proof](#)
Product Name Splash Proof


Physical

Circuits (maximum) 2
Flammability 94V-0
Gender Male
Glow-Wire Compliant No
Number of Rows 1
Packaging Type Tray
Panel Mount No
Pitch - Mating Interface (in) 0.098 In
Pitch - Mating Interface (mm) 2.50 mm
Stackable No
Temperature Range - Operating -40°C to +105°C

Material Info

Reference - Drawing Numbers

Product Specification PS-52213-001, RPS-52213-001, RPS-52266-001
Sales Drawing SD-52266-021*

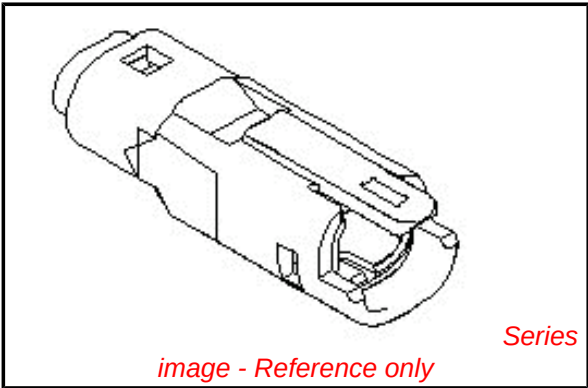

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[52266Series](#)


Mates With
[52213](#)

Use With
[50147](#)

1:MM DIMENSIONS IN METRIC DO NOT SCALE DRAWING

EDP NO.

ENG. NO
SD-52266-021*

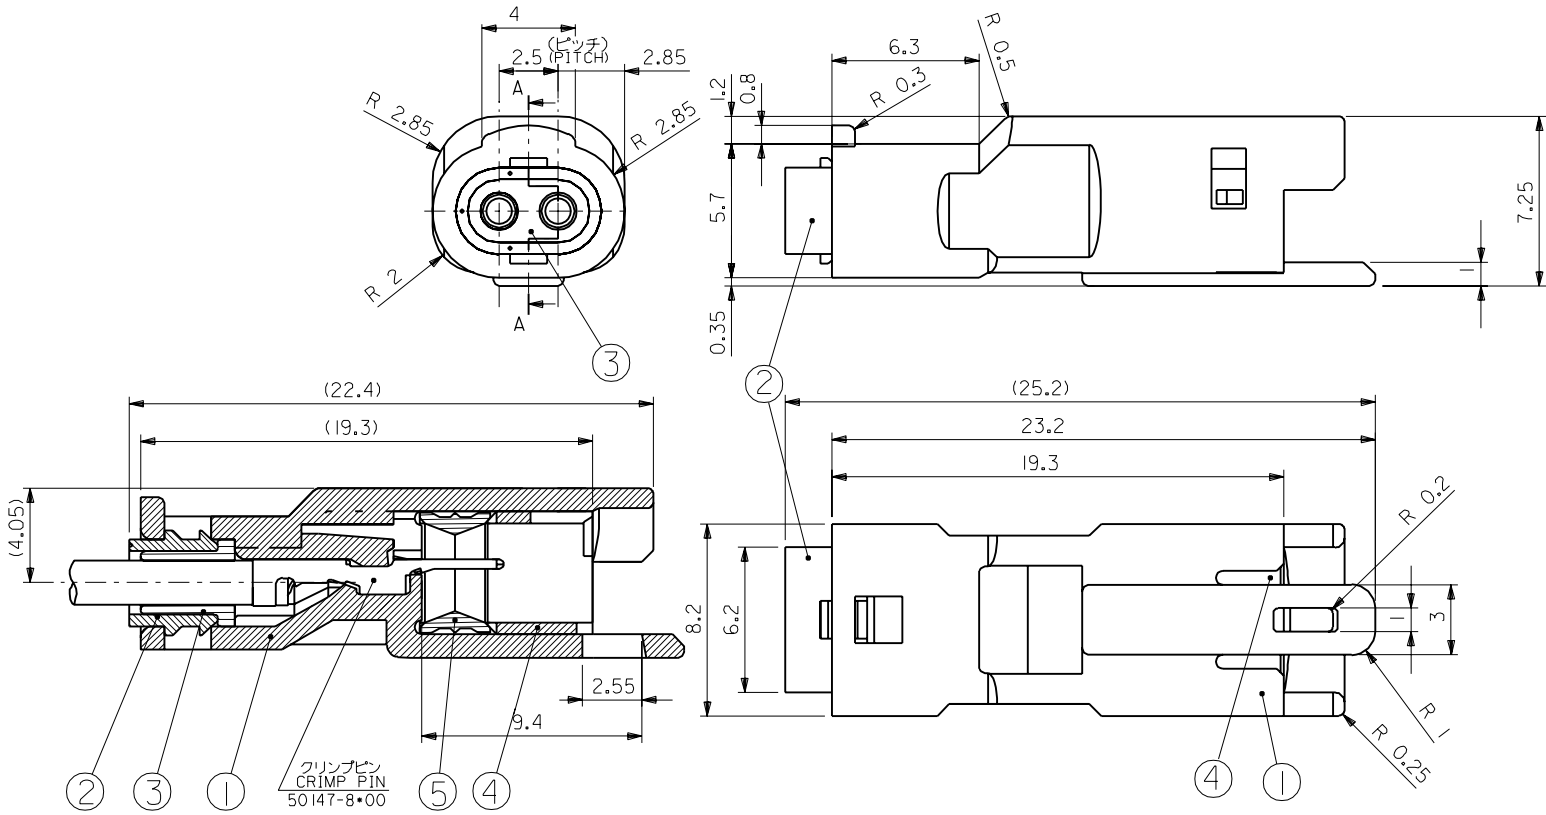

断面A-A (端子装着状態図)
SECT.A-A(TERM.ASSEMBLY DRAWING)

注記
NOTES

- 1. 適合クリンプ ピン :50147-8*00
APPLICABLE CRIMP PIN:50147-8*00
- 2. 嵌合相手 :52213-021*
MATES WITH :52213-021*
- 3. 適合キャップ装着シグ :57147-6000
APPLICABLE CAP FITTING HAND TOOL :57147-6000

シリコンゴム SILICONE	シール SEAL	⑤
ポリエステル (15%G.F.) POLYESTER	シール ストッパー SEAL STOPPER	④
シリコンゴム SILICONE	ワイヤーエンド シール WIRE END SEAL	③
ポリエステル (15%G.F.) POLYESTER	キャップ CAP	②
ポリエステル (15%G.F.) POLYESTER	プラグハウジング PLUG HOUSING	①
材 料 MATERIAL	名 称 TITLE	✕
端子装着時の断面 A-A の構成部品 COMPONENT(SECT.A-A)		

黒 BLACK	52266-0211	2
ハウジングの色 HS'G COLOR	製品番号 ENG.No.	極数 No.OF CKT.

						材料 MATERIAL 表参照 SEE CHART		MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社	
		E 変更 REVISED (J45010)	Y.F	M.S	'94/3/2				
		D 変更 REVISED (J20708)		M.S	'92/8/6				
		C 変更 REVISED (J20220)	Y.F		'92/3/12	仕上げ FINISH		EDP. NO.	
角度 ANGLE	±3°	B 変更 REVISED (J11094)	Y.F		'91/12/4	適用電線範囲 WIRE RANGE		AVSS-0.3 CAVS-0.5	
30 以上 OVER	±0.3	A 変 更	Y.F		'91/1/26	被覆外径 INS. RANGE		Ø 1.4-1.7	REV E
10 以上 30 未満 OVER UNDER	±0.25	O 新規作成 (J00551)	Y.A		90/5/15			SD-52266-021*	
10 未満 UNDER	±0.2	記号 LTR	変更内容 REVISION RECORD	DR. CHK.	日付 DATE	DRAWN BY '90/4/29 Y.ASHIZAWA		CHK'D BY '94/3/2 M.SAKANO M.SANO	TITLE 名称
一般公差 GENERAL TOLERANCES		REVISION RECORD				APP'D BY '94/3/2 M.ENOMOTO	尺 度 SCALE	5-1	2.5 MINI SPLASH PROOF CONN.PLUG HOUSING ASS'Y
REVISION RECORD									