

# Terminal Voltage $\pm 5V$ , 100 Taps, Log Taper

## X9C303

### Digitally Controlled Potentiometer (XDCP™)

#### FEATURES

- Solid-state potentiometer
- Three-wire serial interface
- 100 wiper tap points
  - Wiper position stored in nonvolatile memory and recalled on power-up
- 99 resistive elements, log taper
  - Temperature compensated
  - End to end resistance,  $\pm 15\%$
  - Terminal voltages,  $\pm 5V$
- Low power CMOS
  - $V_{CC} = 5V$
  - Active current, 3mA max.
  - Standby current, 750 $\mu A$  max.
- High reliability
  - Endurance, 100,000 data changes per bit
  - Register data retention, 100 years
- X9C303, 32 k $\Omega$
- Packages
  - 8-lead TSSOP
  - 8-lead SOIC
  - 8-pin DIP


#### DESCRIPTION

The Xicor X9C303 is a digitally controlled potentiometer (XDCP). The device consists of a resistor array, wiper switches, a control section, and nonvolatile memory. The wiper position is controlled by a three-wire interface.

The resistor array is composed of 99 resistive elements. Between each element and at either end are tap points accessible to the wiper terminal. The position of the wiper element is controlled by the  $\overline{CS}$ ,  $U/\overline{D}$ , and  $\overline{INC}$  inputs. The position of the wiper can be stored in nonvolatile memory and then be recalled upon a subsequent power-up operation.

The device can be used as a three-terminal potentiometer or as a two-terminal variable resistor in a wide variety of applications ranging from control, to signal processing, to parameter adjustment. Digitally-controlled potentiometers provide three powerful application advantages; (1) the variability and reliability of a solid-state potentiometer, (2) the flexibility of computer-based digital controls, and (3) the use of nonvolatile memory for potentiometer settings retention.

#### BLOCK DIAGRAM

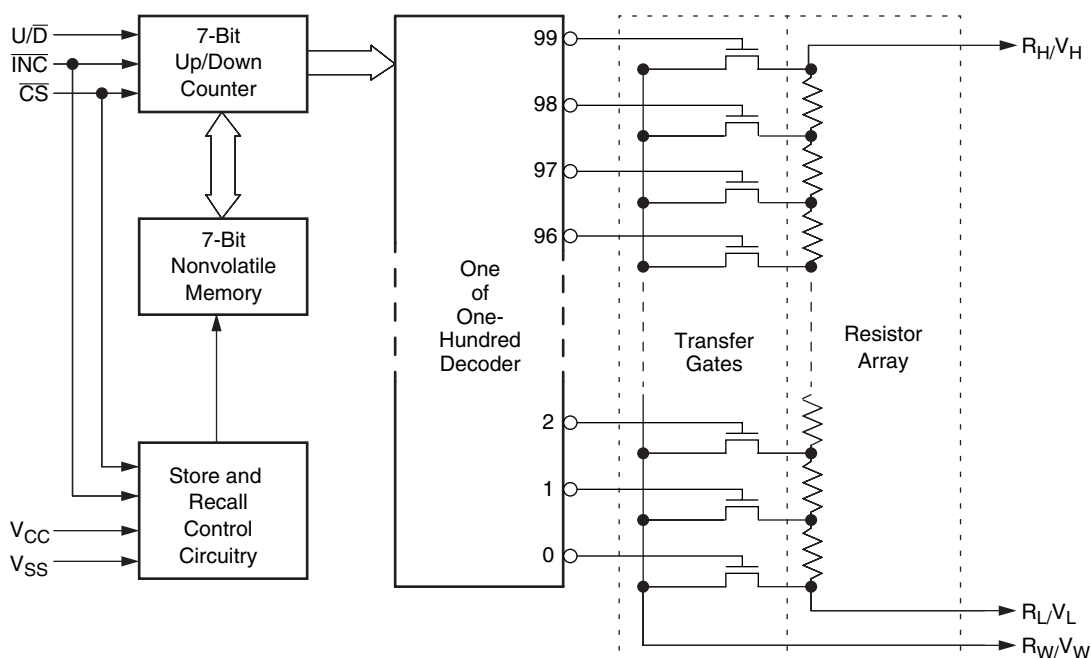

# X9C303

## PIN DESCRIPTIONS

### $V_H$ and $V_L$

The high ( $V_H$ ) and low ( $V_L$ ) terminals of the device are equivalent to the fixed terminals of a mechanical potentiometer. The minimum voltage is  $-5V$  and the maximum is  $+5V$ . It should be noted that the terminology of  $V_L$  and  $V_H$  references the relative position of the terminal in relation to wiper movement direction selected by the  $U/\bar{D}$  input and not the voltage potential on the terminal.

### $V_W$

$V_W$  is the wiper terminal, equivalent to the movable terminal of a mechanical potentiometer. The position of the wiper within the array is determined by the control inputs. The wiper terminal series resistance is typically  $40\Omega$ .

### Up/Down ( $U/\bar{D}$ )

The  $U/\bar{D}$  input controls the direction of the wiper movement and whether the counter is incremented or decremented.


### Increment ( $\bar{INC}$ )

The  $\bar{INC}$  input is negative-edge triggered. Toggling  $\bar{INC}$  will move the wiper and either increment or decrement the counter in the direction indicated by the logic level on the  $U/\bar{D}$  input.

### Chip Select ( $\bar{CS}$ )

The device is selected when the  $\bar{CS}$  input is LOW. The current counter value is stored in nonvolatile memory when  $\bar{CS}$  is returned HIGH while the  $\bar{INC}$  input is also HIGH. After the store operation is complete the device will be placed in the low power standby mode until the device is selected once again.


## PIN CONFIGURATION

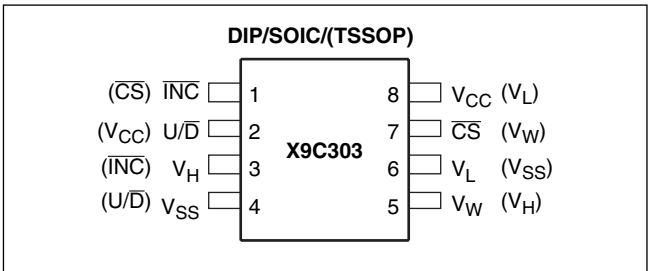

## PIN NAMES

| Symbol      | Description                    |
|-------------|--------------------------------|
| $V_H$       | High Terminal (Potentiometer)  |
| $V_W$       | Wiper Terminal (Potentiometer) |
| $V_L$       | Low Terminal (Potentiometer)   |
| $V_{SS}$    | Ground                         |
| $V_{CC}$    | Supply Voltage                 |
| $U/\bar{D}$ | Up/Down Control Input          |
| $\bar{INC}$ | Increment Control Input        |
| $\bar{CS}$  | Chip Select Control Input      |
| NC          | No Connection                  |

## POTENTIOMETER RELATIONSHIPS

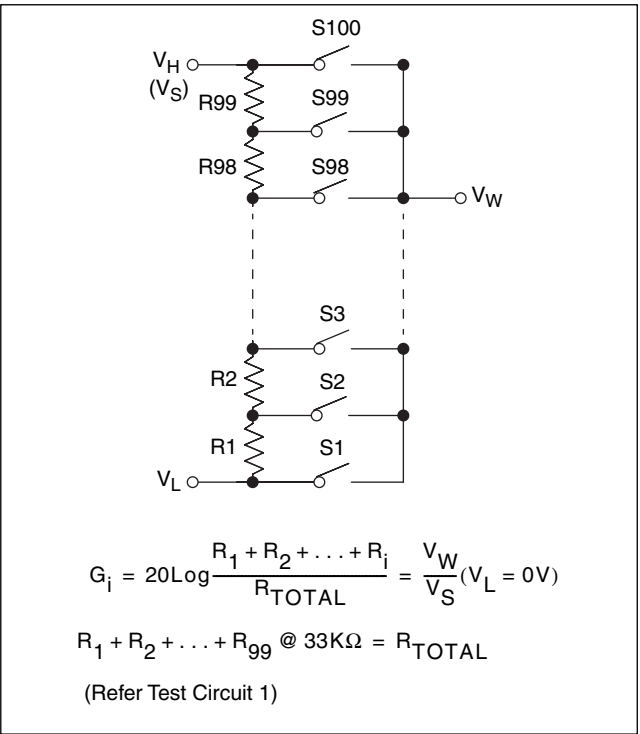

## PRINCIPLES OF OPERATION

There are three sections of the X9C303: the input control, counter and decode section; the nonvolatile memory; and the resistor array. The input control section operates just like an up/down counter. The output of this counter is decoded to turn on a single electronic switch connecting a point on the resistor array to the wiper output. Under the proper conditions the contents of the counter can be stored in nonvolatile memory and retained for future use. The resistor array is comprised of 99 individual resistors connected in series. At either end of the array and between each resistor is an electronic switch that transfers the potential at that point to the wiper.

The wiper, when at either fixed terminal, acts like its mechanical equivalent and does not move beyond the last position. That is, the counter does not wrap around when clocked to either extreme.

The electronic switches on the device operate in a "make before break" mode when the wiper changes tap positions. If the wiper is moved several positions, multiple taps are connected to the wiper for  $t_{WV}$  ( $\overline{INC}$  to  $V_W$  change). The  $R_{TOTAL}$  value for the device can temporarily be reduced by a significant amount if the wiper is moved several positions.

When the device is powered-down, the last counter position stored will be maintained in the nonvolatile memory. When power is restored, the contents of the memory are recalled and the counter is reset to the value last stored.

### Instructions and Programming

The  $\overline{INC}$ ,  $U/\overline{D}$  and  $\overline{CS}$  inputs control the movement of the wiper along the resistor array. With  $\overline{CS}$  set LOW the device is selected and enabled to respond to the  $U/\overline{D}$  and  $\overline{INC}$  inputs. HIGH to LOW transitions on  $\overline{INC}$  will increment or decrement (depending on the state of the  $U/\overline{D}$  input) a seven-bit counter. The output of this counter is decoded to select one of one-hundred wiper positions along the resistive array.

The value of the counter is stored in nonvolatile memory whenever  $\overline{CS}$  transitions HIGH while the  $\overline{INC}$  input is also HIGH.

The system may select the X9C303, move the wiper, and deselect the device without having to store the latest wiper position in nonvolatile memory. The wiper movement is performed as described above; once the new position is reached, the system would keep  $\overline{INC}$  LOW while taking  $\overline{CS}$  HIGH. The new wiper position would be maintained until changed by the system or until a power-down/up cycle recalled the previously stored data.

This would allow the system to always power-up to a preset value stored in nonvolatile memory; then during system operation minor adjustments could be made. The adjustments might be based on user preference: system parameter changes due to temperature drift, etc...

The state of  $U/\overline{D}$  may be changed while  $\overline{CS}$  remains LOW. This allows the host system to enable the device and then move the wiper up and down until the proper trim is attained.

### MODE SELECTION

| $\overline{CS}$                                                                     | $\overline{INC}$                                                                     | $U/\overline{D}$ | Mode                        |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------|-----------------------------|
| L                                                                                   |  | H                | Wiper Up                    |
| L                                                                                   |  | L                | Wiper Down                  |
|  | H                                                                                    | X                | Store Wiper Position        |
| H                                                                                   | X                                                                                    | X                | Standby Current             |
|  | L                                                                                    | X                | No Store, Return to Standby |

### SYMBOL TABLE

| WAVEFORM                                                                            | INPUTS                      | OUTPUTS                       |
|-------------------------------------------------------------------------------------|-----------------------------|-------------------------------|
|  | Must be steady              | Will be steady                |
|  | May change from Low to High | Will change from Low to High  |
|  | May change from High to Low | Will change from High to Low  |
|  | Don't Care: Changes Allowed | Changing: State Not Known     |
|  | N/A                         | Center Line is High Impedance |

# X9C303

## ABSOLUTE MAXIMUM RATINGS

Temperature under bias ..... -65°C to +135°C  
Storage temperature ..... -65°C to +150°C  
Voltage on  $\overline{CS}$ ,  $\overline{IN\overline{C}}$ ,  $U/\overline{D}$  and  $V_{CC}$   
with respect to  $V_{SS}$  ..... -1V to +7V  
Voltage on  $V_H$  and  $V_L$   
referenced to  $V_{SS}$  ..... -8V to +8V  
 $\Delta V = |V_H - V_L|$  X9C303 ..... 10V  
Lead temperature (soldering, 10 seconds) ..... +300°C  
Wiper current .....  $\pm 1$ mA

## COMMENT

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only; functional operation of the device (at these or any other conditions above those listed in the operational sections of this specification) is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ANALOG CHARACTERISTICS

### Electrical Characteristics

End-to-end resistance tolerance .....  $\pm 15\%$   
Power rating at 25°C X9C303 ..... 10mW  
Wiper current .....  $\pm 1$ mA Max.

Typical wiper resistance ..... 40 $\Omega$  at 1mA  
Typical resistor  
noise ..... 23 nV (RMS)/ $\sqrt{\text{Hz}}$  at 1kHzPHZ  
Typical charge pump noise.. 20 mV (RMS) @ 2.5 MHz

### Relative Variation

Relative variation is a measure of the error in step size between taps =  $\log(V_{w(n)}) - \log(V_{w(n-1)}) = 0.045 \pm 0.003$  for tap  $n = 2 - 99$

### Temperature Coefficient

(-40°C to +85°C) X9C303 .....  $\pm 400$  ppm/°C  
Ratiometric temperature coefficient .....  $\pm 20$  ppm

### Wiper Adjustability

Unlimited Wiper Adjustment (Non-Store operation)  
Wiper Position Store  
Operations ..... 100,000 Data Changes per Bit

### Physical Characteristics


Marking Includes

Manufacturer's Trademark

Resistance Value or Code


Date Code

## Typical Electrical Taper

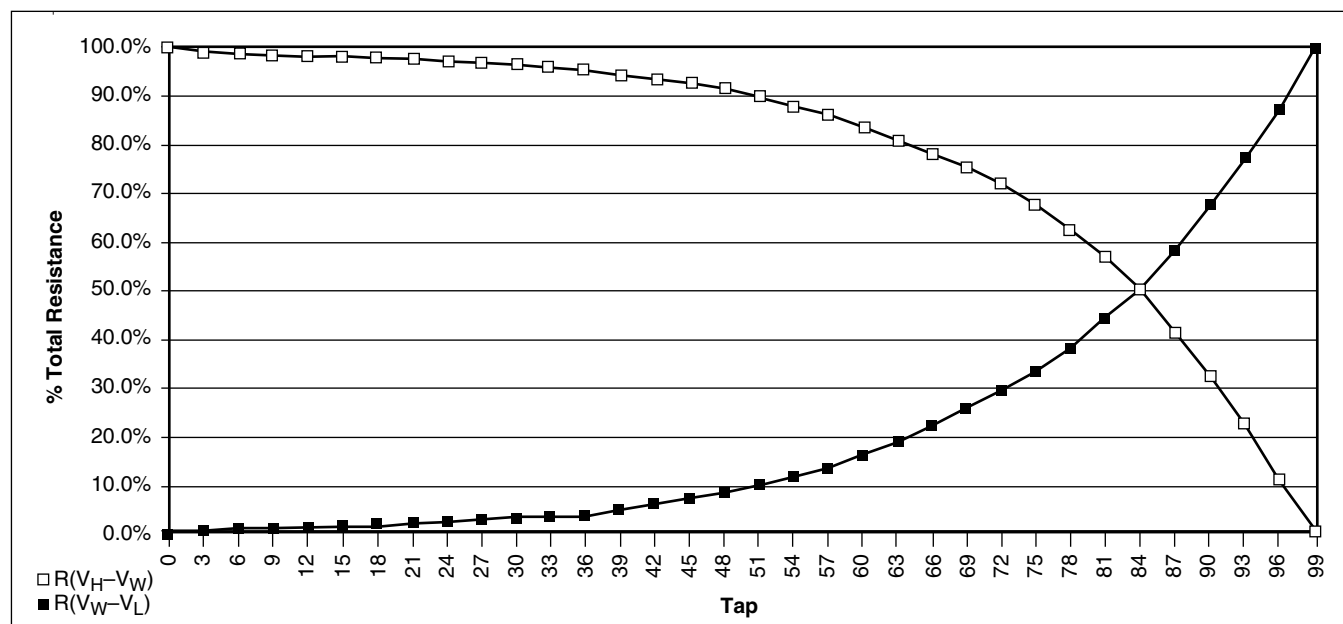


# X9C303


Test Circuit #1

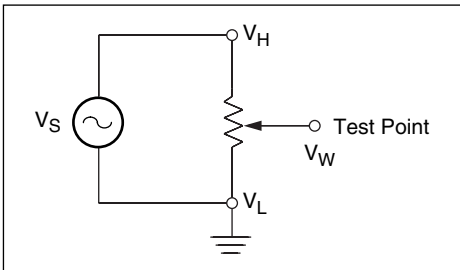

Test Circuit #2

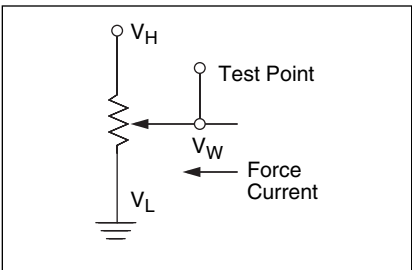

Circuit #3 SPICE Macro Model

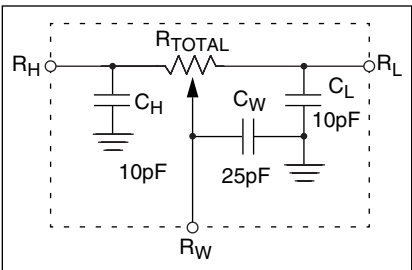

## RECOMMENDED OPERATING CONDITIONS

| Temperature | Min.  | Max.   |
|-------------|-------|--------|
| Commercial  | 0°C   | +70°C  |
| Industrial  | -40°C | +85°C  |
| Military    | -55°C | +125°C |

| Supply Voltage | Limits  |
|----------------|---------|
| X9C303         | 5V ±10% |

## D.C. OPERATING CHARACTERISTICS (Over recommended operating conditions unless otherwise specified.)

| Symbol                                         | Parameter                                                                   | Limits |                   |              | Unit | Test Conditions                                                                                                         |
|------------------------------------------------|-----------------------------------------------------------------------------|--------|-------------------|--------------|------|-------------------------------------------------------------------------------------------------------------------------|
|                                                |                                                                             | Min.   | Typ. <sup>1</sup> | Max.         |      |                                                                                                                         |
| I <sub>CC</sub>                                | V <sub>CC</sub> active current                                              |        | 1                 | 3            | mA   | $\overline{CS} = V_{IL}$ , $U/\overline{D} = V_{IL}$ or $V_{IH}$ and $\overline{INC} = 0.4V$ to $2.4V$ @ max. $t_{CYC}$ |
| I <sub>SB</sub>                                | Standby supply current                                                      |        | 200               | 750          | μA   | $\overline{CS} = V_{CC} - 0.3V$ , $U/\overline{D}$ and $\overline{INC} = V_{SS}$ or $V_{CC} - 0.3V$                     |
| I <sub>LI</sub>                                | $\overline{CS}$ , $\overline{INC}$ , $U/\overline{D}$ input leakage current |        |                   | ±10          | μA   | $V_{IN} = V_{SS}$ to $V_{CC}$                                                                                           |
| V <sub>IH</sub>                                | $\overline{CS}$ , $\overline{INC}$ , $U/\overline{D}$ input HIGH voltage    | 2      |                   | $V_{CC} + 1$ | V    |                                                                                                                         |
| V <sub>IL</sub>                                | $\overline{CS}$ , $\overline{INC}$ , $U/\overline{D}$ input LOW voltage     | -1     |                   | 0.8          | V    |                                                                                                                         |
| R <sub>W</sub>                                 | Wiper resistance                                                            |        | 40                | 100          | Ω    | Max. Wiper Current ±1mA                                                                                                 |
| V <sub>H</sub>                                 | V <sub>H</sub> terminal voltage                                             | -5     |                   | +5           | V    |                                                                                                                         |
| V <sub>L</sub>                                 | V <sub>L</sub> terminal voltage                                             | -5     |                   | +5           | V    |                                                                                                                         |
| C <sub>IN</sub> <sup>(2)</sup>                 | $\overline{CS}$ , $\overline{INC}$ , $U/\overline{D}$ input capacitance     |        |                   | 10           | pF   | $V_{CC} = 5V$ , $V_{IN} = V_{SS}$ , $T_A = 25^\circ C$ , $f = 1MHz$                                                     |
| C <sub>H</sub> /C <sub>L</sub> /C <sub>W</sub> | Potentiometer capacitance                                                   |        | 10/10/25          |              | pF   | See Circuit 3                                                                                                           |

## Standard Parts

| Part Number | Maximum Resistance | Wiper Increments | Minimum Resistance |
|-------------|--------------------|------------------|--------------------|
| X9C303      | 32KΩ               | Log Taper        | 40Ω Typical        |

**Notes:** (1) Typical values are for  $T_A = 25^\circ C$  and nominal supply voltage.  
(2) This parameter is periodically sampled and not 100% tested.

# X9C303


## A.C. CONDITIONS OF TEST

|                           |          |
|---------------------------|----------|
| Input pulse levels        | 0V to 3V |
| Input rise and fall times | 10ns     |
| Input reference levels    | 1.5V     |

## A.C. OPERATING CHARACTERISTICS (Over recommended operating conditions unless otherwise specified)

| Symbol         | Parameter                                             | Limits |                   |      | Unit        |
|----------------|-------------------------------------------------------|--------|-------------------|------|-------------|
|                |                                                       | Min.   | Typ. <sup>3</sup> | Max. |             |
| $t_{CI}$       | $\overline{CS}$ to $\overline{INC}$ setup             | 100    |                   |      | ns          |
| $t_{ID}$       | $\overline{INC}$ HIGH to $U/\overline{D}$ change      | 100    |                   |      | ns          |
| $t_{DI}$       | $U/\overline{D}$ to $\overline{INC}$ setup            | 2.9    |                   |      | $\mu$ s     |
| $t_{IL}$       | $\overline{INC}$ LOW period                           | 1      |                   |      | $\mu$ s     |
| $t_{IH}$       | $\overline{INC}$ HIGH period                          | 1      |                   |      | $\mu$ s     |
| $t_{IC}$       | $\overline{INC}$ inactive to $\overline{CS}$ inactive | 1      |                   |      | $\mu$ s     |
| $t_{CPH}$      | $\overline{CS}$ deselect time                         | 20     |                   |      | ms          |
| $t_{IW}$       | $\overline{INC}$ to $V_W$ change                      |        | 100               | 500  | $\mu$ s     |
| $t_{CYC}$      | $\overline{INC}$ cycle time                           | 4      |                   |      | $\mu$ s     |
| $t_R, t_F^4$   | $\overline{INC}$ input rise and fall time             |        |                   | 500  | ns          |
| $t_{PU}^4$     | Power up to wiper stable                              |        |                   | 500  | $\mu$ s     |
| $t_R V_{CC}^4$ | $V_{CC}$ power-up rate                                | 0.2    |                   | 50   | mV/ $\mu$ s |




## A.C. TIMING

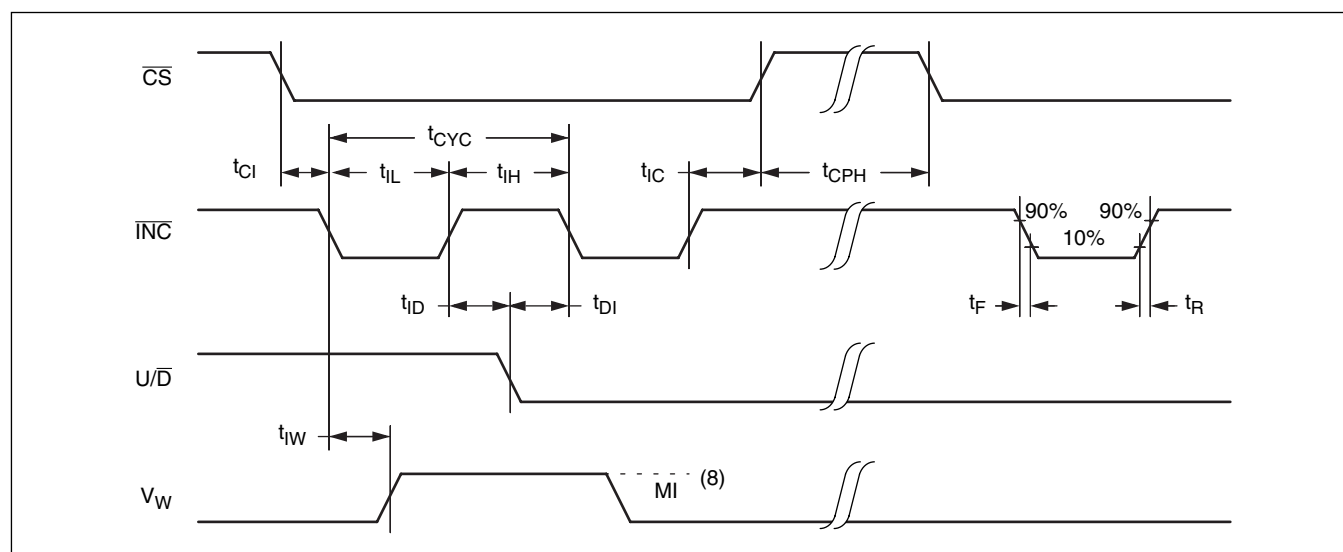

- Notes:** (3) Typical values are for  $T_A = 25^\circ\text{C}$  and nominal supply voltage.  
 (4) This parameter is periodically sampled and not 100% tested.  
 (5) MI in the A.C. timing diagram refers to the minimum incremental change in the  $V_W$  output due to a change in the wiper position.

## PACKAGING INFORMATION

### 8-Lead Plastic Dual In-Line Package Type P

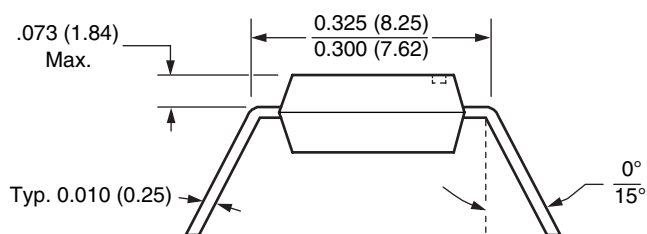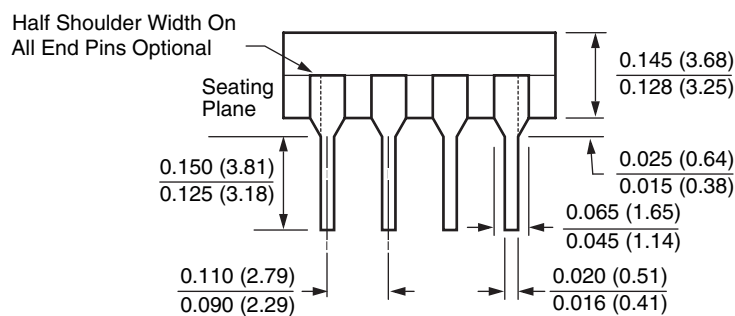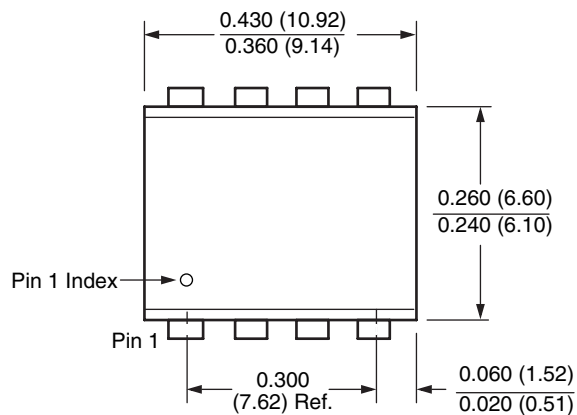


#### NOTE:

1. ALL DIMENSIONS IN INCHES (IN PARENTHESES IN MILLIMETERS)
2. PACKAGE DIMENSIONS EXCLUDE MOLDING FLASH

## PACKAGING INFORMATION

### 8-Lead Plastic Small Outline Gull Wing Package Type S

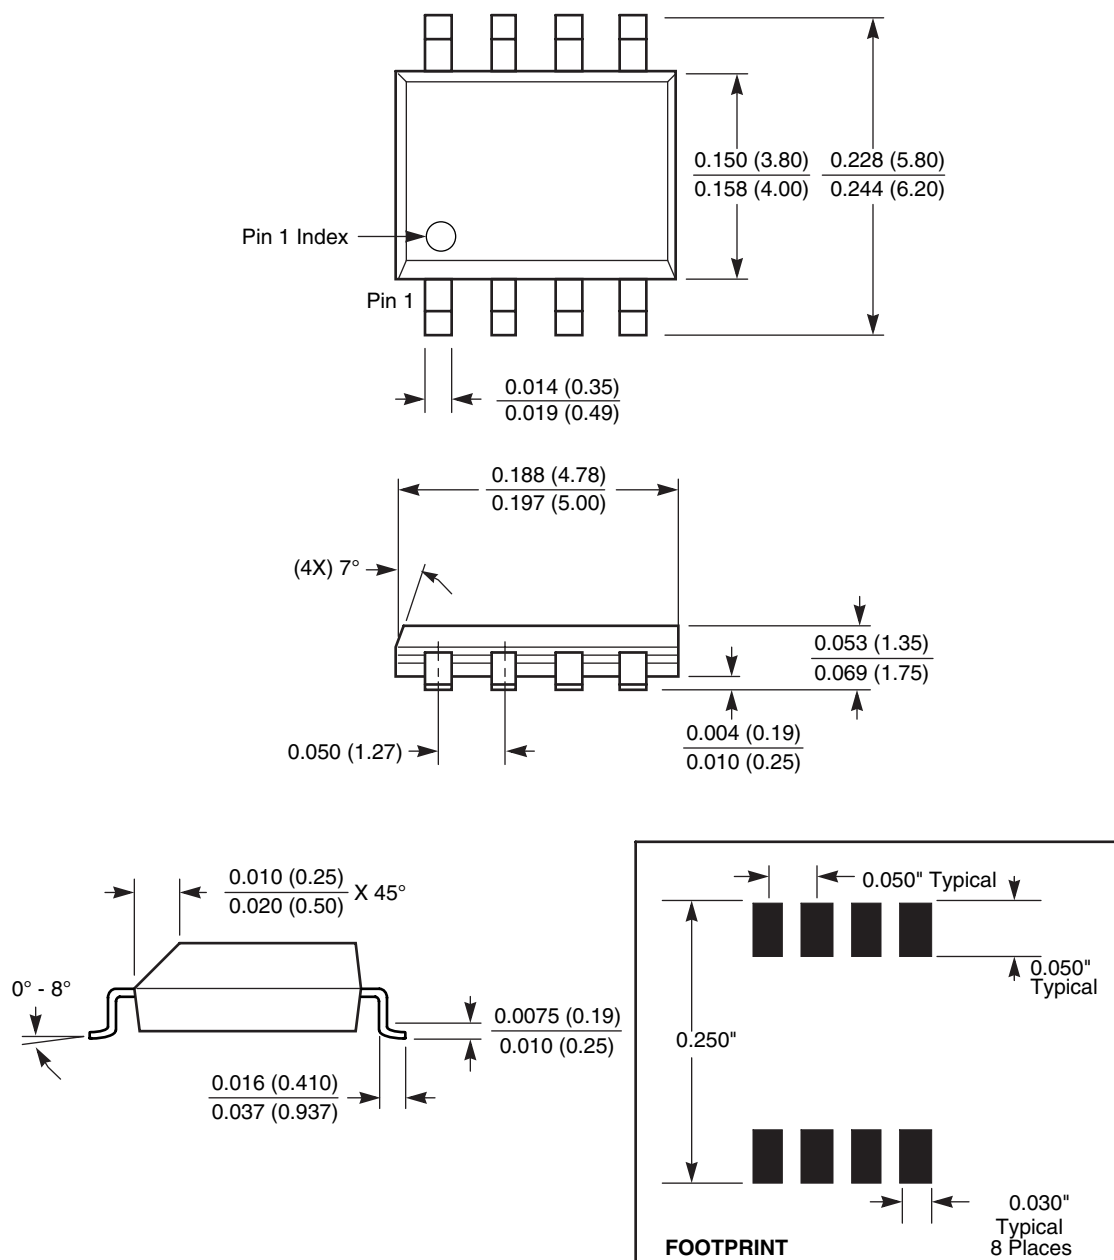


NOTE: ALL DIMENSIONS IN INCHES (IN PARENTHESES IN MILLIMETERS)



## PACKAGING INFORMATION

### 8-Lead Plastic, TSSOP, Package Type V

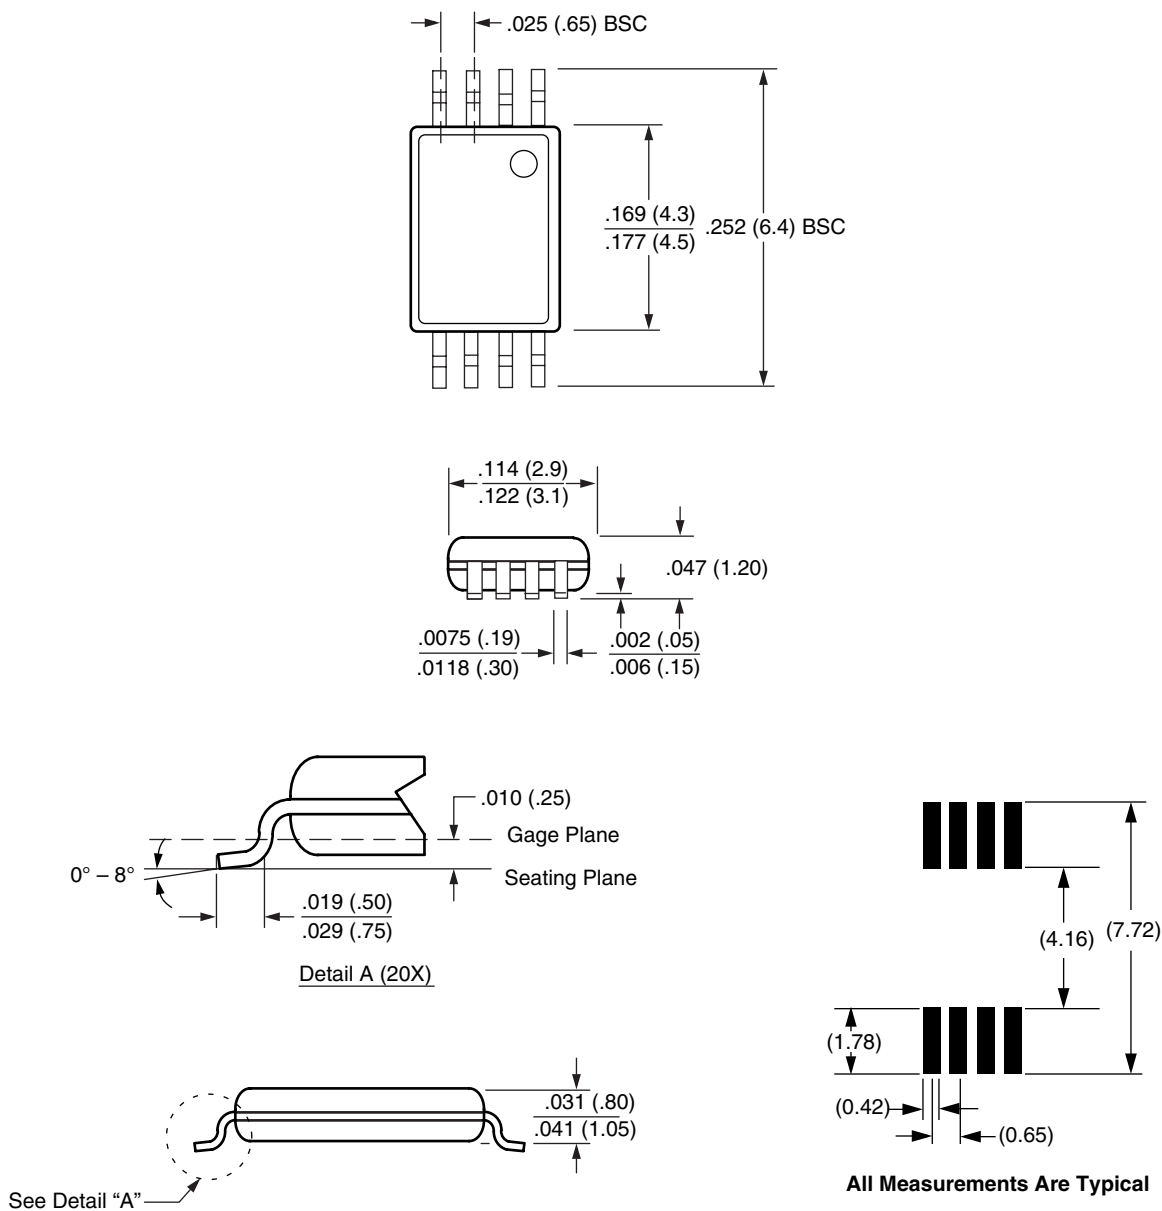


NOTE: ALL DIMENSIONS IN INCHES (IN PARENTHESES IN MILLIMETERS)

# X9C303

---

## Ordering Information

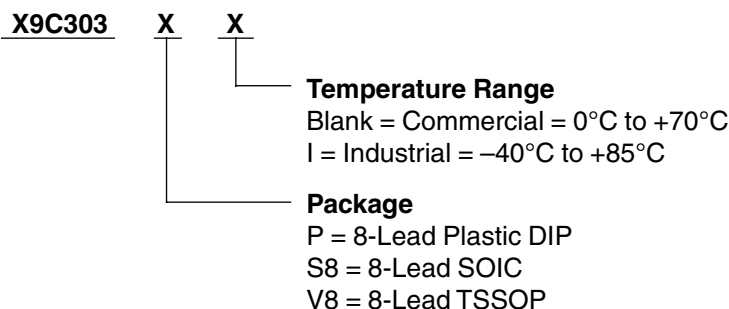

---

### LIMITED WARRANTY

©Xicor, Inc. 2001 Patents Pending

Devices sold by Xicor, Inc. are covered by the warranty and patent indemnification provisions appearing in its Terms of Sale only. Xicor, Inc. makes no warranty, express, statutory, implied, or by description regarding the information set forth herein or regarding the freedom of the described devices from patent infringement. Xicor, Inc. makes no warranty of merchantability or fitness for any purpose. Xicor, Inc. reserves the right to discontinue production and change specifications and prices at any time and without notice.

Xicor, Inc. assumes no responsibility for the use of any circuitry other than circuitry embodied in a Xicor, Inc. product. No other circuits, patents, or licenses are implied.

### COPYRIGHTS AND TRADEMARKS

Xicor, Inc., the Xicor logo, E<sup>2</sup>POT, XDCP, XBGA, AUTOSTORE, Direct Write cell, Concurrent Read-Write, PASS, MPS, PushPOT, Block Lock, IdentiPROM, E<sup>2</sup>KEY, X24C16, SecureFlash, and SerialFlash are all trademarks or registered trademarks of Xicor, Inc. All other brand and product names mentioned herein are used for identification purposes only, and are trademarks or registered trademarks of their respective holders.

### U.S. PATENTS

Xicor products are covered by one or more of the following U.S. Patents: 4,326,134; 4,393,481; 4,404,475; 4,450,402; 4,486,769; 4,488,060; 4,520,461; 4,533,846; 4,599,706; 4,617,652; 4,668,932; 4,752,912; 4,829,482; 4,874,967; 4,883,976; 4,980,859; 5,012,132; 5,003,197; 5,023,694; 5,084,667; 5,153,880; 5,153,691; 5,161,137; 5,219,774; 5,270,927; 5,324,676; 5,434,396; 5,544,103; 5,587,573; 5,835,409; 5,977,585. Foreign patents and additional patents pending.

### LIFE RELATED POLICY

In situations where semiconductor component failure may endanger life, system designers using this product should design the system with appropriate error detection and correction, redundancy and back-up features to prevent such an occurrence.

Xicor's products are not authorized for use in critical components in life support devices or systems.

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.