

DESCRIPTION

These are single-chip 16-bit microcomputers designed with high-performance CMOS silicon gate technology, including the internal flash memory and, being packaged in 64-pin plastic molded QFP or shrink plastic molded DIP. These microcomputers support the 7900 Series instruction set, which are enhanced and expanded instruction set and are upper-compatible with the 7700/7751 Series instruction set. The CPU of these microcomputers is a 16-bit parallel processor that can also be switched to perform 8-bit parallel processing. Also, the bus interface unit of these microcomputers enhances the memory access efficiency to execute instructions fast. Therefore, these microcomputers are suitable for office, business, and industrial equipment controller that require high-speed processing of large data. Also, they are suitable for motor-control equipment since each of them includes the motor control circuit.

For the internal flash memory, single-power-supply programming and erasure, using a PROM programmer or the control by the central processing unit (CPU), is supported. Also, each of these microcomputers has the memory area dedicated for storing a certain software which controls programming and erasure (reprogramming control software). Therefore, on these microcomputers, the program can easily be changed even after they are mounted on the board.

DISTINCTIVE FEATURES

<Microcomputer mode>

- Number of basic machine instructions 203
- Memory
 - Flash memory (User ROM area) 60 Kbytes
 - RAM 3072 bytes
 - Flash memory (Boot ROM area) 8 Kbytes
- Instruction execution time
 - The fastest instruction at 20 MHz frequency 50 ns
- Single power supply 5 V $\pm$ 0.5 V
- Interrupts 8 external sources, 23 internal sources, 7 levels
- Multi-functional 16-bit timer 10 + 3
 (Three-phase motor drive waveform or Pulse motor drive waveform output is available.)
- Serial I/O (UART or Clock synchronous) 3
- 10-bit A-D converter 12-channel inputs
- 8-bit D-A converter 2-channel outputs
- 12-bit watchdog timer
- Programmable input/output (ports P1, P2, P4, P5, P6, P7, P8) 50


<Flash memory mode>

- Power supply voltage 5 V $\pm$ 0.5 V
- Programming/Erase voltage 5 V $\pm$ 0.5 V
- Programming method Programming in a unit of word
- Erase method Block erase or Total erase
 M37905F8CFP, M37905F8CSP
 4 blocks (8 Kbytes $\times$ 2, 16 Kbytes $\times$ 1, 28 Kbytes $\times$ 1)
- Programming/Erase control by software command
- Maximum number of reprograms 100

APPLICATION

- Control devices for office equipment such as copiers and facsimiles
- Control devices for industrial equipment such as communication and measuring instruments
- Control devices for equipment, requiring motor control, such as inverter air conditioners and general-purpose inverters


M37905F8CFP PIN CONFIGURATION (TOP VIEW)

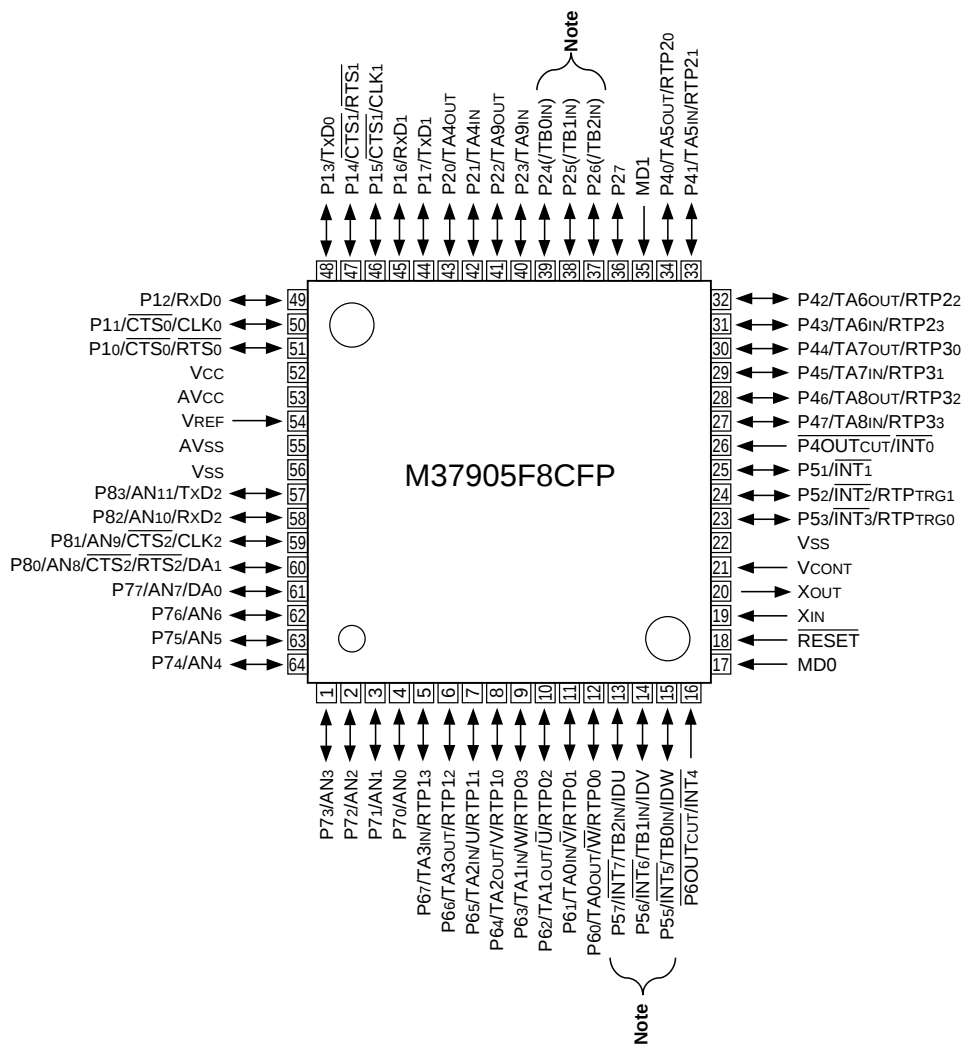

Outline 64P6N-A


Note: Allocation of pins TB0IN to TB2IN can be switched by software.

M37905F8CSP PIN CONFIGURATION (TOP VIEW)

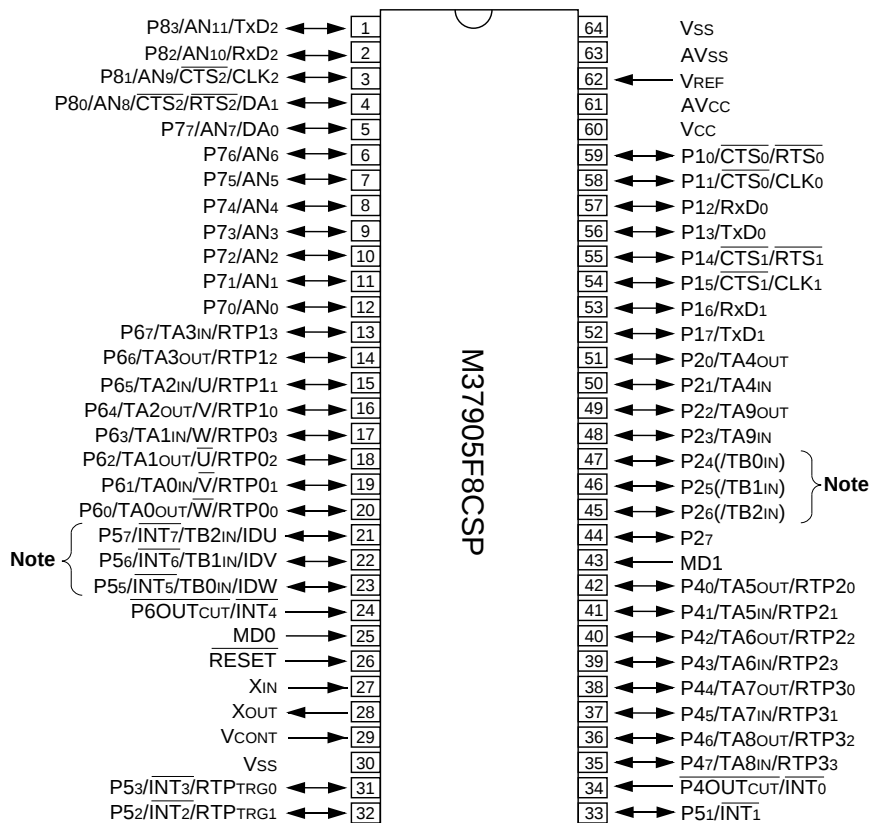

Outline 64P4B

BLOCK DIAGRAM

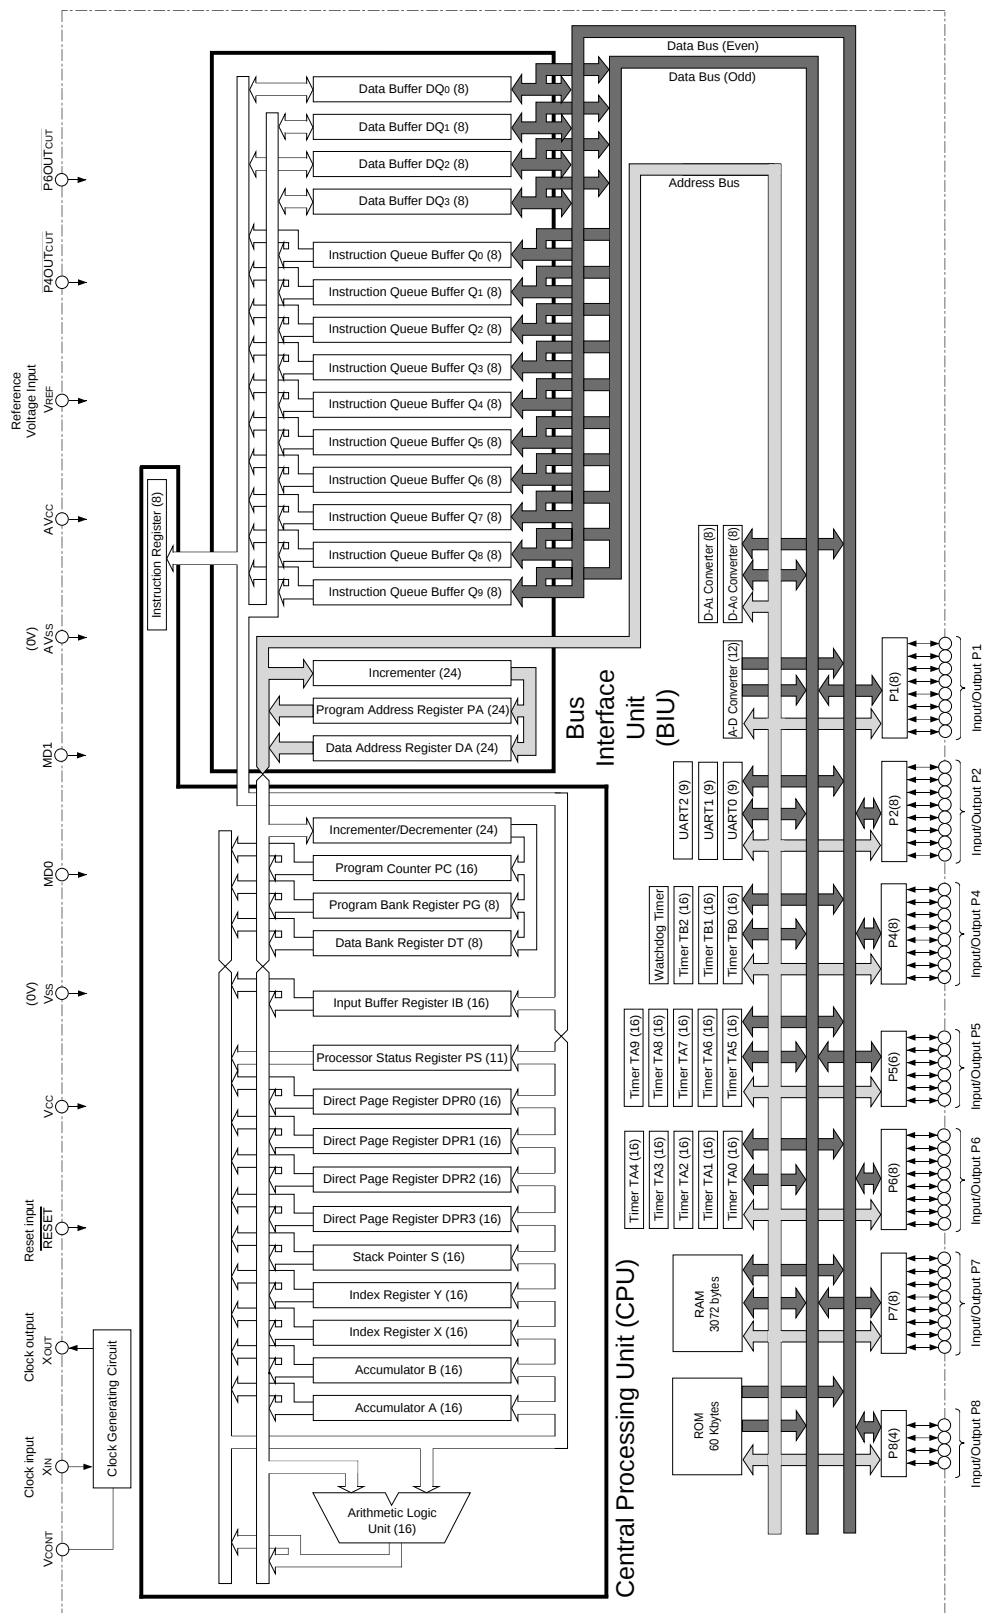

FUNCTIONS (Microcomputer mode)

Parameter		Functions
Number of basic machine instructions		203
Instruction execution time		50 ns (the fastest instruction at $f(f_{sys}) = 20$ MHz)
External clock input frequency $f(XIN)$		20 MHz (Max.)
System clock frequency $f(f_{sys})$		20 MHz (Max.)
Memory size	Flash memory (User ROM area)	60 Kbytes
	RAM	3072 bytes
	Flash memory (Boot ROM area)	8 Kbytes
Programmable input/output ports	P1, P2, P4, P6, P7	8-bit X 5
	P5	6-bit X 1
	P8	4-bit X 1
Multi-functional timers	TA0–TA9	16-bit X 10
	TB0–TB2	16-bit X 3
Serial I/O	UART0, UART1, and UART2	(UART or Clock synchronous serial I/O) X 3
A-D converter		10-bit successive approximation method X 1 (12 channels)
D-A converter		8-bit X 2
Dead-time timer		8-bit X 3
Watchdog timer		12-bit X 1
Interrupts	Maskable interrupts	8 external sources, 20 internal sources. Each interrupt can be set to a priority level within the range of 0–7 by software.
	Non-maskable interrupts	3 internal sources.
Clock generating circuit		Incorporated (externally connected to a ceramic resonator or quartz crystal resonator).
PLL frequency multiplier		The following multiplication ratios are available: X2, X3, X4.
Power supply voltage		5 V $\pm$ 0.5 V
Power dissipation		125 mW (at $f(f_{sys}) = 20$ MHz, Typ., ; the PLL frequency multiplier is inactive.)
Ports' input/output characteristics	Input/Output withstand voltage	5 V
	Output current	5 mA
Memory expansion		Not available (single-chip mode only).
Operating ambient temperature range		–20 to 85 °C
Device structure		CMOS high-performance silicon gate process
Package		(Note)

Note:	Packages	M37905F8CFP	64-pin plastic molded QFP (64P6N-A)
		M37905F8CSP	64-pin shrink plastic moldeds DIP (64P4B)

FUNCTIONS (Flash memory mode)

Parameter		Functions
Power supply voltage		5 V±0.5 V
Programming/Erase voltage		5 V±0.5 V
Flash memory mode		3 modes: parallel I/O, serial I/O, and CPU reprogramming modes
Block division for erasure	User ROM area	4 blocks (8 Kbytes × 2, 16 Kbytes × 1, 28 Kbytes × 1); total of 60 Kbytes
	Boot ROM area	1 block (8 Kbytes × 1) (Note)
Programming method		Programmed per word
	Flash memory parallel I/O mode	User ROM area + Boot ROM area
	Flash memory serial I/O mode	User ROM area
	Flash memory CPU reprogramming mode	User ROM area
Erase method		Total erase/Block erase
	Flash memory parallel I/O mode	User ROM area + Boot ROM area
	Flash memory serial I/O mode	User ROM area
	Flash memory CPU reprogramming mode	User ROM area
Programming/Erase control		Programming/Erase control by software commands
Number of commands		6 commands
Maximum number of reprograms		100

Note: On shipment, our reprogramming control firmware for the flash memory serial I/O mode has been stored into the boot ROM area.

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

PIN DESCRIPTION (MICROCOMPUTER MODE)

Pin	Name	Input/ Output	Functions
Vcc, Vss	Power supply input	—	Apply 5 V±0.5 V to Vcc, and 0 V to Vss.
MD0	MD0	Input	Connect this pin to Vss.
MD1	MD1	Input	Connect this pin to Vss.
RESET	Reset input	Input	The microcomputer is reset when "L" level is applies to this pin.
XIN	Clock input	Output	These are input and output pins of the internal clock generating circuit. Connect a ceramic resonator or quartz-crystal oscillator between pins XIN and XOUT. When an external clock is used, the clock source should be connected to pin XIN, and pin XOUT should be left open.
XOUT	Clock output		
VCONT	Filter circuit connection	—	When using the PLL frequency multiplier, connect this pin to the filter circuit. When not using the PLL frequency multiplier, this pin should be left open.
AVcc, AVss	Analog power supply input	—	Power supply input pins for the A-D and D-A converters. Connect AVcc to Vcc, and AVss to Vss externally.
VREF	Reference voltage input	Input	This is the reference voltage input pin for the A-D and D-A converters.
P10–P17	I/O port P1	I/O	Port P1 is an 8-bit I/O port. This port has an I/O direction register, and each pin can be programmed for input or output. These pins enter the input mode ar reset. These pins also function as I/O pins of UART0, 1.
P20–P27	I/O port P2	I/O	In addition to having the same functions as port P1, these pins function as I/O pins for timers A4 and A9. Also, they can be programmed to function as input pins for timers B0 to B2.
P40–P47	I/O port P4	I/O	In addition to having the same functions as port P1, these pins function as I/O pins for timers A5 to A8. Also, they function as output pins for motor drive waveform.
P51–P53, P55–P57	I/O port P5	I/O	In addition to having the same functions as port P1, these pins function as input pins for INT1 to INT3 and INT5 to INT7. Also, pins P55 to P57 function as input pins for timers B0 to B2 and as input pins for position data in the three-phase waveform mode; and pins P52 and P53 function as trigger-input pins in the pulse output port mode.
P60–P67	I/O port P6	I/O	In addition to having the same functions as port P1, these pins function as I/O pins for timers A0 to A3. Also, they function as motor drive waveform output pins.
P70–P77	I/O port P7	I/O	In addition to having the same functions as port P1, these pins function as input pins for the A-D converter. Also, P77 functions as an output pin for the D-A converter.
P80–P83	I/O port P8	I/O	In addition to having the same functions as port P1, these pins function as input pins for the A-D converter. Also, these pins function as I/O pins for UART2, and pin P80 functions as an output pin for the D-A converter.
P4OUTCUT	P4OUTCUT input	Input	This pin has the function to forcibly place port P4 pins in the input mode. Also, this pin functions as an input pin for INT0; and this pin is used to input a signal, which forcibly cuts off a motor drive waveform output.
P6OUTCUT	P6OUTCUT input	Input	This pin has the function to forcibly place port P6 pins in the input mode. Also, this pin functions as an input pin for INT4; and this pin is used to input a signal, which forcibly cuts off a motor drive waveform output.

PIN DESCRIPTION (FLASH MEMORY SERIAL I/O MODE)

Pin	Name	Input /Output	Functions
Vcc, Vss	Power supply input	—	Apply 5 V $\pm$ 0.5 V to Vcc, and 0 V to Vss.
MD0	MD0	Input	Connect this pin to Vss.
MD1	MD1	Input	Connect this pin to Vss via a resistor of 10 k Ω to 100 k Ω .
RESET	Reset input	Input	The reset input pin.
XIN	Clock input	Input	Connect a ceramic oscillator between the XIN and XOUT pins, or input an external clock from the XIN pin with the XOUT pin left open.
XOUT	Clock output	Output	
AVcc, AVss	Analog supply input	—	Connect AVcc to Vcc, and AVss to Vss.
VREF	Reference voltage input	Input	Input an arbitrary level within the range of Vss–Vcc. (This is not used in the flash memory serial I/O mode.)
P10–P17	Input port P1	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
P20–P23, P27	Input port P2	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
P24	SCLK input	Input	This is an input pin for a serial clock.
P25	SDA I/O	I/O	This is an I/O pin for serial data. Connect this pin to Vcc via a resistor (about 1 k Ω).
P26	BUSY output	Output	This is an output pin for the BUSY signal.
P4OUTCUT	P4OUTCUT input	Input	Input “H”.
P6OUTCUT	P6OUTCUT input	Input	Input “H”.
P40–P47	Input port P4	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
P55–P53, P55–P57	Input port P5	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
P60–P67	Input port P6	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
P70–P74	Input port P7	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
P80–P83	Input port P8	Input	Input “H” or “L”, or leave them open. (This is not used in the flash memory serial I/O mode.)
VCONT	Filter circuit connection	—	Connect this pin to the filter circuit, or leave this pin open. (This is not used in the flash memory serial I/O mode.)

BASIC FUNCTION BLOCKS

Each of the M37905F8CFP and M37905F8CSP has the same function as that of the M37905M4C-XXXXFP except for the following. Therefore, for details except for the following, refer to the datasheet of the M37905M4C-XXXXFP.

- Internal ROM: type (flash memory) and size
- RAM size

MEMORY

Figure 1 shows the memory map.

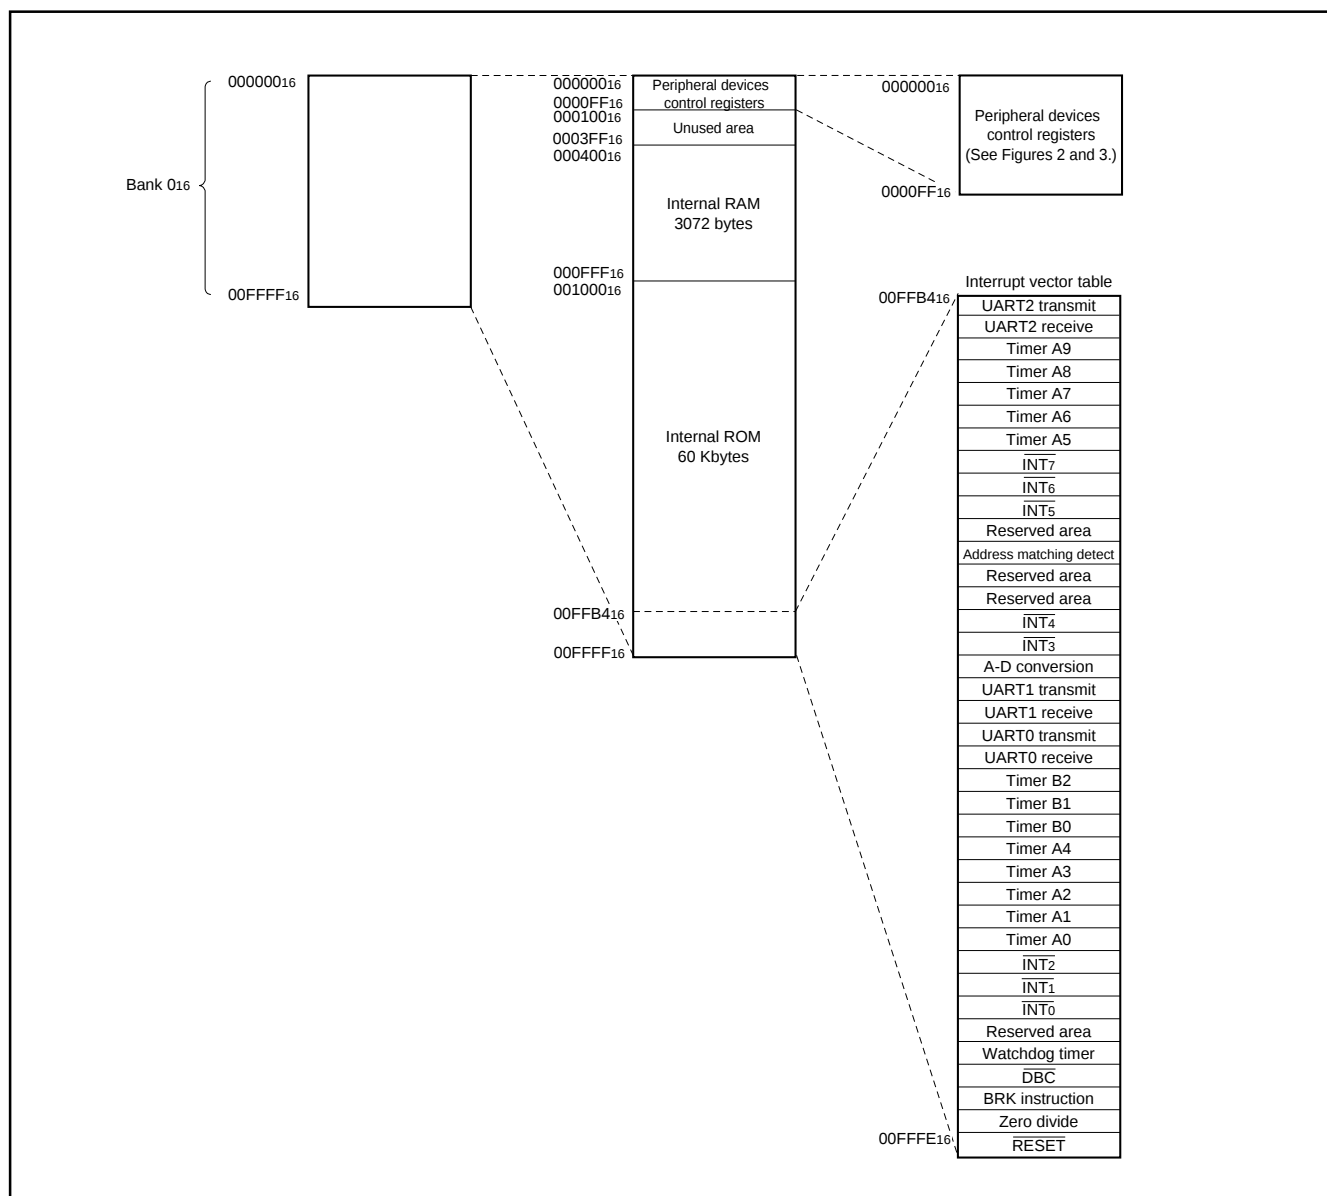


Fig. 1 Memory map of M37905F8CFP, M37905F8CSP (Single-chip mode)

Address (Hexadecimal notation)

000000 ₁₆	Reserved area (Note)
000001 ₁₆	Reserved area (Note)
000002 ₁₆	Reserved area (Note)
000003 ₁₆	Port P1 register
000004 ₁₆	Reserved area (Note)
000005 ₁₆	Port P1 direction register
000006 ₁₆	Port P2 register
000007 ₁₆	Reserved area (Note)
000008 ₁₆	Port P2 direction register
000009 ₁₆	Reserved area (Note)
00000A ₁₆	Port P4 register
00000B ₁₆	Port P5 register
00000C ₁₆	Port P4 direction register
00000D ₁₆	Port P5 direction register
00000E ₁₆	Port P6 register
00000F ₁₆	Port P7 register
000010 ₁₆	Port P6 direction register
000011 ₁₆	Port P7 direction register
000012 ₁₆	Port P8 register
000013 ₁₆	
000014 ₁₆	Port P8 direction register
000015 ₁₆	
000016 ₁₆	Reserved area (Note)
000017 ₁₆	Reserved area (Note)
000018 ₁₆	Reserved area (Note)
000019 ₁₆	Reserved area (Note)
00001A ₁₆	
00001B ₁₆	
00001C ₁₆	
00001D ₁₆	
00001E ₁₆	A-D control register 0
00001F ₁₆	A-D control register 1
000020 ₁₆	A-D register 0
000021 ₁₆	
000022 ₁₆	A-D register 1
000023 ₁₆	
000024 ₁₆	A-D register 2
000025 ₁₆	
000026 ₁₆	A-D register 3
000027 ₁₆	
000028 ₁₆	A-D register 4
000029 ₁₆	
00002A ₁₆	A-D register 5
00002B ₁₆	
00002C ₁₆	A-D register 6
00002D ₁₆	
00002E ₁₆	A-D register 7
00002F ₁₆	
000030 ₁₆	UART0 transmit/receive mode register
000031 ₁₆	UART0 baud rate register (BRG0)
000032 ₁₆	
000033 ₁₆	UART0 transmit buffer register
000034 ₁₆	UART0 transmit/receive control register 0
000035 ₁₆	UART0 transmit/receive control register 1
000036 ₁₆	
000037 ₁₆	UART0 receive buffer register
000038 ₁₆	UART1 transmit/receive mode register
000039 ₁₆	UART1 baud rate register (BRG1)
00003A ₁₆	
00003B ₁₆	UART1 transmit buffer register
00003C ₁₆	
00003D ₁₆	UART1 transmit/receive control register 0
00003E ₁₆	UART1 transmit/receive control register 1
00003F ₁₆	UART1 receive buffer register

Address (Hexadecimal notation)

000040 ₁₆	Count start register 0
000041 ₁₆	Count start register 1
000042 ₁₆	One-shot start register 0
000043 ₁₆	One-shot start register 1
000044 ₁₆	Up-down register 0
000045 ₁₆	Timer A clock division select register
000046 ₁₆	
000047 ₁₆	Timer A0 register
000048 ₁₆	
000049 ₁₆	Timer A1 register
00004A ₁₆	
00004B ₁₆	Timer A2 register
00004C ₁₆	
00004D ₁₆	Timer A3 register
00004E ₁₆	
00004F ₁₆	Timer A4 register
000050 ₁₆	
000051 ₁₆	Timer B0 register
000052 ₁₆	
000053 ₁₆	Timer B1 register
000054 ₁₆	
000055 ₁₆	Timer B2 register
000056 ₁₆	
000057 ₁₆	Timer A0 mode register
000058 ₁₆	Timer A1 mode register
000059 ₁₆	Timer A2 mode register
00005A ₁₆	Timer A3 mode register
00005B ₁₆	Timer A4 mode register
00005C ₁₆	Timer B0 mode register
00005D ₁₆	Timer B1 mode register
00005E ₁₆	Timer B2 mode register
00005F ₁₆	Processor mode register 0
000060 ₁₆	Processor mode register 1
000061 ₁₆	Watchdog timer register
000062 ₁₆	Watchdog timer frequency select register
000063 ₁₆	Particular function select register 0
000064 ₁₆	Particular function select register 1
000065 ₁₆	Particular function select register 2
000066 ₁₆	Reserved area (Note)
000067 ₁₆	Debug control register 0
000068 ₁₆	Debug control register 1
000069 ₁₆	
00006A ₁₆	Address comparison register 0
00006B ₁₆	
00006C ₁₆	Address comparison register 1
00006D ₁₆	
00006E ₁₆	INT ₃ interrupt control register
00006F ₁₆	INT ₄ interrupt control register
000070 ₁₆	A-D conversion interrupt control register
000071 ₁₆	UART0 transmit interrupt control register
000072 ₁₆	UART0 receive interrupt control register
000073 ₁₆	UART1 transmit interrupt control register
000074 ₁₆	UART1 receive interrupt control register
000075 ₁₆	Timer A0 interrupt control register
000076 ₁₆	Timer A1 interrupt control register
000077 ₁₆	Timer A2 interrupt control register
000078 ₁₆	Timer A3 interrupt control register
000079 ₁₆	Timer A4 interrupt control register
00007A ₁₆	Timer B0 interrupt control register
00007B ₁₆	Timer B1 interrupt control register
00007C ₁₆	Timer B2 interrupt control register
00007D ₁₆	INT ₀ interrupt control register
00007E ₁₆	INT ₁ interrupt control register
00007F ₁₆	INT ₂ interrupt control register

Note: Do not write to this address.

Fig. 2 Location of SFRs (1)

Address (Hexadecimal notation)

000080 ₁₆	Reserved area (Note)
000081 ₁₆	Reserved area (Note)
000082 ₁₆	Reserved area (Note)
000083 ₁₆	Reserved area (Note)
000084 ₁₆	Reserved area (Note)
000085 ₁₆	Reserved area (Note)
000086 ₁₆	Reserved area (Note)
000087 ₁₆	Reserved area (Note)
000088 ₁₆	
000089 ₁₆	
00008A ₁₆	Reserved area (Note)
00008B ₁₆	
00008C ₁₆	Reserved area (Note)
00008D ₁₆	
00008E ₁₆	Reserved area (Note)
00008F ₁₆	
000090 ₁₆	Reserved area (Note)
000091 ₁₆	
000092 ₁₆	Reserved area (Note)
000093 ₁₆	
000094 ₁₆	
000095 ₁₆	External interrupt input read-out register
000096 ₁₆	D-A control register
000097 ₁₆	
000098 ₁₆	D-A register 0
000099 ₁₆	D-A register 1
00009A ₁₆	
00009B ₁₆	
00009C ₁₆	Reserved area (Note)
00009D ₁₆	Reserved area (Note)
00009E ₁₆	Flash memory control register
00009F ₁₆	
0000A0 ₁₆	Pulse output control register
0000A1 ₁₆	
0000A2 ₁₆	Pulse output data register 0
0000A3 ₁₆	
0000A4 ₁₆	Pulse output data register 1
0000A5 ₁₆	
0000A6 ₁₆	Waveform output mode register
0000A7 ₁₆	Dead-time timer
0000A8 ₁₆	Three-phase output data register 0
0000A9 ₁₆	Three-phase output data register 1
0000AA ₁₆	Position-data-retain function control register
0000AB ₁₆	
0000AC ₁₆	Serial I/O pin control register
0000AD ₁₆	
0000AE ₁₆	Port P2 pin function control register
0000AF ₁₆	
0000B0 ₁₆	UART2 transmit/receive mode register
0000B1 ₁₆	UART2 band rate register (BRG2)
0000B2 ₁₆	UART2 transmit buffer register
0000B3 ₁₆	
0000B4 ₁₆	UART2 transmit/receive control register 0
0000B5 ₁₆	UART2 transmit/receive control register 1
0000B6 ₁₆	UART2 receive buffer register
0000B7 ₁₆	
0000B8 ₁₆	Reserved area (Note)
0000B9 ₁₆	
0000BA ₁₆	Reserved area (Note)
0000BB ₁₆	Reserved area (Note)
0000BC ₁₆	Clock control register 0
0000BD ₁₆	Reserved area (Note)
0000BE ₁₆	Reserved area (Note)
0000BF ₁₆	Reserved area (Note)

Address (Hexadecimal notation)

0000C0 ₁₆	
0000C1 ₁₆	
0000C2 ₁₆	
0000C3 ₁₆	
0000C4 ₁₆	Up-down register 1
0000C5 ₁₆	
0000C6 ₁₆	Timer A5 register
0000C7 ₁₆	
0000C8 ₁₆	Timer A6 register
0000C9 ₁₆	
0000CA ₁₆	Timer A7 register
0000CB ₁₆	
0000CC ₁₆	Timer A8 register
0000CD ₁₆	
0000CE ₁₆	Timer A9 register
0000CF ₁₆	
0000D0 ₁₆	Timer A0 ₁ register
0000D1 ₁₆	
0000D2 ₁₆	Timer A1 ₁ register
0000D3 ₁₆	
0000D4 ₁₆	Timer A2 ₁ register
0000D5 ₁₆	
0000D6 ₁₆	Timer A5 mode register
0000D7 ₁₆	Timer A6 mode register
0000D8 ₁₆	Timer A7 mode register
0000D9 ₁₆	Timer A8 mode register
0000DA ₁₆	Timer A9 mode register
0000DB ₁₆	A-D control register 2
0000DC ₁₆	Comparator function select register 0
0000DD ₁₆	Comparator function select register 1
0000DE ₁₆	Comparator result register 0
0000DF ₁₆	Comparator result register 1
0000E0 ₁₆	
0000E1 ₁₆	A-D register 8
0000E2 ₁₆	
0000E3 ₁₆	A-D register 9
0000E4 ₁₆	
0000E5 ₁₆	A-D register 10
0000E6 ₁₆	
0000E7 ₁₆	A-D register 11
0000E8 ₁₆	Reserved area (Note)
0000E9 ₁₆	Reserved area (Note)
0000EA ₁₆	Reserved area (Note)
0000EB ₁₆	Reserved area (Note)
0000EC ₁₆	Reserved area (Note)
0000ED ₁₆	Reserved area (Note)
0000EE ₁₆	Reserved area (Note)
0000EF ₁₆	Reserved area (Note)
0000F0 ₁₆	
0000F1 ₁₆	UART2 transmit interrupt control register
0000F2 ₁₆	UART2 receive interrupt control register
0000F3 ₁₆	
0000F4 ₁₆	
0000F5 ₁₆	Timer A5 interrupt control register
0000F6 ₁₆	Timer A6 interrupt control register
0000F7 ₁₆	Timer A7 interrupt control register
0000F8 ₁₆	Timer A8 interrupt control register
0000F9 ₁₆	Timer A9 interrupt control register
0000FA ₁₆	
0000FB ₁₆	
0000FC ₁₆	
0000FD ₁₆	INT ₅ interrupt control register
0000FE ₁₆	INT ₆ interrupt control register
0000FF ₁₆	INT ₇ interrupt control register

Note: Do not write to this address.

Fig. 3 Location of SFRs (2)

FLASH MEMORY MODE

These microcomputers contain the flash memory; and single-power-supply reprogramming is available to this. These microcomputers have the following three modes, enabling reading/programming/erase for the flash memory:

- Flash memory parallel I/O mode and Flash memory serial I/O mode, where the flash memory is handled by using an external programmer.
- CPU reprogramming mode, where the flash memory is handled by the central processing unit (CPU).

As shown in Figure 4, the flash memory is divided into several blocks, and erasure per block is possible.

This internal flash memory has the boot ROM area storing the reprogramming control software for reprogramming in the CPU reprogramming mode and flash memory serial I/O mode, as well as the user ROM area storing a certain control software for the normal operation in the microcomputer mode.

Although our reprogramming control firmware for the flash memory serial I/O mode has been stored into this boot ROM area on shipment, the user-original reprogramming control software which is more appropriate for the user's system is reprogrammable into this area, instead. Note that the reprogramming for the boot ROM area is enabled only in the flash memory parallel I/O mode.

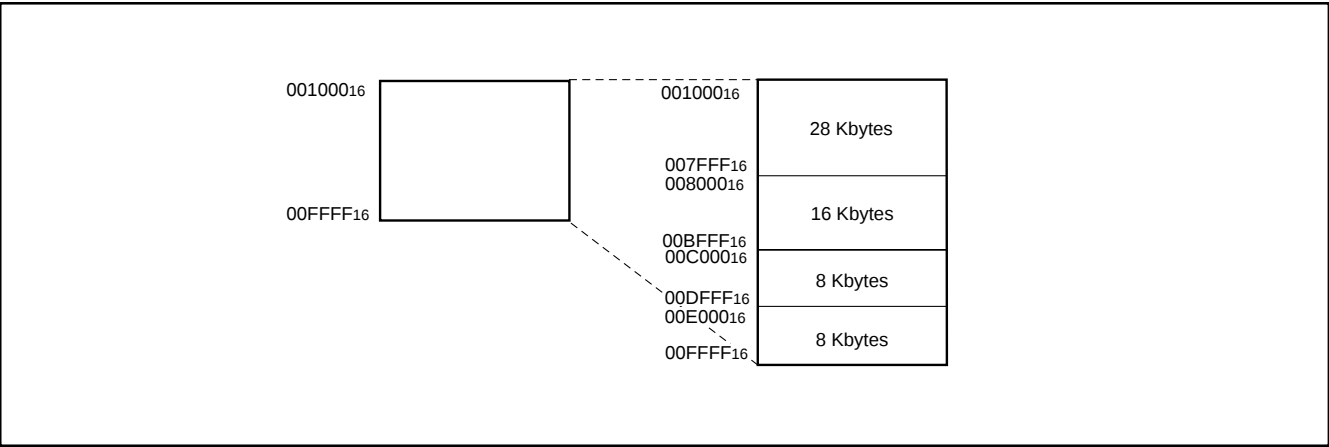


Fig. 4 M37905F8CFP, M37905F8CSP: block configuration of internal flash memory

Flash Memory Parallel I/O Mode

The flash memory parallel I/O mode is used to manipulate the internal flash memory with a parallel programmer. This parallel programmer uses the software commands listed in Table 1 to do the flash memory manipulations, such as read/programming/erase operations.

Table 1. Software commands (flash memory parallel I/O mode)

Software Command
Read Array
Read Status Register
Clear Status Register
Programming
Block Erase
Erase All Block

Addresses FF90₁₆ to FF9F₁₆ are the reserved area for the parallel programmer. Therefore, when the user uses the flash memory parallel I/O mode, do not program to this area.

User ROM Area and Boot ROM Area

The user ROM area and boot ROM area can be reprogrammed in the flash memory parallel I/O mode.

The programming and block erase operations can be performed only to these areas.

The boot ROM area, 8 Kbytes in size, is assigned to addresses 0000₁₆–1FFF₁₆, so that programming and block erase operations can be performed only to this area. (Access to any address out of this area is prohibited).

The erasable block in the boot ROM area is only one block, consisting of 8 Kbytes. The reprogramming control firmware to be used in the flash memory serial I/O mode has been stored to this boot ROM area on our shipment. Therefore, do not reprogram the boot ROM area if the user uses the flash memory serial I/O mode.

Do not program to addresses FF90₁₆ to FF9F₁₆ because this area is the reserved area for the programmer.

Note that, when the boot ROM area is read out from the CPU in the CPU reprogramming mode, described later, its addresses will be shifted to E000₁₆–FFFF₁₆.

Flash Memory Serial I/O Mode

In the flash memory serial I/O mode, addresses, data, and software commands, which are required to read/program/erase the internal flash memory, are serially input and output with a fewer pins and the dedicated serial programmer.

In this mode, being different from the flash memory parallel I/O mode, the CPU controls reprogramming of the flash memory (using the CPU reprogramming mode), serial input of the reprogramming data, etc.

The reprogramming control firmware for the flash memory serial I/O mode has been stored in the boot ROM area on shipment of the product from us. Note that, then, the flash memory serial I/O mode will become unavailable if the boot ROM area has been reprogrammed in the flash memory parallel I/O mode.

Note that, also, this reprogramming control firmware for the flash memory serial I/O mode is subject to change.

Figures 5 and 6 show the pin connections in the flash memory serial I/O mode.


The three pins, SCLK, SDA, and BUSY, are used to input and output serial data.

The SCLK pin is the input pin of external transfer clocks. The SDA pin is the I/O pin of transmit and receive data, and its output acts as the N-channel open-drain output. To the SDA pin, connect an external pullup resistor (about 1 k Ω). The BUSY pin is the output pin of the BUSY flag (CMOS output) and goes "H" during BUSY periods owing to a certain operation, such as transmit, receive, erase, programming, etc.

Transmit and receive data are serially transferred 8 bits at a time.

In the flash memory serial I/O mode, only the user ROM area can be reprogrammed; the boot ROM area is not accessible.

Addresses FF90₁₆ to FF9F₁₆ are the reserved area for the serial programmer. Therefore, when the user uses the flash memory serial I/O mode, do not program to this area.

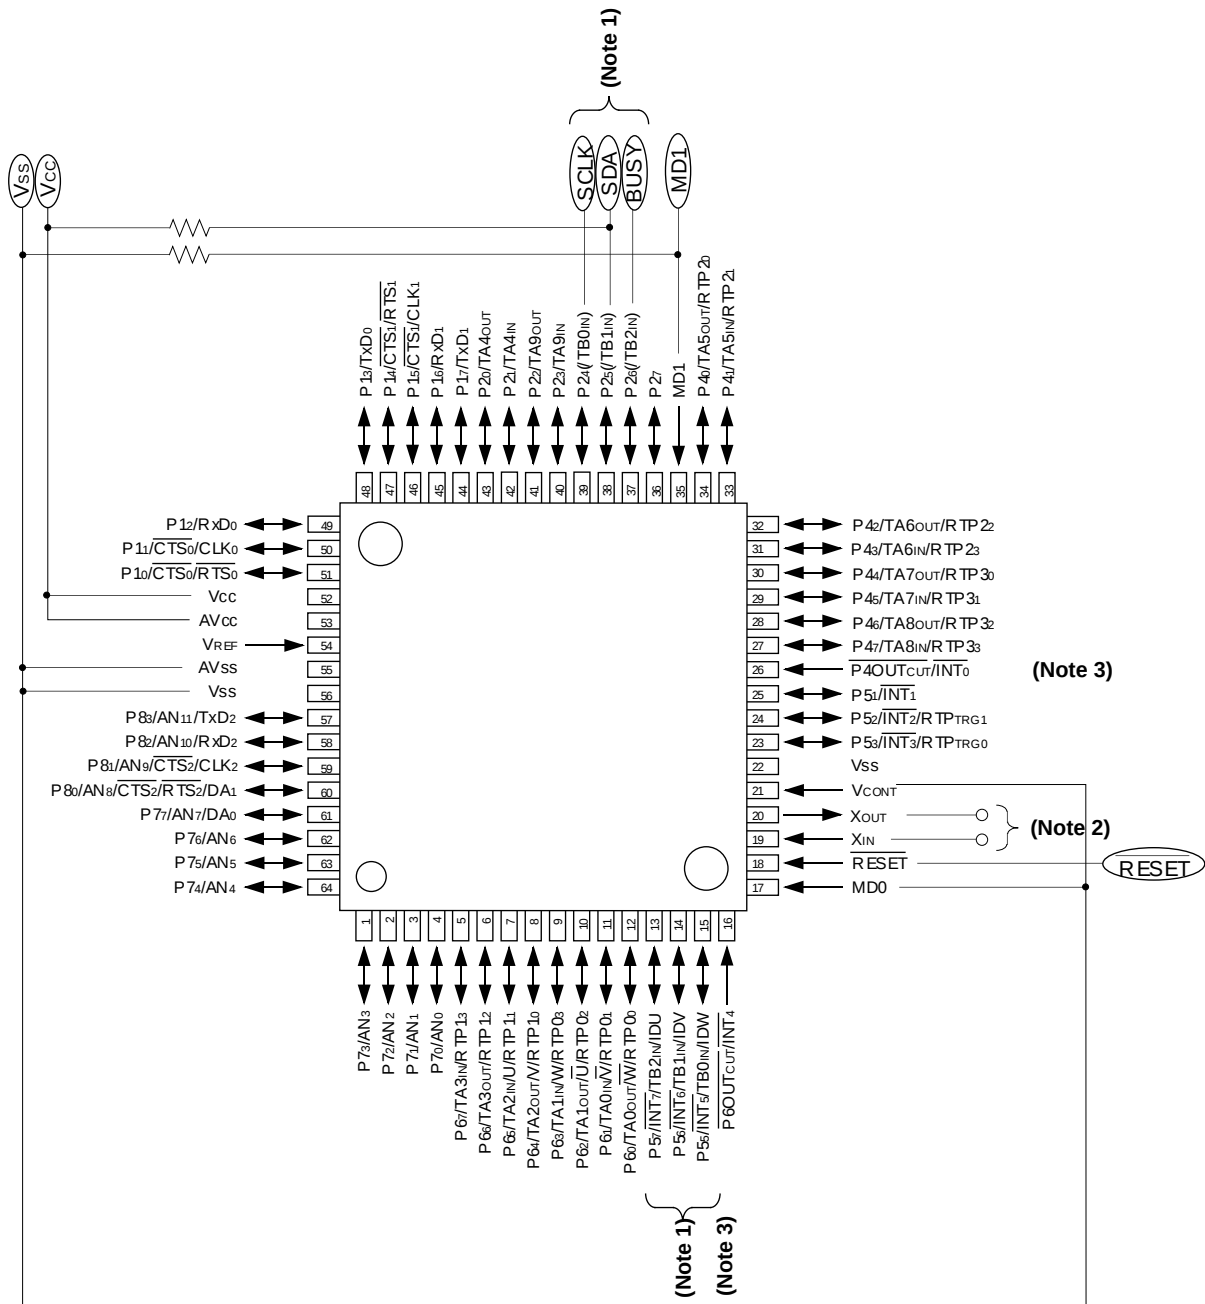

Notes 1: Allocation of pins TB0IN to TB2IN can be switched by software.
2: Connected to the oscillation circuit.
3: Recommended to be connected with VCC via a resistor.

○ : Connected to a serial programmer.

Outline 64P6N-A

Fig. 5 Pin connection of M37905F8CFP in flash memory serial I/O mode (outline: 64P6N-A)

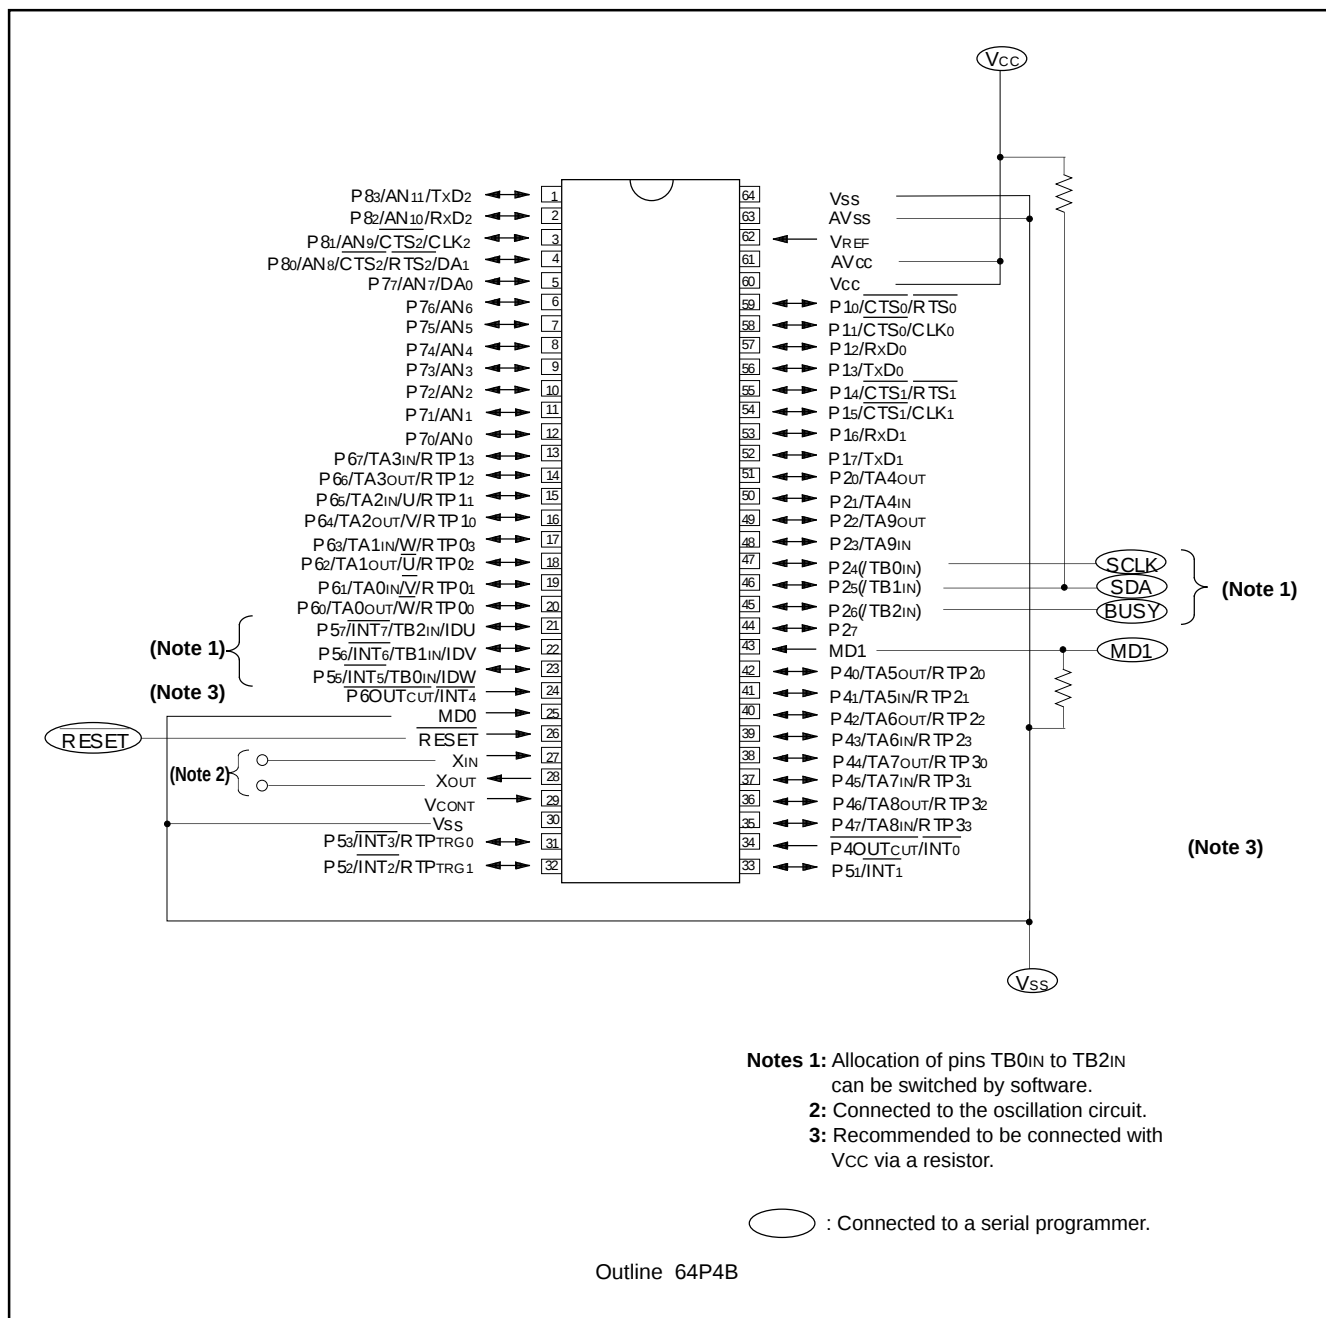


Fig. 6 Pin connection of M37905F8CSP in flash memory serial I/O mode (outline: 64P4B)

CPU Reprogramming Mode

The CPU reprogramming mode is used to perform the operations for the internal flash memory (reading, programming, erasing) under control of the CPU.

In this mode, only the user ROM area can be reprogrammed; the boot ROM area cannot be reprogrammed.

The user-original reprogramming control software for the CPU reprogramming mode can be stored in either the user ROM area or the boot ROM area.

Because the CPU cannot read out the flash memory in the CPU reprogramming mode, the above software must be transferred to the internal RAM in advance to be executed.

Boot Mode

The user-original reprogramming control software for the CPU reprogramming mode must be stored into the user ROM area or the boot ROM area in the flash memory parallel I/O mode in advance. (If this program has been stored into the boot ROM area, the flash memory serial I/O mode will become unavailable).

Note that addresses of the boot ROM area depend on the accessing ways to the boot ROM area. When accessing in the flash memory parallel I/O mode, these addresses will be shifted to 0000₁₆ to 1FFF₁₆. On the other hand, when accessing with the CPU, these addresses will be shifted to E000₁₆ to FFFF₁₆.

Reset removal with both of the MD0 and MD1 pins held "L" invokes the normal microcomputer mode, and the CPU operates using the control software stored in the user ROM area. In this case, the boot ROM area is not accessible.

Removing reset with the MD0 pin held "L" and the MD1 pin "H", the CPU starts its operation using the reprogramming control software stored in the boot ROM area. This mode is called the boot mode. The reprogramming control software in the boot ROM area can also reprogram the user ROM area.

After reset removal, be sure not to change the status at pins MD0 and MD1.

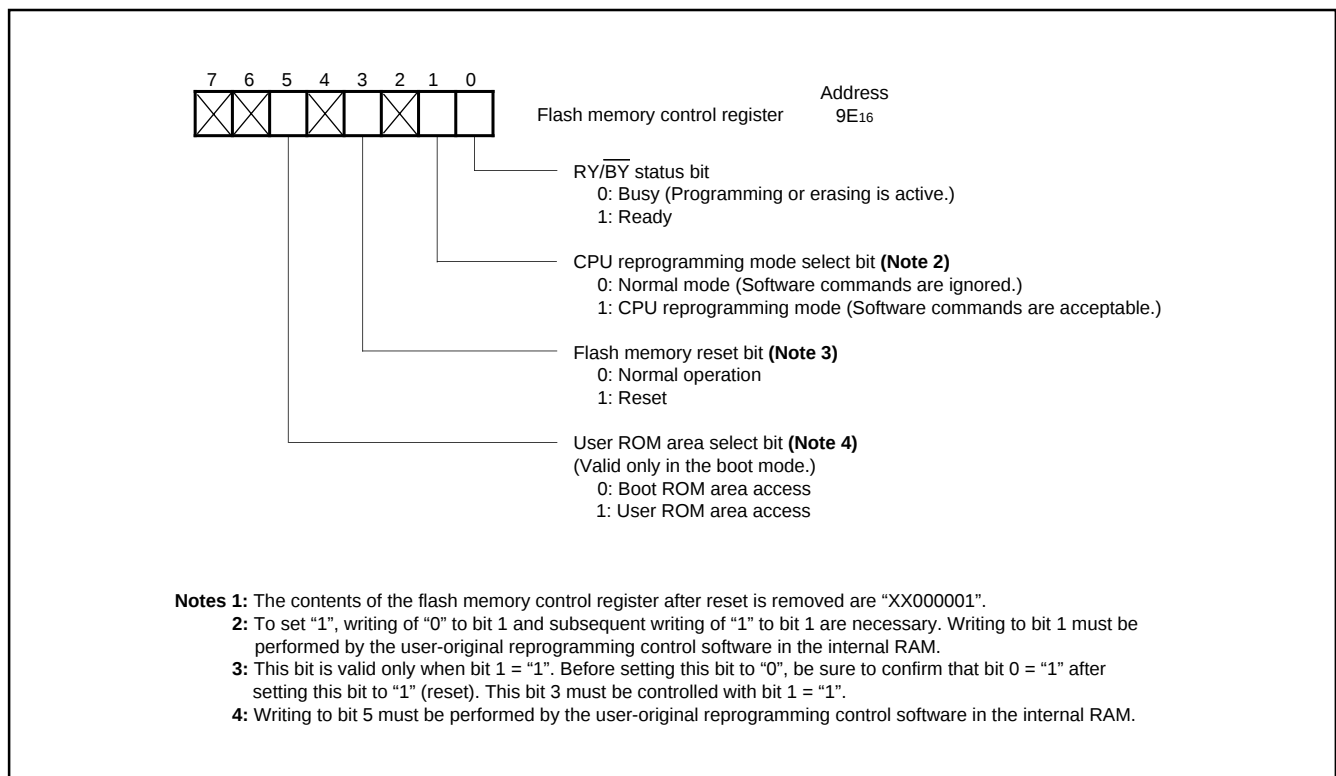


Fig. 7 Bit configuration of flash memory control register

Function overview (CPU reprogramming mode)

The CPU reprogramming mode is available in the single-chip mode, memory expansion mode, and boot mode to reprogram the user ROM area only.

In the CPU reprogramming mode, the CPU erases, programs, and reads the internal flash memory by writing software commands. Note that the user-original reprogramming control software must be transferred to the internal RAM in advance to be executed.

The CPU reprogramming mode becomes active when "1" is written into the flash memory control register's bit 1 (the CPU reprogramming mode select bit) shown in Figure 7, and software commands become acceptable.

In the CPU reprogramming mode, software commands and data are all written to and read from even addresses (Note that address A₀ in byte addresses = "0"), 16 bits at a time. Therefore, a software command consisting of 8 bits must be written to an even address; therefore, any command written to an odd address will be invalid. Since the write data at the 2nd cycle of a programming command consists of 16 bits, this data must be written to even and odd addresses.

The sequencer in the flash memory controls the erase and programming operations. What the status of the sequencer operation is and whether the programming or erase operation has been completed normally or terminated by an error can be examined by reading the flash memory control register.

Figure 7 shows the bit configuration of the flash memory control register.

Bit 0 (the RY/ $\overline{\text{BY}}$ status bit) is a read-only bit for indicating the sequencer operation. This bit goes to "0" (BUSY) while the automatic programming/erase operation is active and goes to "1" (READY) during the other operations.

Bit 1 serves as the CPU reprogramming mode select bit. Writing of "1" to this bit selects the CPU reprogramming mode, and software commands will be acceptable. Because the CPU cannot directly access the internal flash memory in the CPU reprogramming mode, writing to this bit 1 must be performed by the user-original reprogramming control software which has been transferred to the internal RAM in advance. To set bit 1 to "1", it is necessary to write "0" and "1" to this bit 1 successively. On the other hand, to clear this bit to "0", it is sufficient only to write "0".

Bit 3 (the flash memory reset bit) resets the control circuit of the internal flash memory and is used when the CPU reprogramming mode is terminated or when an abnormal access to the flash memory happens. Writing of "1" to bit 3 with the CPU reprogramming mode select bit = "1" performs the reset operation. To remove the reset, write "0" to bit 3 after confirming bit 0 (the RY/ $\overline{\text{BY}}$ status bit) becomes "1".

Bit 5 serves as the user ROM area select bit and is valid only in the boot mode. Setting this bit to "1" in the boot mode switches an accessible area from the boot ROM area to the user ROM area. To use the CPU reprogramming mode in the boot mode, set this bit to "1". Note that when the microcomputer is booted up in the user ROM area, only the user ROM area is accessible and bit 5 is invalid; on the other hand, when the microcomputer is in the boot mode, bit 5 is valid independent of the CPU reprogramming mode. To rewrite bit 5, execute the user-original reprogramming control software transferred to the internal RAM in advance.

Figure 8 shows the CPU reprogramming mode set/termination flow-

chart, and be sure to follow this flowchart. As shown in Note 1 of Figure 8, before selecting the CPU reprogramming mode, set "0" to the processor mode register 1's bit 7 (the internal ROM bus cycle select bit) and set flag I to "1" to avoid an interrupt request input.

When a watchdog timer interrupt request is generated in the CPU reprogramming mode, when an input to the $\overline{\text{RESET}}$ pin is "L", or when the software reset is performed, the flash memory control circuit and flash memory control register will be reset.

When the flash memory is reset during the erase or programming operation, this operation is cancelled and the target block's data will be invalid. Just before writing a software command related to the erase/programming operation, be sure to write to the watchdog timer. In the CPU reprogramming mode, be sure not to use the **STP** and **WIT** instructions.

PRELIMINARY
 Notice: This is not a final specification.
 Some parametric limits are subject to change.

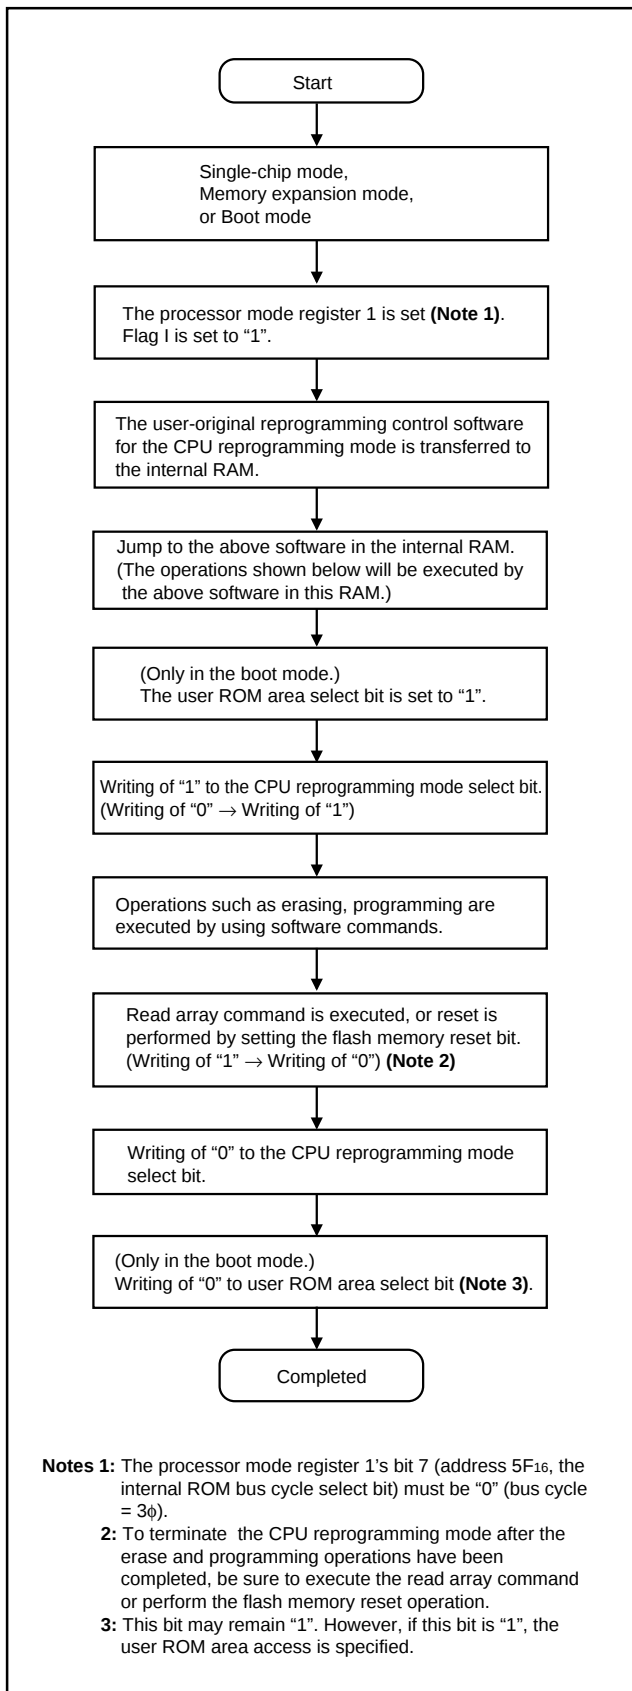


Fig. 8 CPU reprogramming mode set/termination flowchart

Software Commands

Table 2 lists the software commands.

By writing a software command after the CPU reprogramming mode select bit has been set to "1", erasing, programming, etc. can be specified. Note that, at software commands' input, the high-order byte (D₈–D₁₅) is ignored. (Except for the write data at the 2nd cycle of a programming command.)

Software commands are explained as below.

Read Array Command (FF₁₆)

By writing command code "FF₁₆" at the 1st bus cycle, the microcomputer enters the read array mode. If an address to be read is input in the next or the following bus cycles, the contents at the specified address are output to the data bus (D₀ to D₁₅) in a unit of 16 bits.

The read array mode is maintained until writing of another software command.

Read Status Register Command (70₁₆)

Writing command code "70₁₆" at the 1st bus cycle outputs the contents of the status register to the data bus (D₀–D₇) by a read at the 2nd bus cycle.

The status register is explained later.

Clear Status Register Command (50₁₆)

This command clears two status bits (SR.4, 5) each of which is set to "1" to indicate that the operation has been terminated by an error. To clear these bits, write command code "50₁₆" at the 1st bus cycle.

Programming Command (40₁₆)

This command facilitates programming of 1 word (2 bytes) at a time. To initiate programming, write command code "40₁₆" at the 1st bus cycle; when write data is written in a unit of 16 bits at the 2nd bus cycle, the address is specified at the same time. Upon completion of data writing, automatic programming (data programming and verification) operation is started.

The completion of the automatic programming operation is confirmed by a read of the flash memory control register. The RY/BY status bit of the flash memory control register goes "0" during the automatic programming operation; and also, it goes "1" after the end of it.

Before execution of the next command, be sure to confirm that the RY/ $\overline{\text{BY}}$ status bit is set to "1" (READY). During the automatic programming operation, writing of commands and access to the flash memory must not be performed.

When programming continuously, the programming command can be executed with the read status register mode kept if there is no programming error. Simultaneously with start of the automatic programming, the read status register mode is automatically active. In this case, the read status register mode is retained until the next read array command (FF₁₆) is written or until the reset is performed by using the flash memory reset bit.

Reading out the status register after the automatic programming operation is completed reports the result of it. For details, refer to the section on the status register.

Figure 9 shows an example of the programming flowchart.

Additional programming to any word that has already been programmed is prohibited.

Table 2. Software commands (CPU reprogramming mode)

Command	1st cycle			2nd cycle		
	Mode	Address	Data (D0 to D7)	Mode	Address	Data
Read Array	Write	X (Note 2)	FF ₁₆	—	—	—
Read Status Register	Write	X	70 ₁₆	Read	X	SRD (Note 3)
Clear Status Register	Write	X	50 ₁₆	—	—	—
Programming	Write	X	40 ₁₆	Write	WA (Note 4)	WD (Note 4)
Block Erase	Write	X	20 ₁₆	Write	BA (Note 5)	D0 ₁₆
Erase All Block	Write	X	20 ₁₆	Write	X	20 ₁₆

Notes 1: At software commands' input, the high-order byte of data (D8–D15) is ignored.

2: X = An arbitrary address in the user ROM area. (Note that A0 = "0".)

3: SRD = Status Register Data

4: WA = Write Address, WD = Write Data (16 bits).

5: Block address: the maximum address of each block must be input. Note that address A0 = "0".

Block Erase Command (20₁₆/D0₁₆)

Writing command code "20₁₆" at the 1st bus cycle and writing confirmation command code "D0₁₆" and the maximum address of the block (Note that address A0 = "0".) at the subsequent 2nd bus cycle initiate the automatic erase (erasing and erase verification) operation for the specified block.

The completion of the automatic erase operation is confirmed by a read of the flash memory control register. The RY/ $\overline{\text{BY}}$ status bit of the flash memory control register goes "0" simultaneously with start of the automatic erase operation; and also, it goes "1" simultaneously with completion of it.

Before execution of the next command, be sure to confirm that the RY/ $\overline{\text{BY}}$ status bit is set to "1" (READY). During the automatic erase operation, writing of commands and access to the flash memory must not be performed.

Simultaneously with start of the automatic erase, the read status register mode is automatically active. In this case, the read status register mode is retained until the next read array command (FF₁₆) is written or until the reset is performed by using the flash memory reset bit.

Reading out the status register after the automatic erase operation is completed reports the result of it. For details, refer to the section on the status register.

Figure 10 shows an example of the block erase flowchart.

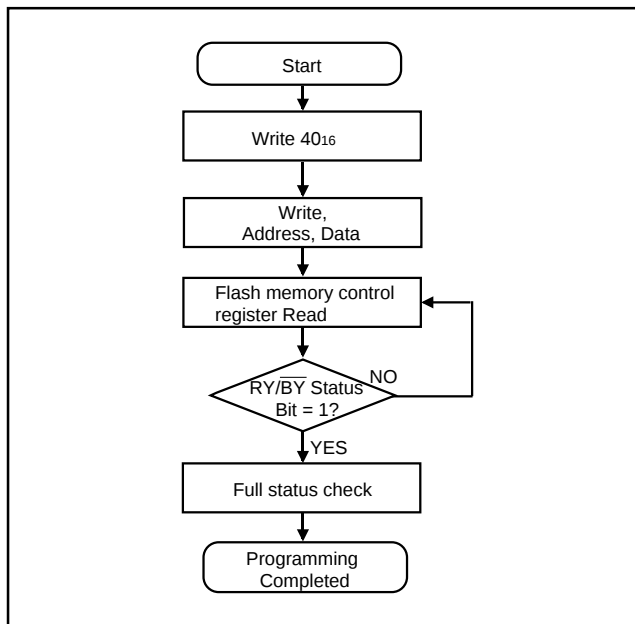


Fig. 9 Programming flowchart

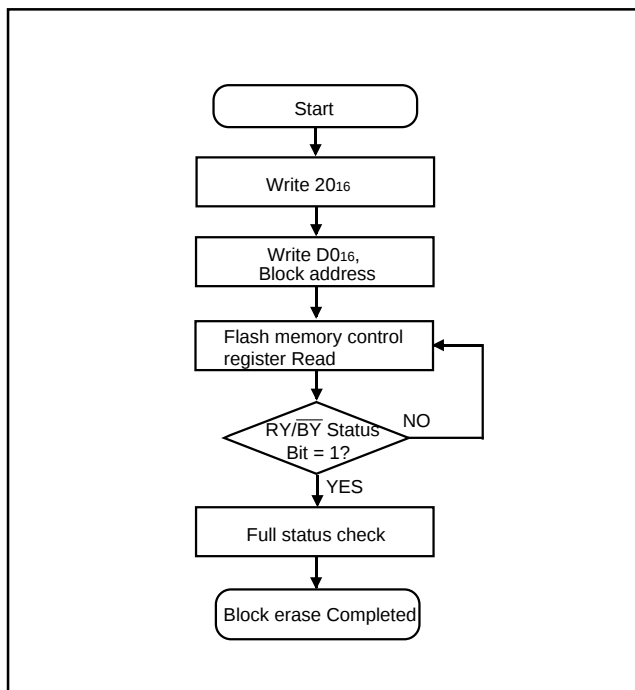


Fig. 10 Block erase flowchart

Erase All Block Command (2016/2016)

Writing command code "2016" at the 1st bus cycle and writing command code "2016" at the subsequent 2nd bus cycle initiate the continuous block erase (chip erase) operations for all the blocks.

The completion of the chip erase operation, as well as of the block erase operation, is confirmed by a read of the flash memory control register. The result of the automatic erase operation is also reported by a read of the status register.

During the automatic erase operation (when the $\overline{RY}/\overline{BY}$ status bit = "0"), writing of commands and access to the flash memory must not be performed.

Status Register

The status register is used to indicate whether the programming/erase operation has been completed normally or terminated by an error. By writing the read status register command (7016), the contents of the status register can be read out; by writing the clear status register command (5016), the contents of the status register can be cleared.

Table 3 lists the definition of each bit of the status register.

The status register outputs "8016" after reset is removed.

The status of each bit is described below.

Erase Status Bit (SR.5)

This bit reports the status of the automatic erase operation. This bit is set to "1" if an erase error occurs and returns to "0" if the clear status register command (5016) is written.

Programming Status Bit (SR.4)

This bit reports the status of the automatic programming operation. This bit is set to "1" if a programming error occurs and returns to "0" if the clear status register command (5016) is written.

Under the condition that any of SR.5, SR.4 = "1", none of the programming, block erase, and erase all block commands can be accepted. Before execution of these commands, execute the clear status register command (5016), in advance, to clear these status bits.

Both of SR.4, SR.5 are set to "1" under the following conditions (Command Sequence Error):

- (1) when data other than "D016" and "FF16" is written to the data in the 2nd bus cycle of the block erase command (2016/D016)
- (2) when data other than "2016" and "FF16" is written to the data in the 2nd bus cycle of the erase all block command (2016/2016)

Note that, writing of "FF16" forces the microcomputer into the read array mode. Simultaneously with this, the command written in the 1st bus cycle will be canceled.

Full Status Check

The full status check reports the results of the erase or programming operation.

Figure 11 shows the full status check flowchart and actions to be taken if an error has occurred.

Table 3. Bit definition of status register

Symbol	Status	Definition	
		"1"	"0"
SR.7 (D7)	Reserved	—	—
SR.6 (D6)	Reserved	—	—
SR.5 (D5)	Erase Status	Terminated by error.	Terminated normally.
SR.4 (D4)	Programming Status	Terminated by error.	Terminated normally.
SR.3 (D3)	Reserved	—	—
SR.2 (D2)	Reserved	—	—
SR.1 (D1)	Reserved	—	—
SR.0 (D0)	Reserved	—	—

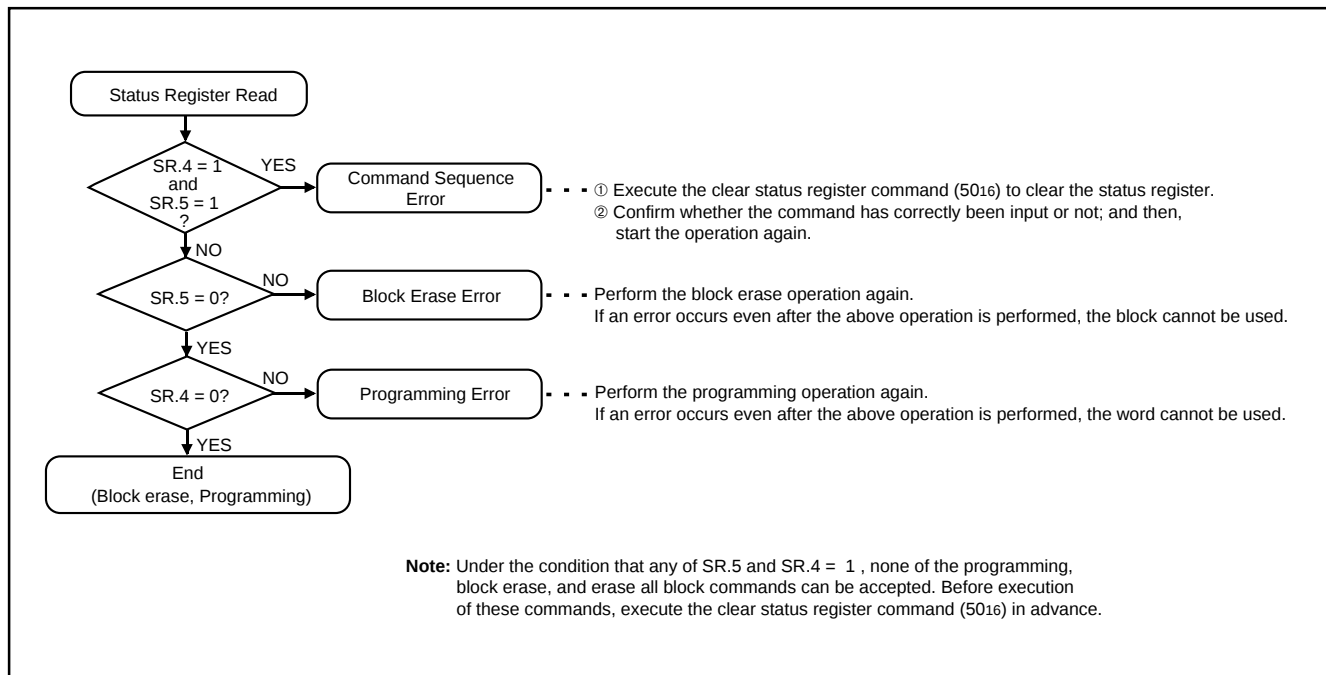


Fig. 11 Full status check flowchart and actions to be taken if an error has occurred

DC Electrical Characteristics (Vcc = 5 V ± 0.5 V, Ta = 0 to 60 °C, f(fsyst) = 20 MHz (Note))

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
Icc1	Vcc power source current (at read)		30	48	mA
Icc2	Vcc power source current (at write)			48	mA
Icc3	Vcc power source current (at programming)			54	mA
Icc4	Vcc power source current (at erasing)			54	mA

Limits of VIH, VIL, VOH, VOL, IiH, and IiL for each pin are the same as those in the microcomputer mode.

Note: f(fsyst) indicates the system clock (fsyst) frequency.

AC Electrical Characteristics (Vcc = 5 V ± 0.5 V, Ta = 0 to 60 °C, f(fsyst) = 20 MHz (Note))

Parameter	Limits			Unit
	Min.	Typ.	Max.	
256-byte programming time		4	40	ms
Block erase time		0.6	8	s
Erase all block time		0.6 × n	8 × n	s

n = Number of blocks to be erased

The limits of parameters other than the above are same as those in the microcomputer mode.

Note: f(fsyst) indicates the system clock (fsyst) frequency.

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Ratings	Unit
V _{CC}	Power source voltage	−0.3 to 6.5	V
AV _{CC}	Analog power source voltage	−0.3 to 6.5	V
V _I	Input voltage P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83, $\overline{P4OUTCUT}$, $\overline{P6OUTCUT}$, V _{CONT} , V _{REF} , X _{IN} , RESET, MD0, MD1	−0.3 to V _{CC} +0.3	V
V _O	Output voltage P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83, X _{OUT}	−0.3 to V _{CC} +0.3	V
P _d	Power dissipation	300	mW
T _{opr}	Operating ambient temperature	−20 to 85	°C
T _{stg}	Storage temperature	−40 to 150	°C

RECOMMENDED OPERATING CONDITIONS (V_{CC} = 5 V, T_a = −20 to 85 °C, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
V _{CC}	Power source voltage	4.5	5.0	5.5	V
AV _{CC}	Analog power source voltage		V _{CC}		V
V _{SS}	Power source voltage		0		V
AV _{SS}	Analog power source voltage		0		V
V _{IH}	High-level Input voltage P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83, $\overline{P4OUTCUT}$, $\overline{P6OUTCUT}$, X _{IN} , RESET, MD0, MD1	0.8 V _{CC}		V _{CC}	V
V _{IL}	Low-level Input voltage P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83, $\overline{P4OUTCUT}$, $\overline{P6OUTCUT}$, X _{IN} , RESET, MD0, MD1	0		0.2 V _{CC}	V
I _{OH(peak)}	High-level peak output current P10–P17, P20–P27, P55–P57, P60–P67, P70–P77			−10	mA
I _{OH(avg)}	High-level average output current P10–P17, P20–P27, P55–P57, P60–P67, P70–P77			−5	mA
I _{OL(peak)}	Low-level peak output current P10–P17, P20–P27, P51–P53, P55–P57, P70–P77			10	mA
I _{OL(peak)}	Low-level peak output current P40–P47, P60–P67			20	mA
I _{OL(avg)}	Low-level average output current P10–P17, P20–P27, P51–P53, P55–P57, P70–P77			5	mA
I _{OL(avg)}	Low-level average output current P40–P47, P60–P67			15	mA
f(X _{IN})	External clock input frequency (Note 1)			20	MHz
f(f _{sys})	System clock frequency			20	MHz

Notes 1: When using the PLL frequency multiplier, be sure that f(f_{sys}) = 20 MHz or less.

2: Average output current is the average value of an interval of 100 ms.

3: The sum of I_{OL(peak)} must be 110 mA or less, the sum of I_{OH(peak)} must be 80 mA or less.

DC ELECTRICAL CHARACTERISTICS ($V_{CC} = 5\text{ V}$, $V_{SS} = 0\text{ V}$, $T_a = -20\text{ to }85\text{ }^\circ\text{C}$, $f(f_{sys}) = 20\text{ MHz}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V_{OH}	High-level output voltage P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83	$I_{OH} = -10\text{ mA}$	3			V
V_{OL}	Low-level output voltage P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83	$I_{OL} = 10\text{ mA}$			2	V
$V_{T+} - V_{T-}$	Hysteresis TA0IN–TA9IN, TA0OUT–TA9OUT, TB0IN–TB2IN, INT0–INT7, CTS0, CTS1, CTS2, CLK0, CLK1, CLK2, RxD0, RxD1, RxD2, RTPTRG0, RTPTRG1, P4OUTCUT, P6OUTCUT		0.4		1	V
$V_{T+} - V_{T-}$	Hysteresis RESET		0.5		1.5	V
$V_{T+} - V_{T-}$	Hysteresis XIN		0.1		0.3	V
I_{IH}	High-level input current P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83, P4OUTCUT, P6OUTCUT, XIN, RESET, MD0, MD1	$V_i = 5.0\text{ V}$			5	μA
I_{IL}	Low-level input current P10–P17, P20–P27, P40–P47, P51–P53, P55–P57, P60–P67, P70–P77, P80–P83, P4OUTCUT, P6OUTCUT, XIN, RESET, MD0, MD1	$V_i = 0\text{ V}$			–5	μA
VRAM	RAM hold voltage	When clock is stopped.	2			V
ICC	Power source current	Output-only pins are open, and the other pins are connected to V_{SS} or V_{CC} . An external square-waveform clock is input. (Pin X_{OUT} is open.) The PLL frequency multiplier is inactive.	$f(f_{sys}) = 20\text{ MHz}$. CPU is active.	25	50	mA
			$T_a = 25\text{ }^\circ\text{C}$ when clock is inactive.		1	μA
			$T_a = 85\text{ }^\circ\text{C}$ when clock is inactive.		20	

A-D CONVERTER CHARACTERISTICS

($V_{CC} = AV_{CC} = 5\text{ V} \pm 0.5\text{ V}$, $V_{SS} = AV_{SS} = 0\text{ V}$, $T_a = -20\text{ to }85\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
	Resolution	$V_{REF} = V_{CC}$			10	Bits
					$\frac{1}{256} V_{REF}$	V
	Absolute accuracy	$V_{REF} = V_{CC}$			± 3	LSB
					± 2	LSB
					± 40	mV
RLADDER	Ladder resistance	$V_{REF} = V_{CC}$	5			k Ω
tCONV	Conversion time	$f(f_{sys}) \leq 20\text{ MHz}$				μs
					5.9	
					2.45 (Note)	
VREF	Reference voltage		2.7		V_{CC}	V
VIA	Analog input voltage		0		V_{REF}	V

Note: This is applied when A-D conversion frequency (ϕ_{AD}) = f_1 (ϕ).

D-A CONVERTER CHARACTERISTICS

($V_{CC} = 5\text{ V}$, $V_{SS} = AV_{SS} = 0\text{ V}$, $V_{REF} = 5\text{ V}$, $T_a = -20\text{ to }85\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
	Resolution				8	Bits
	Absolute accuracy				± 1.0	%
t _{su}	Set time				3	μs
R _o	Output resistance		2	3.5	4.5	k Ω
I _{VREF}	Reference power source input current	(Note)			3.2	mA


Note: The test conditions are as follows:

- One D-A converter is used.
- The D-A register value of the unused D-A converter is "0016."
- The reference power source input current for the ladder resistance of the A-D converter is excluded.

RESET INPUT

Reset input timing requirements ($V_{CC} = 5\text{ V} \pm 0.5\text{ V}$, $V_{SS} = 0\text{ V}$, $T_a = -20\text{ to }85\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min.	Typ.	Max.	
t _w (RESETL)	RESET input low-level pulse width	10			μs



PERIPHERAL DEVICE INPUT/OUTPUT TIMING

(VCC = 5 V±0.5 V, VSS = 0 V, Ta = -20 to 85 °C, f(fsyst) = 20 MHz unless otherwise noted)

* For limits depending on f(fsyst), their calculation formulas are shown below. Also, the values at f(fsyst) = 20 MHz are shown in ().

Timer A input (Count input in event counter mode)

Symbol	Parameter	Limits		Unit
		Min.	Max.	
tc(TA)	TAiIn input cycle time	80		ns
tw(TAH)	TAiIn input high-level pulse width	40		ns
tw(TAL)	TAiIn input low-level pulse width	40		ns

Timer A input (Gating input in timer mode)

Symbol	Parameter		Limits		Unit
			Min.	Max.	
tc(TA)	TAiIn input cycle time	f(fsyst) ≤ 20 MHz	$\frac{16 \times 10^9}{f(fsyst)}$ (800)		ns
tw(TAH)	TAiIn input high-level pulse width	f(fsyst) ≤ 20 MHz	$\frac{8 \times 10^9}{f(fsyst)}$ (400)		ns
tw(TAL)	TAiIn input low-level pulse width	f(fsyst) ≤ 20 MHz	$\frac{8 \times 10^9}{f(fsyst)}$ (400)		ns

Note : The TAiIn input cycle time requires 4 or more cycles of a count source. The TAiIn input high-level pulse width and the TAiIn input low-level pulse width respectively require 2 or more cycles of a count source. The limits in this table are applied when the count source = f2 at f(fsyst) ≤ 20 MHz.

Timer A input (External trigger input in one-shot pulse mode)

Symbol	Parameter		Limits		Unit
			Min.	Max.	
tc(TA)	TAiIn input cycle time	f(fsyst) ≤ 20 MHz	$\frac{8 \times 10^9}{f(fsyst)}$ (400)		ns
tw(TAH)	TAiIn input high-level pulse width		80		ns
tw(TAL)	TAiIn input low-level pulse width		80		ns

Timer A input (External trigger input in pulse width modulation mode)

Symbol	Parameter	Limits		Unit
		Min.	Max.	
tw(TAH)	TAiIn input high-level pulse width	80		ns
tw(TAL)	TAiIn input low-level pulse width	80		ns


Timer A input (Up-down input and Count input in event counter mode)

Symbol	Parameter	Limits		Unit
		Min.	Max.	
tc(UP)	TAiOUT input cycle time	2000		ns
tw(UPH)	TAiOUT input high-level pulse width	1000		ns
tw(UPL)	TAiOUT input low-level pulse width	1000		ns
tsu(UP-TiN)	TAiOUT input setup time	400		ns
th(TiN-UP)	TAiOUT input hold time	400		ns


Timer A input (Two-phase pulse input in event counter mode)

Symbol	Parameter	Limits		Unit
		Min.	Max.	
$t_c(TA)$	TAJIN input cycle time	800		ns
$t_{su}(TA_{JIN}-TA_{JOUT})$	TAJIN input setup time	200		ns
$t_{su}(TA_{JOUT}-TA_{JIN})$	TAJOUT input setup time	200		ns


- Gating input in timer mode
- Count input in event counter mode
- External trigger input in one-shot pulse mode
- External trigger input in pulse width modulation mode

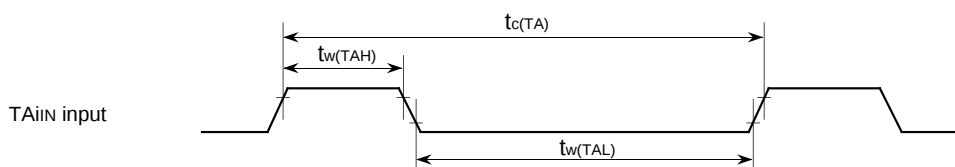

- Up-down and Count input in event counter mode

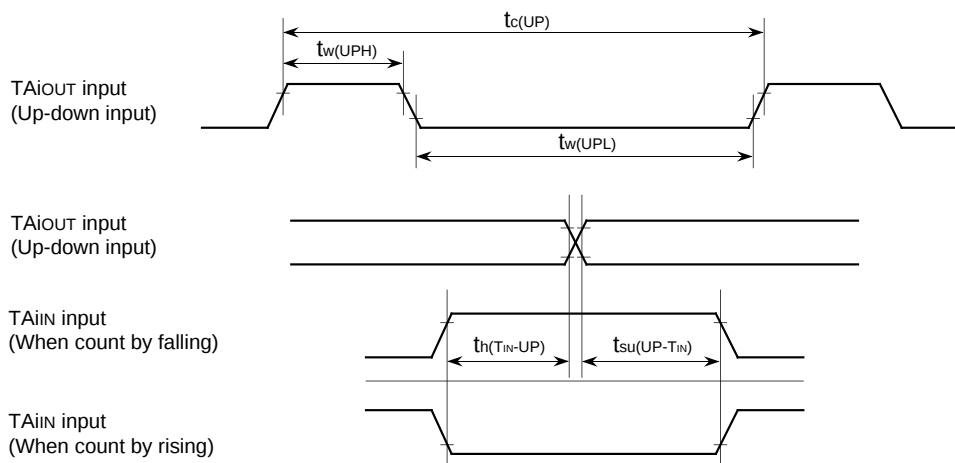

- Two-phase pulse input in event counter mode

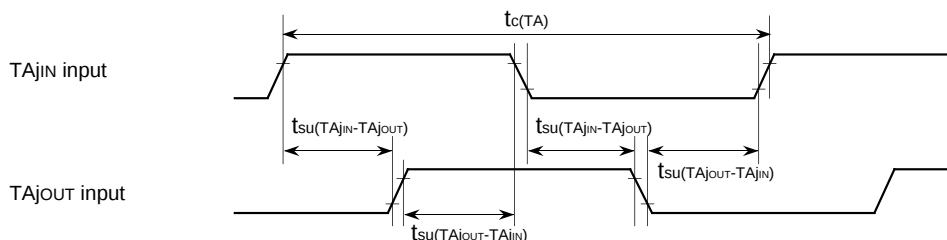

Test conditions

- $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$, $T_a = -20\text{ to }85\text{ }^\circ\text{C}$
- Input timing voltage : $V_{IL} = 1.0\text{ V}$, $V_{IH} = 4.0\text{ V}$

Timer B input (Count input in event counter mode)

Symbol	Parameter	Limits		Unit
		Min.	Max.	
$t_{c(TB)}$	TBiIn input cycle time (one edge count)	80		ns
$t_{w(TBH)}$	TBiIn input high-level pulse width (one edge count)	40		ns
$t_{w(TBL)}$	TBiIn input low-level pulse width (one edge count)	40		ns
$t_{c(TB)}$	TBiIn input cycle time (both edge count)	160		ns
$t_{w(TBH)}$	TBiIn input high-level pulse width (both edge count)	80		ns
$t_{w(TBL)}$	TBiIn input low-level pulse width (both edge count)	80		ns

Timer B input (Pulse period measurement mode)

Symbol	Parameter		Limits		Unit
			Min.	Max.	
$t_{c(TB)}$	TBiIn input cycle time	$f(f_{sys}) \leq 20 \text{ MHz}$	$\frac{16 \times 10^9}{f(f_{sys})}$ (800)		ns
$t_{w(TBH)}$	TBiIn input high-level pulse width	$f(f_{sys}) \leq 20 \text{ MHz}$	$\frac{8 \times 10^9}{f(f_{sys})}$ (400)		ns
$t_{w(TBL)}$	TBiIn input low-level pulse width	$f(f_{sys}) \leq 20 \text{ MHz}$	$\frac{8 \times 10^9}{f(f_{sys})}$ (400)		ns

Note: The TBiIn input cycle time requires 4 or more cycles of a count source. The TBiIn input high-level pulse width and the TBiIn input low-level pulse width respectively require 2 or more cycles of a count source. The limits in this table are applied when the count source = f_2 at $f(f_{sys}) \leq 20 \text{ MHz}$.

Timer B input (Pulse width measurement mode)

Symbol	Parameter		Limits		Unit
			Min.	Max.	
$t_{c(TB)}$	TBiIn input cycle time	$f(f_{sys}) \leq 20 \text{ MHz}$	$\frac{16 \times 10^9}{f(f_{sys})}$ (800)		ns
$t_{w(TBH)}$	TBiIn input high-level pulse width	$f(f_{sys}) \leq 20 \text{ MHz}$	$\frac{8 \times 10^9}{f(f_{sys})}$ (400)		ns
$t_{w(TBL)}$	TBiIn input low-level pulse width	$f(f_{sys}) \leq 20 \text{ MHz}$	$\frac{8 \times 10^9}{f(f_{sys})}$ (400)		ns


Note: The TBiIn input cycle time requires 4 or more cycles of a count source. The TBiIn input high-level pulse width and the TBiIn input low-level pulse width respectively require 2 or more cycles of a count source. The limits in this table are applied when the count source = f_2 at $f(f_{sys}) \leq 20 \text{ MHz}$.

Serial I/O

Symbol	Parameter	Limits		Unit
		Min.	Max.	
$t_{c(CK)}$	CLKi input cycle time	200		ns
$t_{w(CKH)}$	CLKi input high-level pulse width	100		ns
$t_{w(CKL)}$	CLKi input low-level pulse width	100		ns
$t_{d(C-Q)}$	TxDi output delay time		80	ns
$t_{h(C-Q)}$	TxDi hold time	0		ns
$t_{su(D-C)}$	RxDi input setup time	20		ns
$t_{h(C-D)}$	RxDi input hold time	90		ns

External interrupt ($\overline{\text{INTi}}$) input

Symbol	Parameter	Limits		Unit
		Min.	Max.	
$t_w(\text{INH})$	$\overline{\text{INTi}}$ input high-level pulse width	250		ns
$t_w(\text{INL})$	$\overline{\text{INTi}}$ input low-level pulse width	250		ns

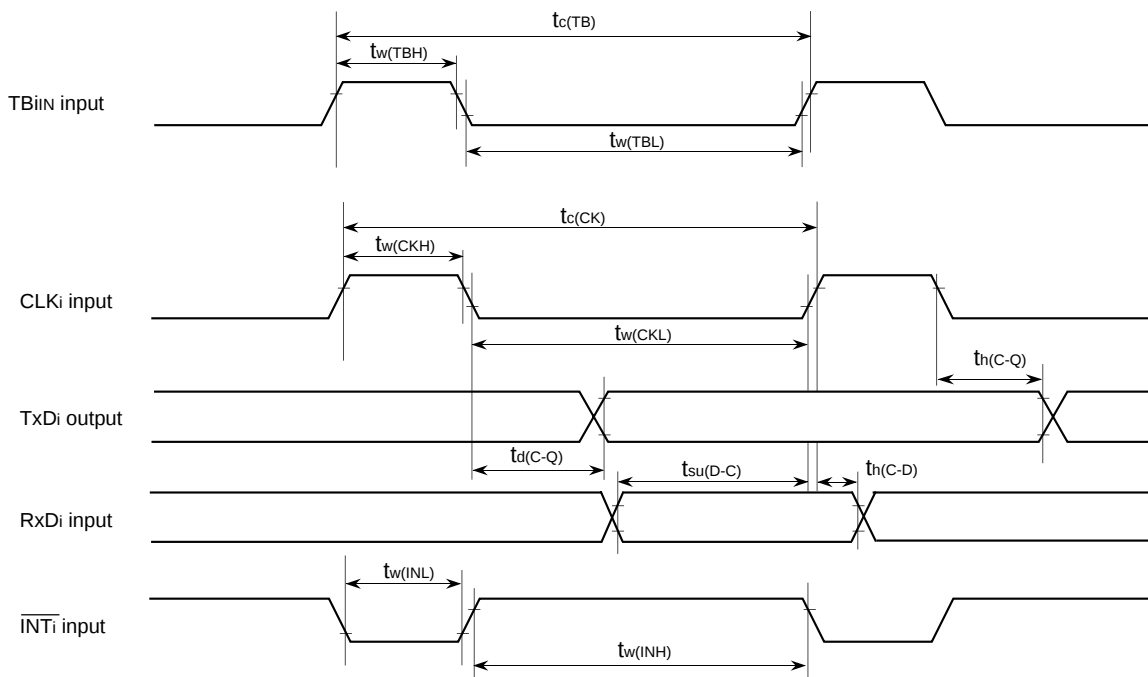

Test conditions


- $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$, $T_a = -20 \text{ to } 85 \text{ }^\circ\text{C}$
- Input timing voltage : $V_{IL} = 1.0 \text{ V}$, $V_{IH} = 4.0 \text{ V}$
- Output timing voltage : $V_{OL} = 0.8 \text{ V}$, $V_{OH} = 2.0 \text{ V}$, $C_L = 50 \text{ pF}$

External clock input

Timing Requirements ($V_{CC} = 5\text{ V} \pm 0.5\text{ V}$, $V_{SS} = 0\text{ V}$, $T_a = -20\text{ to }85\text{ }^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Limits		Unit
		Min.	Max.	
t_c	External clock input cycle time	50		ns
$t_{w(\text{half})}$	External clock input pulse width with half input-voltage	$0.45\ t_c$	$0.55\ t_c$	ns
$t_{w(H)}$	External clock input high-level pulse width	$0.5\ t_c - 8$		ns
$t_{w(L)}$	External clock input low-level pulse width	$0.5\ t_c - 8$		ns
t_r	External clock input rise time		8	ns
t_f	External clock input fall time		8	ns

External clock input

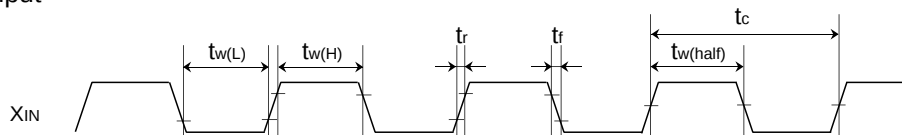


Test conditions

- $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$, $T_a = -20\text{ to }85\text{ }^\circ\text{C}$
- Input timing voltage : $V_{IL} = 1.0\text{ V}$, $V_{IH} = 4.0\text{ V}$ ($t_{w(H)}$, $t_{w(L)}$, t_r , t_f)
- Output timing voltage : 2.5 V (t_c , $t_{w(\text{half})}$)

PACKAGE OUTLINE

64P6N-A


Plastic 64pin 14X14mm body QFP

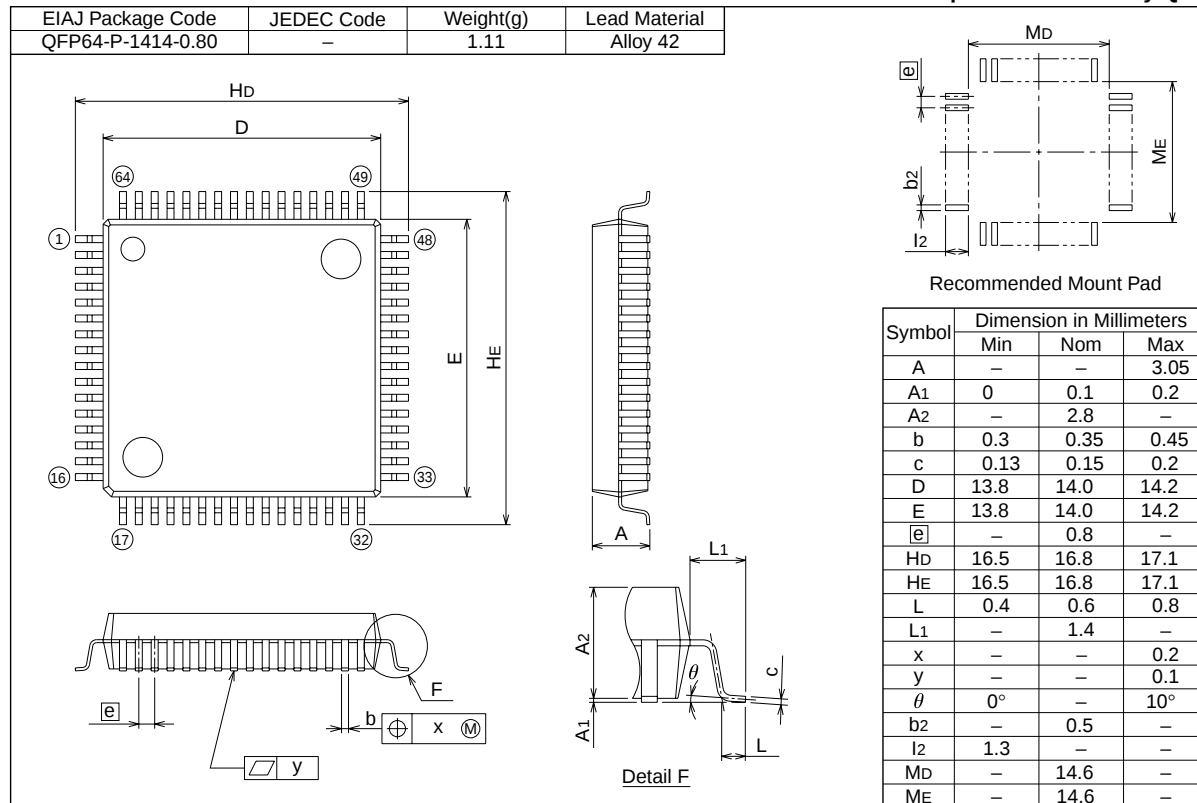

64P4B

(MMP)

Plastic 64pin 750mil SDIP

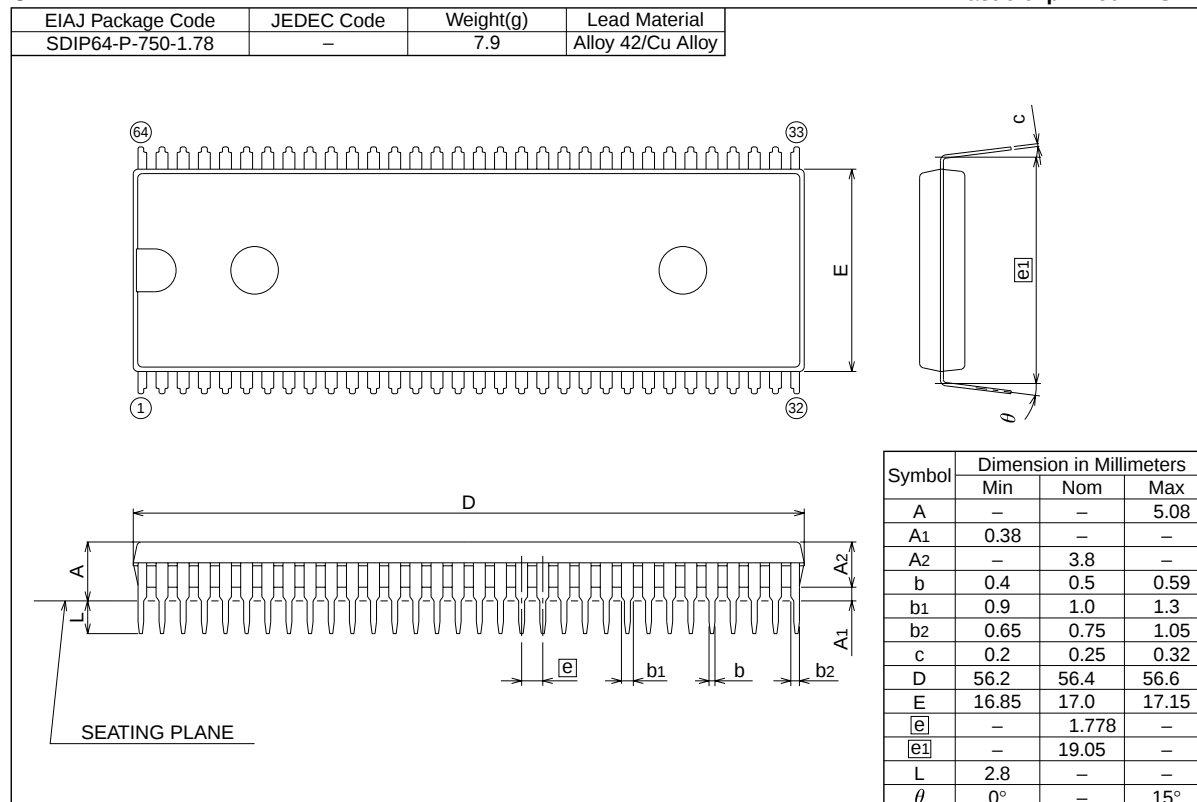

PRELIMINARY
Notice: This is not a final specification.
Some parametric limits are subject to change.

MITSUBISHI MICROCOMPUTERS

M37905F8CFP, M37905F8CSP

16-BIT CMOS MICROCOMPUTER

Keep safety first in your circuit designs!

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
- Please also pay attention to information published by Mitsubishi Electric Corporation by various means, including the Mitsubishi Semiconductor home page (<http://www.mitsubishichips.com>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Mitsubishi Electric Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
- Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

