

INTRODUCTION


Molex's latest Micro PGA sockets are designed to accept Mobile Pentium® 4 and Mobile Celeron® Processor-M series for applications such as thin notebooks and blade servers. These high-density sockets feature low profiles and proven Ball Grid Array (BGA) soldering technology for stable PCB processing.

The new sockets include an easy-to-use cam mechanism and stainless steel cam retainer to prevent wear-and-tear on the housing during use. The terminal includes a dual-beam chamfered contact for good electrical performance, and BGA-interface design to ensure good thermal mismatch control between components and the PCB.

Molex's Micro PGA sockets are part of our growing family of innovative socketing solutions for processor, memory and test applications.

Applications:


- Notebook PCs
- Blade Servers

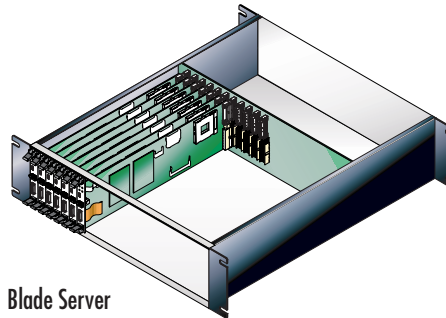

Blade Server




Micro PGA Socket 478/479 Circuits For Mobile Pentium® 4 ZIF Type, BGA Mount

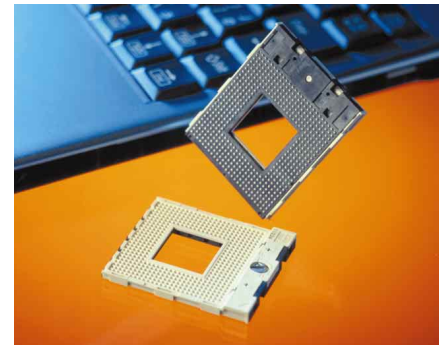


*Pentium and Celeron are registered trademarks of Intel Corporation

FEATURES AND BENEFITS




Stainless steel cam retainer protects plastic cover from wear.

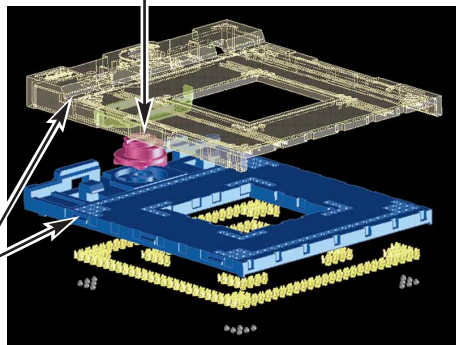


LCP housing and cover with profile height of 3.30mm (.130")

Dual-beam chamfered contact design provides low insertion force and good electrical performance.



Ball Grid Array (BGA) solder balls are self-centering and avoid the problem of bent tails.

New! Blue Color Version For Centrino® Mobile Technology Processors

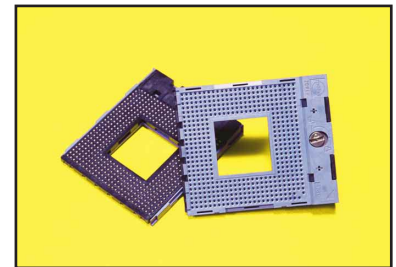

- Accepts energy-saving Pentium mobile processors
- For notebooks, blade servers and small desktop PCs
- 478 circuits
- Small pin layout difference and blue color to differentiate from standard P4-M socket
- Same features as standard P4-M socket
- Order No.: 500210-4784

*Centrino is a trademark of Intel Corporation



SPECIFICATIONS

Physical	Housing	Black LCP, UL 94V-0
	Contact	Copper Alloy
	Solder Ball	Tin/Lead, 0.76mm (.030") dia.
	CAM	Stainless Steel
	CAM Holder	Stainless Steel
	Plating—Contact Area	Gold
	Underplating	Nickel
	Operating Temperature	-20 to +90°C

Electrical	Voltage	100V
	Current	0.5A
	Contact Resistance	25 milliohms max.
	Dielectric Withstanding Voltage	AC 360V
	Insulation Resistance	800 Megohms min.
Mechanical	Durability	50 cycles
Reference	Product Specification	PS-51248-005
	Packaging	Hard Tray/ Embossed Tape
	Designed In	Millimeters



Micro PGA Socket 478/479 Circuits For Mobile Pentium* 4 ZIF Type, BGA Mount

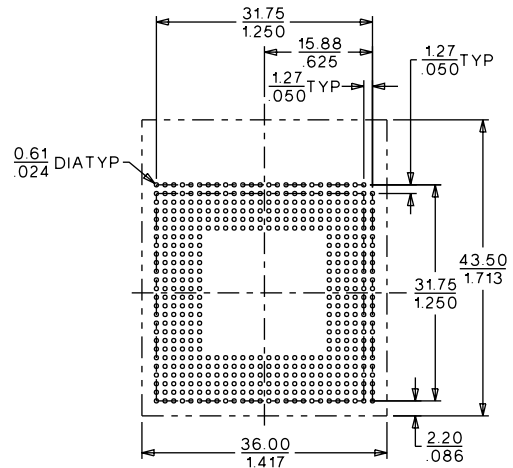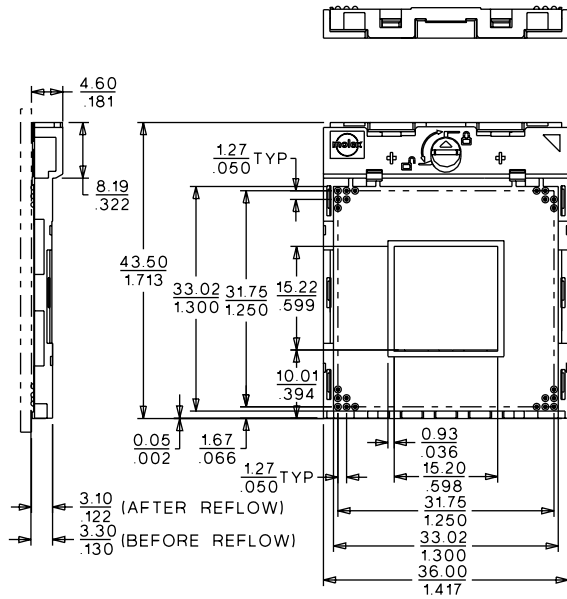

PCB LAYOUT: COMPONENT SIDE

ORDERING INFORMATION

Circuits	Order No.	
	Hard Tray	Embossed Tape
478	51248-4782	51248-4784
479	51248-4792	51248-4794



Bringing People & Technology Together, WorldwideSM

Americas Headquarters

Lisle, Illinois 60532 U.S.A.
Tel: 1-800-78MOLEX
amerinfo@molex.com

Far East North Headquarters

Yamato, Kanagawa, Japan
Tel: 81-462-65-2324
feninfo@molex.com

Far East South Headquarters

Jurong, Singapore
Tel: 65-6268-6868
fesinfo@molex.com

European Headquarters

Munich, Germany
Tel: 49-89-413092-0
eurinfo@molex.com

Corporate Headquarters

2222 Wellington Court
Lisle, Illinois 60532 U.S.A.
Tel: 630-969-4550
amerinfo@molex.com

Visit our Web site at <http://www.molex.com>