

# MTL5074 TEMPERATURE CONVERTER

THC or RTD input



The MTL5074 converts a low-level dc signal from a temperature sensor mounted in a hazardous area into a 4/20mA current for driving a safe-area load. Software selectable features include linearisation, ranging, monitoring, testing and tagging for eight thermocouple types and 2-, 3- or 4-wire RTDs. For thermocouples requiring cold-junction compensation, the HAZ-CJC plug can be ordered with the product, and includes an integral CJC sensor.

## SPECIFICATION

See also common specification

### Number of channels

One

### Signal source

Types J, K, T, E, R, S, B or N THCs to BS 4937

EMF input

2/3/4-wire platinum RTDs to BS 1904/DIN43760 (100 $\Omega$  at 0°C)

### Location of signal source

Zone 0, IIC, T4 hazardous area

Div.1, Group A, hazardous location

### Input signal range

-75 to +75mV, or 0 to 400 $\Omega$  (Input impedance 10M $\Omega$ )

### Input signal span

3 to 150mV, or 10 to 400 $\Omega$

### RTD excitation current

200 $\mu$ A nominal

### Cold junction compensation

Automatic or selectable

### Cold junction compensation error

$\leq 1.0^\circ\text{C}$

### Common mode rejection

120dB for 240V at 50Hz or 60Hz

### Series mode rejection

40dB for 50Hz or 60Hz

### Calibration accuracy (at 20°C)

(includes hysteresis, non-linearity and repeatability)

Inputs:

mV/THC:  $\pm 15\mu\text{V}$  or  $\pm 0.05\%$  of input value (whichever is greater)

RTD:  $\pm 80\text{m}\Omega$

Output:  $\pm 11\mu\text{A}$

### Temperature drift (typical)

Inputs:

mV/THC:  $\pm 0.003\%$  of input value/ $^\circ\text{C}$

RTD:  $\pm 7\text{m}\Omega/^\circ\text{C}$

Output:  $\pm 0.6\mu\text{A}/^\circ\text{C}$

### Example of calibration accuracy and temperature drift (RTD input)

Span: 250 $\Omega$

Accuracy:  $\pm (0.08/250 + 11/16000) \times 100\%$   
 $= 0.1\%$  of span

Temperature drift:  $\pm (0.007/250 \times 16000 + 0.6) \mu\text{A}/^\circ\text{C}$   
 $= \pm 1.0\mu\text{A}/^\circ\text{C}$

### Safety drive on sensor burnout

Upscale, downscale, or off

### Output range

4 to 20mA nominal (direct or reverse)

### Maximum load resistance

600 $\Omega$

### LED indicator

Green: one provided for power and status indication

### Power requirement, Vs with 20mA signal

68mA at 24V

82mA at 20V

52mA at 35V


### Power dissipation within unit with 20mA signal

1.5W at 24V

1.6W at 35V

Hazardous area

Safe area

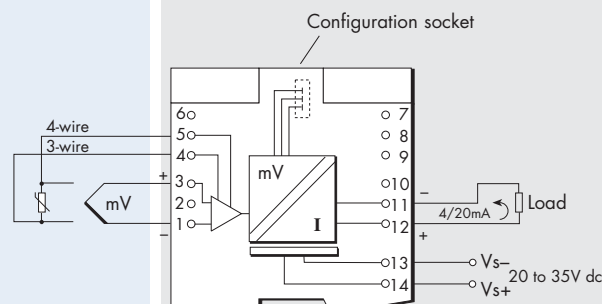

| Terminal | Function              |
|----------|-----------------------|
| 1        | THC/EMF/RTD input -ve |
| 3        | THC/EMF/RTD input +ve |
| 4        | 3-wire RTD input -ve  |
| 5        | 4-wire RTD input +ve  |
| 11       | Output -ve            |
| 12       | Output +ve            |
| 13       | Supply -ve            |
| 14       | Supply +ve            |

### Isolation

250V ac between safe- and hazardous-area circuits and power supply

### Safety description

#### Terminals 1 and 3

i) Without CJ plug

$V_{\text{out}} = 1.1\text{V}$

$I_{\text{out}} = 7\text{mA}$

$P_{\text{out}} = 2\text{mW}$

Non-energy-storing apparatus  $\leq 1.2\text{V}$ ,  $\leq 0.1\text{A}$ ,  $\leq 20\mu\text{J}$  and  $\leq 25\text{mW}$ . Can be connected without further certification into any IS loop with open-circuit voltage not more than 10V.

ii) With CJ plug

$V_{\text{out}} = 6.6\text{V}$ ,  $I_{\text{out}} = 10\text{mA}$

$P_{\text{out}} = 17\text{mW}$

#### Terminals 1 and 3, 4 and 5

$V_{\text{out}} = 6.6\text{V}$ ,  $I_{\text{out}} = 76\text{mA}$

$P_{\text{out}} = 0.13\text{W}$

#### Configuration socket (CON6)

$V_{\text{out}} = 8.3\text{V}$ ,  $I_{\text{out}} = 15\text{mA}$

$P_{\text{out}} = 26\text{mW}$

### Standard configuration

|                            |                     |
|----------------------------|---------------------|
| Input type                 | RTD, 3-wire         |
| Linearisation              | enabled             |
| CJ Compensation            | disabled            |
| Units                      | $^\circ\text{C}$    |
| Damping/Smoothing value    | 0 seconds/0 seconds |
| Output zero                | $0^\circ\text{C}$   |
| Output span                | $250^\circ\text{C}$ |
| Tag and description fields | blank               |
| Open circuit alarm         | set high (upscale)  |
| Transmitter failure alarm  | set low (downscale) |
| CJ failure alarm           | set low (downscale) |
| Line frequency             | 50Hz                |

### Configurator

A personal computer running MTL PCS45 software with a PCL45 interface.

## TO ORDER, specify:

### MTL5074

Includes HAZ-CJC signal plug (with internal CJC sensor). For use with thermocouple, mV or RTD inputs.

### MTL5074-RTD

Includes standard HAZ1-3 signal plug. For use with mV or RTD inputs. (Can be used with thermocouples with cold-junction compensation if HAZ-CJC plug is fitted.)

### HAZ-CJC

Hazardous-area signal plug for terminals 1 to 3 including cold-junction compensation sensor.



EUROPE (EMEA)

AMERICAS

ASIA PACIFIC

E-mail: enquiry@mtl-inst.com Web site: www.mtl-inst.com

Tel: +44 (0)1582 723633

Tel: +1 603 926 0090

Tel: +65 487 7887

Fax: +44 (0)1582 422283

Fax: +1 603 926 1899

Fax: +65 487 7997

June 2004