

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0510220500](#)
Status: **Active**
Description: 1.25mm (.049") Pitch Board-In Housing, 5 Circuits

Documents:

3D Model	Product Specification PS-51022-002 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-51022-001 (PDF)	

General

Product Family	Crimp Housings
Series	51022
Product Name	Board-In


Physical

Circuits (maximum)	5
Color - Resin	Natural
Gender	Male
Glow-Wire Compliant	No
Material - Resin	Polyester
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.049 In
Pitch - Mating Interface (mm)	1.25 mm
Stackable	No
Temperature Range - Operating	-40°C to +85°C

Material Info

Reference - Drawing Numbers

Product Specification	PS-51022-001, PS-51022-002, RPS-51022-001, RPS-51022-002
Sales Drawing	SD-51022-**00, SD-51022-001

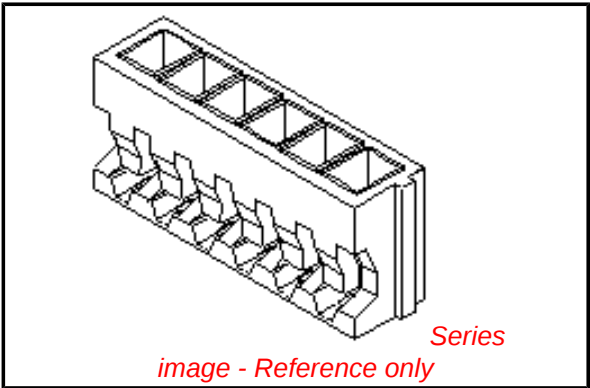

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Contains SVHC: No**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[51022Series](#)

Use With
[50061](#) , [50080](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

8

7





6

5

4

3

2

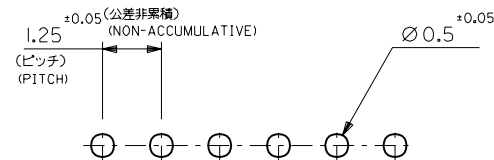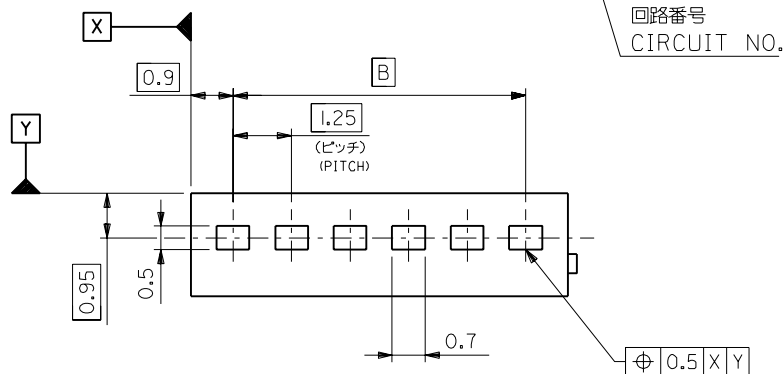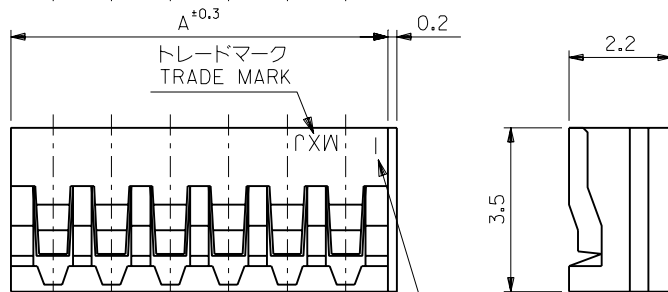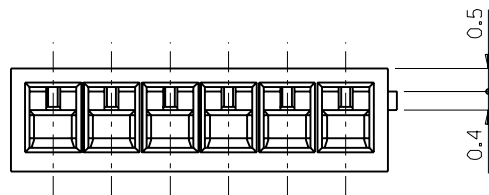


基板取付穴推奨寸法 (t=0.8)
RECOMMENDED P.C.BOARD HOLE DIM.(t=0.8)

適合ターミナル 
APPLICABLE TERMINAL 

注記
NOTE

△ 適合ターミナル : 50061-8*00
50080-8*00
△ APPLICABLE TERMINAL : 50061-8*00
50080-8*00

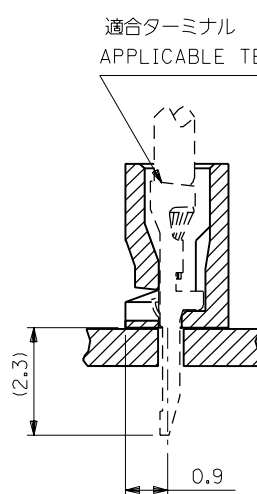

17.5	19.3	51022-1500	15
16.25	18.05	▲ -1400	14
15	16.8	-1300	13
13.75	15.55	-1200	12
12.5	14.3	-1100	11
11.25	13.05	-1000	10
10	11.8	-0900	9
8.75	10.55	-0800	8
7.5	9.3	-0700	7
6.25	8.05	-0600	6
5	6.8	-0500	5
3.75	5.55	-0400	4
2.5	4.3	▼ -0300	3
1.25	3.05	51022-0200	2
B	A	ENG. NO.	検査 CKT. NO.

						材料 MATERIAL ポリエステル、UL94V-0 POLYESTER,UL94V-0	
						仕上げ FINISH	—H—
角度 ANGLE	±3°					適用電線範囲 WIRE RANGE	—H—
30 以上 OVER	±0.3					被覆外径 INS. RANGE	—H—
10 以上 30 未満 OVER 30 UNDER	±0.25						
10 未満 UNDER	±0.2	C	再作図 REDRAWN	(JG70313)	H.J	DRAWN BY '96/05/29 H.IJIMA	CHK'D BY '96/05/29 M.FUKUSHIMA
一般公差 GENERAL TOLERANCES		記号 TO	変更内容 REVISION RECORD	(JG70313)	DR.	APP'D BY '96/05/29 M.FUKUSHIMA	尺度 SCALE 10:

 MOLEX-JAPAN CO.,LTD.
日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM

1.25 BOARD IN
CONN. HOUSING

DWG. NO.
SD-51022-**-00

RE	
C	

F

E

D

C

B

A

F


E

D

C

B

A



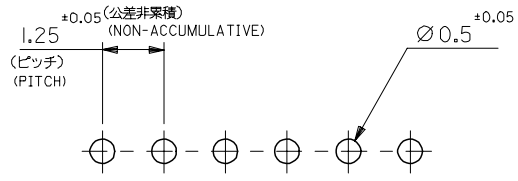


基板取付穴推奨寸法 (t=0.8)
RECOMMENDED P.C.BOARD HOLE DIM.(t=0.8)

適合ターミナル
APPLICABLE TERMINAL

注記
NOTE

- △ 適合ターミナル : 50061-8*00
50080-8*00
- △ APPLICABLE TERMINAL : 50061-8*00
50080-8*00

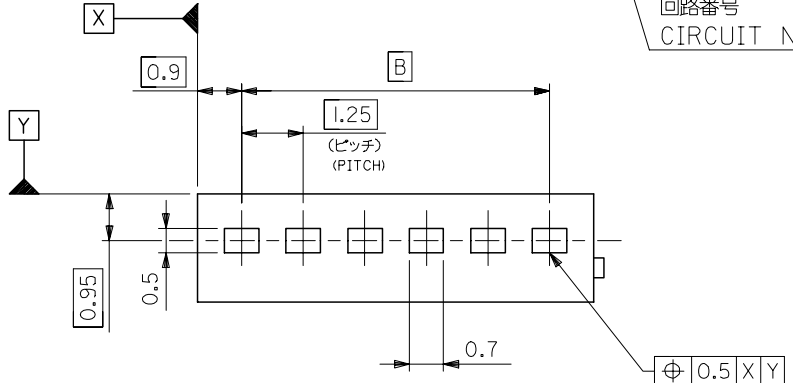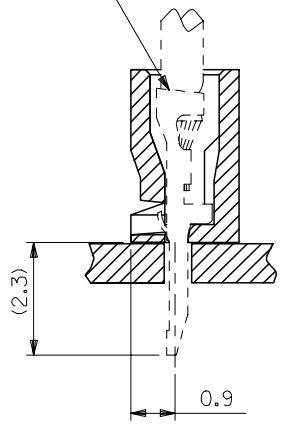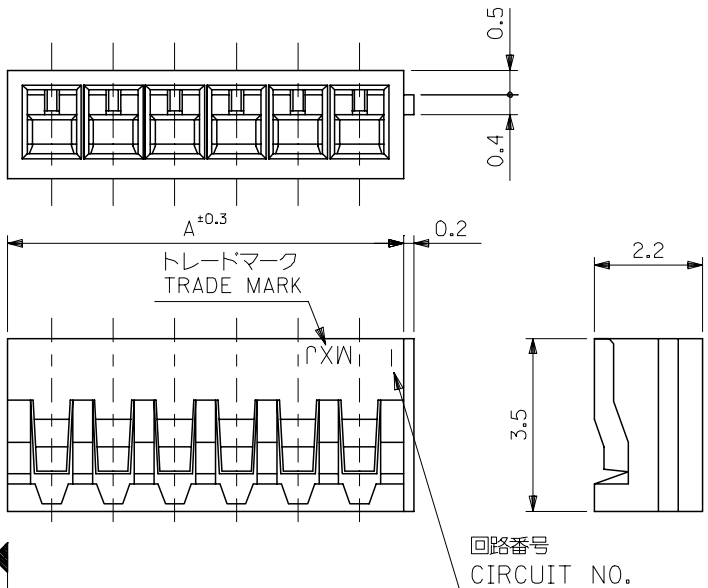

17.5	19.3	51022-1500	15
16.25	18.05	-1400	14
15	16.8	-1300	13
13.75	15.55	-1200	12
12.5	14.3	-1100	11
11.25	13.05	-1000	10
10	11.8	-0900	9
8.75	10.55	-0800	8
7.5	9.3	-0700	7
6.25	8.05	-0600	6
5	6.8	-0500	5
3.75	5.55	-0400	4
2.5	4.3	-0300	3
1.25	3.05	51022-0200	2
B	A	ENG. NO.	極数 CKT.NO.

材料 MATERIAL	ポリエステル, UL94V-0 POLYESTER, UL94V-0
仕上げ FINISH	—
適用電線範囲 WIRE RANGE	—
被覆外径 INS. RANGE	—

REVISED	2006/04/05
EC NO: J2006-2413	2006/04/06
DRWN: AOYAGI	2006/04/06
CHKD: TANAKA	2006/04/12
APPR: NUKITA	
DESCRIPTION	
REV	D

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR	±3 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
H. IJIMA	1996/05/29
CHECKED BY	DATE
M. FUKUSHIMA	1996/05/29
APPROVED BY	DATE
M. ENOMOTO	1996/05/29
MATERIAL NO.	
SEE CHART	
SIZE	A3

SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
TITLE 1.25 BOARD IN CONN HSG		
MOLEX INCORPORATED		
DOCUMENT NO. SD-51022-001		SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		