

Micro-D Backshells EMI, Banding, Elliptical, One Piece 507-175








17-7PH Stainless Steel Clips attach the backshell to the connector. These backshells accept standard and micro **BAND-IT®** shield termination straps.

Straight, 45° and Right Angle elliptical backshell provides plenty of working room for complicated wiring situations.

Rugged One-Piece Aluminum Shell with stainless steel hardware, available in standard nickel plating, or choose optional finishes.

HOW TO ORDER 507-175 EMI BACKSHELLS


Series	Shell Finish	Connector Size	Cable Entry Code						Hardware Option
Top Entry 507T175  Side Entry 507S175  45° Entry 507E175 	E – Chem Film (Alodyne)	09	D Size In. mm. ± .010 ± 0.25	E In. mm. ± .010 ± 0.25	Available on Shell Size 09 Thru 100 15 Thru 100 21 Thru 100 25 Thru 100 31 Thru 100 37 Thru 100 37 and 100 100	Omit (Leave Blank) Fillister Head Jackscrew 			
	J – Cadmium, Yellow Chromate	15				01 .344 8.74 .290 7.37	H – Hex Head Jackscrew 		
	M – Electroless Nickel	21				02 .494 12.55 .290 7.37			
		25				03 .644 16.36 .290 7.37			
		31				04 .744 18.90 .304 7.72			
	NF – Cadmium, Olive Drab	37				05 .894 21.34 .304 7.72		E – Extended Jackscrew 	
		51				06 .994 25.25 .304 7.72			
	Z2 – Gold	51-2				07 1.044 26.52 .304 7.72	F – Jackpost, Female 		
		67				08 1.024 26.01 .384 9.75			
		69							
100									
									
Sample Part Number									
507E175	M	25	04						

Micro-D Backshells

EMI, Banding, Elliptical, One Piece 507-175


MATERIALS (SEE ORDERING INFO FOR FINISH OPTIONS)

Shell	Aluminum Alloy 6061 -T6 Per QQ-A-200, QQ-A-225 (Machined Components) Aluminum Alloy 6061-T6 Per QQ-A-591 (A380) (Die-Cast Components)
Clips	17-7PH Stainless Steel
Jackscrews, Washers, Jackposts	300 Series Stainless Steel, Passivated

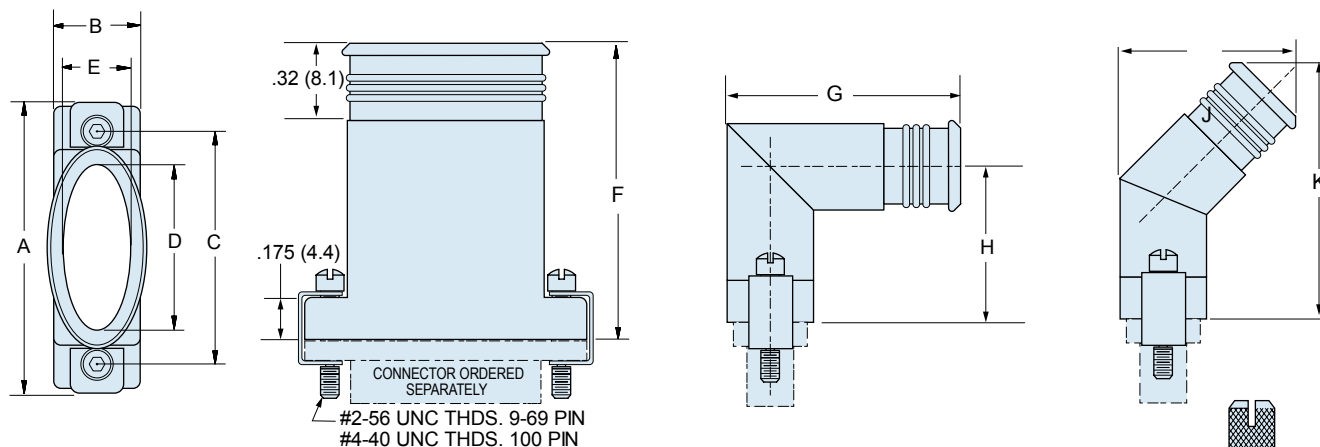


CABLE ENTRY SIZES


Cable Entry Code	D		E		Available on Shell Size
	In.	mm.	In.	mm.	
01	.344	8.74	.290	7.37	09 Thru 100
02	.494	12.55	.290	7.37	15 Thru 100
03	.644	16.36	.290	7.37	21 Thru 100
04	.744	18.90	.304	7.72	25 Thru 100
05	.894	21.34	.304	7.72	31 Thru 100
06	.994	25.25	.304	7.72	37 Thru 100
07	1.044	26.52	.304	7.72	37 and 100
08	1.024	26.01	.384	9.75	100




STANDARD
FILLISTER HEAD
JACKSCREW



CODE H
HEX HEAD
JACKSCREW



CODE F
FEMALE
JACKPOST



CODE E
EXTENDED
JACKSCREW

DIMENSIONS

Size	A Max.		B Max.		C		F Max.		G Max.		H Max.		J Max.		K Max.	
	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.	In.	mm.
09	.850	21.59	.370	9.40	.565	14.35	.782	19.86	.970	24.64	.668	16.97	.673	17.09	.851	21.62
15	1.000	25.40	.370	9.40	.715	18.16	.832	21.13	.970	24.64	.668	16.97	.673	17.09	.876	22.25
21	1.150	29.21	.370	9.40	.865	21.97	.882	22.40	.970	24.64	.668	16.97	.673	17.09	.901	22.89
25	1.250	31.75	.370	9.40	.965	24.51	.932	23.67	.990	25.15	.678	17.22	.700	17.78	.943	23.95
31	1.400	35.56	.370	9.40	1.115	28.32	.972	24.69	.990	25.15	.678	17.22	.700	17.78	.963	24.46
37	1.550	39.37	.370	9.40	1.265	32.13	.972	24.69	.990	25.15	.678	17.22	.700	17.78	.983	24.97
51	1.500	38.10	.410	10.41	1.215	30.86	1.092	27.74	1.030	26.16	.698	17.73	.758	19.25	1.050	26.67
51-2	1.910	48.51	.370	9.40	1.615	41.02	1.092	27.74	1.030	26.16	.698	17.73	.758	19.25	1.050	26.67
67	2.310	58.67	.370	9.40	2.015	51.18	1.092	27.74	1.030	26.16	.698	17.73	.758	19.25	1.050	26.67
69	1.810	45.97	.410	10.41	1.515	38.48	1.092	27.74	1.030	26.16	.698	17.73	.758	19.25	1.050	26.67
100	2.235	56.77	.460	11.68	1.800	45.72	1.157	29.39	1.090	27.69	.723	18.36	.824	20.93	1.130	28.70