

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0505557312
Status: Active
Description: Ring Tongue Terminal for 8 AWG, Closed Uninsulated Brazed Barrel, Stud Size M10, Oxygen-Free Copper, Length 29.50mm (1.161")

Documents:
[Drawing \(PDF\)](#)
[Product Specification PS-50555-001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR95446
UL E134962

General

Product Family Ring and Spade Terminals
Series 50555
Crimp Quality Equipment Yes
Mil-Spec N/A
Product Name R (Ring)
Type Ring

Physical

Barrel Type Closed - Brazed
Insulation None
Material - Plating Mating Tin
Packaging Type Bag
Plating min: Mating (µin) 40
Plating min: Mating (µm) 1
Plating min: Termination (µin) 40
Plating min: Termination (µm) 1
Stud Size M10
Termination Interface: Style Crimp or Compression
Wire Size AWG 8
Wire Size mm² 6.64 - 10.52

Material Info

Reference - Drawing Numbers

Product Specification PS-50555-001
Sales Drawing SD-50555-001



image - Reference only

Series

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)




Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
50555Series

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Japan

Description	Product #
Hand Crimper For JIS Terminal	0572575000

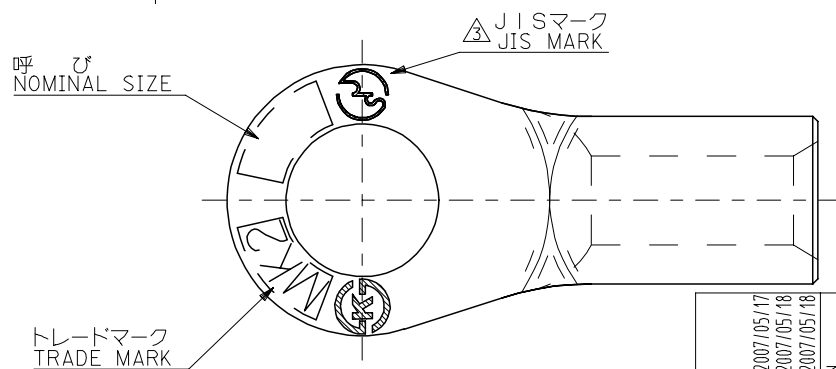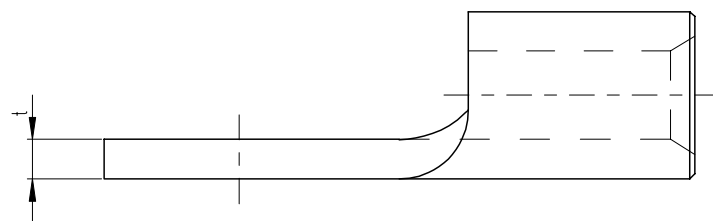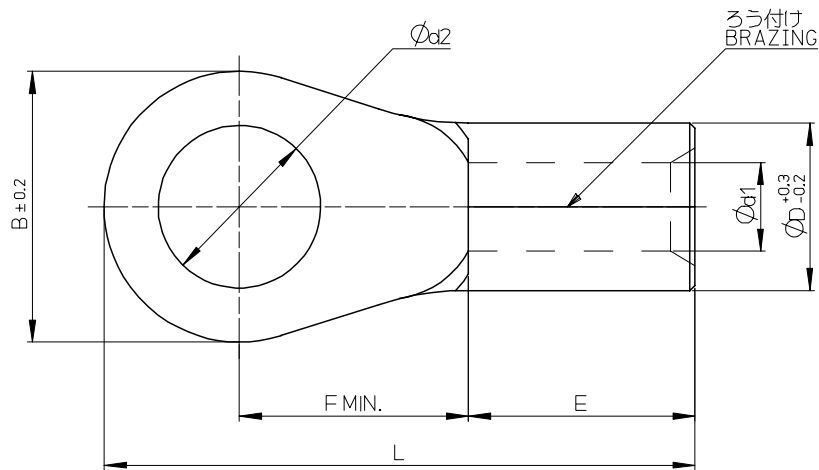

注記 NOTES

- 材質 MATERIAL
端子：無酸素銅、錫めっき
TERMINAL: OXYGEN-FREE COPPER, TIN PLATING
ろう付け部：りん銅ろう
PART OF BRAZING : COPPER PHOSPHORUS BRAZING FILLER METALS
- 適用電線 APPLICABLE WIRE RANGE

単線 SOLID WIRE	撚線 STRANDED WIRE
2.89~3.65 mm	6.64~10.52 mm ²

△ JIS認定品にのみ刻印。
DIE STAMPED MARK IS ALLOWED ONLY
FOR JIS FILED PRODUCTS.

		13.2 ^{+0.2} _{-0.15}	34 ^{+0.5}	15.2				20		12	50555-7912
		5.3 ^{+0.2}		9.7				10		S5	50555-7812
		4.4 ^{+0.2}	23.5 ^{+0.5}	10.2				9		S4	50555-7712
		5.4 ^{+0.2}						15		L5	50555-7612
		6.5 ^{+0.2}	29.5 ^{+0.5}	9.1				12		L6	50555-7512
		4.4 ^{+0.2}	23.5 ^{+0.5}	6.1				15		4	50555-7412
JIS	1.15 ^{MIN}	10.5 ^{+0.4} ₀	30 ^{MAX}	13.5				12		10	50555-7312
		8.4 ^{+0.4} ₀		9				15		8	50555-7212
		6.4 ^{+0.4} ₀	24 ^{MAX}	7				12		6	50555-7112
		5.3 ^{+0.2} ₀		6						5	50555-7012
△	t	Ød2	L	F	E	Ød1	ØD	B	呼び NOMINAL SIZE	呼び NOMINAL SIZE	ENG. NO.

RELEASED EC NO: J2007-0312 DRAWN: H.YAJIMA CHECKED: K.KASAHARA APPR: N.UKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY H.YAJIMA	DATE '06/08/21	RING TERMINAL				
		10 OVER 30 UNDER	± ---	CHECKED BY K.KASAHARA	DATE '06/08/21					
		30 OVER	± ---	APPROVED BY N.UKITA	DATE '06/08/21					
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-50555-001		1 OF 1		
0	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								