



Data Sheet

 telephone
949 252 0522

BACK

Product Category: IF SAW Filter

Part Number	Package	Application	Last Modified
813-SL100.0M-28	13.3 x 6.5 SMD	Low-Loss 100MHz	Jan 01, 2007

TYPE :

Low-Loss 100MHz IF SAW Filter


PART NUMBER :

813-SL100.0M-28**OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**

PARAMETERS	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	100.0	-	MHz
Insertion Loss at Fo	-	17.5	19.5	dB
Source Impedance (single ended)*	-	50	-	ohm
Load Impedance (single ended)*	-	50	-	ohm
Temperature Coefficient	-	-94	-	ppm/C
Amplitude Ripple fo+/-13.0MHz	-	0.5	1.0	dBp-p
-1.0 dB Bandwidth	27.0	28.1	-	MHz
-3.0 dB Bandwidth	28.0	29.0	-	MHz
-40.0 dB Bandwidth	-	33.3	35	MHz
Relative Attenuation:	-			
Lower Sidelobe	40	47	-	dB
Upper Sidelobe	40	47	-	dB
Absolute Delay at Fo	-	0.88	0.92	us
Group Delay Variation fo +/-13.0 MHz	-	50	80	ns
IN/OUT Return Loss at Fo	-	-	-	dB


*With Matching Network (Ref. Testing Environment Circuit as Shown Below).

Those impedances could be modified with different impedance values and/or structures, if necessary

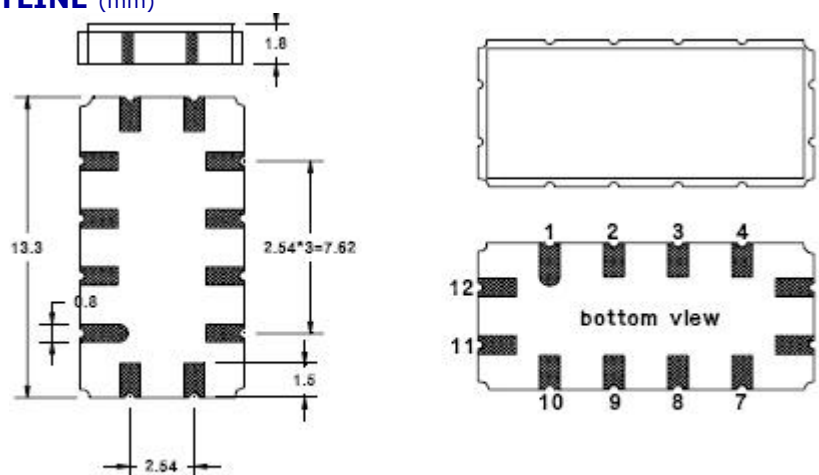PACKAGE OUTLINE (mm)

PIN Descriptions: IN – 11, OUT – 5, GROUND - 1,2,3,4,6,7,8,9,10,12

TEST CIRCUIT

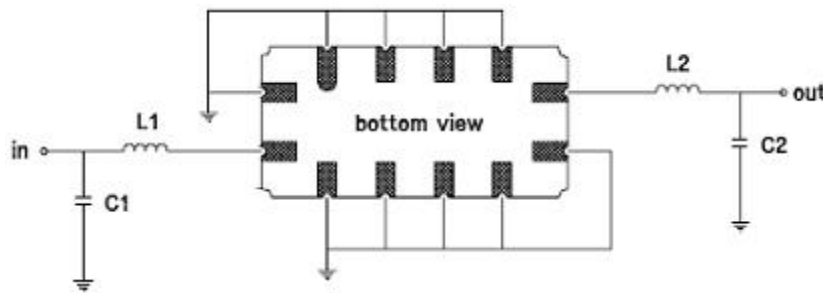


TEST FIXTURE AND VALUES/SOURCE AND LOAD IMPEDANCE 50 ohm

INPUT: L1: 68 nH; Q>40

OUTPUT: L2: 68 nH; Q>40 C2=15pF

FREQUENCY RESPONSE

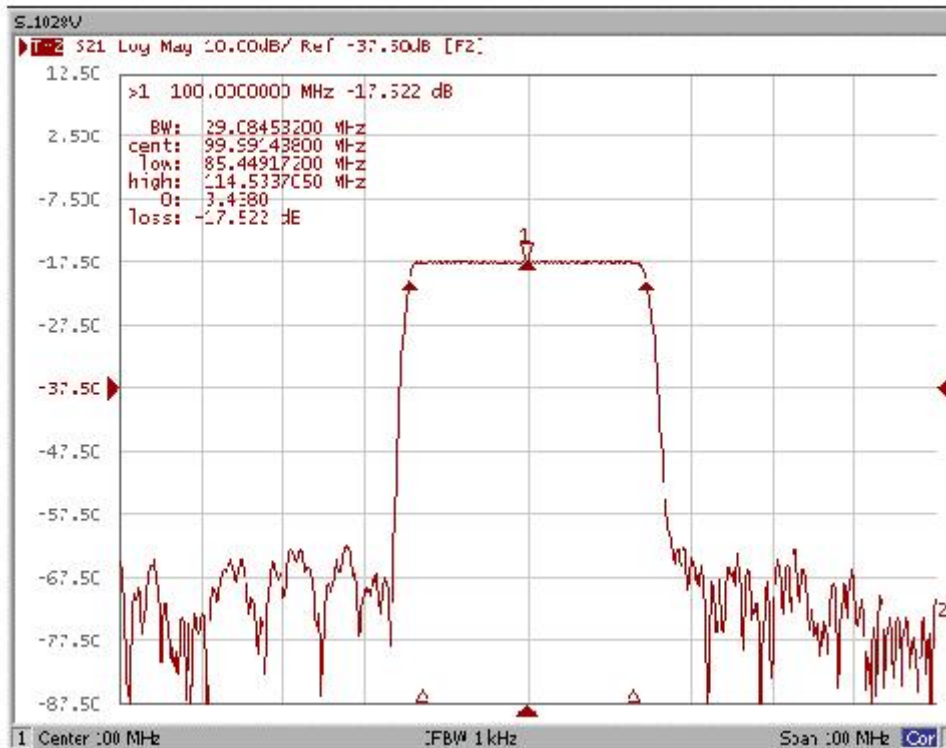

Oscilent Corporation - CALL **949.252.0522**

Part No.: 813-SL100.0M-28

18195 East McDermott Street, Building D, Irvine, CA 92614, USA

Fax: 949.252.0599, E-Mail: Sales@Oscilent.com