

**Data Sheet**
telephone
949 252 0522

 BACK

Product Category: RF SAW Filter

Part Number	Package	Application	Last Modified
802-RF422.25M-B	3.0 x 3.0 SMD	CDMA450(L-Band)	Jan. 01, 2007

TYPE :

CDMA450(L-Band), RF-Rx SAW Filter






PART NUMBER :

802-RF422.25M-B**OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS**


PARAMETERS	Condition	Minimum	Typical	Maximum	Units
Center Frequency (Fo)	-	-	422.25	-	MHz
Maximum Insertion Loss	420.0~424.5MHz	-	3.2	4.8	dB
Stop Band Attenuation:	0.3~ 410.0 MHz	37	47	-	dB
	410.06~ 414.5 MHz	35	49	-	
	445.0~ 600.0MHz	40	48	-	
	600~ 1200.0 MHz	40	47	-	
	1200~ 2000.0 MHz	30	40	-	
Source Impedance (single ended)*	-	-	50	-	ohm
Load Impedance (single ended)*	-	-	50	-	ohm
VSWR	420.0~424.5MHz	-	2.0	2.4	-
Maximum Input Power	-	-	-	27	dBm
Operating Temperature	-	-30	-	+80	°C

* No Matching Network

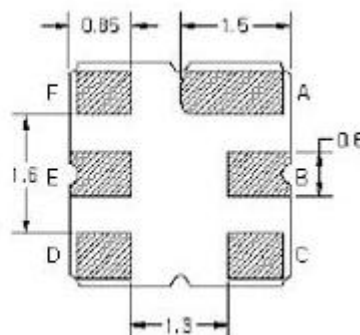PACKAGE OUTLINE (mm)



PIN LAYOUT	
A	Ground
B	Out
C	Ground
D	Ground
E	In
F	Ground

TEST FIXTURE


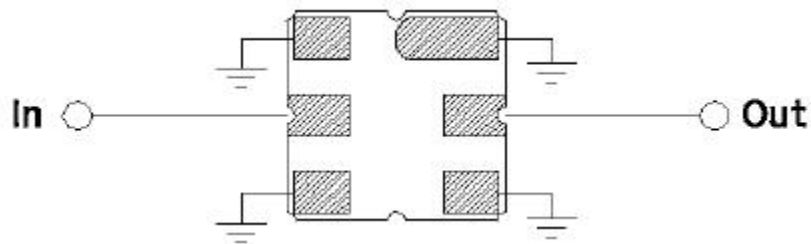


Source/Load Impedance = 50 ohms



FREQUENCY RESPONSE

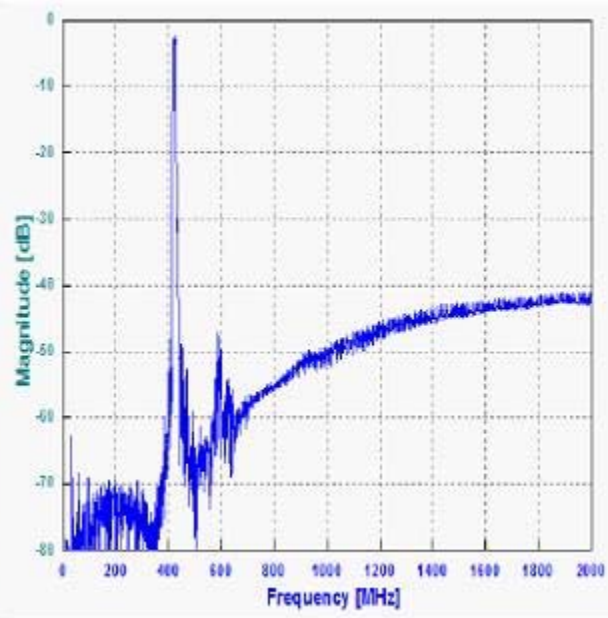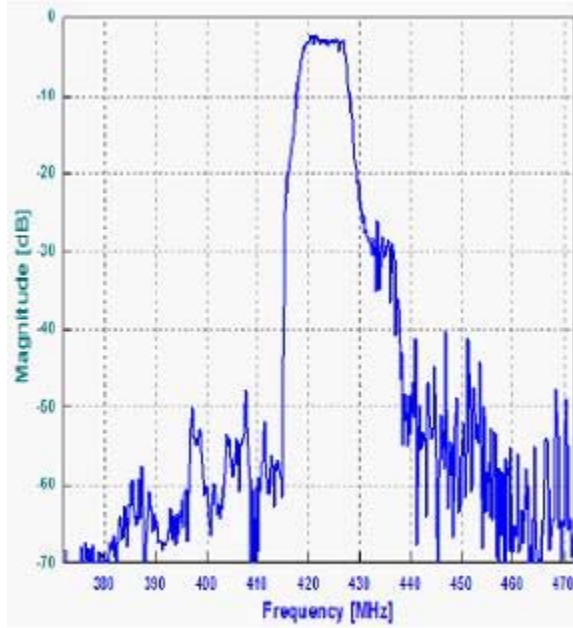

VSWR

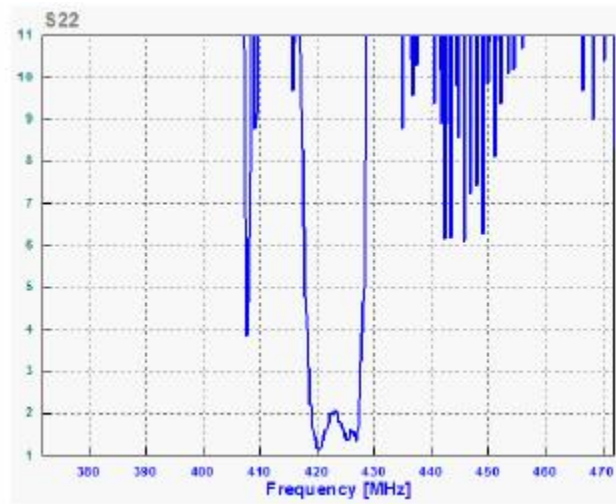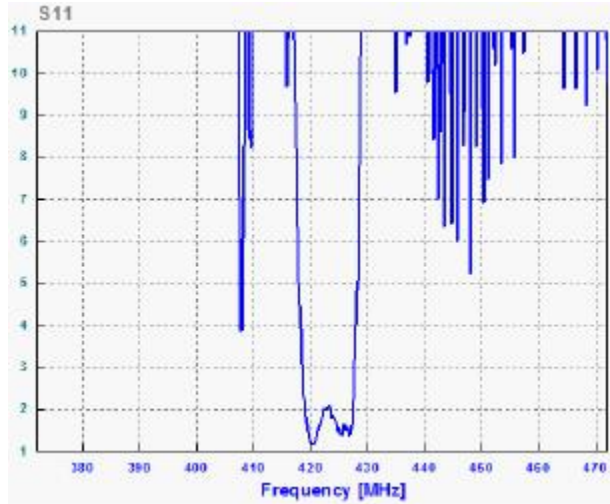

SMITH CHART

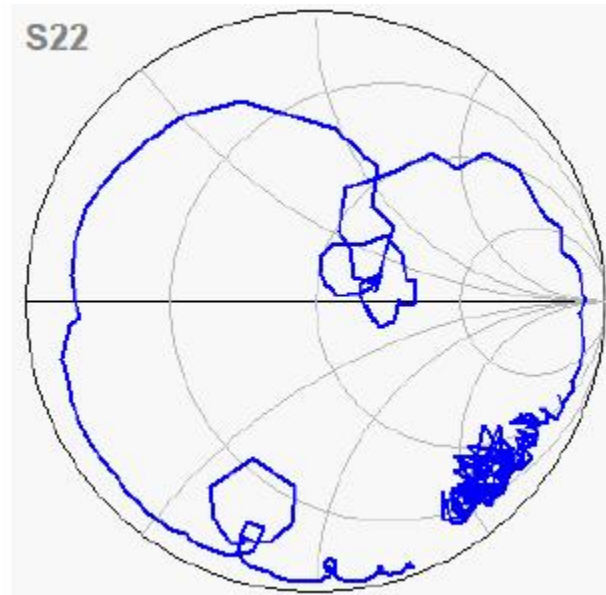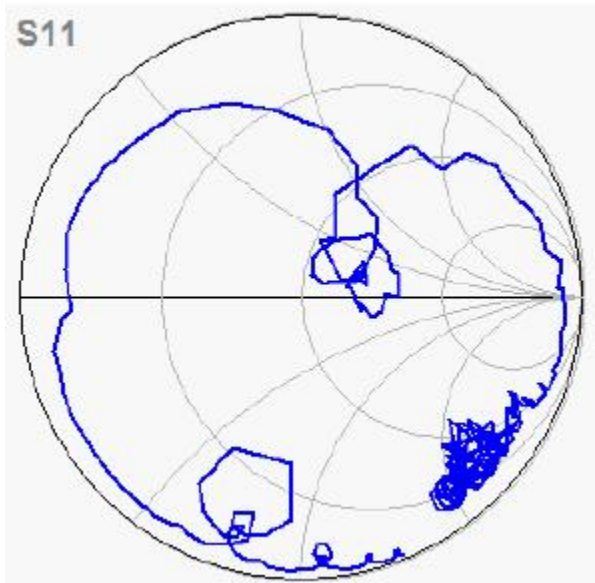

Oscilent Corporation - CALL **949.252.0522**

18195 East McDermott Street , Building D , Irvine , CA 92614 , USA

Fax: 949.252.0599 , E-Mail: Sales@Oscilent.com

Part No.: 802-RF422.25M-B