

KR Electronics

General Description


KR 2696 is a 6.25 MHz surface mount bandpass filter. Other center frequencies and bandwidths available. Please consult the factory.

Features


- 6.25 MHz Center Frequency
- High Stopband Rejection
- Surface Mount Package
- 50 Ω Source and Load

Typical Performance

Passband Amplitude & Group Delay (1 dB/div and 50 nsec/div)

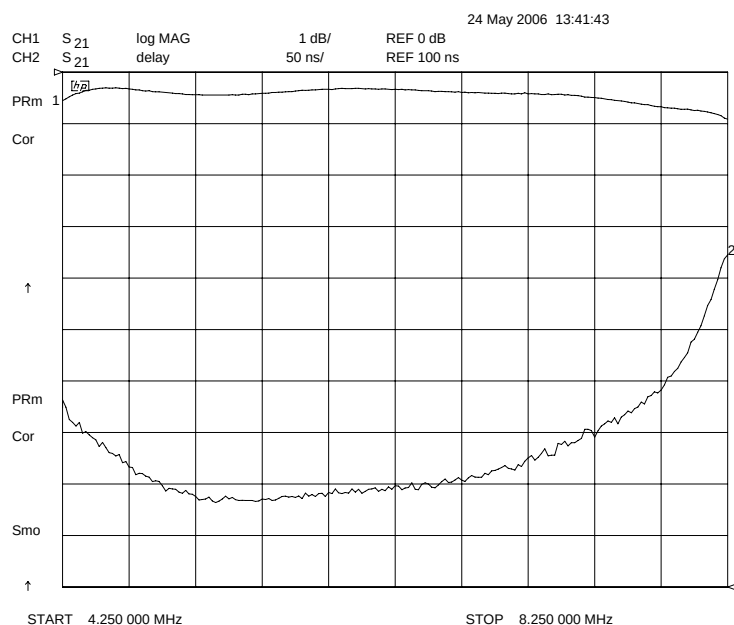

Overall Response (10 dB/div)

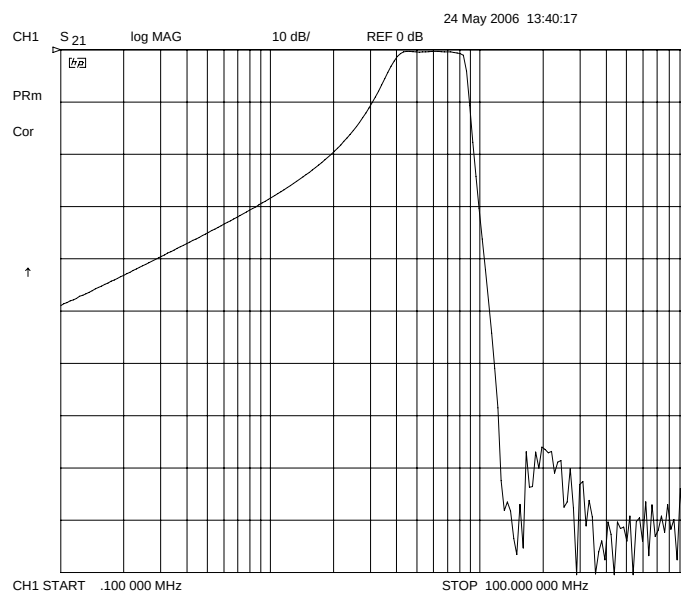

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 2696 Bandpass

Specifications

Parameter	Specification	Typical
Filter type	Bandpass	
Center Frequency	6.25 MHz	
Insertion Loss	< 2 dB	< 1 dB
3 dB Bandwidth	4 MHz min	
Attenuation at 12.5 MHz	> 65 dB	
Source and Load	50 Ω	

Physical Dimensions

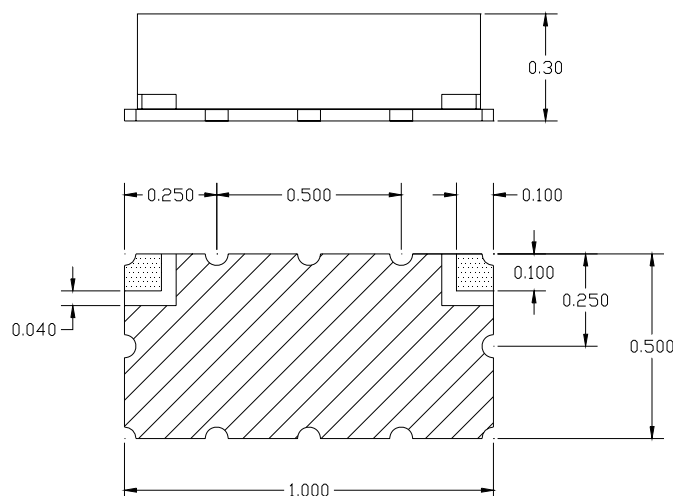

Notes:

1. Surface mount package — Metal cover (can also be supplied in an package with SMA Connectors)
2. Dimensions in inches
3. If boards are cleaned after installation, dry units completely.