


Lowpass Filter

KR Model 2306


Passband Amplitude

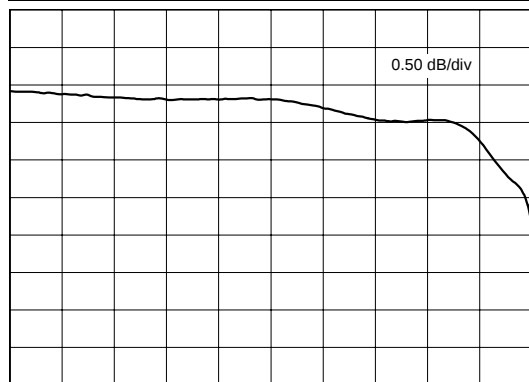

100 KHz

6 MHz

Overall Amplitude

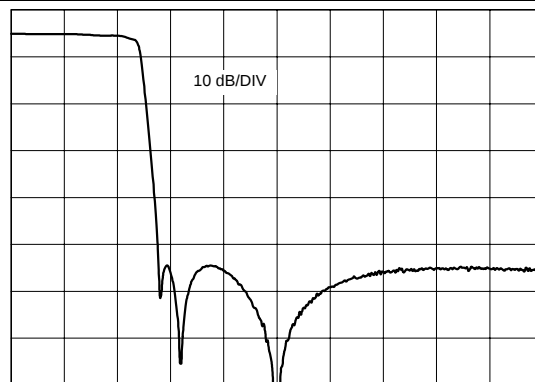



100 KHz

25 MHz

Specifications

KR Part Number	2306
Filter Type	Lowpass
Insertion Loss	< 1 dB
Attenuation at 6 MHz	< 3 db
Start of Stopband	7 MHz
Stopband Attenuation	> 40 dB
Source and Load Impedance	75 Ω

Outline Drawing

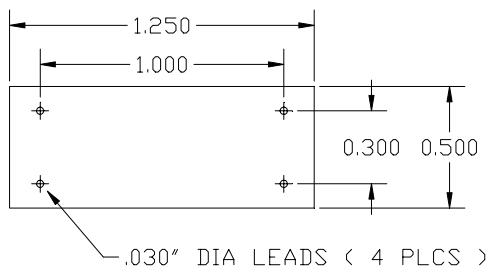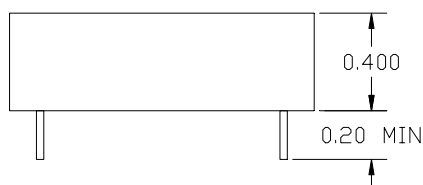

Epoxy Case
Pins are 0.030 Diameter

All Dimensions Shown in inches

KR Electronics
www.krfilters.com
 91 Avenel Street
 Avenel, NJ 07001
 732-636-1900