

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


5031590700

Status:

Active

Description:

1.50mm (.059") Pitch CLIK-Mate™ Wire-to-Board PCB Receptacle, Single Row, Through Hole, Vertical, with Peg, 7 Circuits

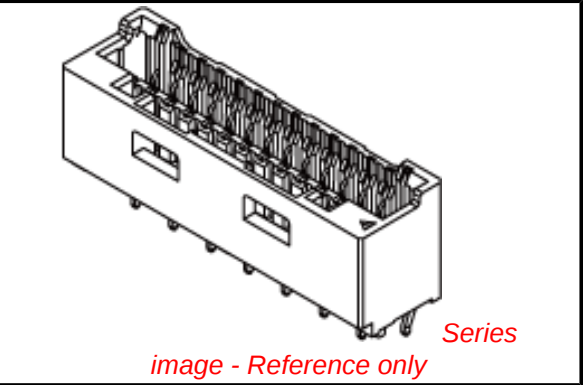

Documents:	
3D Model	Product Specification PS-503159-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Receptacles
Series	503159
Application	Wire-to-Board
Product Name	CLIK-Mate™
Physical	
Circuits (Loaded)	7
Color - Resin	Beige
Durability (mating cycles max)	30
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Vertical
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.059 In
Pitch - Mating Interface (mm)	1.50 mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Temperature Range - Operating	-25°C to +85°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	2A
Voltage - Maximum	100V
Material Info	
Reference - Drawing Numbers	
Product Specification	PS-503159-001, RPS-503159-001, RPS-503159-003
Sales Drawing	SD-503159-001

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.


Search Parts in this Series

503159Series

Mates With

502578 Crimp Housing . 502579 Crimp Terminal

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

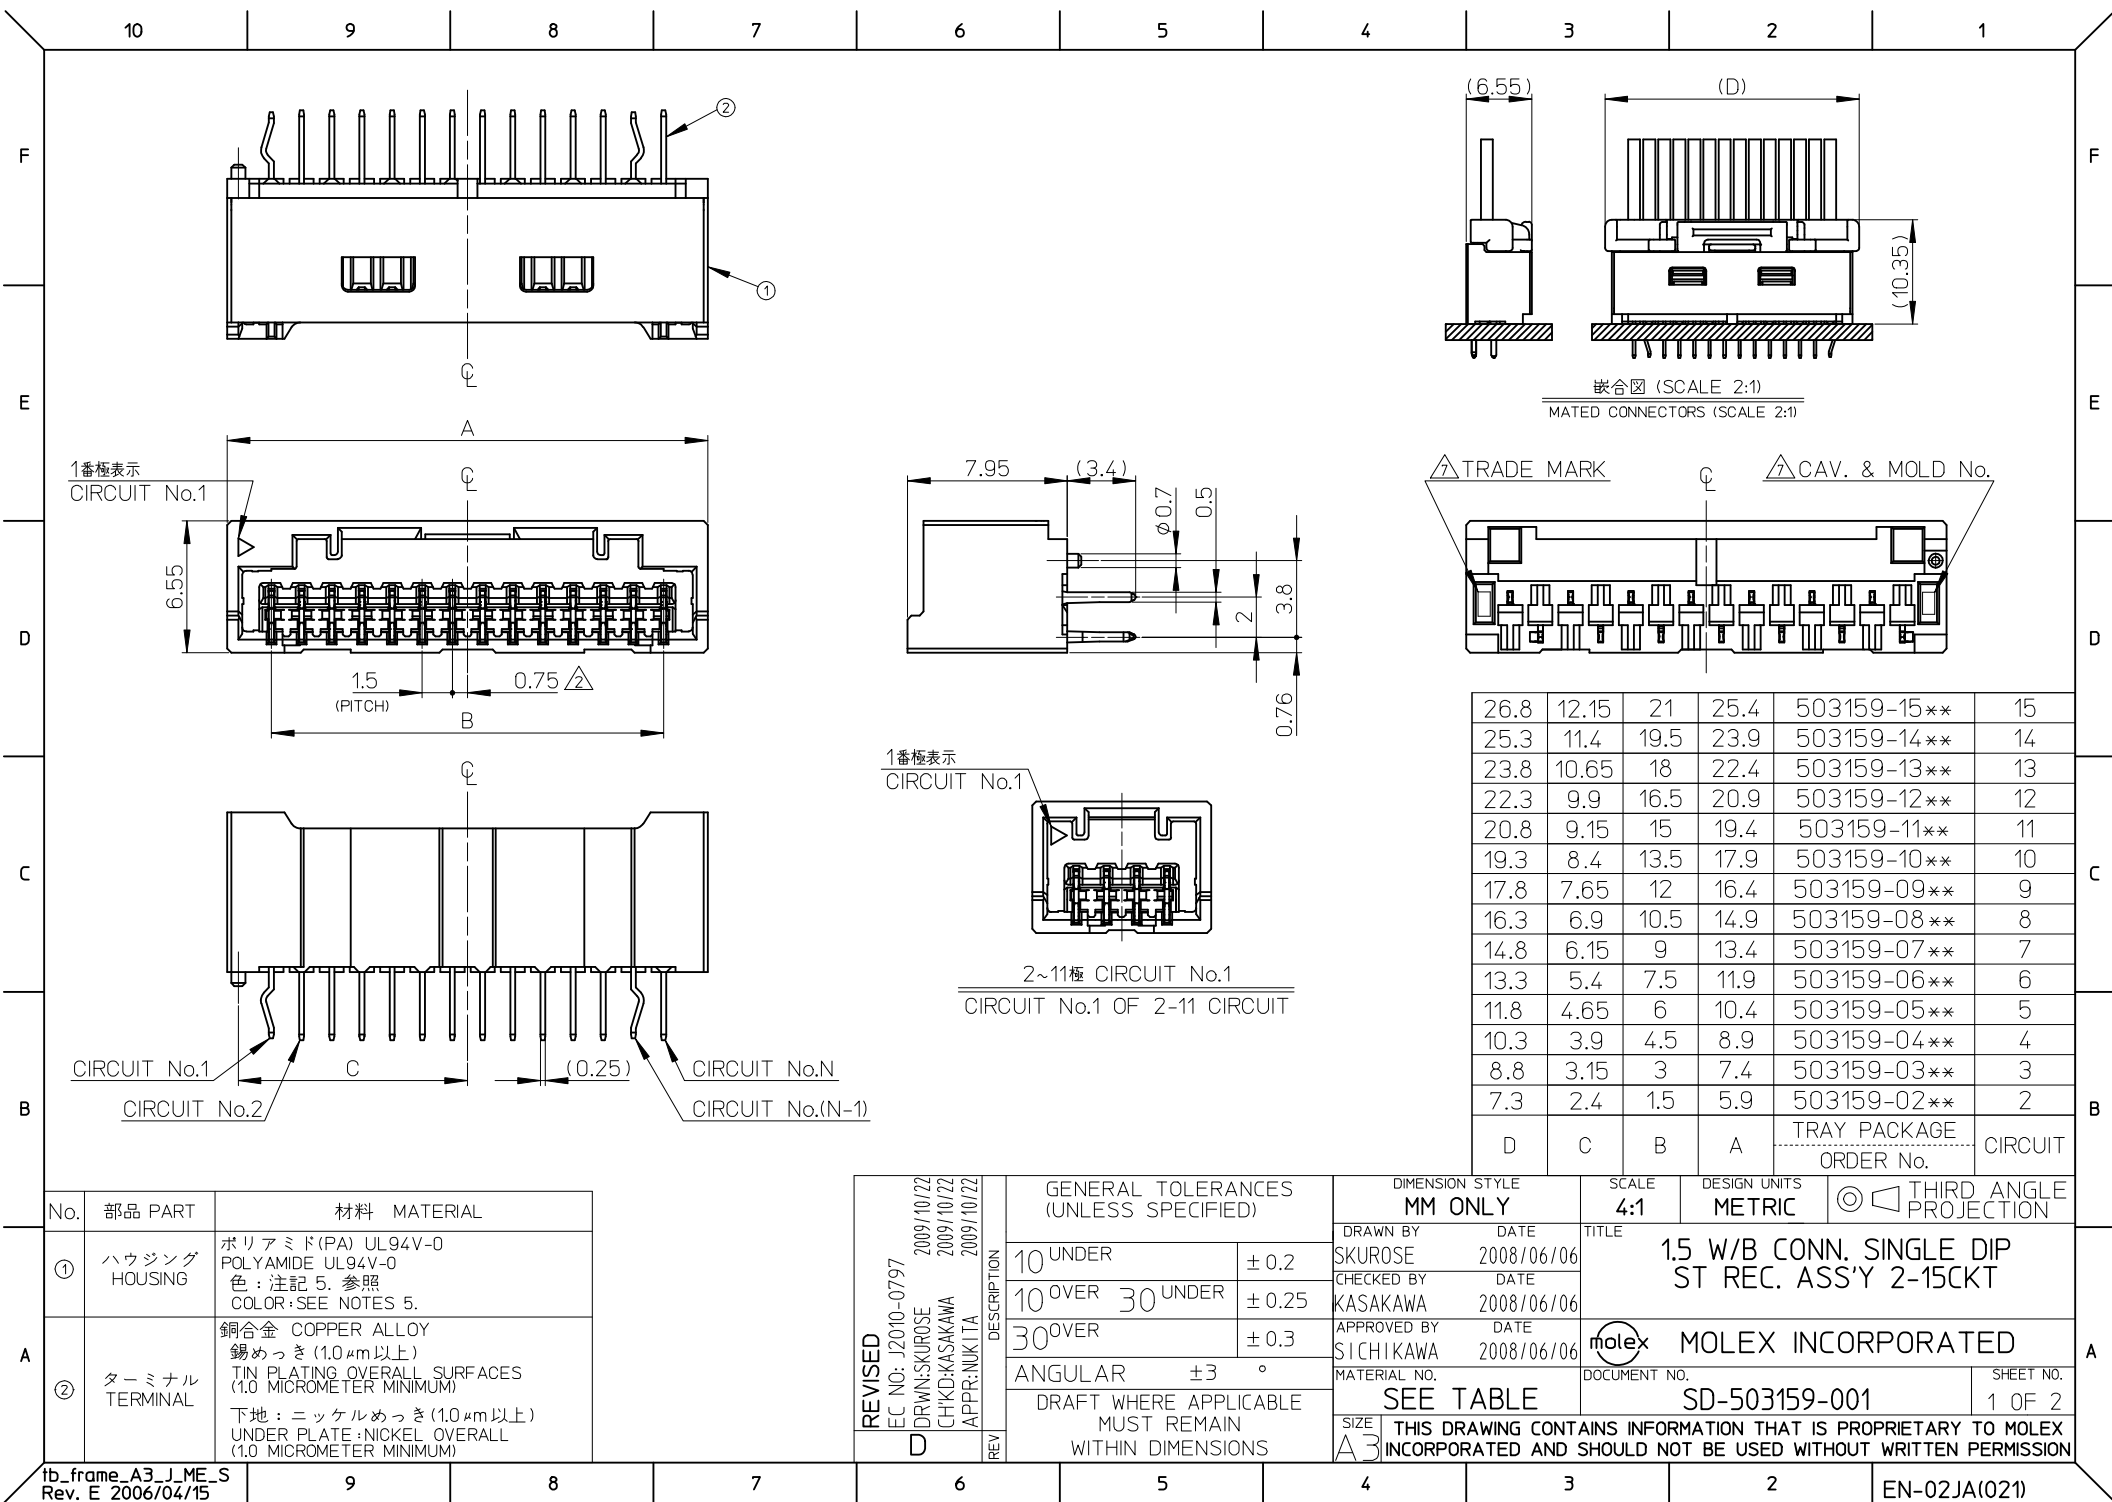

10

9

8

7

6


5

4

3


2

1

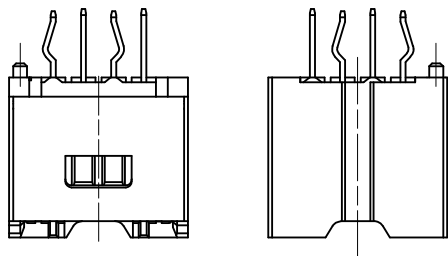


2~5 極形状 (ロック面及び反ロック面)

FIGURE OF 2-5 CIRCUIT (LOOK SIDE AND UN-LOCK SIDE)




6~10 極形状 (反ロック面)

FIGURE OF 6-10 CIRCUIT (UN-LOCK SIDE)

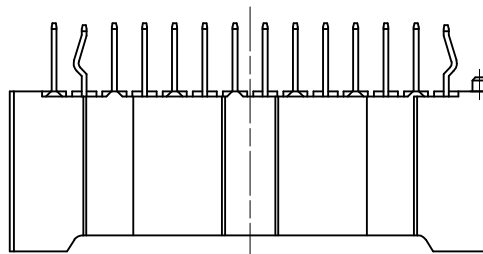

11~15 極形状 (反ロック面)

FIGURE OF 11-15 CIRCUIT (UN-LOCK SIDE)

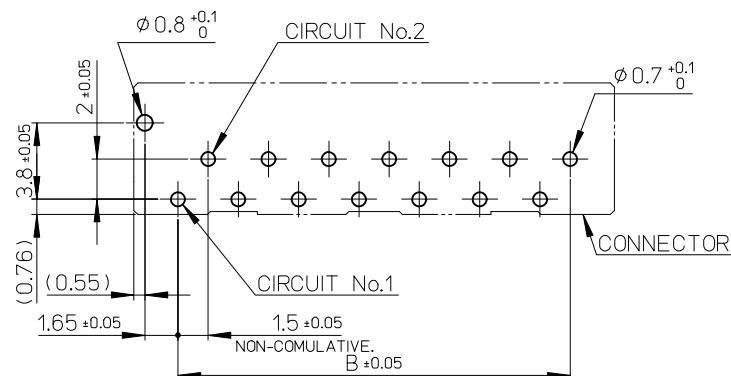

基板取付穴推奨寸法 (マウント面)

RECOMMENDED P.C.BOARD
HOLE DIMENSION
(MOUNTING SIDE)
(t=1.6)

NOTES

1. 嵌合相手: 502578 シリーズ
MATE WITH: 502578 SERIES.

2. 極数/2=偶数に適用
APPLY FOR CIRCUIT SIZE/2=EVEN.

3. 端子テール部に錫めっきを使用している為、外観に摺動痕が付く場合があります。
THE WOUND OF FRICTION MIGHT ADHERE TO EXTERNALS
BECAUSE THE TIN PLATING IS USED FOR THE TAIL.

4. 製品番号
MATERIAL No.

503159-***

極数
CIRCUIT SIZE

ボス、色
BOSS, COLOR

ボス有り

CIRCUIT	No.	COLOR
02~15	0	ベージュ BEIGE
	1	黒 BLACK
	2	赤 RED
	3	黄 YELLOW
	4	青 BLUE
	5	桃 PINK
	6	緑 GREEN
	7	茶 BROWN
	8	橙 ORANGE
02	9	紫 VIOLET
	4	水 PALE BLUE

5. 本製品のプラスチック部に黒点・白点等が確認される場合や
色合いが異なる場合がありますが、製品性能に影響はありません。

THERE IS NO INFLUENCE IN THE PRODUCT
PERFORMANCE THOUGH THE BLACK AND WHITE SPOT ETC.
MIGHT BE CONFIRMED TO THE PLASTIC PART OF
THIS PRODUCT AND THE SHADE MIGHT BE DIFFERENT.

6. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT

7. トレードマーク: Mプラス1~2文字のアルファベットにて構成 (例 MXJ)

但し "J" は JAPAN を示す。

キャビティ番号: 1桁~2桁の数字で構成。

金型番号: アルファベット1文字にて構成。

TRADE MARK: FORMED BY M AND 1~2 MORE LETTER OF ALPHABET (e.g. MXJ).

BUT "J" MEANS JAPAN.

CAVITY NO.: FORMED BY 1 DIGIT TO 2 DIGIT NUMBERS.

MOLD NO.: FORMED BY 1 LETTER OF ALPHABET.

REVISED EC NO: J2010-0797 DRWN:SKUROSE CHKD:KASAKAWA APPR:NUKITA	DESCRIPTION 2009/10/22 2009/10/22 2009/10/22	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
		10 UNDER	±0.2	DRAWN BY SKUROSE	DATE 2008/06/06	TITLE 1.5 W/B CONN. SINGLE DIP ST REC. ASS'Y 2-15CKT		
		10 OVER 30 UNDER	±0.25	CHECKED BY KASAKAWA	DATE 2008/06/06			
		30 OVER	±0.3	APPROVED BY SICHIKAWA	DATE 2008/06/06			
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-503159-001		2 OF 2	
D	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9

8

7

6

5

4

3

2