

# ST1116B

---

**Version** : A.003  
**Issue Date** : 2002/10/21  
**File Name** : SP-ST1116B-A.003.doc  
**Total Pages** : 7

## *Variable Speed Double Coil DC Brushless Motor Driver*

This product is protected by the following patents :

China PAT.NO : ZL99207658.7

Other Patents are pending now, including USA 09/307,906, Taiwan 88202931, et al.



新竹市科學園區展業一路9號4樓之3

SILICON TOUCH TECHNOLOGY INC.

9-4F-3, Prosperity Road I, Science Based Industrial Park,  
Hsin-Chu, Taiwan 300, R.O.C.

Tel : 886-3-5645656 Fax : 886-3-5645626

## **ST1116B**

# **Variable Speed Double Coil DC Brushless Motor Driver**

## **General Specifications**


The device is a driver with variable speed control for two-phase unipolar driver of DC brushless fan motor applications. The device is intended to be used as an interface between a HALL effect latch and a double coil load. The device has functions such as driving, rotation detecting, lock protection, self-restart and speed control.

An open-drain FG pin outputs the pulses, of which the frequency is proportional to the fan speed. With suitable output pull up, this fan tachometer output can be used directly with bipolar or MOS logic for motor speed monitoring/control.

## **Features and Benefits**

- Variable fan speed control
- Motor starts at low speed
- Lock protection and automatic self-restart
- Tachometer output
- High output sinking current capability
- Connectable direct to a HALL Latch IC
- Thin, highly reliable package ( SOP-8 )

## Pin Assignment

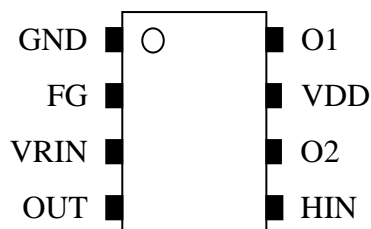

Pin NO.	Pin Name	Description
1	GND	Ground
2	FG	Fan tachometer output (open-drain)
3	VRIN	Input pin for variable speed control function
4	OUT	Output pin to control the external source driver
5	HIN	Input pin from Hall Latch IC
6	O2	Output sinking driver 2
7	VDD	Power supply
8	O1	Output sinking driver 1

## Absolute Maximum Ratings (T<sub>A</sub>=25°C )

Characteristic	Symbol	Rating	Unit
Supply Voltage	V <sub>DD</sub>	14	V
Input Voltage	V <sub>IN</sub>	V <sub>DD</sub> +0.4	V
Output Current at Lock	I <sub>OUT</sub>	600	mA
Output Current at Operating	I <sub>OPR</sub>	300	mA
Power Dissipation	P <sub>D</sub>	0.44	W
Operating Temperature Range	T <sub>A</sub>	-40 ~ 125	°C
Storage Temperature Range	T <sub>S</sub>	-65 ~ 150	°C
Operating Junction Temperature	T <sub>J</sub>	125	°C
Thermal Resistance, Junction to Ambient	θ <sub>JA</sub>	156.5	°C/ W
Thermal Resistance, Junction to Case	θ <sub>JC</sub>	42	°C/ W

## Electrical Characteristic ( $T_A = 25^\circ\text{C}$ & $V_{DD} = 12\text{ V}$ )


Characteristic	Sym.	Condition	Limit			Unit
			Min.	Typ.	Max.	
Supply Voltage	$V_{DD}$	Operating	3	12	14	V
Quiescent Current	$I_{DD}$	No load, All Inputs = 0V or $V_{DD}$	-	4.5	-	mA
HIN Input Terminal						
Input Voltage "H"	$V_{IH}$	-	$0.8 \cdot V_{DD}$	-	$V_{DD} + 0.4$	V
Input Voltage "L"	$V_{IL}$	-	-0.4	-	$0.2 \cdot V_{DD}$	V
Input Current "H"	$I_{IH}$	$V_{IN} = V_{DD}$	-	-	4	$\mu\text{A}$
O1 / O2 Output Terminal ( $T_J = 25^\circ\text{C}$ )						
Output Voltage Low	$V_{OL}$	$I_{OUT} = 250\text{mA}$	-	0.3	-	V
FG Open-Drain Terminal ( $T_J = 25^\circ\text{C}$ )						
Output Leakage Current	$I_{Leak}$	$V_{FG} = 12\text{V}$	--	-	10	$\mu\text{A}$
Output Current	$I_{FG}$	$V_{FG} = 0.4\text{V}$	-	10	-	mA
Output Voltage High	$V_{FGOH}$	-	-	-	15	V
Automatic Self-Restart Circuit						
On Time	$T_{ON}$		-	160	-	ms
Duty Ratio	$R_{DR}$	$T_{OFF} / T_{ON}$	6	7	8	
OUT Terminal						
OUT Voltage High	$V_{OUTH}$	$VRIN = 3.81\text{V}$	-	11.9	-	V
OUT Voltage Low	$V_{OUTL}$	$VRIN = 4.89\text{V}$	-	3.2	-	V

## Truth Table

### • Drivers Output


HIN	O1	O2
H	OFF	ON
L	ON	OFF

## Block Diagram & Application Circuit

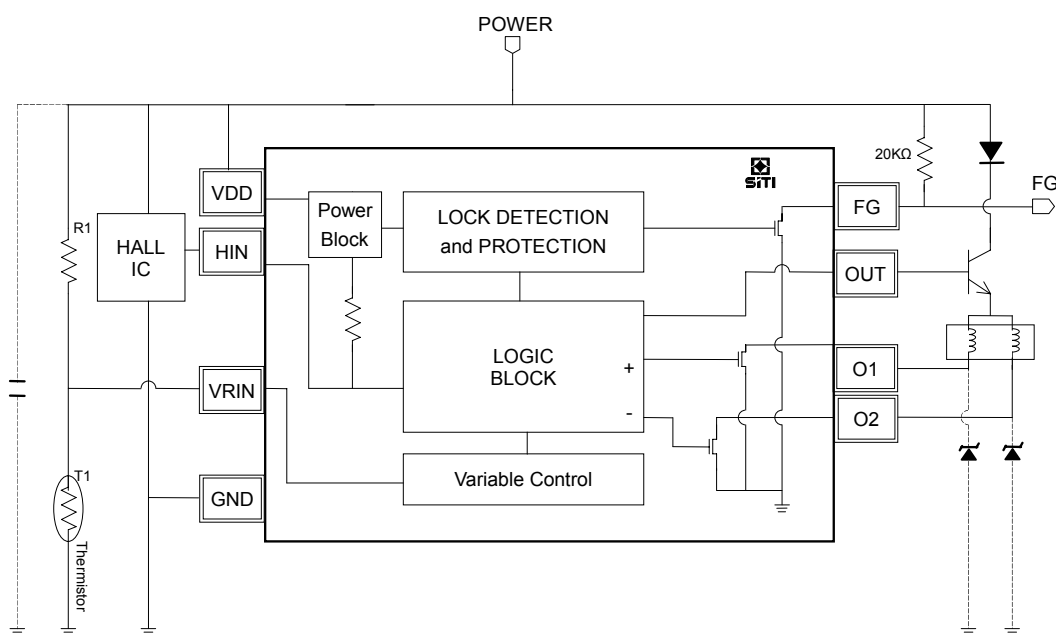


## Application Notes

- The FG pin is an open-drain output. A resistor can be used to pull up the FG voltage to the appropriate level, which depends on the voltage level of the monitoring/control system. Without the additional pull-up resistor, the FG voltage will be  $V_{DD}$  when the fan stops.
- The power dissipated by the IC varies widely with the supply voltage, the output current, and loading. It is important to ensure the application does not exceed the allowable power dissipation of the IC package. The recommended **motor driver** power dissipation versus temperature is depicted as follows:

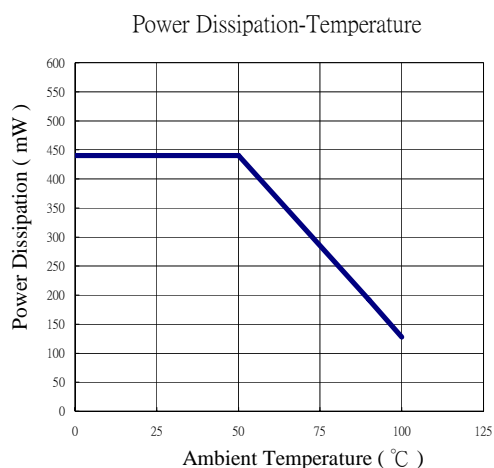

## Package Specifications (SOP-8)

( 8-pin SOP )

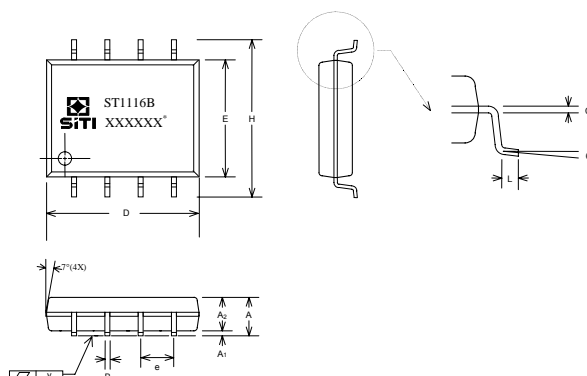

SYMBOL	Dimensions in Millimeter			Dimensions in Inches		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.35	1.60	1.75	0.053	0.063	0.069
A <sub>1</sub>	0.10	—	0.25	0.004	—	0.010
A <sub>2</sub>	—	1.45	—	—	0.057	—
B	0.33	—	0.51	0.013	—	0.020
C	0.19	—	0.25	0.007	—	0.010
D	4.80	—	5.00	0.189	—	0.197
E	3.80	—	4.00	0.150	—	0.157
e	—	1.27	—	—	1.27	—
H	5.80	—	6.20	0.228	—	0.244
L	0.40	—	1.27	0.016	—	0.050
Y	—	—	0.10	—	—	0.004
θ	0°	—	8°	0°	—	8°

\* The package marking "XXXX" is a lot number of ST1116A and therefore being subject to change.

The products listed herein are designed for ordinary electronic applications, such as electrical appliances, audio-visual equipment, communications devices and so on. Hence, it is advisable that the devices should not be used in medical instruments, surgical implants, aerospace machinery, nuclear power control systems, disaster/crime-prevention equipment and the like. Misusing those products may directly or indirectly endanger human life, or cause injury and property loss.

Silicon Touch Technology, Inc. will not take any responsibilities regarding the misuse of the products mentioned above. Anyone who purchases any products described herein with the above-mentioned intention or with such misused applications should accept full responsibility and indemnify. Silicon Touch Technology, Inc. and its distributors and all their officers and employees shall defend jointly and severally against any and all claims and litigation and all damages, cost and expenses associated with such intention and manipulation.